

RF Emissions Test Report To Determine Compliance With: FCC, Part 15 Rules and Regulations

Model number: Porteson
November 26, 2001

Applicant: PocketPyro, Inc.
590 SW 34th Street
Fort Lauderdale, FL 33315

EMC Testing Laboratories, Inc. authorizes the above company to reproduce
this report provided it is reproduced in its entirety

<u>Contents</u>	<u>Section</u>
General Information	1
Test Summary.....	2
Standard Reference	3
Test Method	4
Radiated Emissions Measurements	5
Test Configuration	6

Section 1

General Information

Applicant: PocketPyro, Inc.
590 SW 34th Street
Fort Lauderdale, FL 33315

Applicant representative: **Mr. Tom Harrah**

Manufacturer: Singapore Shinei Sangyo Pte Ltd.
31 Joo Koon Circle
Singapore 629108

Manufacturer representative: **Mr. K. C. Lim**

Equipment covered by this report: Model no. Porteson

Options covered by this report: None

Equipment serial no. None

Test specifications: To determine compliance with:
FCC, Part 15, Subpart B Rules
and Regulations, Class B

Test report number: 00-212A

Test commenced: November 21, 2001

Test completed: November 21, 2001

Test engineer: **Kent Stewart**

Test Facility: The test facility used to perform these tests is on file with
the FCC under file 31040/SIT, 1300F2 and located at:

EMC Testing Laboratories, Inc.
2420 Oak Street West
Cumming, GA. 30041-6456

Section 2

Test report summary sheet 1 of 4

Summary:

Tests	Results
FCC, Part 15, Class B, Radiated emissions:	Pass
FCC, Part 15, Class B, Conducted emissions:	N/A

- 1- The product(s) covered by this report was found to comply with the Class B limits of the FCC, Part 15, Subpart B Rules and Regulations.
- 2- The minimum margin of compliance was **-2.2 dB μ V/m** at 266.7 Mhz followed by **-3.9 dB μ V/m** at 33.9 Mhz.
- 3- The test results apply only to the products identified on the test report.
- 4- The conducted emissions measurement was considered unnecessary since the product has no means for connection to public mains.

Product description:

The product(s) covered by this report consisted of a model Porteson, a battery operated external drive/MP3 player. The EUT is capable of connection to a Palm via RS-232 Docking port or may connect to a personal computer via VSB connection. Additionally, the EUT may operate as a MP3 player in a stand-alone configuration.

The enclosure is constructed of plastic with overall dimensions measuring 12.6cm long by 8cm wide by 1.9cm deep and encloses the following components judged as critical:

1. A printed wiring board, manufactured by Pocket Pyro, Inc., part no. 701-0100 (Rev. 6.0)

Test configuration:

The equipment under test (EUT) was set-up and configured as specified by the manufacturer. To test all possible combinations of communication circuits, two configurations of the equipment were tested as indicated below:

Test report summary sheet 2 of 4

1- During test configuration 1, the EUT was connected to the following support peripherals.

- A)** A typical pair of headphones.
- B)** A laptop computer, manufactured by IBM, model no. 2611-410, serial no. AA-D2PFF 98/12, FCC marked.
- C)** A mouse manufactured by Logitech, model no. M-S34-6MD, serial number LZA60347350, FCC ID: DZL210472.
- D)** A printer, manufactured by Hewlett Packard, model 660C, serial number SG5BE1C151, FCC ID: B94C2164X.
- E)** A power controller, manufactured by CPS, model IPC, serial number 031561.

2- During test configuration 1, the EUT utilized the following cables and were connected as indicated below:

- A)** An unshielded audio cable integral to the headset was connected to the EUT Audio port.
- B)** A shielded USB cable was connected from the EUT's USB port to the laptop's USB port.
- C)** A shielded cable, (integral to the mouse) was connected to the computer's mouse port.
- D)** A shielded printer cable was connected from the computer's parallel printer port to the printer.
- E)** A shielded serial cable was connected from the computers serial port to the power controller's serial port.

3- During test configuration 2, the EUT was connected to the following support peripherals.

- A)** A typical pair of headphones.

Test report summary sheet 3 of 4

B) A personal organizer, manufactured by Palm, model no. M100, serial no. BOHK15G00007.

4- During test configuration 2, the EUT utilized the following cables and were connected as indicated below:

A) An unshielded audio cable integral to the headset was connected to the EUT Audio port.

Test operation:

For all measurements, the equipment under test was caused to function in a continuous mode of operation for maximum electrical activity as specified by the manufacturer. Specifically, during test configuration 1, the EUT's USB drivers were downloaded onto the laptop PC. The PC was programmed to play a MP3 music file that was stored on the EUT while simultaneously sending a scrolling "H" character to the display.

During test configuration 2, the organizer was docked onto the EUT. The organizer was programmed to monitor the battery power of the EUT and made the EUT play its stored MP3 music files in random order and output them to the headset.

Modifications:

The following modifications were required to comply with the indicated limits:

1- None

Engineering Statement:

All measurement data, of this test report, was taken in accordance with the FCC, Part 15, Subpart B Rules and Regulations and ANSI C63.4-1992 by EMC Testing Laboratories, Inc., located in Cumming, Georgia. Although this data is taken under stringent laboratory conditions and to the best of our knowledge, represents accurate data, it must be recognized that emissions from or immunity to this type equipment may be greatly affected by the final installation of the equipment. Therefore, EMC Testing Laboratories, Inc., while supporting the accuracy of the data in this report, takes no responsibility for use of equipment based on these tests. The manufacturer of this equipment must take full responsibility for any field problems which may arise, and agrees that EMC Testing Laboratories, Inc., in performing its functions in accordance with its objectives and purposes, does not assume or undertake to discharge any responsibility of the manufacturer to any other party or parties.

Test report summary sheet 4 of 4

Conclusion:

With the above indicated modifications, the product(s) covered by this report has been tested and found to comply with the limits for a Class B device in accordance with the FCC, Part 15, Subpart B Rules and Regulations.

Tested by:

Reviewed by:

Kent Stewart
Laboratory Manager

Gene J. Bailey
Engineering Manager
EMC Testing Laboratories, Inc.
November 26, 2001

Section 2 cont...

This page intentionally left blank.

(Reserved for future use)

Section 3

STANDARD REFERENCE

The following primary standards were used for this test:

- 1) **ANSI C63.4-1992:** Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 Khz to 40 Ghz.
- 2) **US Code of Federal Regulations (CFR) (1998):** Title 47, Part 15, Radio Frequency Devices, Subpart B, Unintentional Radiators.

Section 4

TEST METHOD

INTRODUCTION:

The product(s) covered by this report were subjected to electromagnetic interference emissions measurements to determine compliance with the FCC, Part 15 requirements.

Radiated and conducted emissions were measured in accordance with Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 Ghz, ANSI C63.4.

MEASUREMENT CALCULATIONS:

Radiated Emissions:

For radiated emissions measurements, the signal attenuation due to impedance losses in the antenna and signal cable was significant and was added to the spectrum analyzer reading to give corrected signal strength reading. If a preamplifier was used, the signal gain was subtracted from the signal strength reading. Radiated emissions data was specified as decibels above 1 microvolt per meter (dB μ V/m) of radiated field strength.

$$\text{Radiated emissions (dB}\mu\text{V)} = \text{Analyzer reading (dB}\mu\text{V)} + \text{antenna factor (dB)} + \text{cable factor (dB)} - \text{Amplifier gain (dB)}$$

Conducted Emissions:

For conducted emissions, the signal attenuation due to impedance losses in the LISN and signal cables were negligible and assumed to be 0dB. The conducted emissions were directly equal to the spectrum analyzer reading. Conducted emissions data was specified as decibels above 1 microvolt (dB μ V) of conducted line voltage.

$$\text{Conducted emissions (dB}\mu\text{V)} = \text{Analyzer reading (dB}\mu\text{V)}$$

RADIATED EMISSIONS MEASUREMENT:

Radiated emissions measurements were performed at an open field test site. The receiving antenna was positioned 10 meters from the equipment under test along the center axis of the test site. Measurements were made with broadband antennas and if necessary, detected emissions were verified with dipole antennas. The dipole antenna was manually tuned to the signal frequency by adjusting the length of the antenna elements. The radiated emissions were measured for both the horizontal and vertical signal planes by rotating the antennas. Additionally, the EUT was rotated by the turntable and the antenna height was raised and lowered 1 to 4 meters to locate the maximum emission strength at each frequency.

The radiated emissions were measured over the frequency span of 30 Mhz to 1000 Mhz. The following antennas were used to measure the radiated emissions within the specified frequency spans.

<u>Antenna</u>	<u>Frequency Span</u>
Biconical	20 - 200 Mhz
Log Periodic	200 - 1000 Mhz
Dipoles	20 - 1000 Mhz
Horn	1-18 Ghz

CONDUCTED EMISSIONS MEASUREMENT:

Conducted emissions measurements were performed on a ground plane that was electrically bonded to earth ground. The equipment under test was positioned 0.8 meter above the ground plane and 0.8 meter minimum from the LISN that was positioned on the ground plane. The LISN housings were electrically bonded to the ground plane. The conducted emissions for both the ungrounded supply conductor (L1) and the grounded conductor (L2) of the power supply cord were measured. The conducted emissions were measured over the frequency span of 0.45 to 30 Mhz. The measurements were conducted in the quasi-peak and average detector modes.

INSTRUMENTATION:

Radiated and conducted signal strength measurements were taken with a spectrum analyzer. Radiated emissions were measured with broadband and tuned dipole antennas. Conducted emissions were measured with a 50 UH line impedance stabilization network (LISN). The test equipment consists of the following:

<u>Test Equipment</u>	<u>Model No.</u>	<u>Serial No.</u>	<u>Cal. Due</u>
Spectrum Analyzer	HP 8591A	2919A00171	06-19-02
Spectrum Analyzer	8592L	3649A00744	02-12-02
LISN	94641-1	0145/0146	06-01-02
Biconical Antenna	3110B	1708	09-14-02
Biconical Antenna	BIA-25	2451	09-14-02
Log Periodic	LPA25	1112	09-14-02
Dipole Antenna	DM-105A-T1	31402-110	06-01-02
Dipole Antenna	DM-105A-T2	31402-105	06-01-02
Dipole Antenna	DM-105A-T3	31402-109	06-01-02
Horn Antenna	3115	9405-4264	09-14-02
R.F. Amplifier	QB-820	11602	09-14-02
Preamplifier	8449B	3008A00914	09-14-02

DETECTOR FUNCTION:

All measurements were taken using a peak hold signal detector function. In this mode, the spectrum analyzer makes continuous scans across the frequency band and stores the highest emission value detected at each frequency for all scans. The peak hold integration will detect transient or low duty cycle emissions peak which might be missed on single scan measurement. The emission value at each frequency was a true value.

SPECTRUM ANALYZER SETTING:

For all measurements, the spectrum analyzer was set for a 10 dB input attenuation. 10 dB/Division vertical scale and 90 or 100 dB μ V reference level. The resolution bandwidth is set at 9 KHz for the 0.45 - 30 Mhz span and at 120 KHz for 30 - 1000 Mhz span. The video bandwidth and sweep rate were automatically coupled by the analyzer.

Section 5

RADIATED EMISSIONS MEASUREMENTS

RADIATED EMISSIONS MEASUREMENTS

Test Configuration 1 (Tested with computer)

Model number: Porteson**Test date:** 11-21-01

Frequency Mhz	Measurement Reading dB μ V/m	Corrected Reading dB μ V/m	FCC Limit dB μ V/m	Minimum Margin dB μ V/m
Vertical				
33.9	34.2	25.6	29.5	-3.9
56.5	30.6	19.7	29.5	-9.8
124.2	31.7	23.1	33.0	-9.9
146.8	32.1	24.7	33.0	-8.3
*169.3	33.4	26.7	33.0	-6.3
233.2	33.4	25.2	35.5	-10.3
266.6	34.7	28.1	35.5	-7.4
333.2	31.6	26.7	35.5	-8.8

* - Indicates Quasi-Peak Measurement

Radiated Emissions Measurements cont...

Test Configuration 1
(Tested with computer)

Model number: Porteson**Test date:** 11-21-01

Frequency Mhz	Measurement Reading dBμV/m	Corrected Reading dBμV/m	FCC Limit dBμV/m	Minimum Margin dBμV/m
Horizontal				
33.8	32.1	23.8	29.5	-5.7
124.2	31.4	22.7	33.0	-10.3
146.5	32.5	24.8	33.0	-8.2
169.3	33.5	26.5	33.0	-6.5
232.5	30.8	22.2	35.5	-13.3
233.3	31.2	22.6	35.5	-12.9
*266.7	40.1	33.3	35.5	-2.2
333.2	35.2	30.0	35.5	-5.5

* - Indicates Quasi-Peak Measurement

Radiated Emissions Measurements cont...

Test Configuration 2
(Tested with connection to Palm)


Model number: Porteson**Test date:** 11-21-01

Frequency Mhz	Measurement Reading dBμV/m	Corrected Reading dBμV/m	FCC Limit dBμV/m	Minimum Margin dBμV/m
Vertical				
259.6	31.0	24.0	35.5	-11.5
304.8	29.6	25.0	35.5	-10.5
Horizontal				
124.2	29.1	20.4	33.0	-12.6
146.8	28.4	20.7	33.0	-12.3
169.3	26.7	19.7	33.0	-13.3
237.0	28.8	20.4	35.5	-15.1
259.6	33.9	26.4	35.5	-9.1
304.8	30.6	25.8	35.5	-9.7
355.6	31.0	26.1	35.5	-9.4
440.3	28.7	26.0	35.5	-9.5
485.4	28.2	27.0	35.5	-8.5

Section 6


Configuration

Test Configuration 1

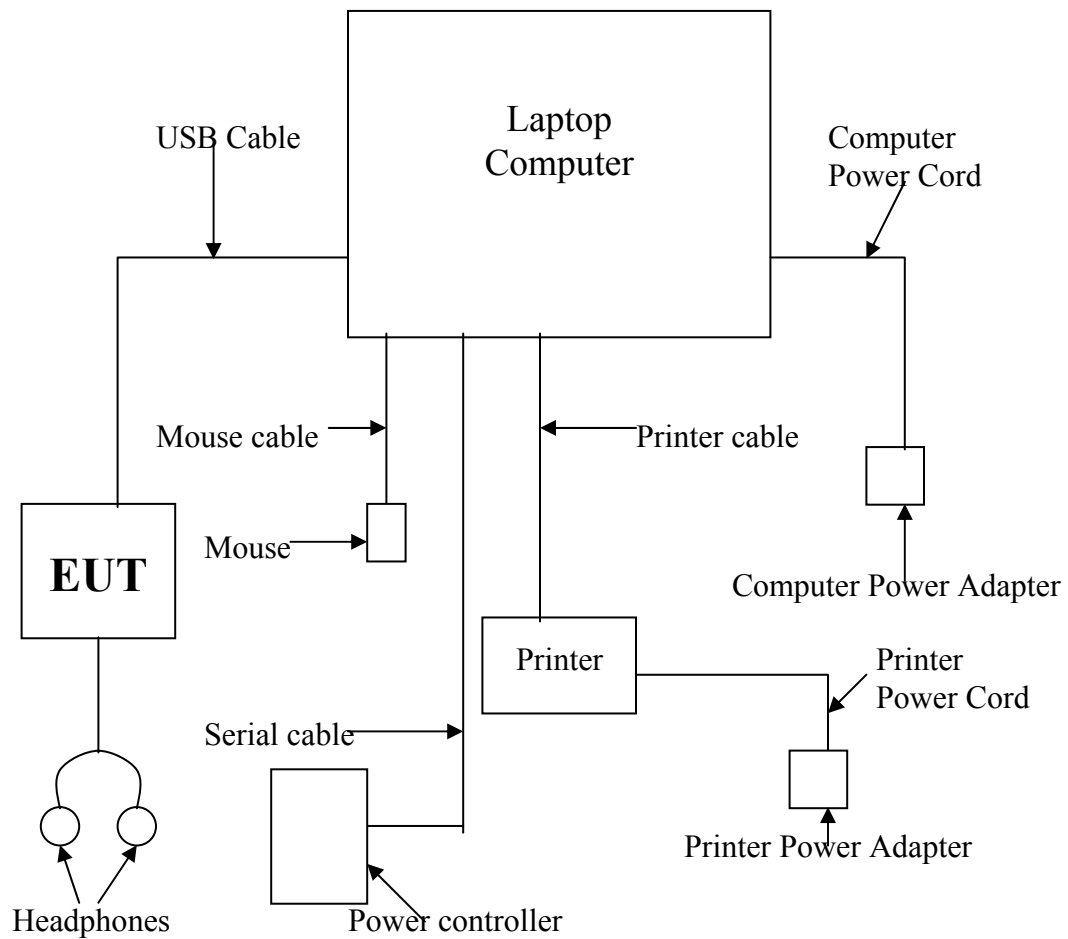

Photographs cont...

Test Configuration 2

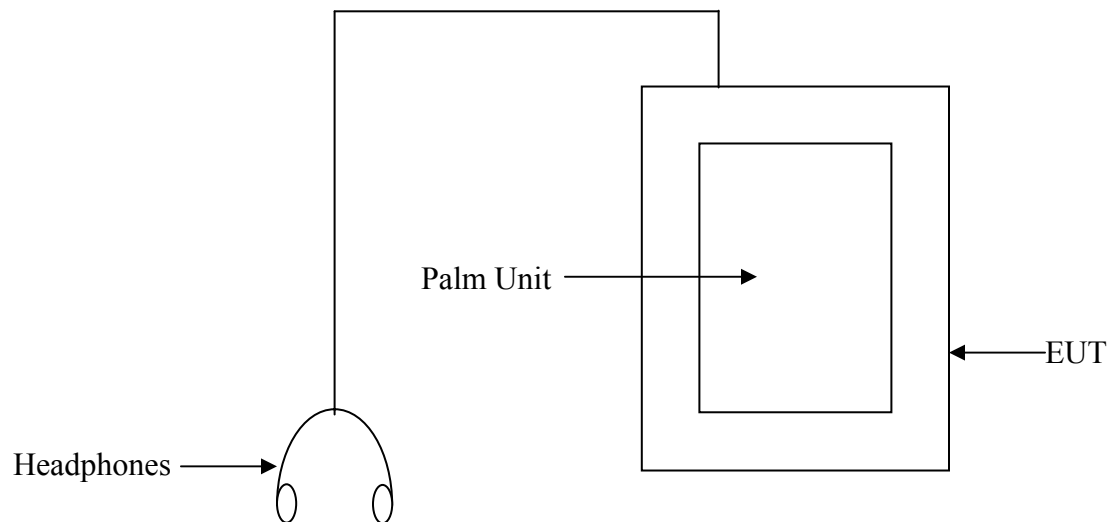

LAST PAGE ...