

IEC 62238 TEST REPORT

For

Raymarine UK Limited

Raymarine UK Limited, Marine House, Cartwright Drive, Fareham,
Hampshire, PO15 5RJ, England

Model: RAY50

Report Type: Original Report	Product Type: Class D Digital Selective Calling device
Test Engineer: Candy Li	<i>Candy Li</i>
Report Number: RSZ141203001-01	
Report Date: 2015-01-30	
Reviewed By: Jimmy Xiao RF Engineer	<i>Jimmy Xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
SUMMARY OF TEST RESULTS	6
§7.4 VIBRATION TEST	7
APPLICABLE STANDARD	7
TEST EQUIPMENT LIST AND DETAILS.....	7
TEST DATA	7
§7.5 TEMPERATURE TEST.....	8
APPLICABLE STANDARD	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST DATA	8
§8.14 TEST OF GENNERATED CALL SEQUENCES	10
APPLICABLE STANDARD	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST DATA	10
§9.13 MULTIPLE WATCH CHARACTERISTICS.....	12
APPLICABLE STANDARD	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA	12
§10.3 DSC RECEIVER ADJACENT CHANNEL SELECTIVITY.....	14
APPLICABLE STANDARD	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA	14
§10.5 DSC RECEIVER INTERMODULATION RESPONSE	16
APPLICABLE STANDARD	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
§10.8 VERIFICATION OF CORRECT DECODING OF VARIOUS TYPES OF DSC CALLS.....	17
APPLICABLE STANDARD	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
§10.9 REACTION TO VTS AND AIS CHANNEL MANAGEMENT DSC TRANSMISSIONS	19
APPLICABLE STANDARD	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19

§10.10 SIMULTANEOUS RECEPTION	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
EXHIBIT A- EUT PHOTOGRAPHS.....	22
EUT –ALL VIEW.....	22
EUT –LABEL VIEW (MAIN PART).....	22
EUT – BASE FRONT VIEW	23
EUT –BASE REAR VIEW	23
EUT –BASE TOP VIEW.....	24
EUT –BASE BOTTOM VIEW	24
EUT –BASE LEFT SIDE VIEW.....	25
EUT –BASE RIGHT SIDE VIEW	25
EUT – MIC FRONT VIEW.....	26
EUT –MIC REAR VIEW	26
EUT –MICROPHONE TOP VIEW	27
EUT –MICROPHONE BOTTOM VIEW	27
EUT –MICROPHONE LEFT SIDE VIEW.....	28
EUT –MICROPHONE RIGHT SIDE VIEW	28
EUT –COVER OFF VIEW 1.....	29
EUT –COVER OFF VIEW 2.....	29
EUT –COVER OFF VIEW 3.....	30
EUT –COVER OFF VIEW 4.....	30
EUT –COVER OFF VIEW 5.....	31
EUT –COVER OFF VIEW 6.....	31
EUT –BASE MAIN BOARD 1 Top View 1	32
EUT –BASE MAIN BOARD 1 BOTTOM VIEW 1	32
EUT –THE CONNECT BOARD 1 WITH LCD OFF VIEW	33
EUT –THE CONNECT BOARD 1 TOP VIEW	33
EUT –THE CONNECT BOARD 1 BOTTOM VIEW.....	34
EUT –THE CONNECT BOARD 2 TOP VIEW.....	34
EUT –THE CONNECT BOARD 2 BOTTOM VIEW.....	35
EUT –THE CONNECT BOARD 3 TOP VIEW	35
EUT –THE CONNECT BOARD 3 BOTTOMVIEW	36
EUT –LCD SCREEN FRONT VIEW	36
EUT –LCD SCREEN BACK VIEW	37
EUT –MICROPHONE COVER OFF VIEW	37
EUT –MICROPHONE MAIN BOARD TOP VIEW	38
EUT –MICROPHONE MAIN BOARD TOP VIEW	38
EUT –MICROPHONE MAIN BOARD BOTTOM VIEW.....	39
EUT –MICROPHONE SPEAKER VIEW	39
EXHIBIT B - TEST SETUP PHOTOGRAPHS	40

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Raymarine UK Limited*'s product, model number: RAY50 or the "EUT" in this report was a RAY50 DSC Class D VHF Radio, which was measured approximately: 173.75 mm (L) × 168 mm (W) × 88.5 mm (H), rated with input voltage: DC 12 V.

** All measurement and test data in this report was gathered from production sample serial number: 1412028 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2014-12-03.*

Objective

This test report is prepared on behalf of *Raymarine UK Limited* in accordance with IEC 62238.

Related Submittal(s)/Grant(s)

No related submittal(s)

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the IEC 62238 First edition 2003-03, Maritime navigation and radiocommunication equipment and systems-VHF radiotelephone equipment incorporating Class "D" Digital Selective Calling (DSC)-Methods of testing and required test results.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a DSC mode in accordance with IEC 62238.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DC Power Supply	MEAN WELL	SP-320	N/A

SUMMARY OF TEST RESULTS

IEC 62238 Rules	Description of Test	Results
§7.4	Vibration Test	Compliance
§7.5	Temperature Tests	Compliance
§8.14	Test of Generated Call Sequences	Compliance
§9.13	Multiple Watch Characteristics	Compliance
§10.3	DSC Receiver Adjacent Channel Selectivity	Compliance
§10.5	DSC Receiver Intermodulation Response	Compliance
§10.8	Verification of Correct Decoding of Various Types of DSC Calls	Compliance
§10.9	Reaction to VTS and AIS Channel Management DSC Transmissions	Compliance
§10.10	Simultaneous Reception	Compliance

Note: a brief summary of the tests carried out in accordance with IEC 62238 standards.

§7.4 VIBRATION TEST

Applicable Standard

The vibration test shall be performed as in IEC 60945 clause 8.7.1,

Limit:

The requirement of the performance check shall be met.

Test Equipment List and Details

Manufacturer	Description	Model	Calibration Date	Calibration Due Date
H&P	RF Communication Test Set	8921A	2014-05-16	2015-05-16
CMI	Vibration Tester	ACT2000-S06L	2014-06-03	2015-06-03

Test Data

Environmental Conditions

External Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed on 2015-01-26

Test Levels:

- 2Hz to 5Hz and up to 13.2Hz with and excursion of $\pm 1.43\text{mm} \pm 10\%$ (9.8m/s^2 maximum acceleration at 13.2Hz)
- Above 13.2Hz and up to 600Hz with a constant acceleration of 1g
- Nominal test voltage = +12Vdc

Endurance Test for 2 hour sat each resonant frequency or frequency with a g level ≥ 5 times the drive g level. If no resonant frequencies or frequency with a g level ≥ 5 times the drive g level are found endurance test shall be performed at 30Hz.

Test Result: Compliance.

§7.5 TEMPERATURE TEST

Applicable Standard

The dry heat cycle shall be performed as in IEC 60945. tests and performance checks at extreme power supply conditions shall be performed under the environmental conditions as follow:

Environment	Normal power supply	Extreme power supply
Dry heat	Performance test	Performance check

Limit:

The requirement of the performance check shall be met.

Test Equipment List and Details

Manufacturer	Description	Model	Calibration Date	Calibration Due Date
H&P	RF Communication Test Set	8921A	2014-05-16	2015-05-16
ESPEC	Temperature & Humidity Chamber	ESL-04KA	2014-12-14	2015-12-14

Test Data

Environmental Conditions

External Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed from 2015-01-26 to 2015-01-28

Test Result: Compliance. Please refer to following table.

Environmental Conditions		Temperature	Voltage (V _{DC})	Test Period(Hour)	Results
Dry Heat	Storage Test	70±1℃	-	15	Compliance
	Functional Test	55±1℃	15.6	15	Compliance
			12.0	15	Compliance
			10.8	15	Compliance

§8.14 TEST OF GENNERATED CALL SEQUENCES

Applicable Standard

According to IEC 62238, Clause 8.14

Limit:

The requirement of ITU-R Recommendation M.493-10 regarding message composition and content shall be met.

The generated call shall be analysed with the calibrated apparatus for correct configuration of the signal format, including time diversity.

It shall be verified that, after transmission of a DSC call, the transmitter re-tunes to the original channel. However, in the case of a distress call, the transmitter shall tune to channel 16 and automatically select the maximum power.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
H&P	Modulation Analyzer	8901B	3438A05208	2014-06-03	2015-06-03
Agilent	RF Communication test set	8920A	3325U00859	2014-06-03	2015-06-03
Agilent	MXG X-Series Signal Generators	N5182B	N/A	2014-06-03	2015-06-03
Agilent	Universal Frequency Center	53220A	N/A	2014-10-09	2015-10-08
Aeroflex	Digital Radio Test Set	3920	1000003253	2014-09-06	2015-09-05
Agilent	Signal Generator	E4422B	T-08-RM137	2014-01-22	2015-01-21

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Candy Li on 2015-01-26

Test Result: Compliance. Please refer to following table.

Format specifier	Category	1 st telecommand (symbol No.)	2 st telecommand (symbol No.)
Distress	-	100	126
All Ships	Distress	100	126
All Ships	Urgency	100	126
All Ships	Safety	100	126
Individual	Urgency	100	126
Individual	Safety	100	126
Individual	Routine	100	126
Group	Routine	100	126

§9.13 MULTIPLE WATCH CHARACTERISTICS

Applicable Standard

According to IEC 62238, Clause 9.13

Limit:

Test Project	Requirement
Scanning Period	$\leq 2s$
Dwell Time (Priority Channel)	$\leq 150ms$
Dwell Time (Additional Channel)	Between 850 ms and 2s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
H&P	Modulation Analyzer	8901B	3438A05208	2014-06-03	2015-06-03
Agilent	RF Communication test set	8920A	3325U00859	2014-06-03	2015-06-03
Agilent	MXG X-Series Signal Generators	N5182B	N/A	2014-06-03	2015-06-03
Agilent	Universal Frequency Center	53220A	N/A	2014-10-09	2015-10-08
Aeroflex	Digital Radio Test Set	3920	1000003253	2014-09-06	2015-09-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2014-11-01	2015-11-01

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Candy Li on 2015-01-26.

Test Result: Compliance. Please refer to following table.

Test Conditions		Scanning Time(s)	Dwell on Priority (ms)	Dwell on Additional (s)
Temperature(°C)	Voltage (V _{DC})			
-15	15.6	1.630	80.1	1.608
-15	12.0	1.632	80.5	1.601
-15	10.8	1.631	80.5	1.614
+25	12.0	1.634	80.9	1.615
+55	15.6	1.632	80.3	1.611
+55	12.0	1.625	80.4	1.606
+55	10.8	1.621	80.6	1.601

§10.3 DSC RECEIVER ADJACENT CHANNEL SELECTIVITY**Applicable Standard**

According to IEC 62238, Clause 10.3

Limit:

The bit error ratio shall be less than 10^{-2}

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
H&P	Modulation Analyzer	8901B	3438A05208	2014-06-03	2015-06-03
Agilent	RF Communication test set	8920A	3325U00859	2014-06-03	2015-06-03
Agilent	MXG X-Series Signal Generators	N5182B	N/A	2014-06-03	2015-06-03
Agilent	Universal Frequency Center	53220A	N/A	2014-10-09	2015-10-08
Aeroflex	Digital Radio Test Set	3920	1000003253	2014-09-06	2015-09-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2014-11-01	2015-11-01
Hyetra	DSC Decoder/Encoder	N/A	N/A	NCR	NCR

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Candy Li on 2015-01-26.

Test Result: Compliance. Please refer to following table.

Test Conditions		Bit Error Ratio	
Temperature(°C)	Temperature(°C)	156.525MHz	
		+25 kHz	-25 kHz
-15	-15	Less than 10^{-2}	Less than 10^{-2}
-15	-15		
-15	-15		
+25	+25		
+55	+55		
+55	+55		
+55	+55		

Measurement uncertainty: ± 1.6 dB

§10.5 DSC RECEIVER INTERMODULATION RESPONSE

Applicable Standard

According to IEC 62238, Clause 10.5

Limit:

The BER shall not exceed 10^{-2}

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
H&P	Modulation Analyzer	8901B	3438A05208	2014-06-03	2015-06-03
Agilent	RF Communication test set	8920A	3325U00859	2014-06-03	2015-06-03
Agilent	MXG X-Series Signal Generators	N5182B	N/A	2014-06-03	2015-06-03
Agilent	Universal Frequency Center	53220A	N/A	2014-10-09	2015-10-08
Aeroflex	Digital Radio Test Set	3920	1000003253	2014-09-06	2015-09-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2014-11-01	2015-11-01

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	43 %
ATM Pressure:	101.0 kPa

The testing was performed by Candy Li on 2015-01-26.

Test Result: Compliance. Please refer to following table.

Frequency Increments of Unwanted Signals	Bit Error Rate
	156.525 MHz
+50/100 kHz	Less than 10^{-2}
-50/100 kHz	Less than 10^{-2}

Measurement uncertainty: ± 1.5 dB

§10.8 VERIFICATION OF CORRECT DECODING OF VARIOUS TYPES OF DSC CALLS

Applicable Standard

According to IEC 62238, Clause 10.8

Limit:

The requirement of ITU-R Recommendation M.493.13(5) regarding message composition and content shall be met.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
H&P	Modulation Analyzer	8901B	3438A05208	2014-06-03	2015-06-03
Agilent	RF Communication test set	8920A	3325U00859	2014-06-03	2015-06-03
Agilent	MXG X-Series Signal Generators	N5182B	N/A	2014-06-03	2015-06-03
Agilent	Universal Frequency Center	53220A	N/A	2014-10-09	2015-10-08
Aeroflex	Digital Radio Test Set	3920	1000003253	2014-09-06	2015-09-05

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	43 %
ATM Pressure:	101.0 kPa

The testing was performed by Candy Li on 2015-01-27.

Test Result: Compliance. Please refer to following tables.

Format specifier	Category	1 st telecommand (symbol No.)	2 st telecommand (symbol No.)
Distress	-	100	126
All Ships	Distress	100	126
All Ships	Urgency	100	126
All Ships	Safety	100	126
Individual	Urgency	100	126
Individual	Safety	100	126
Individual	Routine	100	126
Group	Routine	100	126

	Confirm (Y or N)
Confirm that the decoded call sequences at the output of the receiver have been examined for correct technical format, including error check characteristics:	Y
Error found:	N
Confirm that the checks have been made to ensure accordance between printer output and display:	Y
Error found:	N
It has been verified that the equipment is capable of switching to a channel identified in the DSC call:	Y

§10.9 REACTION TO VTS AND AIS CHANNEL MANAGEMENT DSC TRANSMISSIONS

Applicable Standard

According to IEC 62238, Clause 10.8

Limit:

The equipment shall not sound an alarm, display a message (an accurate, informative display is permissible but not required), transmit a message a reponse or suggest a transmitted response, lock up, or require operator intervention.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
H&P	Modulation Analyzer	8901B	3438A05208	2014-06-03	2015-06-03
Agilent	RF Communication test set	8920A	3325U00859	2014-06-03	2015-06-03
Agilent	MXG X-Series Signal Generators	N5182B	N/A	2014-06-03	2015-06-03
Agilent	Universal Frequency Center	53220A	N/A	2014-10-09	2015-10-08
Aeroflex	Digital Radio Test Set	3920	1000003253	2014-09-06	2015-09-05

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	43 %
ATM Pressure:	101.0 kPa

The testing was performed by Candy Li on 2015-01-26.

Test Result: Compliance. Please refer to following table.

	Confirm (Y or N)
Not sound an alarm	Y
Not display a message (An accurate informative display is permissible but not required)	Y
Not transmit a response	Y
Not suggest a transmitted response	Y
Not lock up	Y
Not require operator intervention	Y

§10.10 SIMULTANEOUS RECEPTION

Applicable Standard

According to IEC 62238, Clause 10.8

Limit:

Test Project	Requirement
SINAD Ratio (dB)	≥ 20 dB in presence of DSC Signal
Bit Error Rate	$\leq 10^{-2}$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
H&P	Modulation Analyzer	8901B	3438A05208	2014-06-03	2015-06-03
Agilent	RF Communication test set	8920A	3325U00859	2014-06-03	2015-06-03
Agilent	MXG X-Series Signal Generators	N5182B	N/A	2014-06-03	2015-06-03
Agilent	Universal Frequency Center	53220A	N/A	2014-10-09	2015-10-08
Aeroflex	Digital Radio Test Set	3920	1000003253	2014-09-06	2015-09-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2014-11-01	2015-11-01
Hyetra	DSC Decoder/Encoder	N/A	N/A	NCR	NCR

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	47 %
ATM Pressure:	100.0 kPa

The testing was performed by Candy Li on 2015-01-26

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

SINAD (dB) No DSC Signal	SINAD (dB) DSC Signal Applied	Bit Error Rate
44.3	44.8	Less than 10^{-2}

Measurement uncertainty: ± 1.6 dB

EXHIBIT A- EUT PHOTOGRAPHS

EUT –All View



EUT –Label View (Main Part)



EUT – Base Front View



EUT –Base Rear View



EUT –Base Top View



EUT –Base Bottom View



EUT –Base Left Side View



EUT –Base Right Side View



EUT – MIC Front View



EUT –MIC Rear View



EUT –Microphone Top View



EUT –Microphone Bottom View




EUT –Microphone Left Side View



EUT –Microphone Right Side View




EUT –Cover off View 1

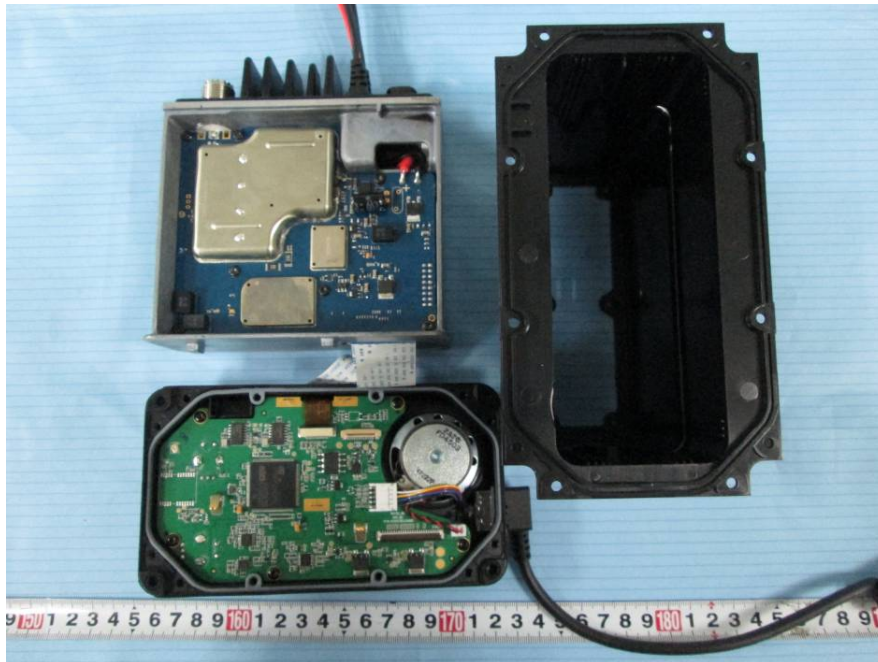


EUT –Cover off View 2




EUT –Cover off View 3

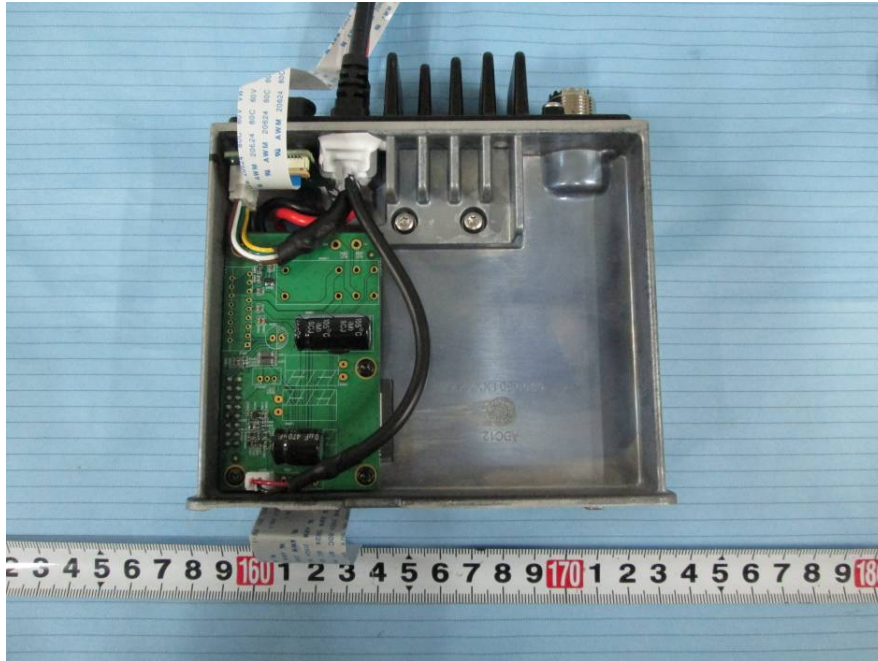


EUT –Cover off View 4

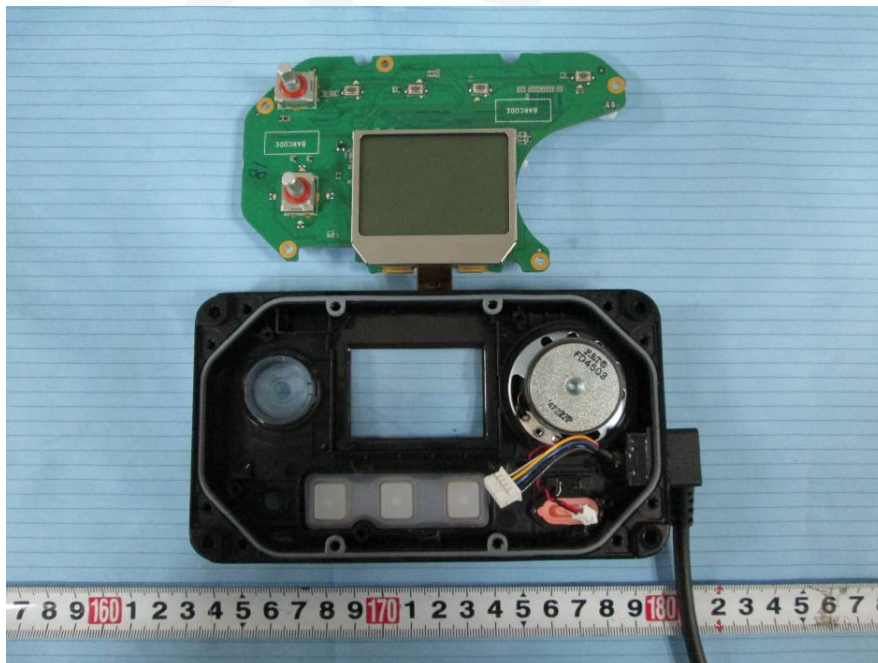


EUT –Cover off View 5

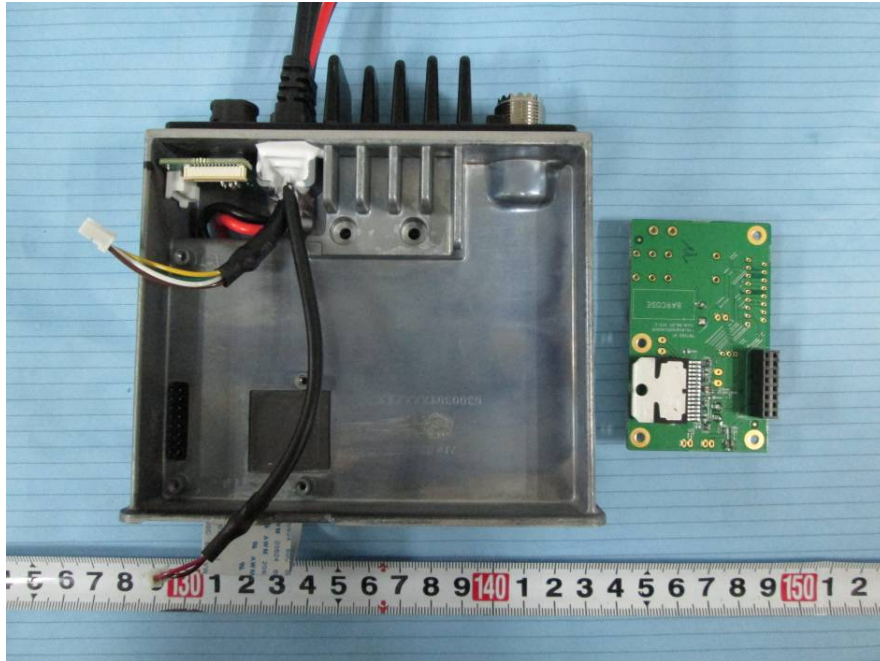

EUT –Cover off View 6

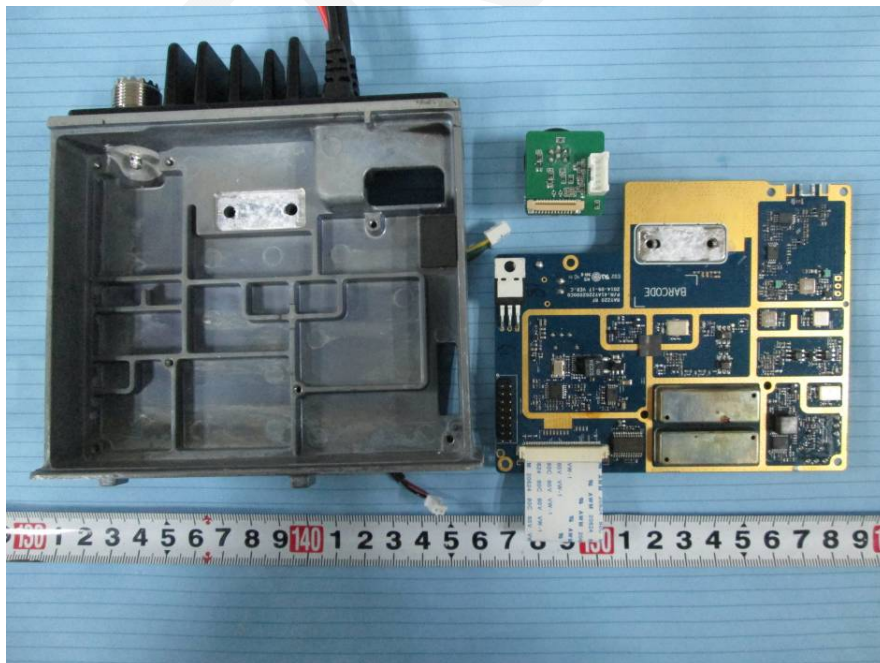


EUT –Base Main Board 1Top View 1

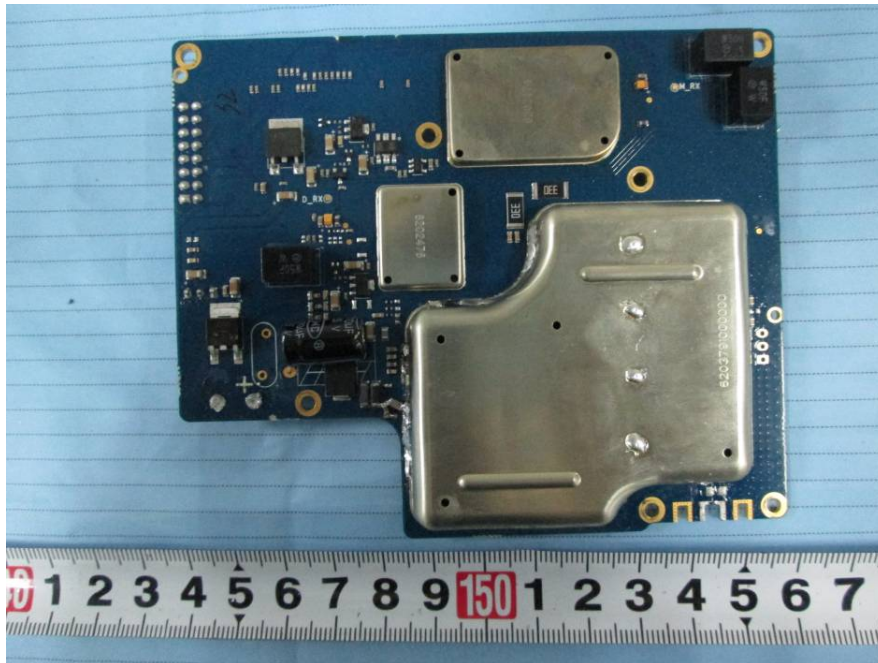


EUT –Base Main Board 1 Bottom View 1




EUT –The Connect Board 1 With LCD off View

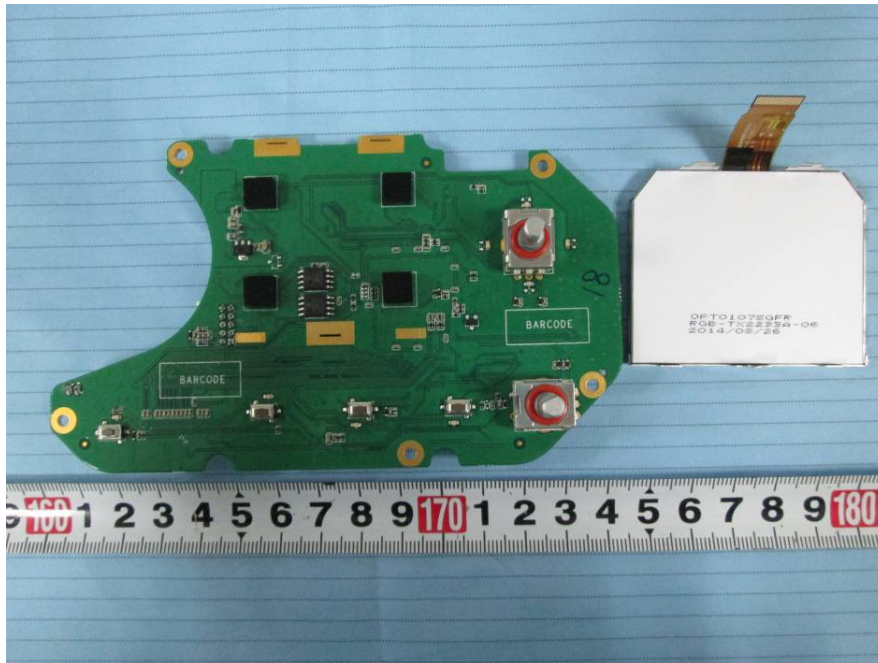


EUT –The Connect Board 1 Top View

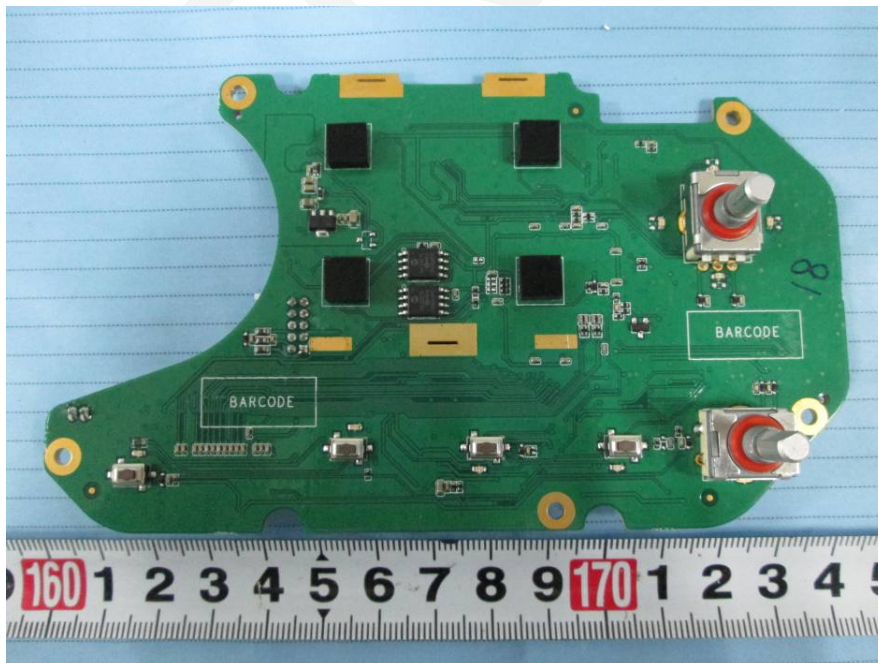


EUT –The Connect Board 1 Bottom View

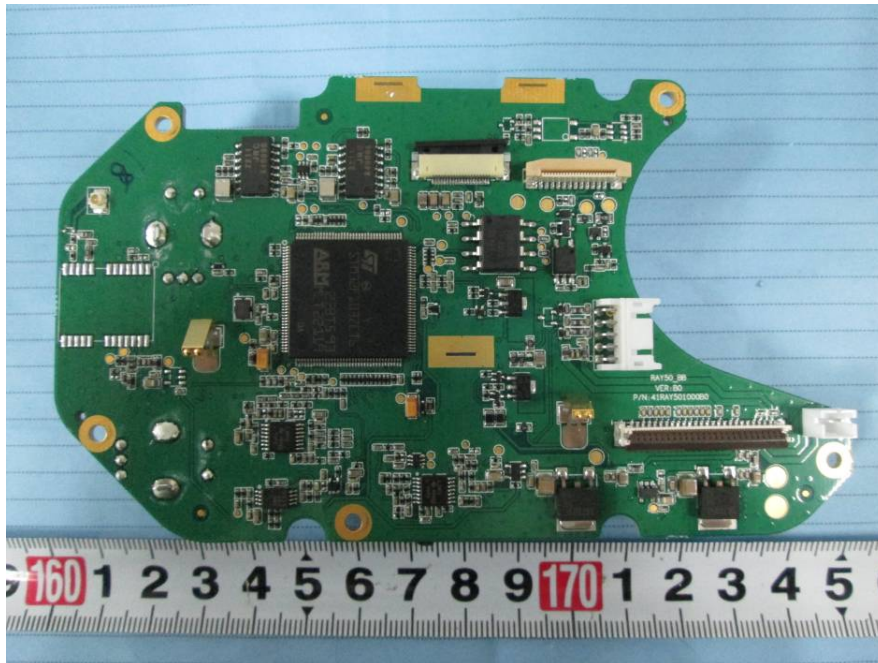

EUT –The Connect Board 2 Top View

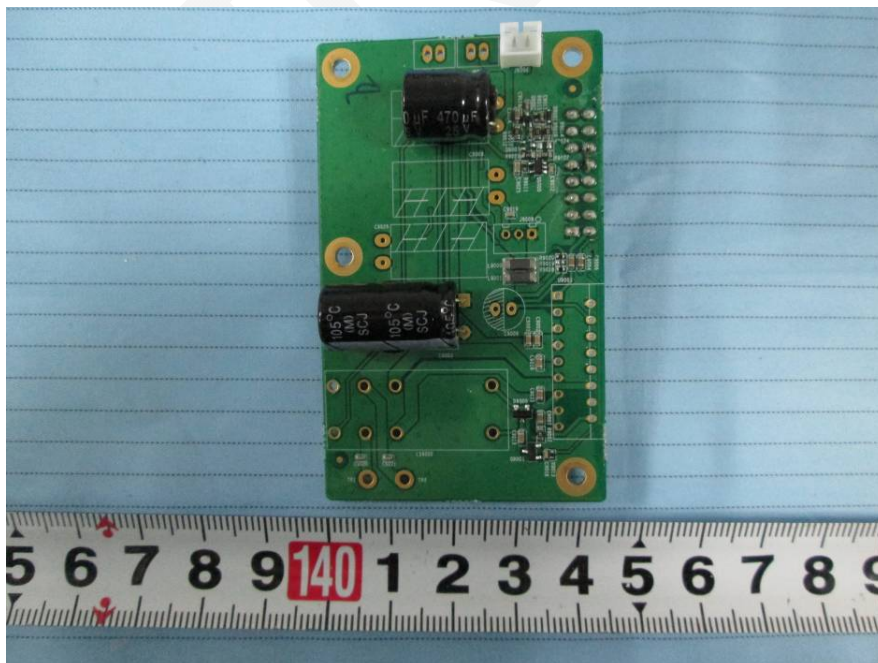


EUT –The Connect Board 2 Bottom View

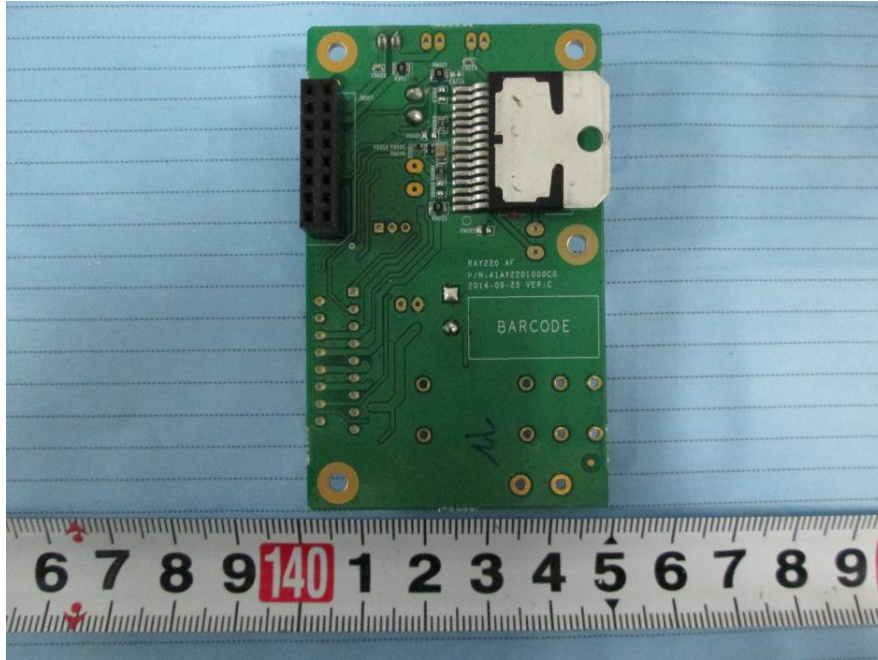

EUT –The Connect Board 3 Top View




EUT –The Connect Board 3 BottomView

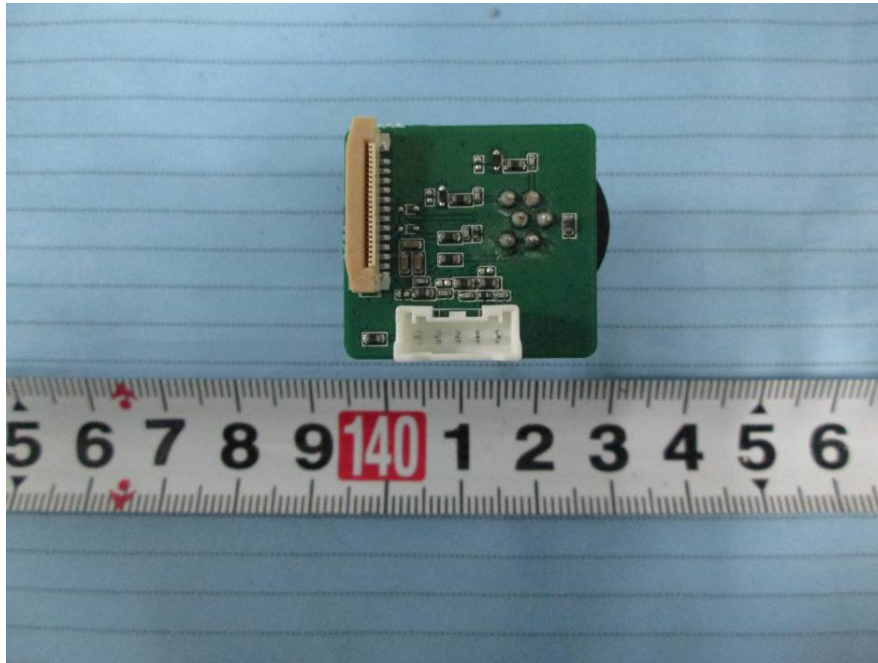

EUT –LCD Screen Front View



EUT –LCD Screen Back View

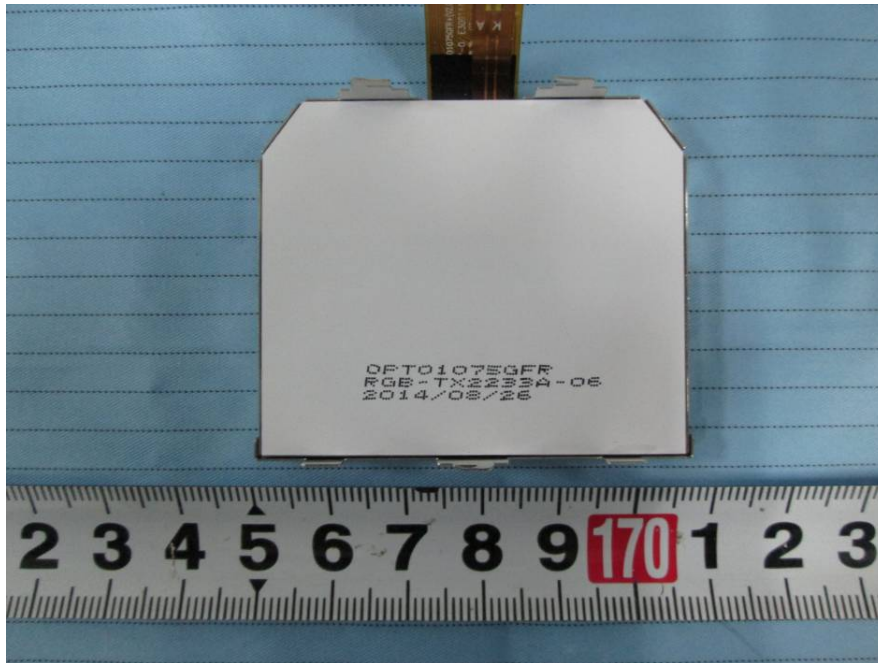

EUT –Microphone Cover off View




RAY20C_F15TMC
REV.B0
P/JM-41009001167B0

BARCODE

304502020
88 77002 8 00001 1 W 0001

EUT –Microphone Main Board Bottom View

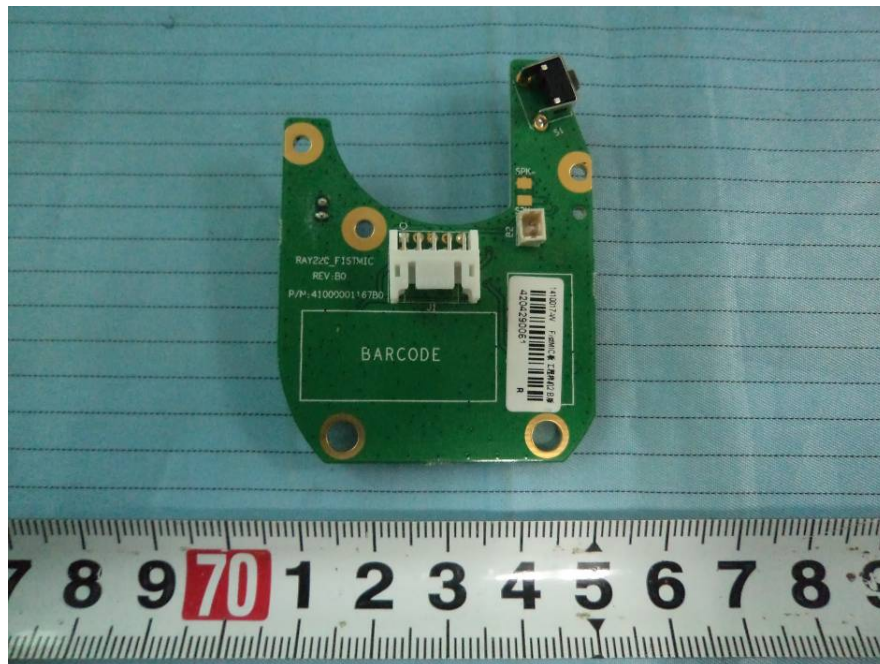

EUT –Microphone Speaker View

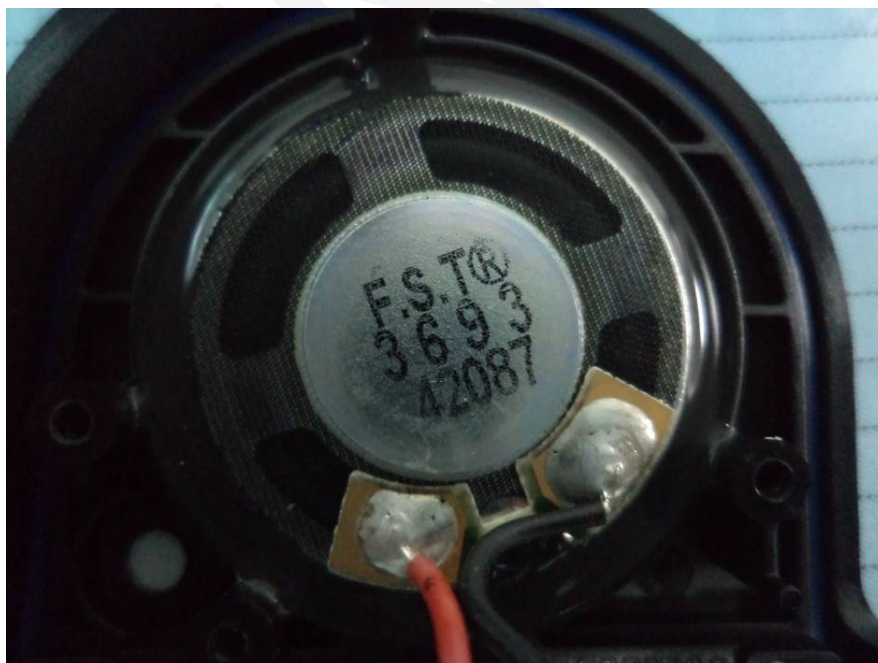


EXHIBIT B - TEST SETUP PHOTOGRAPHS



*****END OF REPORT *****