

FCC PART 15.247

TEST REPORT

For

Baby's Journey, Inc.

999 Main Street, Unit 703, Pawtucket, Rhode Island, United States

FCC ID: PJF-05000RX

Report Type: Original Report	Product Type: SMART TRAC Digital Audio Monitor (Parents Unit)
Test Engineer:	Ares Liu 
Report Number:	R2DG140305004-00A
Report Date:	2014-05-21
Reviewed By:	Sula Huang RF Engineer 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	24
APPLICABLE STANDARD	24

TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(d) - BAND EDGES TESTING	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Baby's Journey, Inc.*'s product, model number: 05000RX (FCC ID: PJF-05000RX) (the "EUT") in this report was a parent unit of SMART TRAC Digital Audio Monitor, which was measured approximately: 11.0 cm (L) x 6.3cm (W) x 2.1 cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery or DC5V charging from adapter.

Adapter information: KUANTEN
Model: SSA021F050050USD
Input: AC 100-240V, 50/60Hz, 0.2A
Output: DC 5V, 0.5A

All measurement and test data in this report was gathered from production sample serial number: 140305004 (Assigned by BACL, Dongguan). The EUT was received on 2014-03-06.

Objective

This report is prepared on behalf of *Baby's Journey, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. The system configured the maximum power and switched mode by software in the engineering mode.

19 hopping channels were provided for test, the channels as below table:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2406	08	2434	15	2462
02	2410	09	2438	16	2466
03	2414	10	2442	17	2470
04	2418	11	2446	18	2474
05	2422	12	2450	19	2478
06	2426	13	2454		
07	2430	14	2458		

EUT was tested with frequency Channel 01, 10 and 19.

EUT Exercise Software

The software “ConfigGen” was used in the test.


Equipment Modifications

No modification was made to the EUT.

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter Cable	No	No	1.8	Adapter	EUT

Block Diagram of Test Setup

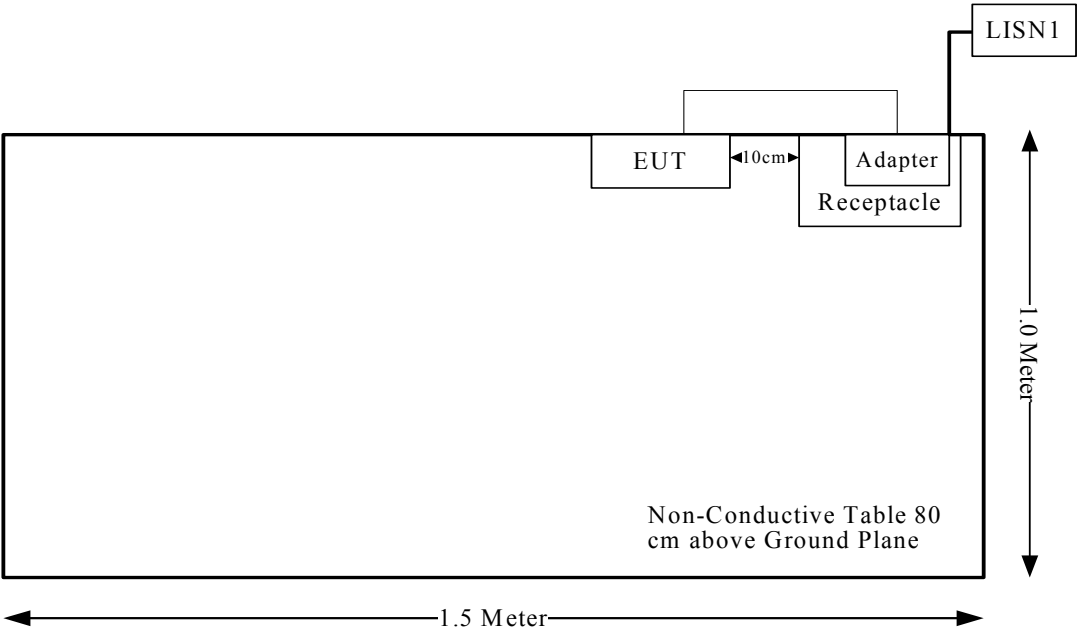

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: R1DG140305004-20A

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

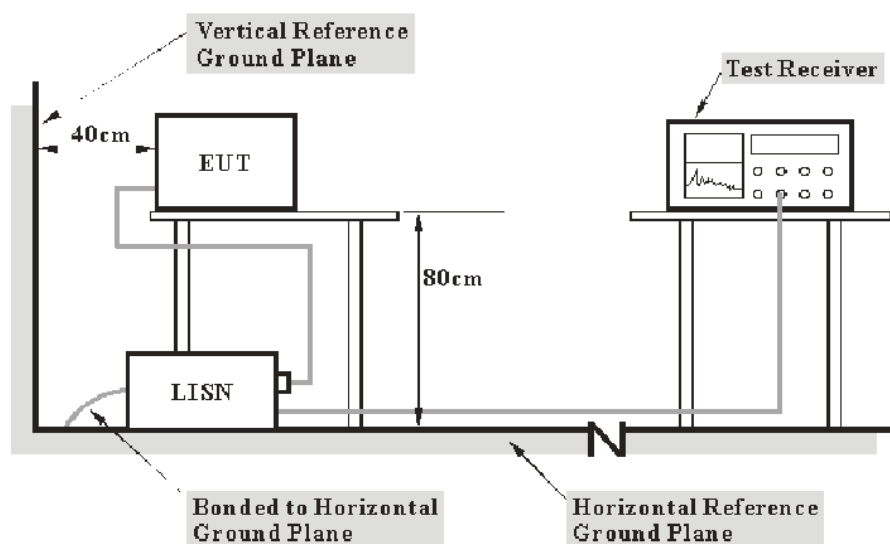

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2014-01-22	2015-01-21
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

12.6 dB at 0.937592 MHz in the Line conducted mode


Test Data**Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	60 %
ATM Pressure:	100.2kPa

The testing was performed by Ares Liu on 2014-05-21.


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

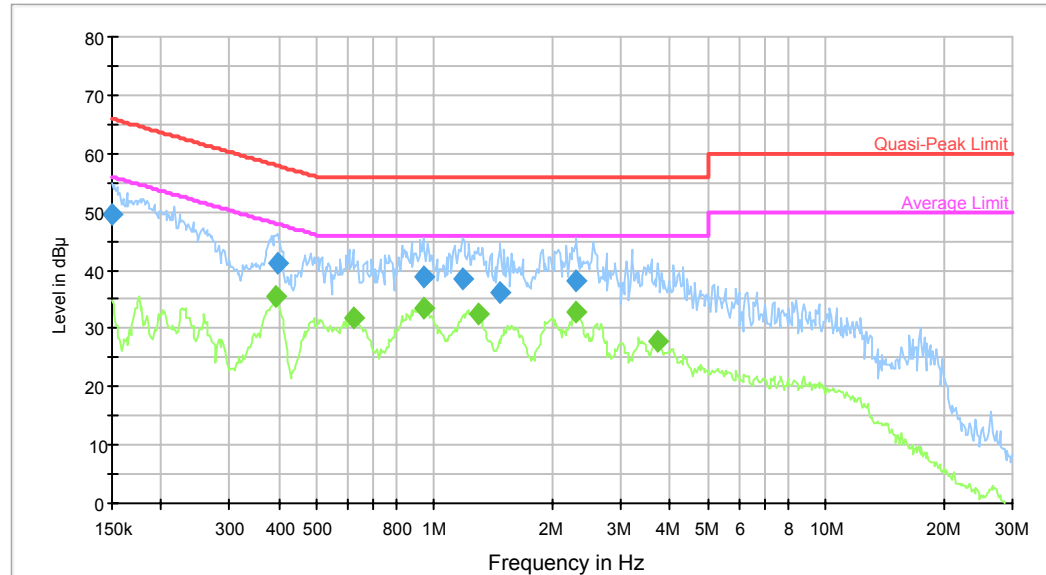

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	49.4	9.000	L1	10.1	16.6	66.0	Compliance
0.399703	41.3	9.000	L1	10.6	16.6	57.9	Compliance
0.937592	38.7	9.000	L1	10.5	17.3	56.0	Compliance
1.181325	38.6	9.000	L1	10.4	17.4	56.0	Compliance
1.476605	36.2	9.000	L1	10.4	19.8	56.0	Compliance
2.307034	38.3	9.000	L1	10.5	17.7	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.393383	35.3	9.000	L1	10.6	12.7	48.0	Compliance
0.619536	31.8	9.000	L1	10.5	14.2	46.0	Compliance
0.937592	33.4	9.000	L1	10.5	12.6	46.0	Compliance
1.289541	32.4	9.000	L1	10.4	13.6	46.0	Compliance
2.307034	32.8	9.000	L1	10.5	13.2	46.0	Compliance
3.721226	27.7	9.000	L1	10.7	18.3	46.0	Compliance

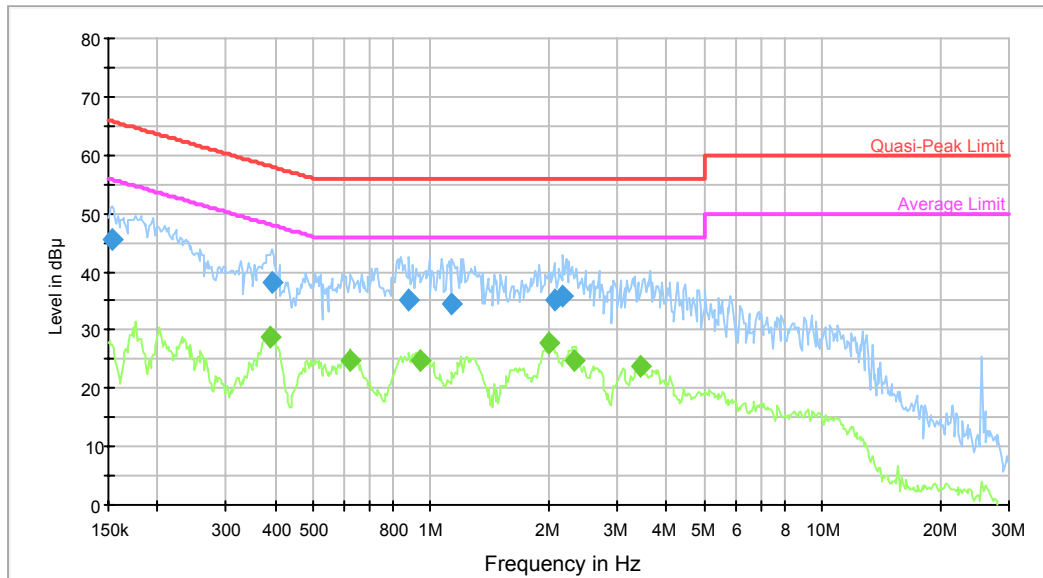AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.153629	45.6	9.000	N	10.3	20.2	65.8	Compliance
0.393383	38.3	9.000	N	10.8	19.7	58.0	Compliance
0.879690	35.2	9.000	N	10.6	20.8	56.0	Compliance
1.135185	34.5	9.000	N	10.5	21.5	56.0	Compliance
2.063510	35.1	9.000	N	10.5	20.9	56.0	Compliance
2.181877	35.7	9.000	N	10.5	20.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.390261	28.7	9.000	N	10.9	19.3	48.1	Compliance
0.624492	24.6	9.000	N	10.5	21.4	46.0	Compliance
0.937592	24.7	9.000	N	10.6	21.3	46.0	Compliance
1.998778	27.7	9.000	N	10.5	18.4	46.0	Compliance
2.325491	24.7	9.000	N	10.5	21.3	46.0	Compliance
3.436218	23.8	9.000	N	10.7	22.2	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

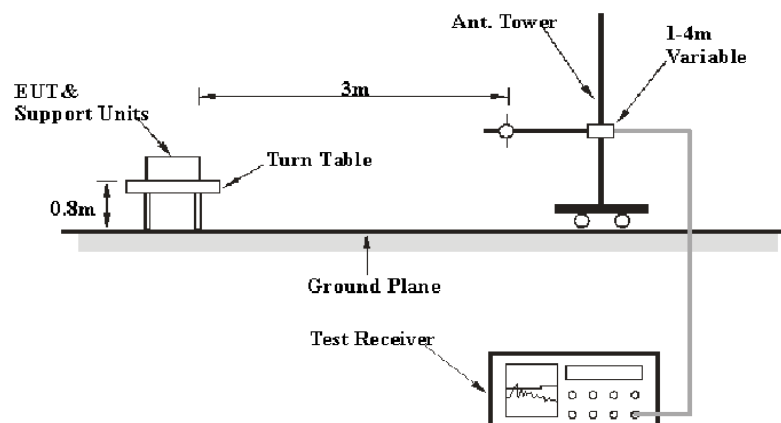

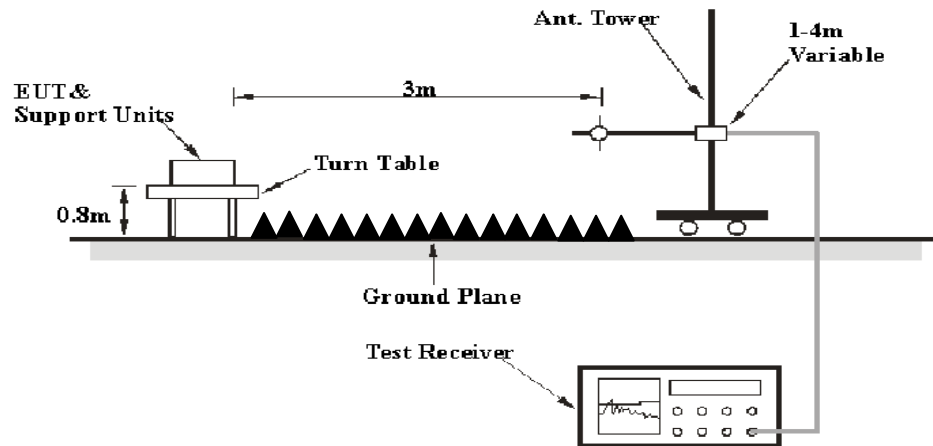Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emissions, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-06	2015-05-05
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-07	2015-05-06
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-18
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2013-06-16	2014-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2013-09-06	2014-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

1.29 dB at 2483.5 MHz in the Vertical polarization

Test Data**Environmental Conditions**

Temperature:	23.6 °C
Relative Humidity:	68 %
ATM Pressure:	100.3 kPa

The testing was performed by Ares Liu on 2014-05-09


Mode: Transmitting

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2406 MHz									
2406	74.32	PK	H	25.66	4.42	0.00	104.40	N/A	N/A
2406	67.51	AV	H	25.66	4.42	0.00	97.59	N/A	N/A
2406	76.52	PK	V	25.66	4.42	0.00	106.60	N/A	N/A
2406	69.47	AV	V	25.66	4.42	0.00	99.55	N/A	N/A
2342.8	27.10	PK	V	25.49	4.27	0.00	56.86	74.00	17.14
2342.8	16.22	AV	V	25.49	4.27	0.00	45.98	54.00	8.02
4812	52.14	PK	V	30.61	6.00	27.41	61.34	74.00	12.66
4812	41.39	AV	V	30.61	6.00	27.41	50.59	54.00	3.41*
7218	43.26	PK	V	34.12	7.46	25.91	58.93	74.00	15.07
7218	34.28	AV	V	34.12	7.46	25.91	49.95	54.00	4.05*
1690	36.28	PK	V	23.98	3.39	27.68	35.97	74.00	38.03
1690	22.67	AV	V	23.98	3.39	27.68	22.36	54.00	31.64
7375	31.85	PK	V	34.50	7.54	25.87	48.02	74.00	25.98
7375	18.37	AV	V	34.50	7.54	25.87	34.54	54.00	19.46
78.5	35.60	QP	V	8.17	1.11	21.41	23.47	40.00	16.53
Middle Channel: 2442 MHz									
2442	75.26	PK	H	25.75	4.40	0.00	105.41	N/A	N/A
2442	68.49	AV	H	25.75	4.40	0.00	98.64	N/A	N/A
2442	78.36	PK	V	25.75	4.40	0.00	108.51	N/A	N/A
2442	71.25	AV	V	25.75	4.40	0.00	101.40	N/A	N/A
4884	50.34	PK	V	30.80	6.08	27.42	59.80	74.00	14.20
4884	40.27	AV	V	30.80	6.08	27.42	49.73	54.00	4.27*
7326	43.28	PK	V	34.38	7.52	25.88	59.30	74.00	14.70
7326	33.52	AV	V	34.38	7.52	25.88	49.54	54.00	4.46*
1690	36.22	PK	V	23.98	3.39	27.68	35.91	74.00	38.09
1690	22.53	AV	V	23.98	3.39	27.68	22.22	54.00	31.78
5620	30.12	PK	V	32.12	5.99	26.75	41.48	74.00	32.52
5620	17.12	AV	V	32.12	5.99	26.75	28.48	54.00	25.52
78.5	35.10	QP	V	8.17	1.11	21.41	22.97	40.00	17.03
118.56	34.50	QP	V	14.02	1.32	21.41	28.43	43.50	15.07
High Channel: 2478 MHz									
2478	76.26	PK	H	25.84	4.47	0.00	107.57	N/A	N/A
2478	69.04	AV	H	25.84	4.47	0.00	100.35	N/A	N/A
2478	79.63	PK	V	25.84	4.47	0.00	109.94	N/A	N/A
2478	71.41	AV	V	25.84	4.47	0.00	101.72	N/A	N/A
2483.5	39.63	PK	V	25.86	4.49	0.00	69.98	74.00	4.02*
2483.5	22.36	AV	V	25.86	4.49	0.00	52.71	54.00	1.29*
4956	48.63	PK	V	30.99	5.89	27.43	58.08	74.00	15.92
4956	35.47	AV	V	30.99	5.89	27.43	44.92	54.00	9.08
7434	45.12	PK	V	34.64	7.57	25.95	61.38	74.00	12.62
7434	32.67	AV	V	34.64	7.57	25.95	48.93	54.00	5.07*
3025	32.76	PK	V	27.28	7.34	27.51	39.87	74.00	34.13
3025	18.59	AV	V	27.28	7.34	27.51	25.70	54.00	28.30
7270	32.35	PK	V	34.25	7.49	25.89	48.20	74.00	25.80
7270	18.03	AV	V	34.25	7.49	25.89	33.88	54.00	20.12
78.5	35.40	OP	V	8.17	1.11	21.41	23.27	40.00	16.73

*Within measurement uncertainty!


Conducted Spurious Emissions at Antenna Port

Low Channel

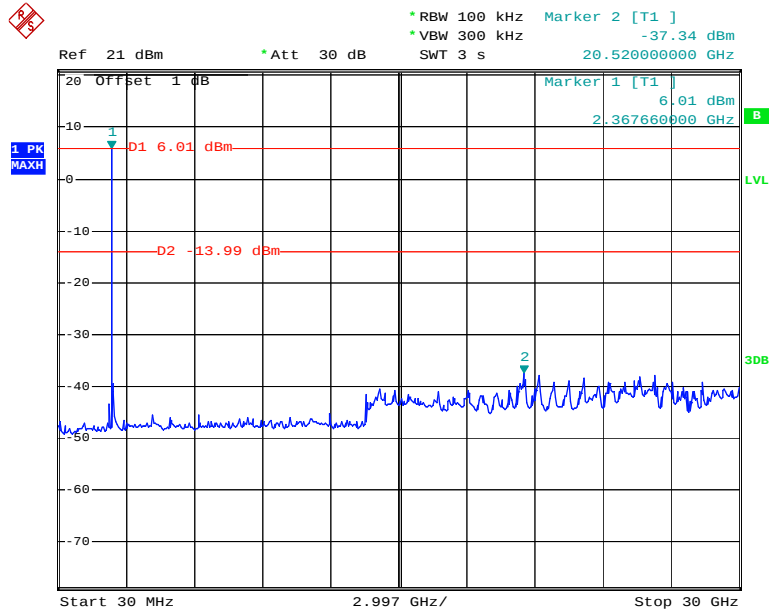


Date: 9.MAY.2014 14:39:03

Middle Channel

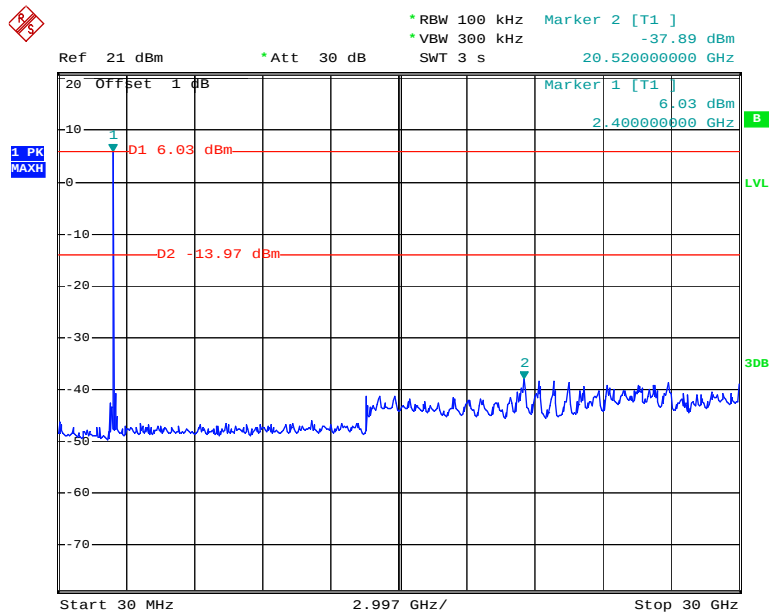

Date: 9.MAY.2014 14:35:30

High Channel

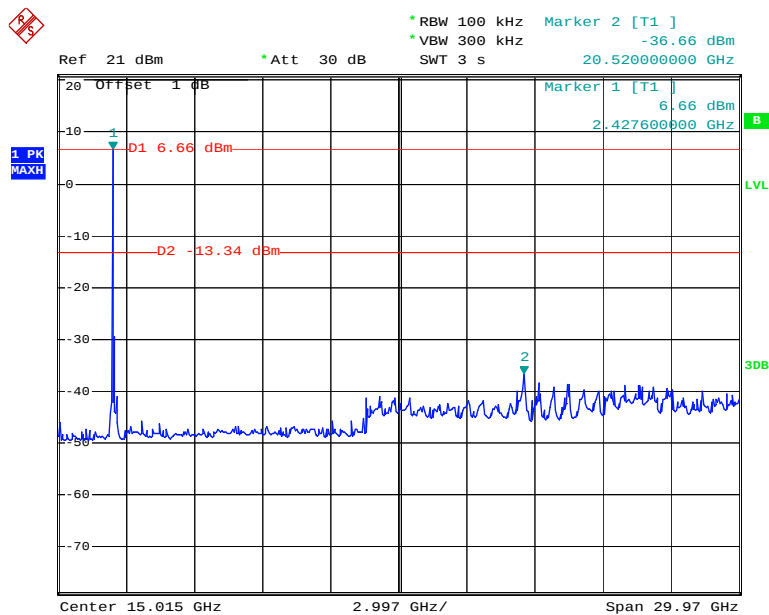

Date: 9.MAY.2014 14:41:30

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	68 %
ATM Pressure:	100.3 kPa

* The testing was performed by Ares Liu on 2014-05-09.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Hopping

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2406	4.01	3.28	Pass
Adjacent	2410			
Middle	2442	3.91	3.37	Pass
Adjacent	2446			
High	2478	4.00	3.43	Pass
Adjacent	2474			


Limit=2/3 of 20 dB bandwidth

Low Channel

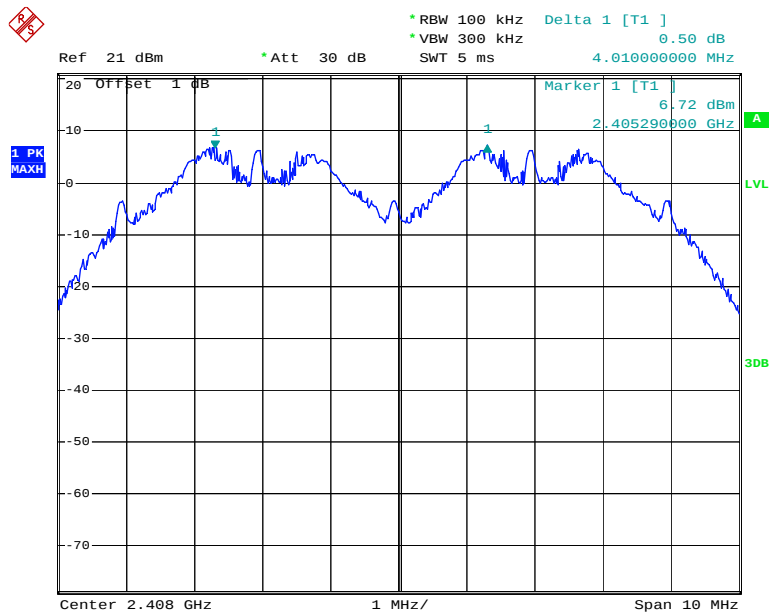


Date: 9.MAY.2014 11:39:48

Middle Channel

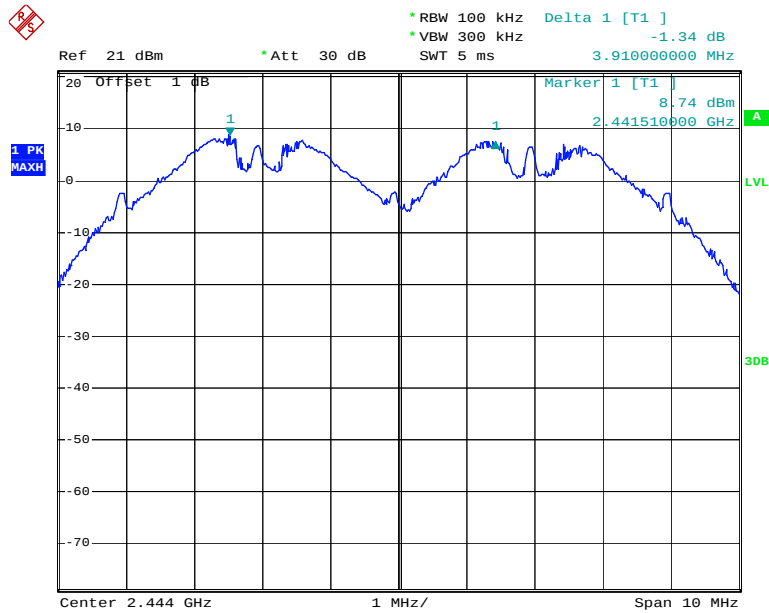

Date: 9.MAY.2014 12:00:47

HighChannel

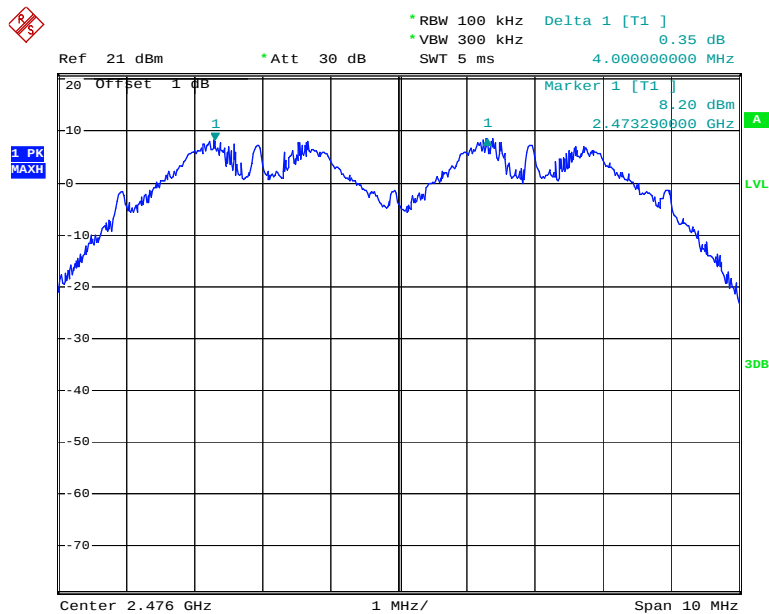

Date: 9.MAY.2014 13:13:27

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.6 °C
Relative Humidity:	68 %
ATM Pressure:	100.3 kPa

* The testing was performed by Ares Liu on 2014-05-09.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2406	4.92
Middle	2442	5.05
High	2478	5.15

Please refer to the following plots.

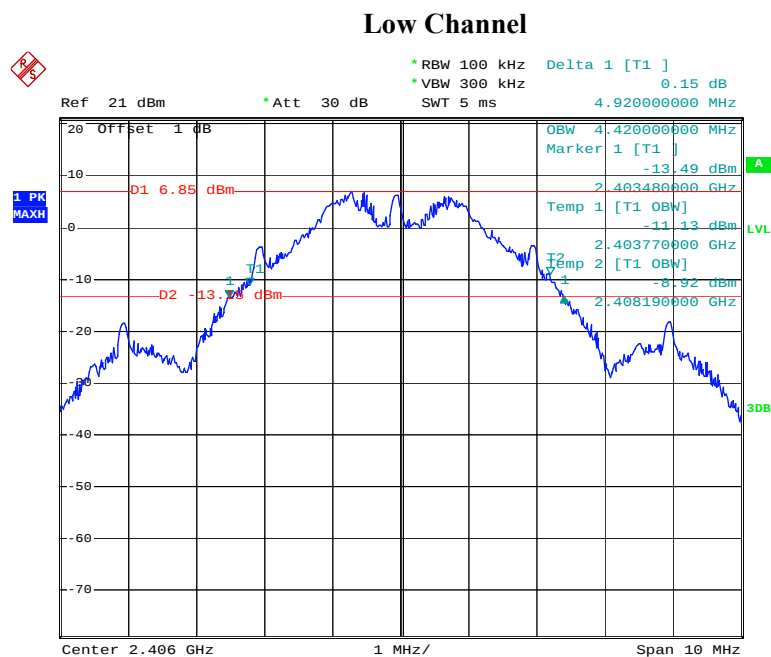


Date: 9.MAY.2014 11:16:58

Middle Channel

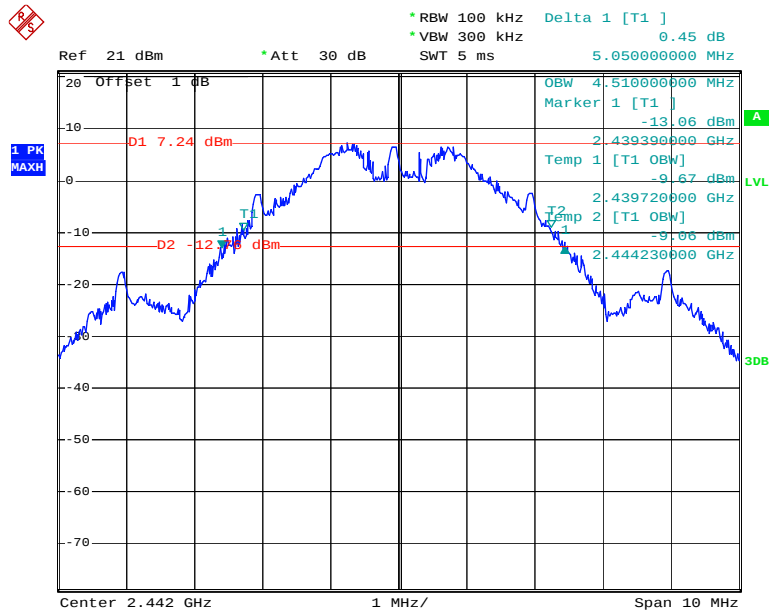

Date: 9.MAY.2014 11:17:47

High Channel

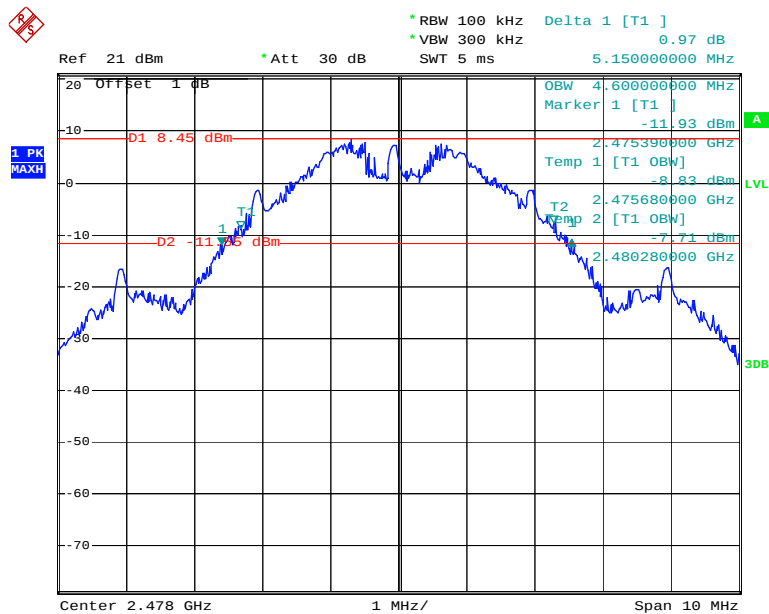

Date: 9.MAY.2014 11:18:45

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.6 °C
Relative Humidity:	68 %
ATM Pressure:	100.3 kPa


* The testing was performed by Ares Liu on 2014-05-09.

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Hopping

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	19	≥ 15

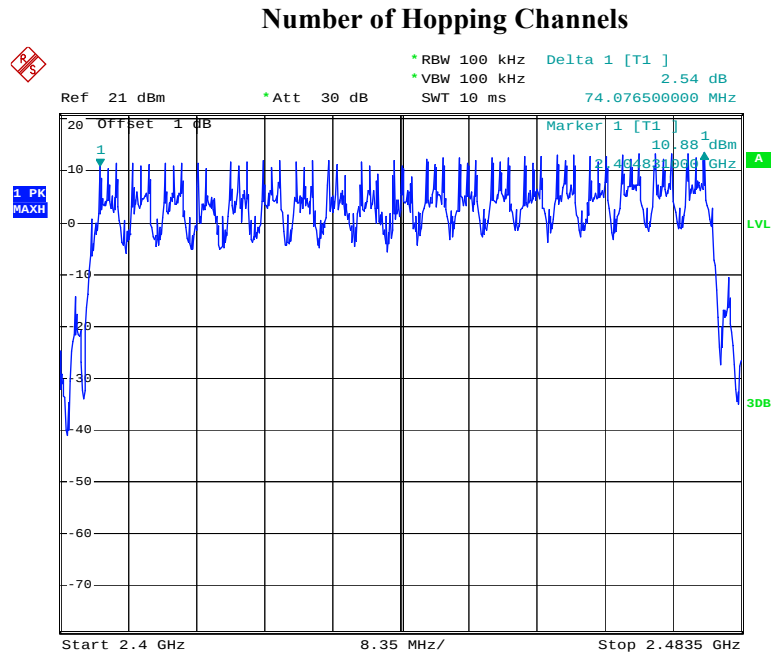

Date: 9.MAY.2014 10:51:37

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = pulse width * hopping rate / hopping numbers * hopping numbers * 0.4

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	68 %
ATM Pressure:	100.3 kPa

* The testing was performed by Ares Liu on 2014-05-09.


Test Result: Compliance. Please refer to following tables and plots

Test Mode: Hopping

Frequency (MHz)	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2406	0.244	0.087	0.4	Pass
2442	0.244	0.087	0.4	Pass
2478	0.244	0.087	0.4	Pass
Dwell time = Pulse time * (892/19) * 0.4 * 19s				


Note: the hopping rate was 892 times per second, which was declared by the manufacturer.

Low Channel

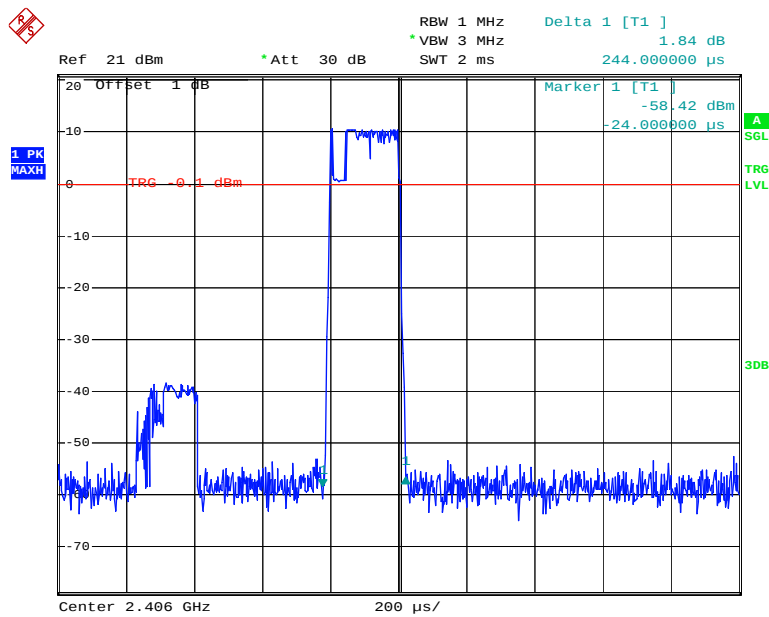


Date: 9.MAY.2014 14:07:01

Middle Channel

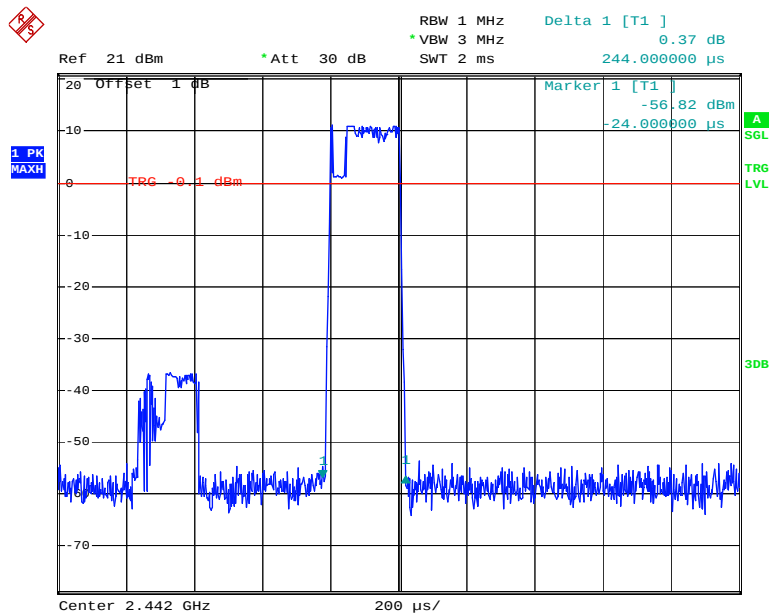

Date: 9.MAY.2014 14:11:27

High Channel

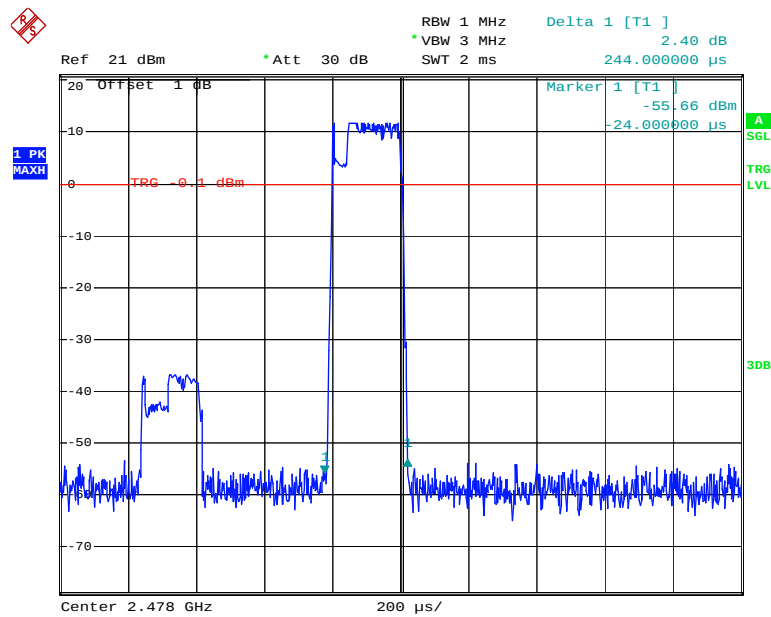

Date: 9.MAY.2014 14:11:40

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.6 °C
Relative Humidity:	68 %
ATM Pressure:	100.3 kPa


* The testing was performed by Ares Liu on 2014-05-09.

Test Result: Compliance.

Test Mode: Transmitting


Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
Low	2406	10.50	21
Middle	2442	11.20	21
High	2478	12.09	21

Note: The data above was tested in conducted mode.

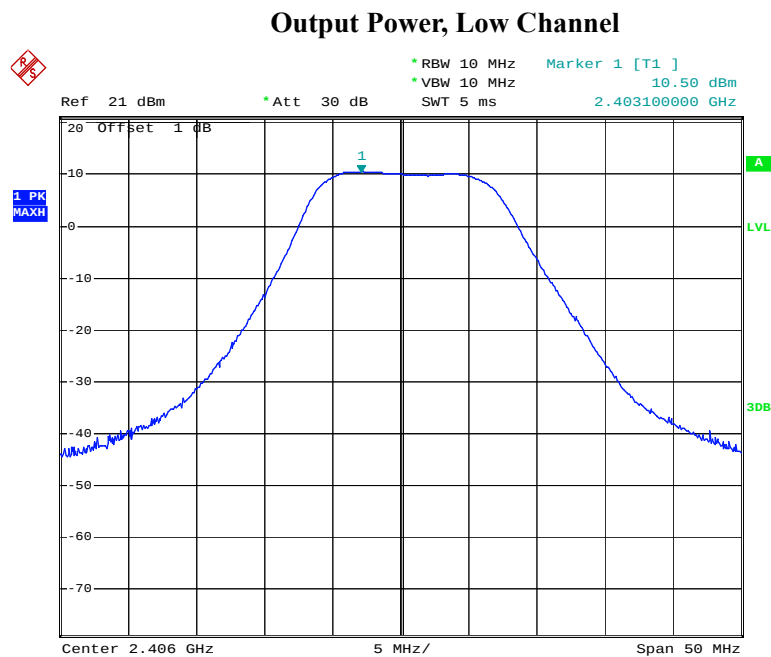


Date: 9.MAY.2014 11:19:49

Output Power, Middle Channel

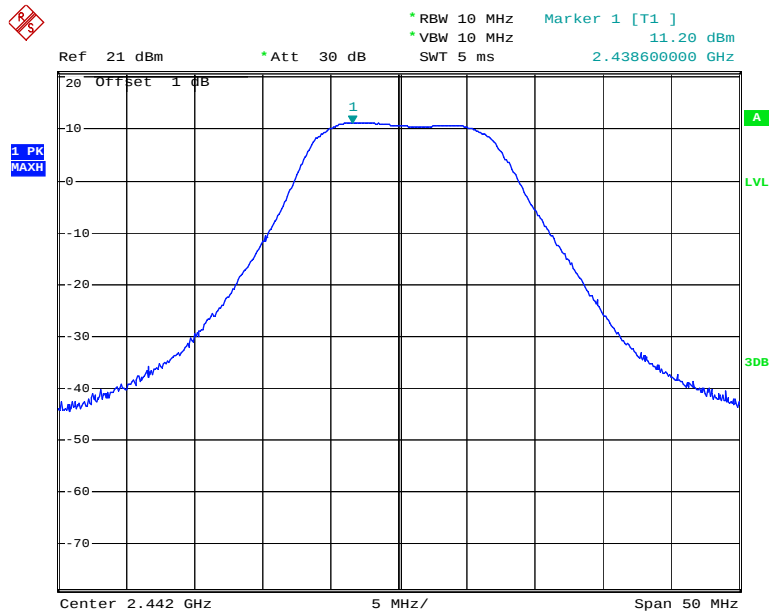

Date: 9.MAY.2014 11:19:33

Output Power, High Channel

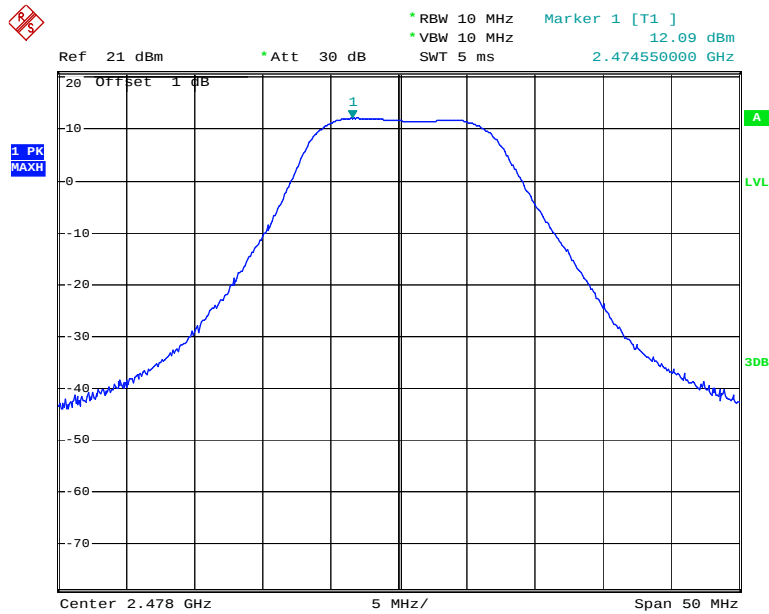

Date: 9.MAY.2014 11:19:20

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	68 %
ATM Pressure:	100.3 kPa

* The testing was performed by Ares Liu on 2014-05-09.

Band Edge, Left Side

[illegible]

Date: 9.MAY.2014 14:40:29

***** END OF REPORT *****