

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : LCD MONITOR
MODEL/TYPE NO : L21DPFAL0 / NONE
FCC ID : PJIL21DPFAL0
MULTIPLE MODEL : P227DP, P227DPS, P227DPL, P227DPT, P227DPU, P227DPV
BRAND NAME : **HYUNDAI**
APPLICANT : HYUNDAI IBT CORP.
106, Apogongdan-gil, Gimcheon-si,
Gyeongsangbuk-do, 740-862, Korea
Attn.: Yoon Suk Lee / Manager
MANUFACTURER : HYUNDAI IBT CORP.
106, Apogongdan-gil, Gimcheon-si,
Gyeongsangbuk-do, 740-862, Korea
FCC CLASSIFICATION : Class B Personal computers and peripherals
RULE PART(S) : FCC Part 15 Subpart B & ICES-003 Issue 4
TEST PROCEDURE : ANSI C63.4-2003
TEST REPORT No. : ETLE130417.0399
DATES OF TEST : May 02, 2013 to May 03, 2013
REPORT ISSUE DATE : May 16, 2013
TEST LABORATORY : ETL Inc. (FCC Designation Number: KR0022, IC OATS Number: 6473B-1)

This LCD MONITOR, Model L21DPFAL0 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B & ICES-003 Issue 4:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by: 
Jeong Hwan, Pyo (Test Engineer)
May 16, 2013

Reviewed by: 
Hyung Min, Choi (Chief Engineer)
May 16, 2013

ETL Inc.
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Tel: 82-2-858-0786 Fax: 82-2-858-0788

*The test report merely corresponds to the test sample(s).
This report shall not be reproduced, in whole or in part without the written approval of ETL Inc.*

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : HYUNDAI IBT CORP.

Address : 106, Apogongdan-gil, Gimcheon-si,
Gyeongsangbuk-do, 740-862, Korea

Attention : Yoon Suk Lee / Manager

- **EUT Type :** LCD MONITOR
- **Model Number :** L21DPFAL0
- **S/N :** -
- **Frequency Range :** X-tal → 14.185 MHz; F/MEMORY clock → 75 MHz;
LVDS clock → 74.25 MHz; EEPROM clock → Max 400 kHz
- **Rule Part(s) :** FCC Part 15 Subpart B & ICES-003 Issue 4
- **Test Procedure :** ANSI C63.4-2003
- **FCC Classification :** Class B Personal computers and peripherals
- **Dates of Tests :** May 02, 2013 to May 03, 2013
- **Place of Tests :** ETL Inc. Testing Lab. (FCC Designation Number : KR0022)

Radiated Emission test;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea

Conducted Emission test;
ETL Inc. Testing Lab. (FCC Designation Number : KR0022)
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
- **Test Report No. :** ETLE130417.0399

1. INTRODUCTION

The measurement tests for radiated and conducted emission test were conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the HYUNDAI IBT CORP., Model: L21DPFAL0.

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the LCD MONITOR (model: L21DPFAL0).

The model L21DPFAL0 is basic model that was tested.

The model differences are same with below table;

Model name	DP	DVI	VGA	Speaker	USB	Lift stand	Tilt stand
L21DPFAL0	O	O	O	O	O	O	O
P227DP	O	O	O	X	X	X	O
P227DPS	O	O	O	O	X	X	O
P227DPL	O	O	O	X	X	O	X
P227DPT	O	O	O	O	X	O	X
P227DPU	O	O	O	O	O	O	X
P227DPV	O	O	O	X	O	O	X

* O: Existence, X: Non-existence

2.2 General Specification

Item		Specification
LCD	Visible Screen Area	476.64 mm (H) x 268.11 mm (V) (21.5 Inch)
	Pixel Pitch	0.248 mm (H) x 0.248 mm (V)
	Recommended Resolution	1 920 x 1 080 @ 60 Hz
	Maximum Visible Angle	170°/170° (H/V)
	Displayed Color	16.7 M
	Brightness	250 cd/m ²
	Contrast Ratio	1 000:1
	Response Time	5 msec
Input Signal	Horizontal Frequency	30 kHz – 80 kHz
	Vertical Frequency	60 kHz – 75 kHz
	Video Signal	Analog VGA, DVI
	Connector	DVI-I, AUDIO, USB
Power	Power Consumption	< 25 W (Typ.)
	Stand by Power	< 0.5 W
	Input Power	AC 100 V – 240 V; 50 Hz/60 Hz; 2.0 A
Multimedia Speakers		1 W x 2
Operating Environment	Operation	Temperature: (25 ± 15) °C
		Humidity: (50 ± 30) % (non-condensing)
	Storage	Temperature: (20 ± 30) °C
		Humidity: (50 ± 40) % (non-condensing)

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 30 MHz to 40 GHz (or 5th harmonic of the highest frequency) in using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements below 1 GHz were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz. The measurements above 1 GHz were made with the detector set for "Peak and Average" within a bandwidth of 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determined the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner and which tends to maximize its emission level in a typical application.

4.2 EUT operation

The equipment under test was operated during the measurement under following conditions:

	Conditions	Remark
■	Stand by	
■	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor.	VGA mode & USB mode
■	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor.	DVI mode & USB mode
■	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor.	DP mode & USB mode *

* The worst case was investigated for emission test.


4.3 Support Equipment Used

Description	Model Name	Serial No.	Manufacturer	FCC
PC	D08M	6GPJXBX	Dell Inc.	DoC
Keyboard	IGK-5300	NONE	Shenzhen Jiayewang Technology Co.,Ltd.	-
Mouse	MO-2100	NONE	Tonzo Industrial Co., Ltd.	DoC
USB Drive (4 GB)	SUM-BSY4G	NONE	Samsung Electronics	-

4.4 Type of Cables Used

Device from	Device to	Type of I/O port	Length[m]	Type of shield	Used ferrite core
EUT	PC	VGA	1.5	Shielded	O
EUT	PC	DVI	1.5	Shielded	O
EUT	PC	DP	1.5	Shielded	X
EUT	PC	PC Audio In	1.5	Shielded	O
EUT	PC	USB	1.2	Shielded	X
EUT	USB Drive	USB	-	-	-
EUT	Power socket	AC Input	1.2	Unshielded	X
PC	Keyboard	USB	1.2	Shielded	X
PC	Mouse	USB	1.2	Shielded	X
PC	Power socket	AC Input	1.2	Unshielded	X

4.5 The setup drawing(s)

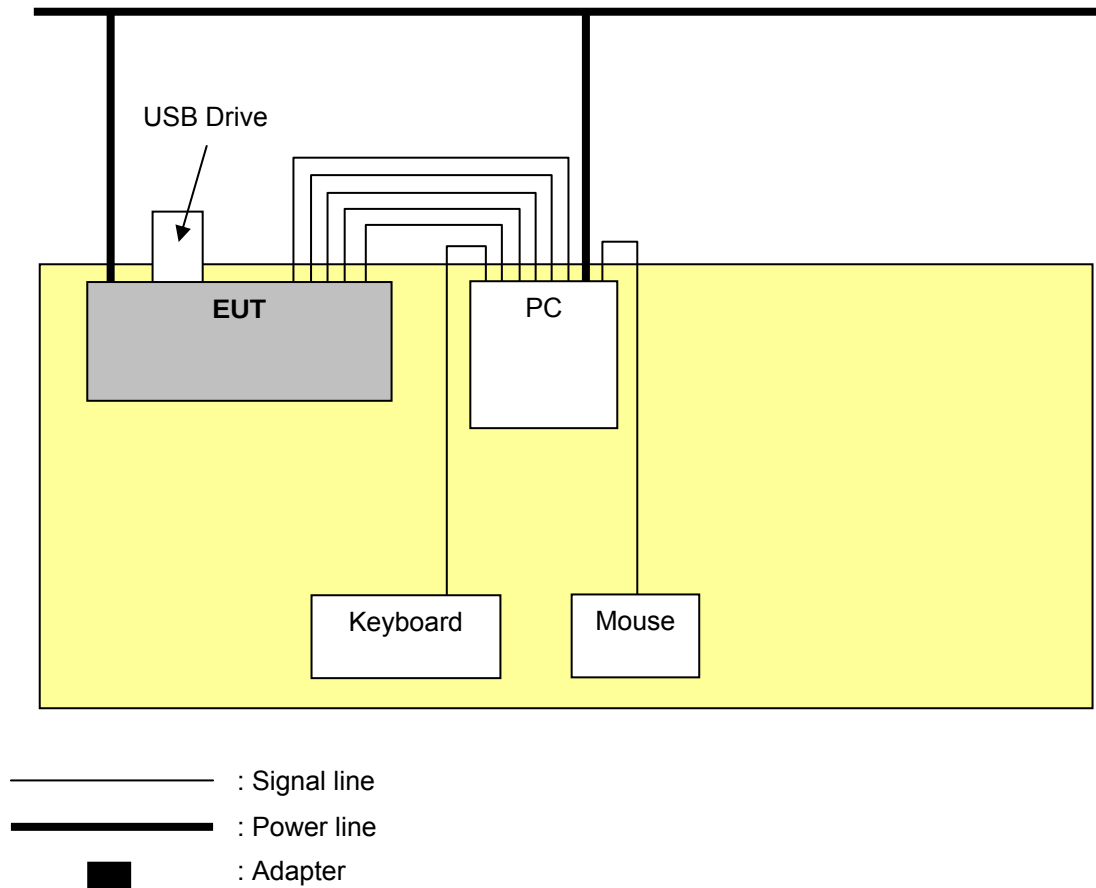

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule	Measurement Required	Result
15.107(a)	Conducted Emission Measurement	Passed by 7.00 dB
15.109(a)	Radiated Emission Measurement (Below 1 GHz)	Passed by 5.70 dB
15.109(a)	Radiated Emission Measurement (Above 1 GHz)	N/A *

** The highest frequency of the internal sources of the EUT is less than 108 MHz. This test was measurement made up to 1 GHz according to the section 15.33 of FCC Part 15.*

The data collected shows that the **HYUNDAI IBT CORP. / LCD MONITOR / L21DPFAL0** complied with technical requirements of above rules part 15.107(a) and 15.109(a) Class B Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 Conducted Emissions Measurement

5.2.1 Conducted Emissions Data

EUT	LCD MONITOR / L21DPFAL0 (S/N: N/A)
Limit apply to	FCC Part 15.107(a) Class B
Test Date	May 03, 2013
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor. (Worst case: DP mode & USB mode)
Result	Passed by 7.00 dB

Conducted Emission Test Data


The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the antenna factor and cable loss.
3. Result value = Reading + c.f
4. Margin = Limit - Result
5. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B.
6. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


Line: HOT

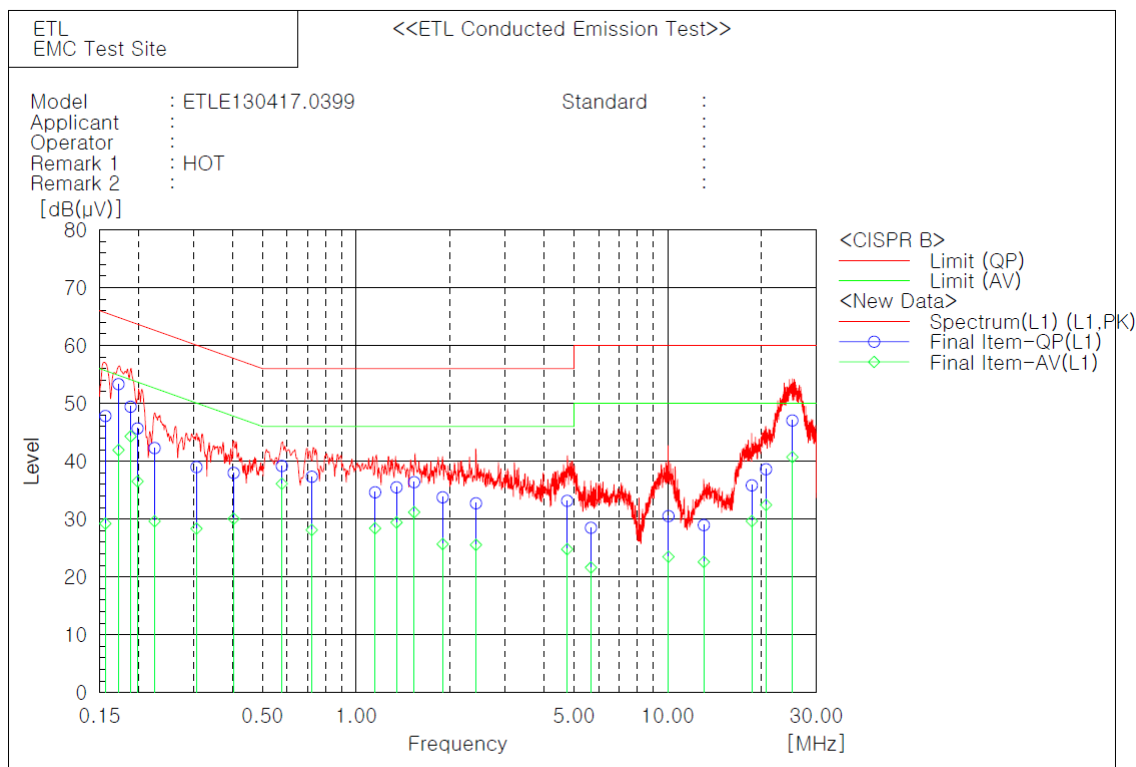

Final Result

--- L1 Phase ---										
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.15659	37.0	18.4	10.8	47.8	29.2	65.6	55.6	17.8	26.4
2	0.17261	42.7	31.3	10.6	53.3	41.9	64.8	54.8	11.5	12.9
3	0.1887	39.0	33.9	10.4	49.4	44.3	64.1	54.1	14.7	9.8
4	0.1988	35.4	26.2	10.3	45.7	36.5	63.7	53.7	18.0	17.2
5	0.22544	32.2	19.5	10.1	42.3	29.6	62.6	52.6	20.3	23.0
6	0.30715	29.0	18.3	10.0	39.0	28.3	60.0	50.0	21.0	21.7
7	0.40435	28.1	20.1	9.9	38.0	30.0	57.8	47.8	19.8	17.8
8	0.57715	29.3	26.2	9.9	39.2	36.1	56.0	46.0	16.8	9.9
9	0.7204	27.5	18.3	9.8	37.3	28.1	56.0	46.0	18.7	17.9
10	1.1498	24.8	18.6	9.8	34.6	28.4	56.0	46.0	21.4	17.6
11	1.34695	25.7	19.6	9.8	35.5	29.4	56.0	46.0	20.5	16.6
12	1.53475	26.6	21.4	9.8	36.4	31.2	56.0	46.0	19.6	14.8
13	1.8953	23.9	15.9	9.8	33.7	25.7	56.0	46.0	22.3	20.3
14	2.42355	22.9	15.7	9.8	32.7	25.5	56.0	46.0	23.3	20.5
15	4.75932	23.3	15.0	9.8	33.1	24.8	56.0	46.0	22.9	21.2
16	5.67012	18.7	11.8	9.8	28.5	21.6	60.0	50.0	31.5	28.4
17	10.055	20.6	13.6	9.9	30.5	23.5	60.0	50.0	29.5	26.5
18	13.0628	19.0	12.6	10.0	29.0	22.6	60.0	50.0	31.0	27.4
19	18.6156	25.7	19.5	10.1	35.8	29.6	60.0	50.0	24.2	20.4
20	20.6858	28.4	22.2	10.2	38.6	32.4	60.0	50.0	21.4	17.6
21	25.126	36.8	30.5	10.2	47.0	40.7	60.0	50.0	13.0	9.3

Line: Neutral

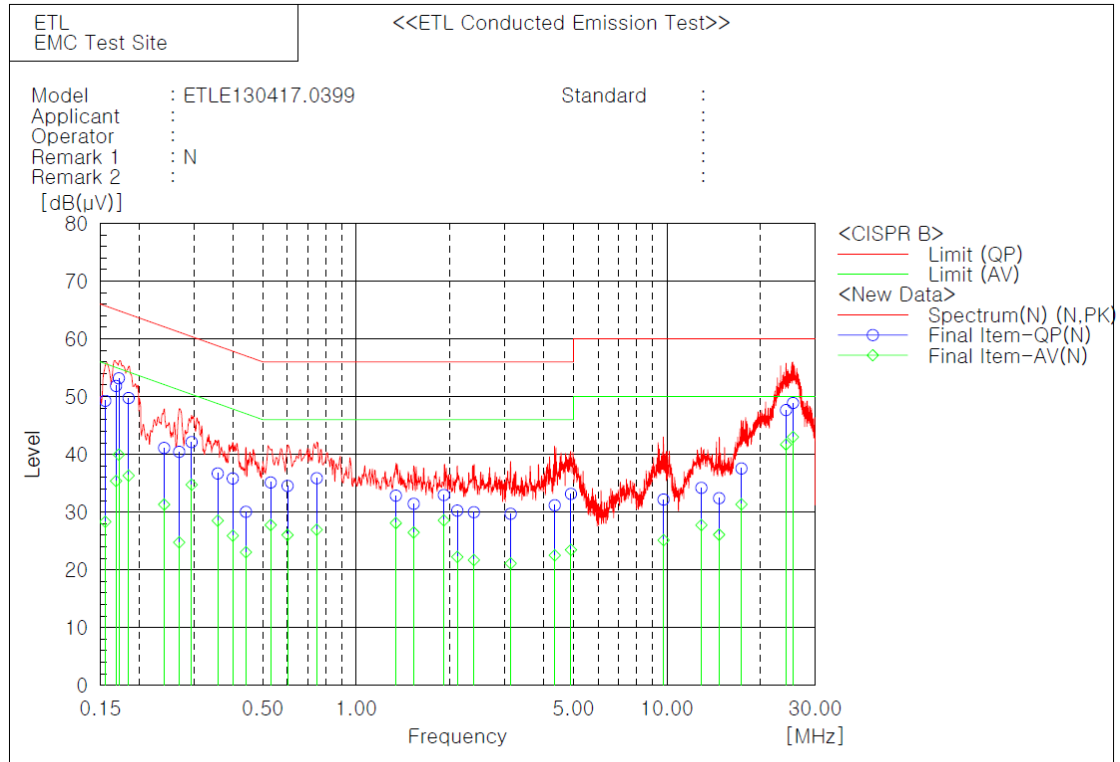

Final Result

--- N Phase ---										
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.1557	38.5	17.5	10.8	49.3	28.3	65.7	55.7	16.4	27.4
2	0.16861	41.2	24.8	10.6	51.8	35.4	65.0	55.0	13.2	19.6
3	0.17206	42.6	29.4	10.6	53.2	40.0	64.9	54.9	11.7	14.9
4	0.18497	39.3	25.9	10.4	49.7	36.3	64.3	54.3	14.6	18.0
5	0.24071	31.0	21.2	10.1	41.1	31.3	62.1	52.1	21.0	20.8
6	0.26913	30.4	14.8	10.0	40.4	24.8	61.1	51.1	20.7	26.3
7	0.29514	32.1	24.7	10.0	42.1	34.7	60.4	50.4	18.3	15.7
8	0.35838	26.8	18.6	9.9	36.7	28.5	58.8	48.8	22.1	20.3
9	0.40058	25.9	16.0	9.9	35.8	25.9	57.8	47.8	22.0	21.9
10	0.44169	20.1	13.1	9.9	30.0	23.0	57.0	47.0	27.0	24.0
11	0.53065	25.2	17.8	9.9	35.1	27.7	56.0	46.0	20.9	18.3
12	0.60095	24.6	16.1	9.9	34.5	26.0	56.0	46.0	21.5	20.0
13	0.7465	26.1	17.2	9.8	35.9	27.0	56.0	46.0	20.1	19.0
14	1.34085	23.0	18.3	9.8	32.8	28.1	56.0	46.0	23.2	17.9
15	1.53055	21.6	16.7	9.8	31.4	26.5	56.0	46.0	24.6	19.5
16	1.9147	23.2	18.8	9.8	33.0	28.6	56.0	46.0	23.0	17.4
17	2.11375	20.5	12.4	9.8	30.3	22.2	56.0	46.0	25.7	23.8
18	2.3922	20.2	11.9	9.8	30.0	21.7	56.0	46.0	26.0	24.3
19	3.14052	19.9	11.3	9.8	29.7	21.1	56.0	46.0	26.3	24.9
20	4.3536	21.4	12.7	9.8	31.2	22.5	56.0	46.0	24.8	23.5
21	4.91178	23.3	13.6	9.8	33.1	23.4	56.0	46.0	22.9	22.6
22	9.74904	22.3	15.2	9.9	32.2	25.1	60.0	50.0	27.8	24.9
23	12.9022	24.2	17.7	10.0	34.2	27.7	60.0	50.0	25.8	22.3
24	14.7196	22.4	16.1	10.0	32.4	26.1	60.0	50.0	27.6	23.9
25	17.3746	27.4	21.2	10.1	37.5	31.3	60.0	50.0	22.5	18.7
26	24.163	37.4	31.4	10.3	47.7	41.7	60.0	50.0	12.3	8.3
27	25.4376	38.6	32.7	10.3	48.9	43.0	60.0	50.0	11.1	7.0

5.3 Radiated Emissions Measurement

5.3.1 Radiated Emissions Data

- Below 1 GHz

EUT	LCD MONITOR / L21DPFAL0 (S/N: N/A)
Limit apply to	FCC Part 15.109(a) Class B
Test Date	May 02, 2013
Operating Condition	The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor. (Worst case: DP mode & USB mode)
Result	Passed by 5.70 dB


Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
40.98	16.90	V	11.92	1.38	30.20	40.00	9.80
45.60	15.42	V	12.22	1.36	29.00	40.00	11.00
129.53	17.44	V	11.85	1.91	31.20	43.50	12.30
268.61	19.27	H	12.29	2.54	34.10	46.00	11.90
376.00	22.27	H	15.11	2.92	40.30	46.00	5.70

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the FCC Part 15.109(a) Class B.
5. The highest frequency of the internal sources of the EUT is less than 108 MHz. This test was measurement made up to 1 GHz according to the section 15.33 of FCC Part 15.

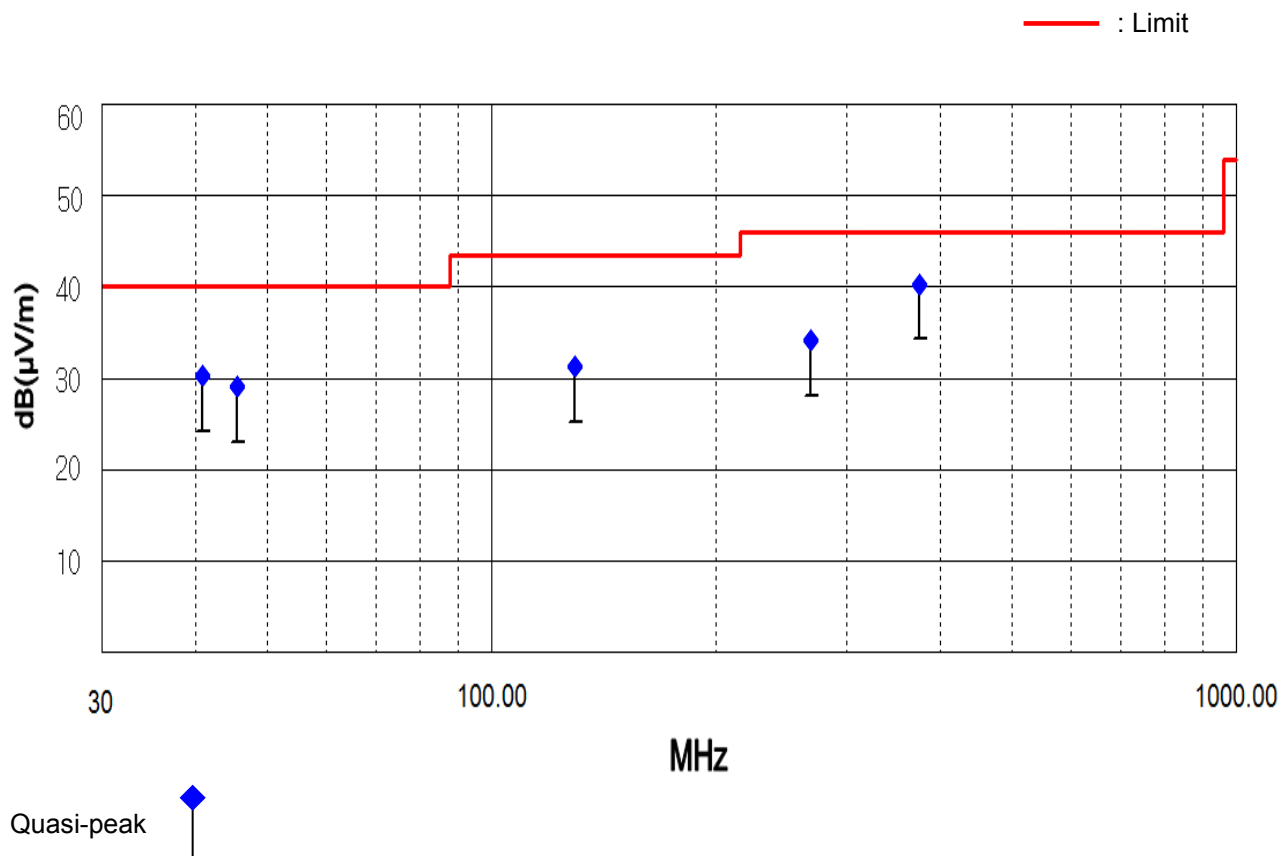

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

PA* = Preamplifier Factor

* PA is only be used for the measuring frequency above 1 GHz.

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$

$$dB(\mu V) = dBm + 107$$

Example : @ 376.00 MHz

$$\text{Class B Limit} = 46.00 \text{ dB}(\mu V/m)$$

$$\text{Reading} = 22.27 \text{ dB}(\mu V)$$

$$\text{Antenna Factor + Cable Loss} = 15.11 + 2.92 = 18.03 \text{ dB}(\mu V/m)$$

$$\text{Total} = 40.30 \text{ dB}(\mu V/m)$$

$$\text{Margin} = 46.00 - 40.30 = 5.70 \text{ dB}$$

$$= 5.70 \text{ dB below Limit}$$

7. List of test equipments used for measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
☒	EMI Test Receiver	ESVS 10	R&S	835165/001	13.03.18	14.03.18
☒	EMI Test Receiver	ESPI3	R&S	100478	12.09.05	13.09.05
☒	Two-Line V-Network	ENV216	R&S	958599/106	13.03.19	14.03.19
☒	LISN	3816-2	EMCO	1002	12.09.05	13.09.05
☒	LogBicon Antenna	VULB9160	Schwarzbeck	3128	12.02.22	14.02.22
☒	Turn-Table	TT 1.35 SI	SES	-	N/A	N/A
☒	Antenna Master	AM 4.5	SES	-	N/A	N/A