

## Electromagnetic Emission

# FCC MEASUREMENT REPORT

## CERTIFICATION OF COMPLIANCE

## FCC Part 15 Certification Measurement

<b>PRODUCT</b>	: LCD MONITOR
<b>MODEL/TYPE NO</b>	: L24DPFAL0 / NONE
<b>FCC ID</b>	: PJIL24DPFAL0
<b>MULTIPLE MODEL</b>	: P247DP, P247DPS, P247DPL, P247DPT, P247DPU, P247DPV
<b>BRAND NAME</b>	: <b>HYUNDAI</b>
<b>APPLICANT</b>	: HYUNDAI IT CORP.  San 136-1, Ami-ri, Bubal-eub, Icheon-si, Gyeonggi-do, 467-701, Korea Attn.: Kyoung-ok, Kim / Assistant Manager
<b>MANUFACTURER</b>	: HYUNDAI IBT CORP.  106, Apogongdan-gil, Gimcheon-si, Gyeongsangbuk-do, 740-862, Korea
<b>FCC CLASSIFICATION</b>	: Class B Personal computers and peripherals
<b>RULE PART(S)</b>	: FCC Part 15 Subpart B & ICES-003 Issue 4
<b>TEST PROCEDURE</b>	: ANSI C63.4-2003
<b>TEST REPORT No.</b>	: ETLE120630.0785
<b>DATES OF TEST</b>	: July 09, 2012 to July 10, 2012
<b>REPORT ISSUE DATE</b>	: August 03, 2012
<b>TEST LABORATORY</b>	: ETL Inc. (FCC Designation Number: KR0022, IC OATS Number: 6473B-1)

This LCD MONITOR, Model L24DPFAL0 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B & ICES-003 Issue 4: I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by:

Chul Min, Ji (Test Engineer)

August 03, 2012

Reviewed by:

Hyung Min, Choi (Chief Engineer)

August 03, 2012

**ETL Inc.**  
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea  
Tel: 82-2-858-0786 Fax: 82-2-858-0788

The test report merely corresponds to the test sample(s).  
This report shall not be reproduced, in whole or in part without the written approval of ETL Inc.

## Table of Contents

### **FCC Measurement Report**

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
  - 5.1 Summary of Test Results**
  - 5.2 Conducted Emissions Measurement**
  - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

**Appendix A. FCC Label and Location**

**Appendix B. Test Setup Photographs**

**Appendix C. External Photographs**

**Appendix D. Internal Photographs**

**Appendix E. Block Diagram**

**Appendix F. User Manual**

## FCC MEASUREMENT REPORT

**Scope** – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

### General Information

<b>Applicant Name :</b> HYUNDAI IT CORP.	
<b>Address</b>	: San 136-1, Ami-ri, Bubal-eub, Icheon-si, Gyeonggi-do, 467-701, Korea
<b>Attention</b>	: Kyoung-ok, Kim / Assistant Manager

- **EUT Type :** LCD MONITOR
- **Model Number :** L24DPFAL0
- **S/N :** -
- **Frequency Range :** X-tal → 14.185 MHz; F/MEMORY clock → 75 MHz;  
LVDS clock → 74.25 MHz; EEPROM clock → Max 400 kHz
- **Rule Part(s) :** FCC Part 15 Subpart B & ICES-003 Issue 4
- **Test Procedure :** ANSI C63.4-2003
- **FCC Classification :** Class B Personal computers and peripherals
- **Dates of Tests :** July 09, 2012 to July 10, 2012
- **Place of Tests :** ETL Inc. Testing Lab. (FCC Designation Number : KR0022)  
  
Radiated Emission test;  
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,  
Gyeonggi-do, 445-882, Korea
- **Conducted Emission test;**  
ETL Inc. Testing Lab. (FCC Designation Number : KR0022)  
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
- **Test Report No. :** ETLE120630.0785

## 1. INTRODUCTION

The measurement tests for radiated and conducted emission test were conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the HYUNDAI IT CORP., Model: L24DPFAL0.

## 2. PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the LCD MONITOR (model: L24DPFAL0).

The model L24DPFAL0 is basic model that was tested.

The model differences are same with below table;

Model name	DP	DVI	VGA	Speaker	USB	Lift stand	Tilt stand
L24DPFAL0	O	O	O	O	O	O	O
P247DP	O	O	O	X	X	X	O
P247DPS	O	O	O	O	X	X	O
P247DPL	O	O	O	X	X	O	X
P247DPT	O	O	O	O	X	O	X
P247DPU	O	O	O	O	O	O	X
P247DPV	O	O	O	X	O	O	X

\* O: Existence, X: Non-existence

## 2.2 General Specification

Item		Specification
LCD	Visible Screen Area	531.36 mm (H) x 298.89 mm (V) (24 Inch)
	Pixel Pitch	0.276 mm (H) x 0.276 mm (V)
	Recommended Resolution	1 920 x 1 080 @ 60 Hz
	Maximum Visible Angle	170°/170° (H/V)
	Displayed Color	16.7 M
	Brightness	250 cd/m <sup>2</sup>
	Contrast Ratio	1 000:1
	Response Time	5 msec
Input Signal	Horizontal Frequency	30 kHz – 80 kHz
	Vertical Frequency	60 kHz – 75 kHz
	Video Signal	Analog RGB, DVI
	Connector	DVI-I, AUDIO, USB
Power	Power Consumption	< 28 W (Typ.)
	Stand by Power	< 0.5 W
	Input Power	AC 100 V – 240 V; 50 Hz/60 Hz; 2.0 A
Multimedia Speakers		1 W x 2
Operating Environment	Operation	Temperature: (25 ± 15) °C
		Humidity: (50 ± 30) % (non-condensing)
	Storage	Temperature: (20 ± 30) °C
		Humidity: (50 ± 40) % (non-condensing)

## 3. DESCRIPTION OF TESTS

### 3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 μH LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

### 3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 30 MHz to 40 GHz (or 5th harmonic of the highest frequency) in using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements below 1 GHz were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz. The measurements above 1 GHz were made with the detector set for "Peak and Average" within a bandwidth of 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determined the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 4. TEST CONDITION

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner and which tends to maximize its emission level in a typical application.

### 4.2 EUT operation

The equipment under test was operated during the measurement under following conditions:

	Conditions	Remark
■	Stand by	
■	Burn-in test program with "H" pattern display on monitor.	RGB mode & USB mode
■	Burn-in test program with "H" pattern display on monitor.	DVI mode & USB mode
■	Burn-in test program with "H" pattern display on monitor. *	DP mode & USB mode


\* The worst case was investigated for emission test.

### 4.3 Support Equipment Used

Description	Model Name	Serial No.	Manufacturer	FCC
PC	P6-2010kr	4CE1360CC5	Hewlett-Packard Company	DoC
Keyboard	SK-8115	NONE	Yet Foundate Ltd	DoC
Mouse	MOC5UO	NONE	Dongguan Primax Electronics Ltd	DoC
USB Drive	NONE	NONE	NONE	DoC

## 4.4 Type of Cables Used

Device from	Device to	Type of I/O port	Length[m]	Type of shield	Used ferrite core
EUT	PC	RGB	1.5	Shielded	O
EUT	PC	DVI	1.5	Shielded	O
EUT	PC	DP	1.5	Shielded	X
EUT	PC	PC Audio In	1.5	Shielded	X
EUT	PC	USB	1.2	Shielded	X
EUT	USB Drive	USB	-	-	-
EUT	Power socket	AC Input	1.5	Unshielded	X
PC	Keyboard	USB	1.2	Shielded	X
PC	Mouse	USB	1.2	Shielded	X
PC	Power socket	AC Input	1.5	Unshielded	X

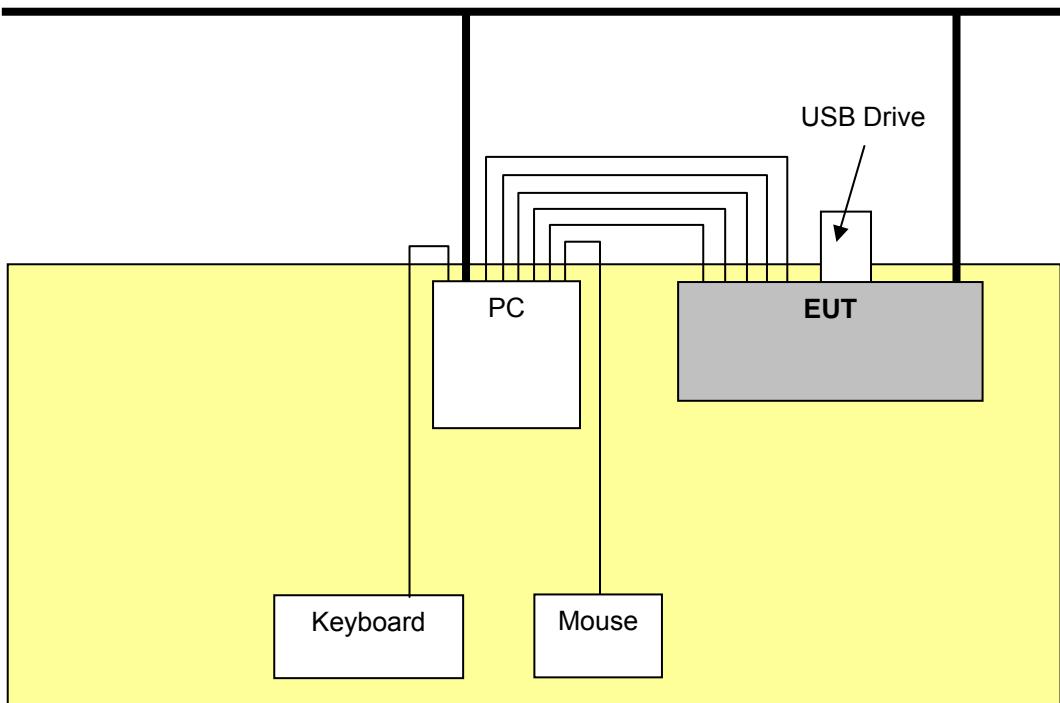**4.5 The setup drawing(s)**

— : Signal line

— : Power line

■ : Adapter

## 5. TEST RESULTS

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule	Measurement Required	Result
15.107(a)	Conducted Emission Measurement	<b>Passed by 5.90 dB</b>
15.109(a)	Radiated Emission Measurement	<b>Passed by 3.50 dB *</b>

\* The highest frequency of the internal sources of the EUT is less than 108 MHz. This test was measurement made up to 1 GHz according to the section 15.33 of FCC Part 15.

The data collected shows that the **HYUNDAI IT CORP. / LCD MONITOR / L24DPFAL0** complied with technical requirements of above rules part 15.107(a) and 15.109(a) Class B Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 5.2 Conducted Emissions Measurement

### 5.2.1 Conducted Emissions Data

EUT	LCD MONITOR / L24DPFAL0 (S/N: N/A)
Limit apply to	FCC Part 15.107(a) Class B
Test Date	July 09, 2012
Operating Condition	Burn-in test program with "H" pattern display on monitor (Worst case: DP mode & USB mode)
Result	Passed by 5.90 dB


### Conducted Emission Test Data

The following graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.  
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

#### NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the antenna factor and cable loss.
3. Result value = Reading + c.f
4. Margin = Limit - Result
5. \* H : HOT Line , \*\*N : Neutral Line
6. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B.
7. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


Line: HOT

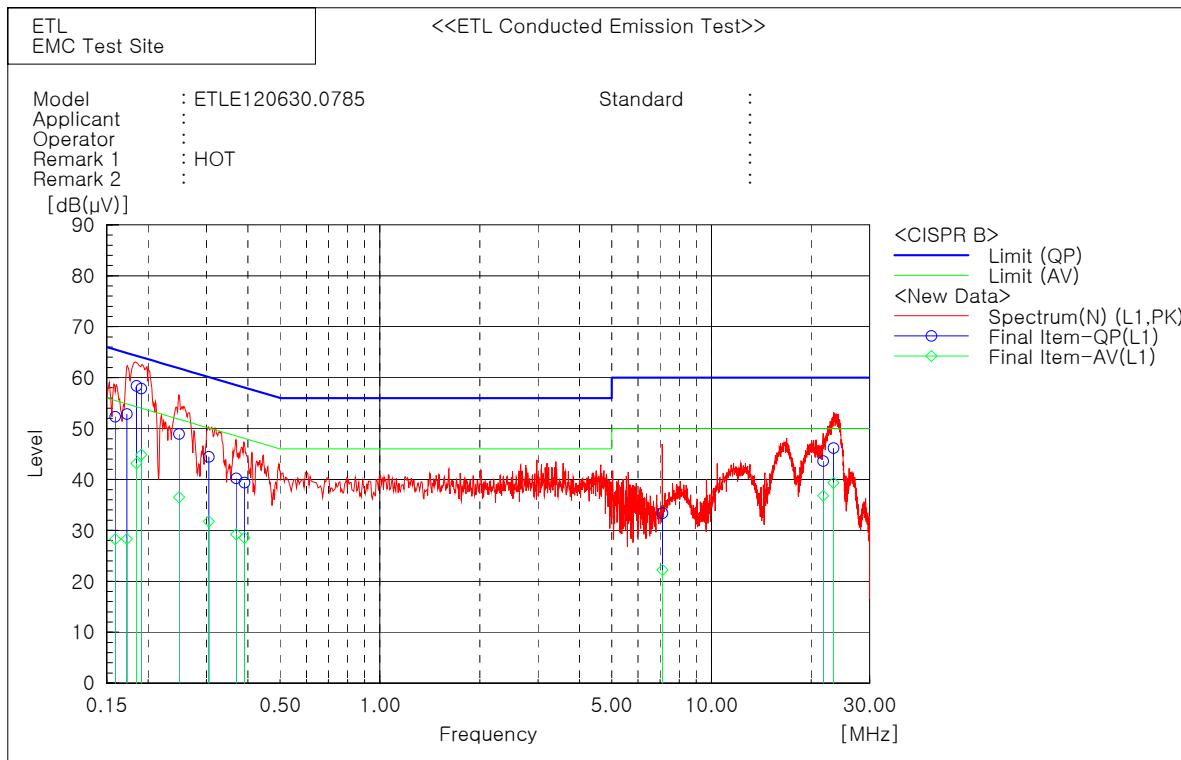

#### Final Result

--- L1 Phase ---												
No.	Frequency [MHz]	Reading QP [dB( μV)]	Reading AV [dB( μV)]	c.f	Result QP [dB]	Result AV [dB( μV)]	Result L1 [dB( μV)]	Limit QP [dB( μV)]	Limit AV [dB( μV)]	Margin QP [dB]	Margin AV [dB]	
1	0.15901	42.6	18.6	9.7	52.3	28.3	65.5	55.5	55.5	13.2	27.2	
2	0.17246	43.2	18.6	9.7	52.9	28.3	64.8	54.8	54.8	11.9	26.5	
3	0.18443	48.7	33.4	9.7	58.4	43.1	64.3	54.3	54.3	5.9	11.2	
4	0.1908	48.2	35.1	9.7	57.9	44.8	64.0	54.0	54.0	6.1	9.2	
5	0.24801	39.2	26.8	9.7	48.9	36.5	61.8	51.8	51.8	12.9	15.3	
6	0.30471	34.7	22.1	9.7	44.4	31.8	60.1	50.1	50.1	15.7	18.3	
7	0.36861	30.5	19.5	9.7	40.2	29.2	58.5	48.5	48.5	18.3	19.3	
8	0.39065	29.7	18.8	9.7	39.4	28.5	58.0	48.0	48.0	18.6	19.5	
9	7.12424	23.5	12.3	9.9	33.4	22.2	60.0	50.0	50.0	26.6	27.8	
10	21.7326	33.5	26.7	10.1	43.6	36.8	60.0	50.0	50.0	16.4	13.2	
11	23.3316	36.0	29.2	10.2	46.2	39.4	60.0	50.0	50.0	13.8	10.6	

## Line: Neutral

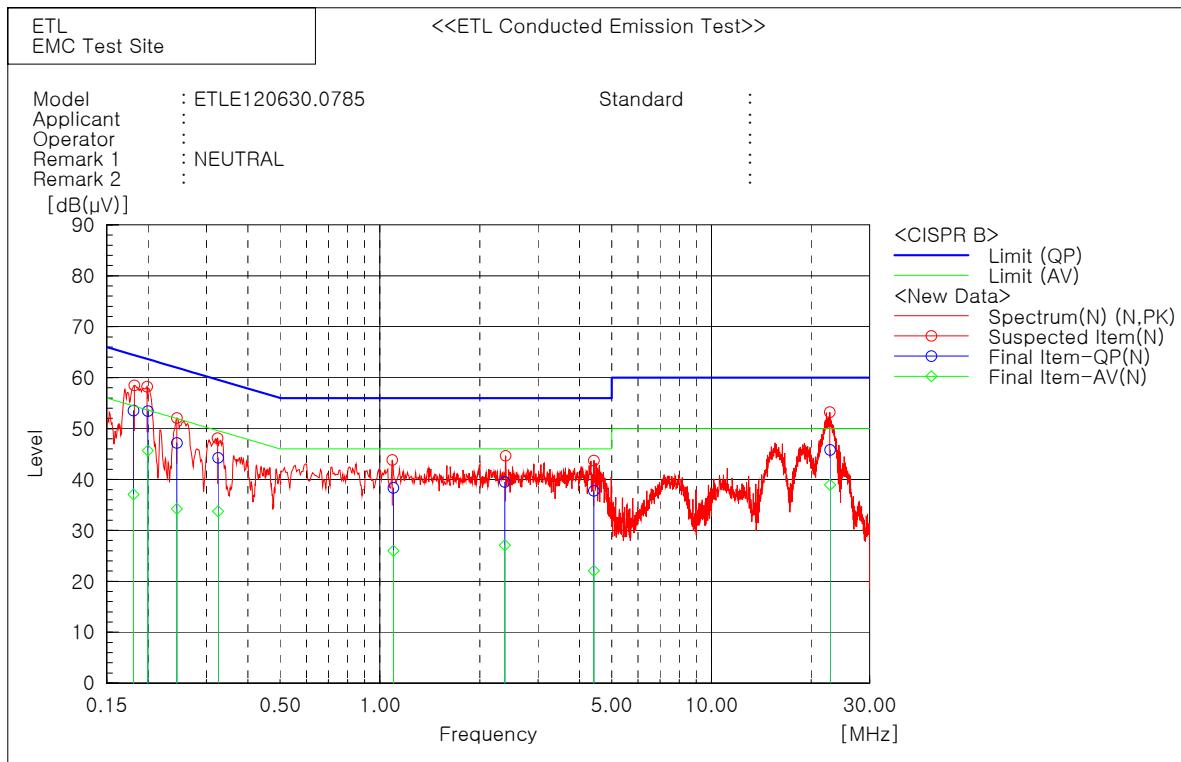

### Final Result

--- N Phase ---											
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	
	[MHz]	[dB( μV)]	[dB( μV)]		[dB]	[dB( μV)]	[dB( μV)]	[dB( μV)]	[dB]	[dB]	
1	0.18077	43.8	27.4	9.7	53.5	37.1	64.5	54.5	11.0	17.4	
2	0.19988	43.8	35.9	9.7	53.5	45.6	63.6	53.6	10.1	8.0	
3	0.24402	37.5	24.5	9.7	47.2	34.2	62.0	52.0	14.8	17.8	
4	0.32528	34.5	24.1	9.7	44.2	33.8	59.6	49.6	15.4	15.8	
5	1.09835	28.6	16.3	9.7	38.3	26.0	56.0	46.0	17.7	20.0	
6	2.38135	29.7	17.3	9.8	39.5	27.1	56.0	46.0	16.5	18.9	
7	4.41642	28.0	12.3	9.8	37.8	22.1	56.0	46.0	18.2	23.9	
8	22.7824	35.7	28.8	10.1	45.8	38.9	60.0	50.0	14.2	11.1	

## 5.3 Radiated Emissions Measurement

### 5.3.1 Radiated Emissions Data

- Below 1 GHz

EUT	LCD MONITOR / L24DPFAL0 (S/N: N/A)		
Limit apply to	FCC Part 15.109(a) Class B		
Test Date	July 10, 2012		
Operating Condition	Burn-in test program with "H" pattern display on monitor (Worst case: DP mode & USB mode)		
Result	Passed by 3.50 dB		


### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(µV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(µV)]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
32.72	20.75	V	11.34	1.41	33.50	40.00	6.50
46.36	22.88	V	12.25	1.37	36.50	40.00	3.50
119.99	22.18	V	11.26	1.86	35.30	43.50	8.20
160.89	24.30	V	13.13	2.07	39.50	43.50	4.00
163.62	22.71	V	12.90	2.09	37.70	43.50	5.80
365.17	20.36	H	14.85	2.89	38.10	46.00	7.90
483.21	18.56	H	17.30	3.34	39.20	46.00	6.80

#### NOTES:

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 30 MHz ~ 1 000 MHz according to the FCC Part 15.109(a) Class B.
5. The highest frequency of the internal sources of the EUT is less than 108 MHz. This test was measurement made up to 1 GHz according to the section 15.33 of FCC Part 15.

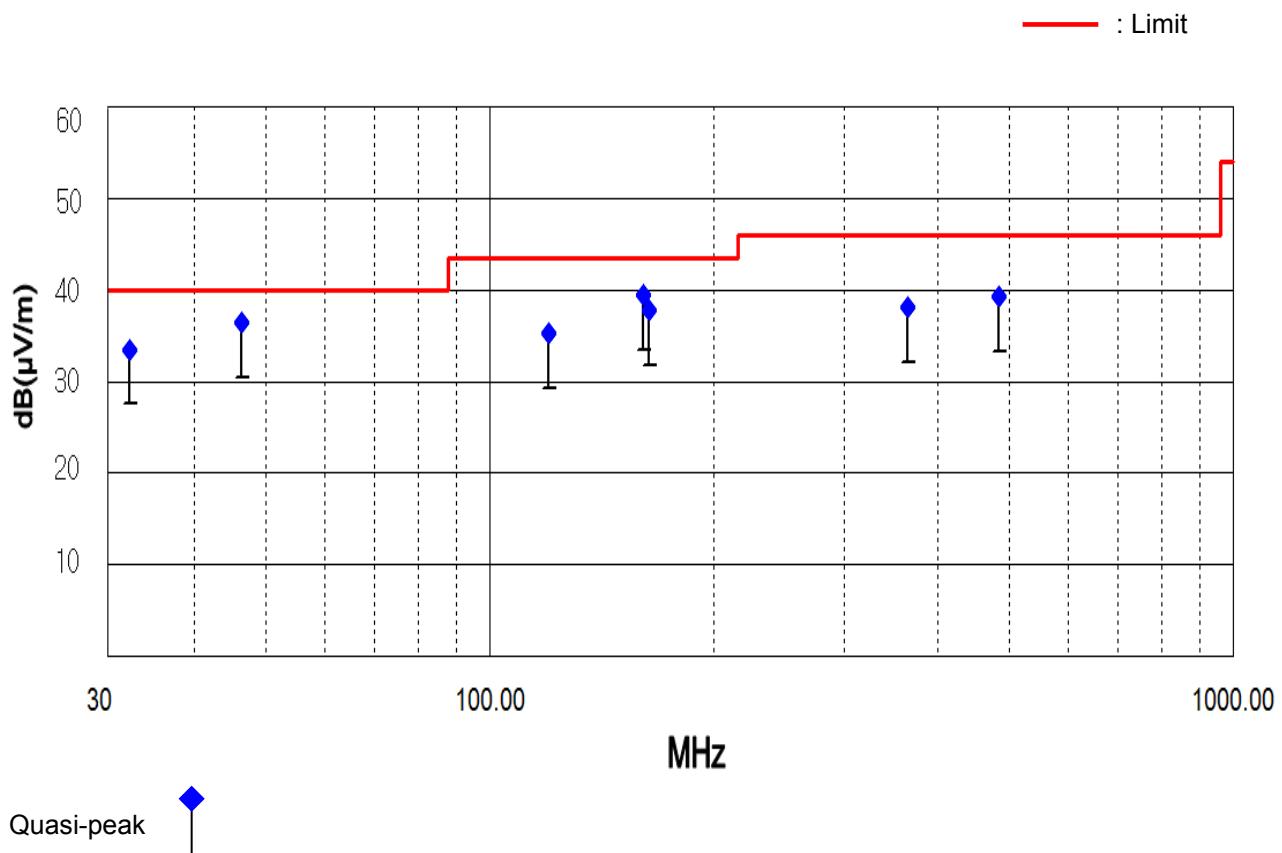

## 6. SAMPLE CALCULATION

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (\mu V)$$

$$dB(\mu V) = dBm + 107$$

Example : @ 46.36 MHz

Class B Limit = 40.00 dB( $\mu V/m$ )

Reading = 22.88 dB( $\mu V$ )

Antenna Factor + Cable Loss =  $12.25 + 1.37 = 13.62$  dB( $\mu V/m$ )

Total = 36.50 dB( $\mu V/m$ )

Margin =  $40.00 - 36.50 = 3.50$  dB

= 3.50 dB below Limit

## 7. List of test equipments used for measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
<input checked="" type="checkbox"/>	EMI Test Receiver	ESVS 10	R&S	835165/001	12.03.20	13.03.20
<input checked="" type="checkbox"/>	EMI Test Receiver	ESPI3	R&S	100478	11.09.15	12.09.15
<input checked="" type="checkbox"/>	Two-Line V-Network	ENV216	R&S	958599/106	12.03.19	13.03.19
<input checked="" type="checkbox"/>	LISN	3816-2	EMCO	1002	11.09.15	12.09.15
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarzbeck	3128	12.02.22	14.02.22
<input checked="" type="checkbox"/>	Turn-Table	MFT-120S	Max-Full Antenna Corp	-	N/A	N/A
<input checked="" type="checkbox"/>	Antenna Master	MFA-440E	Max-Full Antenna Corp	-	N/A	N/A