

HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

INT'L STANDARD CERTIFICATION TEAM
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA
TEL : +82 31 639 8518 FAX : +82 31 639 8525 www.hctec.co.kr

CERTIFICATION

Manufacture;
IMAGEQUEST CO., LTD.
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI,
KYOUNKI-DO, 467-701, KOREA

IMAGEQUEST FRN : 0005-8664-39

Date of Issue: DECEMBER 24, 2001
Test Report No.: HCT-F02-0101
Test Site: HYUNDAI CALIBRATION & CERTIFICATION
TECHNOLOGIES CO., LTD.

HCT FRN : 0005-8664-21

FCC ID :

PJIL520
L520

MODEL / TYPE :

FCC Rule Part(s):

Part 15 & 2; ET Docket 95-19

Classification:

FCC Class B Peripheral Device (JBP)

Standard(s):

FCC Class B: 1998 (CISPR 22)

Equipment(EUT) Type:

15" LCD Monitor

Max Resolution:

1024X768 (@60KHz/ 75Hz)

Port/ Connector(s)

15-pin D-sub VGA connector


LCD PANEL

Acer Display Technology Inc. (L150X2M)

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988,21 U.S.C.853(a).



Report prepared by : Ki-Soo Kim
Manager of EMC Tech. Part



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION.....	3
1.1 Product Description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested System Details.....	4
1.4 Test Methodology.....	4
1.5 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 Justification.....	5
2.2 EUT Exercise Software.....	5
2.3 Cable Description.....	5
2.4 Noise Suppression Parts on Cable.....	6
2.5 Equipment Modifications.....	6
2.6 Configuration of Tested System.....	7
3. PRELIMINARY TESTS.....	8
3.1 Power line Conducted Emissions Tests.....	9
3.2 Radiated Emissions Tests.....	9
4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	9
4.1 Conducted Emission Tests.....	10
4.2 Radiated Emission Tests.....	11
5. FIELD STRENGTH CALCULATION.....	12
6. LIST OF TEST EQUIPMENT	13

ATTACHMENT A	ID Label / Location Info.
ATTACHMENT B.....	External Photos.
ATTACHMENT C	Block Diagram..
ATTACHMENT D	Test Setup Photos.
ATTACHMENT E	User's Manual.
ATTACHMENT F	Internal Photos.

1. GENERAL INFORMATION

1.1 Product Description

The ImageQuest CO., LTD. Model L520 (referred to as the EUT in this report) is a 15" LCD Monitor HOR. Freq. 60KHz w/max. Resolution of 1024X768 . Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	PLASTIC
LIST OF EACH OSC. OR XTAL. FREQ.(FREQ. 1MHz)	12MHz, 20MHz
POWER REQUIREMENT	DC 12V/5V --- 2.0A/2.0A
NUMBER OF LAYERS	MAIN BOARD 4 LAYER OSD BOARD 1 LAYER POWER BOARD 1 LAYER INVERTER BOARD 2 LAYER
MAX. RESOLUTION	1024X768 (@60KHz/ 75 Hz)
H-SYNC FREQUENCY RANGE	31KHz 60KHz
V-SYNC FREQUENCY RANGE	56Hz 75Hz
LCD TYPE	15" (LCD Type : L150X2M)

1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

1.3 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

TYPE DEVICE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
MONITOR (EUT)	IMAGEQUEST CO., LTD.	L520	PJIL520	HOST
PC(HOST)	H/P	DTPC-17	DoC	N/A
KEY BOARD	H/P	SK-2501-2D-K	GYUR385K	HOST
PRINTER	H/P	HP895C	DoC	HOST
MODEM	3COM CORPORATION	56K FAX MODEM	DoC	HOST
VIDEO CARD	DIAMOND	3D3000	DoC	HOST
MOUSE	H/P	INTELLIMOUSE	DZL211029	HOST

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 10 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO, 467-701,KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 24,2000(Confirmation Number: EA90661)

2.SYSTEM TEST CONFIGURATION

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following components and I/O cards inside the E.U.T were used.

DEVICE TYPE	MANUFACTURE	MODEL/PART NUMBER
MAIN BOARD	ImageQuest CO., Ltd.	3041001041
POWER BOARD	C&C TECH CO.,LTD.	3610200093
OSD BOARD	ImageQuest CO., Ltd.	3010700781
INVERTOR BOARD	ImageQuest CO., Ltd.	3610400246
LCD BOARD	Acer Display Technology Inc.	L150X2M

2.2 EUT exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

2.3 Cable Description

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
MONITOR(EUT)	N	Y	1.8(P), 1.5(D)
PC(HOST)	N	N/A	1.8(P)
PRINTER	N	Y	2.0(P),1.8(D)
KEY BOARD	N/A	Y	2.0(D)
MODEM	N	Y	2.0(P),0.8(D)
MOUSE	N/A	Y	1.8(D)

2.4 Noise Suppression Parts on Cable. (I/O CABLE)

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
MONITOR(EUT)	Y	BOTH END	Y	BOTH END
PRINTER	N	PC END	Y	BOTH END
KEY BOARD	Y	PC END	Y	PC END
MODEM	Y	PC END	Y	BOTH END
MOUSE	N	N/A	Y	PC END

2.5 Equipment Modifications

N/A


2.6 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were connected to another LISN.

Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating condition. Final Radiated Emission tests were conducted at 10 meter open area test site.

[Configuration of Tested System]

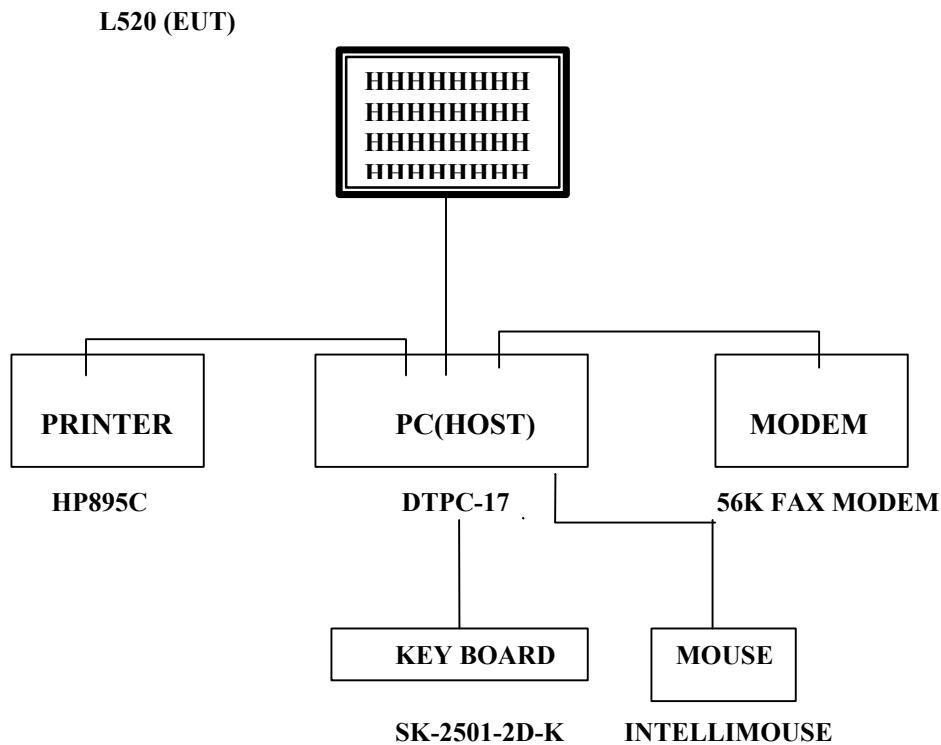

3. PRELIMINARY TESTS

3.1 AC Power line Conducted Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1024X768 (60KHz/75Hz)	X
	1024X768 (48.4KHz/60Hz)	
	1024X768 (56.5KHz/70Hz)	
	720X400 (31.5KHz/70Hz)	
	800 x 600 (46.7 KHz/75Hz)	
	640 x 480 (31.5KHz/60Hz)	

4.2 Radiated Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1024X768 (60KHz/75Hz)	X
	1024X768 (48.4KHz/60Hz)	
	1024X768 (56.5KHz/70Hz)	
	720X400 (31.5KHz/70Hz)	
	800 x 600 (46.7 KHz/75Hz)	
	640 x 480 (31.5KHz/60Hz)	

Tested by Kyoung-Houn SEO / Engineer

Date : DECEMBER 3 , 2001

4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Humidity Level : 33% Temperature : 20
 Limit apply to : CISPR 22
 Type of Tests : CLASS B
 Date : DECEMBER 6, 2001
 Result : PASSED BY -3.6 dB
 EUT : 15" LCD MONITOR

Operating Condition : 1024X768 (Hf : 60KHz, Vf : 75Hz)
 Detector : CISPR Quasi-Peak (6 dB Bandwidth : 9 KHz)
 CISPR Average(6 dB Bandwidth : 9 KHz)

Line Conducted Emission Tabulated Data

Power Line Conducted Emissions			CISPR 22		
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)	Detector Mode
1.08	52.4	NEUTRAL	56.0	3.6	Quasi-Peak
1.72	41.6	NEUTRAL	46.0	4.4	Average
1.07	41.3	NEUTRAL	46.0	4.7	Average
1.18	41.1	NEUTRAL	46.0	4.9	Average

NOTE:

1. All video modes and resolutions were investigated and the worst-case emissions are reported
Other video modes & resolution were tested and found to be in compliance.

Measured by : Kyoung-Houn SEO / Engineer


Date : DECEMBER 6, 2001

HYUNDAI C-TECH. CO., LTD.
EMC TEST LAB.

EUT: L520
 Manufacturer:
 Operating Condition:
 Test Site: Shield Room
 Operator:
 Test Specification:
 Comment: N
 Start of Test: 12/6/01 / 11:49:25AM

SCAN TABLE: "EN 55022 V (PKH)"

Short Description:			EN 55022 Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	100.0 ms	9 kHz	CABLE LOSS (NEW)
500.0 kHz	5.0 MHz	5.0 kHz	Average			
			MaxPeak	10.0 ms	9 kHz	CABLE LOSS (NEW)
			Average			

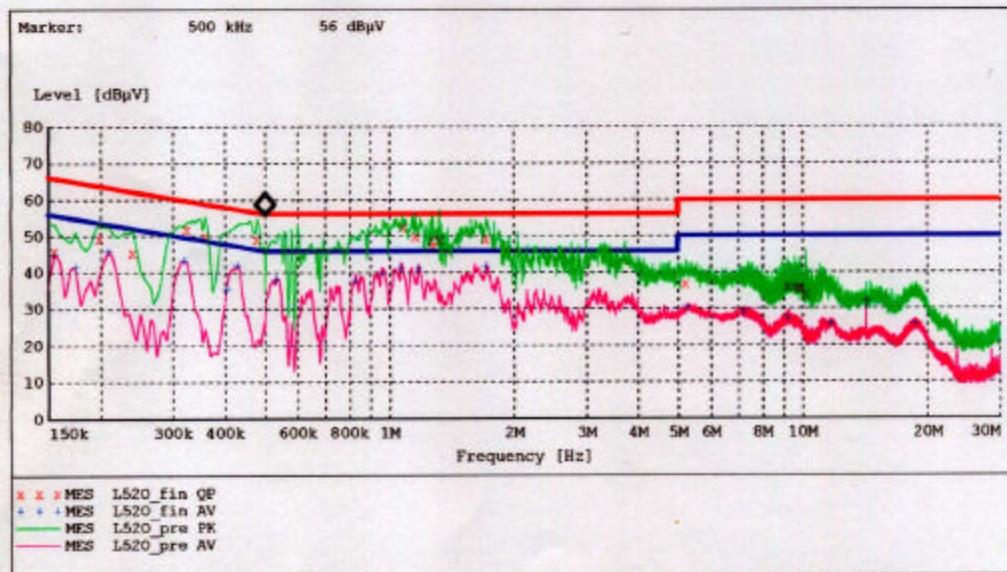

MEASUREMENT RESULT: "L520_fin_QP"

12/6/01 11:53AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.155000	45.70	0.5	66	20.0	1	---
0.200000	49.30	0.5	64	14.3	1	---
0.240000	45.40	0.5	62	16.7	1	---
0.325000	51.90	0.5	60	7.7	1	---
0.360000	49.90	0.5	59	8.8	1	---
0.480000	49.00	0.5	56	7.3	1	---
1.080000	52.40	0.5	56	3.6	1	---
1.160000	49.80	0.5	56	6.2	1	---
1.270000	48.80	0.5	56	7.2	1	---
1.280000	47.10	0.5	56	8.9	1	---
1.325000	48.70	0.5	56	7.3	1	---
1.715000	49.10	0.5	56	6.9	1	---
5.230000	36.90	0.9	60	23.1	1	---
9.215000	36.10	1.2	60	23.9	1	---

Page 1/2 12/6/01 11:54AM L520

MEASUREMENT RESULT: "L520_fin_QP"

(continued)

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
9.610000	36.10	1.3	60	23.9	1	---
9.870000	36.00	1.3	60	24.0	1	---
9.890000	35.50	1.3	60	24.5	1	---
10.205000	33.90	1.3	60	26.1	1	---

MEASUREMENT RESULT: "L520_fin_AV"

12/6/01 11:53AM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.155000	45.10	0.5	56	10.6	1	---
0.175000	41.60	0.5	55	13.2	1	---
0.210000	46.00	0.5	53	7.2	1	---
0.320000	43.30	0.5	50	6.4	1	---
0.405000	35.40	0.5	48	12.3	1	---
0.430000	41.90	0.5	47	5.3	1	---
0.535000	38.00	0.5	46	8.0	1	---
0.830000	37.80	0.5	46	8.2	1	---
0.960000	39.80	0.5	46	6.2	1	---
1.070000	41.30	0.5	46	4.7	1	---
1.180000	41.10	0.5	46	4.9	1	---
1.720000	41.60	0.5	46	4.4	1	---
5.275000	30.50	0.9	50	19.5	1	---
7.230000	29.10	1.1	50	20.9	1	---
9.255000	27.50	1.2	50	22.5	1	---
11.755000	25.80	1.4	50	24.2	1	---
14.320000	32.10	1.5	50	17.9	1	---
18.740000	25.80	1.7	50	24.2	1	---

HYUNDAI C-TECH. CO., LTD.
EMC TEST LAB.

EUT: L520
 Manufacturer:
 Operating Condition:
 Test Site: Shield Room
 Operator:
 Test Specification:
 Comment: H
 Start of Test: 12/6/01 / 11:55:12AM

SCAN TABLE: "EN 55022 V (PKH)"

EN 55022 Voltage						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	100.0 ms	9 kHz	CABLE LOSS (NEW)
500.0 kHz	5.0 MHz	5.0 kHz	Average			
			MaxPeak	10.0 ms	9 kHz	CABLE LOSS (NEW)
			Average			

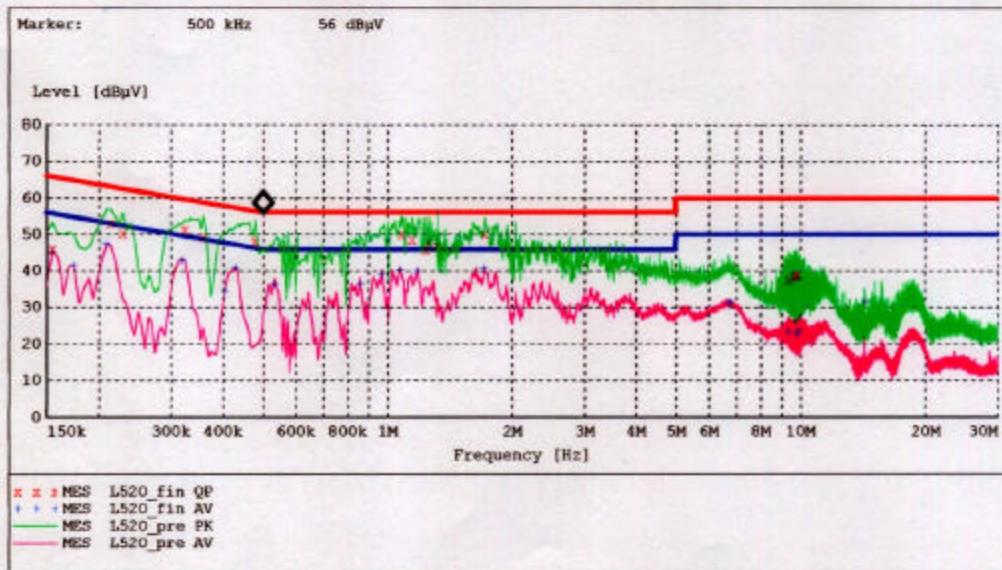

MEASUREMENT RESULT: "L520_fin_QP"

12/6/01 11:59AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.155000	45.90	0.5	66	19.8	1	---
0.215000	52.90	0.5	63	10.1	1	---
0.230000	50.40	0.5	62	12.0	1	---
0.325000	51.50	0.5	60	8.0	1	---
0.360000	49.30	0.5	59	9.4	1	---
0.480000	48.10	0.5	56	8.2	1	---
1.085000	50.10	0.5	56	5.9	1	---
1.150000	48.60	0.5	56	7.4	1	---
1.245000	45.50	0.5	56	10.5	1	---
1.265000	47.80	0.5	56	8.2	1	---
1.325000	46.90	0.5	56	9.1	1	---
1.725000	50.20	0.5	56	5.8	1	---
9.360000	37.70	1.2	60	22.3	1	---
9.665000	38.50	1.3	60	21.5	1	---

Page 1/2 12/6/01 11:59AM L520

MEASUREMENT RESULT: "L520_fin QP"
(continued)

Frequency MHz	Level dB _μ V	Transd dB	Limit dB _μ V	Margin dB	Line	PE
9.765000	38.80	1.3	60	21.2	1	---
9.820000	38.80	1.3	60	21.2	1	---
9.850000	39.10	1.3	60	20.9	1	---
9.860000	39.10	1.3	60	20.9	1	---

MEASUREMENT RESULT: "L520_fin AV"

12/6/01 11:59AM

Frequency MHz	Level dB _μ V	Transd dB	Limit dB _μ V	Margin dB	Line	PE
0.155000	45.30	0.5	56	10.5	1	---
0.175000	41.60	0.5	55	13.1	1	---
0.210000	47.40	0.5	53	5.8	1	---
0.320000	43.00	0.5	50	6.7	1	---
0.405000	34.50	0.5	48	13.3	1	---
0.430000	40.90	0.5	47	6.3	1	---
0.535000	36.40	0.5	46	9.6	1	---
0.860000	36.70	0.5	46	9.3	1	---
0.970000	39.10	0.5	46	6.9	1	---
1.075000	40.40	0.5	46	5.6	1	---
1.185000	40.10	0.5	46	5.9	1	---
1.720000	40.80	0.5	46	5.2	1	---
6.715000	31.40	1.1	50	18.6	1	---
6.750000	31.30	1.1	50	18.7	1	---
9.360000	23.50	1.2	50	26.5	1	---
9.820000	22.90	1.3	50	27.1	1	---
9.995000	23.60	1.3	50	26.4	1	---
14.320000	31.70	1.5	50	18.3	1	---

4.2 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Humidity Level : 25 % Temperature : 15

Limit apply to : CISPR 22

Type of Tests : CLASS B

Date : DECEMBER 11, 2001

Result : PASSED BY -3.0dB

EUT : 15" LCD MONITOR

Operating Condition : 1024X768 (Hf :60 kHz, Vf : 75 Hz)

Detector : CISPR Quasi-Peak (6 dB Bandwidth : 120 KHz)

Frequency MHz	Reading dBuV/m	Ant. Factor dB	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dBuV
96.2	15.15	9.55	2.00	V	26.7	30.0	-3.3
105.6	11.92	11.28	2.20	H	25.4	30.0	-4.6
140.7	9.83	14.57	2.50	V	26.9	30.0	-3.1
174.7	9.26	15.04	2.70	H	27.0	30.0	-3.0
201.5	6.57	15.83	3.00	V	25.4	30.0	-4.6
246.7	10.59	17.61	3.40	V	31.6	37.0	-5.4
315.8	13.53	15.87	3.80	V	33.2	37.0	-3.8
401.5	12.80	16.50	4.20	H	33.5	37.0	-3.5
545.0	6.35	19.15	5.30	V	30.8	37.0	-6.2
601.0	7.19	20.71	5.80	H	33.7	37.0	-3.3
613.3	4.59	21.01	5.90	V	31.5	37.0	-5.5
748.0	3.76	22.54	6.40	V	32.7	37.0	-4.3

NOTE:

1. All video modes and resolutions were investigated and the worst-case emissions are reported.

2. Other video modes & resolution were tested and found to be in compliance.

Measured by Kyoung-Houn Seo / Engineer

Date : DECEMBER 11, 2001

5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

6. LIST OF TEST EQUIPMENT

TYPE	MANUFACTURE	MODEL	CAL. DATE
EMI Test Receiver	Rohde & Schwarz	ESH3	2001.6.29
EMI Test Receiver	Rohde & Schwarz	ESVP	2001.2.14
EMI Test Receiver	Rohde & Schwarz	ESI40	2001.1.18
EMI Test Receiver	Rohde & Schwarz	ESVS30	2001.6.26
Spectrum Monitor	Rohde & Schwarz	EZM	N.A
Graphic Plotter	Rohde & Schwarz	DOP2	N.A
Printer	Rohde & Schwarz	PDN	N.A
Spectrum Analyzer	H.P	8591EM	2001.7.11
LISN	EMCO	3825/2	2001.7.13
LISN	Rohde & Schwarz	ESH2-Z5	2001.7.14
Amplifier	Hewlett-Packard	8447E	2001.3.2
Dipole Antennas	Rohde & Schwarz	VHAP	2001.6.28
Dipole Antennas	Rohde & Schwarz	UHAP	2001.6.28
Biconical Antenna	Rohde & Schwarz	BBA-9106	2001.6.28
Log-Periodic Antenna	Rohde & Schwarz	UHALP-9107	2001.6.26
Antenna Position Tower	EMCO	1051-12	N.A
Turn Table	EMCO	1060-06	N.A
Line Filter	KEENE	ULW 2X30-60	N.A
Power Analyzer	Voltech	PM 3300	2001.2.20
Reference Network Impedance	Voltech	IEC 555	N.A
AC Power Source	PACIFIC	Magnetic Module	N.A
AC Power Source	PACIFIC	360AMX	N.A