

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12



Deutsche
Akkreditierungsstelle
D-PL-12053-01-01

**Test Report acc. to FCC Title 47 CFR Part 15
relating to
FEIG ELECTRONIC GmbH
ID ISC.MR102**

**Title 47 - Telecommunication
Part 15 - Radio Frequency Devices
Subpart C – Intentional Radiators
Measurement Procedure:
ANSI C63.4-2009**

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

Manufacturer's details	
Manufacturer	FEIG ELECTRONIC GmbH
Manufacturer's grantee code	PJM
Manufacturer's address	Lange Str.4
	35781 Weilburg
	Germany
	Phone: +49 (0) 6471 3109 438
	Fax: +49 (0) 6471 3109 99
	Contact: Mr. Elmar Reichwein
	Email: elmar.reichwein@feig.de
Relevant standard used	47 CFR Part 15C - Intentional Radiators
	ANSI C63.4-2009

Test Report prepared by	
Technical engineer	Ralf Trepper
	m. dudde hochfrequenz-technik (laboratory)
	Rottland 5a
	51429 Bergisch Gladbach
	Germany
	Phone: +49 2207 96890
	Fax: +49 2207 968920
	Email: m.dudde@labor@dudde.com

Equipment Under Test (EUT)	
Equipment category	Inductive application / RFID
Trade name	OBID i-scan
Type designation	ID ISC.MR102
Serial no.	---
Variants	ID ISC.MR102-A / ID ISC.MR102-B ID ISC.MRM102-A / ID ISC.MRM102-USB ID ISC.MR102-USB / ID ISC.SPAD102-USB ID ISC.MR102-PoE / ID ISC.SPAD102-PoE
Antennas	ID ISC.ANT40/30 ID ISC.ANT100/100 ID ISC.ANT200/200 ID ISC.ANT310/310 ID ISC.ANT340/240 ID ISC.ANTS370/270 ID ISC.ANT800/600

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

1. Test results

Clause	Requirements headline	Test result			Report page number
8.1	Antenna Requirement	Pass	Fail	N.t.*	10
8.2	Restricted bands of operation	Pass	Fail	N.t.*	11 to 12
8.3	Conducted limits	Pass	Fail	N.t.*	13 to 17
8.4	Radiated emission limits	Pass	Fail	N.t.*	18 to 34
8.5	Frequency tolerance	Pass	Fail	N.t.*	35 to 37

* Not tested

The equipment meets the requirements	Yes	No
---	------------	----------------------

Signature: 
(Technician)Signature: 
(Manager)

Table of contents

1. Test results.....	3
2. Introduction.....	5
3. Testing laboratory	5
4. Applicant.....	6
5. Product and product documentation	6
6. Conclusions, observations and comments	7
7. Operational description.....	8
8. Compliance assessment	10
8.1 Antenna requirement	10
8.1.1 Regulation.....	10
8.1.2 Result	10
8.2 Restricted bands of operation	11
8.2.1 Regulation.....	11
8.2.2 Result	12
8.3 Conducted limits	13
8.3.1 Regulation.....	13
8.3.2 Test equipment	14
8.3.3 Test procedures.....	14
8.3.4 Result	15
8.4 Radiated emission limits.....	20
8.4.1 Regulation.....	20
8.4.2 Test equipment	21
8.4.3 Test procedure	22
8.4.4 Calculation of the field strength	23
8.4.5 Result	24
8.5 Frequency tolerance	39
8.5.1 Regulation.....	39
8.5.2 Test equipment	39
11.5.3 Test procedures.....	39
8.5.4 Result	41
9. Additional information to the test report	42

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

2. Introduction

This test report consists of:

- Test result summary
- List of contents
- Introduction and further information
- Performance assessment
- Detailed test information

All pages have been numbered consecutively and bear the m. dudde hochfrequenz-technik logo, the test report number, the date, the test specification in its current version as well as the type designation of the EUT. The total number of pages in this report is **43**.

The tests were carried out at:

- **m. dudde hochfrequenz-technik, D-51429 Bergisch Gladbach**

in a representative assembly and in accordance with the test methods and/or requirements stated in:

FCC Title 47 CFR Part 15 Subpart C & ANSI C63.4-2009

The sample of the product was received on:

- **2011-02-16**

The tests were carried out in the following period of time:

- **2011-06-20 – 2011-07-12**

3. Testing laboratory

m. dudde hochfrequenz-technik
Rottland 5a, 51429 Bergisch Gladbach, Germany

Phone: +49 - (0) 22 07 / 96 89-0
Fax: +49 - (0) 22 07 / 96 89-20

- FCC Registration Number: **699717**

Accredited by:

DAkkS Deutsche Akkreditierungsstelle GmbH
DAkkS accreditation number: D-PL-12053-01

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

4. Applicant

Company name : FEIG ELECTRONIC GmbH
Address : Lange Straße 4
35781 Weilburg
Country : Germany
Telephone : +49 (0) 6471 3109 438
Fax : +49 (0) 6471 3109 99
Email : elmar.reichwein@feig.de
Date of order : 2011-02-14
References : Mr. Elmar Reichwein

5. Product and product documentation

Samples of the following apparatus were submitted for testing:

Manufacturer : FEIG ELECTRONIC GmbH
Trademark : OBID i-scan
Type designation : **ID ISC.MR102 with ID ISC.ANT40/30,
ID ISC.ANT100/100, ID ISC.ANTH200/200, ID ISC.ANT310/310,
ID ISC.ANT340/240, ID ISC.ANTS370/270, ID ISC.ANT800/600**
Hardware version : ID ISC.MR102 with ID ISC.ANT40/30,
ID ISC.ANT100/100, ID ISC.ANTH200/200, ID ISC.ANT310/310,
ID ISC.ANT340/240, ID ISC.ANTS370/270, ID ISC.ANT800/600
Serial number : ---
Software release : ---
Type of equipment : RFID
Power used : 24.0 V DC
Frequency used : 13.560 MHz
Generated frequencies : 13.560 MHz (Crystal), 25.0 MHz (Crystal),
13.560 MHz (Carrier)
ITU emission class : 168K A1D

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

For issuing this report the following product documentation was used:

Description	Date	Identifications
External photographs of the Equipment Under Test (EUT)	2011-07-12	Annex no. 1
Internal photographs of the Equipment Under Test (EUT)	2011-07-12	Annex no. 2
Channel occupancy / bandwidth	2011-07-12	Annex no. 3
Label sample	2011-07-12	Annex no. 4
Functional description / User manual	2011-07-12	Annex no. 5
Test setup photos	2011-07-12	Annex no. 6
Block diagram	2011-07-12	Annex no. 7
Operational description	2011-07-12	Annex no. 8
Schematics	2011-07-12	Annex no. 9
Parts list	2011-07-12	Annex no. 10
Periodic operation characteristics / Transmission times	---	Annex no. 11
Antenna characteristics / Antenna description	2011-07-12	Annex no. 12

6. Conclusions, observations and comments

The test report will be filed at m. dudde hochfrequenz-technik for a period of 10 years following the issue of this report. It may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of m. dudde hochfrequenz-technik.

The results of the tests as stated in this report are exclusively applicable to the EUT as identified in this report. m. dudde hochfrequenz-technik cannot be held liable for properties of the EUT that have not been observed during these tests.

m. dudde hochfrequenz-technik assumes the sample to comply with the requirements of FCC Title 47 CFR Part 15 for the respective test sector, if the test results turn out positive.

Comments: ---

Date : 2011-07-12

Name : Ralf Trepper


Function : Technician

Signature : 

Date : 2011-07-12

Name : Manfred Dudde

Function : Manager

Signature : 

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

7. Operational description


7.1 EUT details

RFID Reader System including the ID ISC.MR102 works at a frequency of 13.56 MHz. It comprises a reader, one antenna and transponder (for example: smart label) and is used for wireless identification of a variety of objects.


A HF Reader System including the reader, integrated in the ID ISC.SPAD102 (integrated ID ISC.MR102 Reader) works at a frequency of 13.56 MHz. It comprises a antenna with integrated reader and transponder (for example: smart label) and is used for wireless identification of a variety of objects.

7.2 EUT configurations

- 1.) The Reader ID ISC.MR102-A comes with an asynchronous RS232 interface.
The Reader ID ISC.MR102-B comes with an asynchronous RS485 interface.
The Reader ID ISC.MR102-PoE comes with a LAN interface.
The Reader ID ISC.MR102-USB comes with an USB interface.

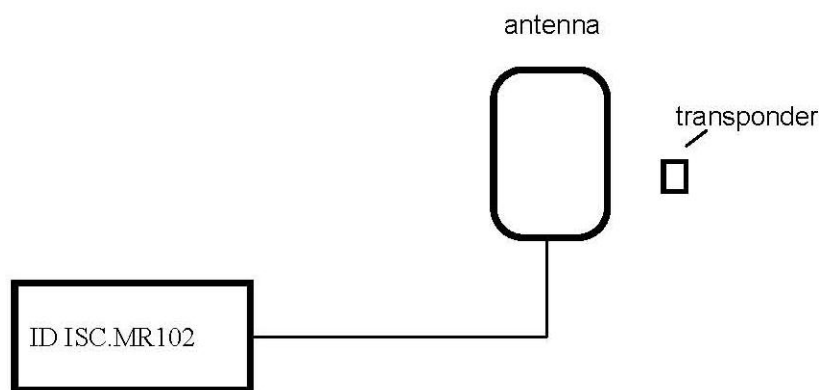

- 2.) The HF Reader System ID ISC.SPAD102-PoE comes with a LAN interface.
The HF Reader System ID ISC.SPAD102-USB comes with an USB interface

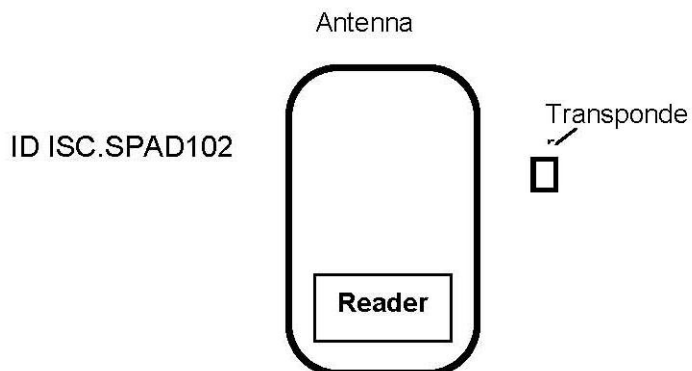

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

7.3 EUT measurement description

Radiated measurements

The **ID ISC.MR102** was tested in a typical fashion with the combinations described in 7.2. During preliminary emission tests the **ID ISC.MR102** was operated in the continuous transmitting mode for worst case emission mode investigation. Therefore, the final qualification testing was completed with **ID ISC.MR102PoE** in combination with all antenna variants operated in continuous mode. Additionally the **ID ISC.SPAD102-PoE** was tested separately in continuous mode.

All tests were performed with the applicant's declared maximum voltage: 24 V DC

In order to establish the maximum radiation, firstly, there have been viewed all orthogonal adjustments of the test samples, secondly the test sample have been rotated at all adjustments around the own axis between 0° and 360°, and thirdly, the antenna polarization between horizontal and vertical had been varied.

Conducted measurements

- 1.) The device was connected to the artificial mains network via an USB- connector to the USB- port of a HP Notebook and this to the artificial mains network. It has been tested in two runs: first, with inactive **ID ISC.MR102**, second with activated **ID ISC.MR102** in read write mode to read user data and write user data into different tags.
- 2.) The device was connected to the artificial mains network via an LAN- connector to the LAN- port of a HP Notebook and this to the artificial mains network. It has been tested in two runs: first, with inactive **ID ISC.MR102**, second with activated **ID ISC.MR102** in read write mode to read user data and write user data into different tags.
- 3.) The device was connected to the artificial mains network via the external power supply **PS18A** and this to the artificial mains network. It has been tested in two runs: first, with inactive **ID ISC.MR102**, second with activated **ID ISC.MR102** in read write mode to read user data and write user data into different tags.

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

8. Compliance assessment

8.1 Antenna requirement

8.1.1 Regulation

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

8.1.2 Result

The equipment meets the requirements	Yes	No	N.t.
Further test results are attached	Yes	No	Page no.

Dedicated antennas limited to the following types:

ID ISC.ANT40/30
ID ISC.ANT100/100
ID ISC.ANTH200/200
ID ISC.ANT310/310
ID ISC.ANT340/240
ID ISC.ANTS370/270
ID ISC.ANT800/600

Installation, operation, and maintenance procedures should only be carried out by qualified personnel!

N.t.* See page no. 42

8.2 Restricted bands of operation

8.2.1 Regulation

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator.

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

(d) The following devices are exempt from the requirements of this Section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.
- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).

8.2.2 Result

The equipment meets the requirements	Yes	No	N.t.
Further test results are attached	Yes	No	Page no.

N.t.* See page no. 42

8.3 Conducted limits

8.3.1 Regulation

(a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50ohms line impedance stabilization network (LISN). Compliance with this provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of emission(MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.50	66 to 56*	56 to 46*
0.50-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or connected to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

8.3.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Remarks
Receiver (9 kHz - 30MHz)	Schwarzbeck FMLK 1518 (428)	1518294 9360	2010/08	2013/08	---
Panorama- Monitor FMLK / VUMA	PAZ1550 (429)				
Protector limiter 9 kHz - 30MHz 10 dB	Rhode & Schwarz ESH 3Z2 (272)	357,881052	2011/02	2014/02	---
V-LISN 50 ohms/(50 uH+5 ohms)	RFT NNB 11 (72)	13835240	2010/07	2013/07	---
V-LISN 50 ohms/(50 uH+5 ohms)	EMCO (49b)	9512-1227	2009/05	2012/05	---
RF-cable	Aircell 1.5m [BNC/N]	K30	2011/01	2012/01	---

8.3.3 Test procedures

The EUT and the additional equipment (if required) are connected to the main power through a line impedance stabilization network (LISN). The LISN must be appropriate to ANSI C63.4-2009 Section 7.

Additional equipment must also be connected to a second LISN with the same specifications described in the above sentence (if required).

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

8.3.4 Result

Tested with external AC/DC power supply (power supply PS18A)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB μ V]	Spec. limit (average) [dB μ V]	Margin [dB]	Remarks
L1	0.177	9	42.0	54.7	12.7	* ²
N	0.177	9	42.0	54.7	12.7	* ²
L1	0.220	9	-2	52.7	54.7	* ²
N	0.220	9	-2	52.7	54.7	* ²
L1	0.294	9	-2	50.3	52.3	* ²
N	0.294	9	-2	50.3	52.3	* ²
L1	0.584	9	-2	46	48.0	* ²
N	0.584	9	-2	46	48.0	* ²
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ¹
N	0.775	9	-2	46	48.0	* ¹
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.250	9	-2	46	48.0	* ¹
N	1.250	9	-2	46	48.0	* ¹
L1	1.150	9	30.0	46	16.0	* ²
N	1.150	9	30.5	46	15.5	* ²
L1	4.000	9	-2	46	48.0	* ¹
N	4.000	9	-2	46	48.0	* ¹
L1	6.7644	9	-2	50	52.0	* ¹
N	6.7644	9	-2	50	52.0	* ¹
L1	13.8700	9	28.0	50	22.0	* ¹
N	13.8700	9	28.0	50	22.0	* ¹
L1	20.2931	9	-2	50	52.0	* ¹
N	20.2931	9	-2	50	52.0	* ¹
L1	27.120	9	30.0	50	20.0	* ²
N	27.120	9	30.0	50	20.0	* ²

Remark: *¹ Noise level of the measuring instrument $\leq$ -2dB μ V (0.009 – 30MHz)

Remark: *² Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	Yes	No	N.t.
Further test results are attached	Yes	No	Page no.

N.t.* See page no. 42

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

Tested with a Laptop over USB port (ID ISC.MR102 not active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dBμV]	Spec. limit (average) [dBμV]	Margin [dB]	Remarks
L1	0.1960	9	44.0	55.3	11.3	* ²
N	0.1960	9	44.0	55.3	11.3	* ²
L1	0.301	9	-2	51.7	53.7	* ¹
N	0.301	9	-2	51.7	53.2	* ¹
L1	0.475	9	-2	47	49.0	* ¹
N	0.475	9	-2	47	49.0	* ¹
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ²
N	0.775	9	-2	46	48.0	* ²
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.787	9	29.0	46	17.0	* ²
N	1.787	9	29.0	46	17.0	* ²
L1	2.084	9	29.5	46	16.5	* ²
N	2.084	9	29.5	46	16.5	* ²
L1	2.423	9	25.0	46	21.0	* ²
N	2.423	9	25.0	46	21.0	* ²
L1	6.7644	9	-2	50	52.0	* ¹
N	6.7644	9	-2	50	52.0	* ¹
L1	13.5288	9	-2	50	52.0	* ¹
N	13.5288	9	-2	50	52.0	* ¹
L1	20.2931	9	-2	50	52.0	* ¹
N	20.2931	9	-2	50	52.0	* ¹
L1	27.0575	9	-2	50	52.0	* ¹
N	27.0575	9	-2	50	52.0	* ¹

Remark: *¹ Noise level of the measuring instrument ≤ -2dBμV (0.009 – 30MHz)Remark: *² Quasi peak measurements lower than “Specified Average Limit”

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	---------------	-----------------

Further test results are attached	Yes	No	Page no.
-----------------------------------	----------------	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

Tested with a Laptop over USB port (ID ISC.MR102 active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB μ V]	Spec. limit (average) [dB μ V]	Margin [dB]	Remarks
L1	0.1770	9	42.0	55.4	13.4	* ²
N	0.1770	9	42.0	55.4	13.4	* ²
L1	0.1960	9	44.0	55.3	11.3	* ²
N	0.1960	9	44.0	55.3	11.3	* ²
L1	0.301	9	-2	51.7	53.7	* ¹
N	0.301	9	-2	51.7	53.2	* ¹
L1	0.475	9	-2	47	49.0	* ¹
N	0.475	9	-2	47	49.0	* ¹
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ²
N	0.775	9	-2	46	48.0	* ²
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.150	9	30.0	46	48.0	* ²
N	1.150	9	30.0	46	48.0	* ²
L1	1.787	9	29.0	46	17.0	* ²
N	1.787	9	29.0	46	17.0	* ²
L1	2.084	9	29.5	46	16.5	* ²
N	2.084	9	29.5	46	16.5	* ²
L1	2.423	9	25.0	46	21.0	* ²
N	2.423	9	25.0	46	21.0	* ²
L1	3.186	9	33.0	46	13.0	* ²
N	3.186	9	33.0	46	13.0	* ²
L1	6.7644	9	-2	50	52.0	* ¹
N	6.7644	9	-2	50	52.0	* ¹
L1	13.870	9	28.0	50	22.0	* ²
N	13.870	9	28.0	50	22.0	* ²
L1	20.2931	9	-2	50	52.0	* ¹
N	20.2931	9	-2	50	52.0	* ¹
L1	27.120	9	30.0	50	20.0	* ²
N	27.120	9	30.0	50	20.0	* ²

Remark: *¹ Noise level of the measuring instrument $\leq$ -2dB μ V (0.009 – 30MHz)Remark: *² Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	Yes	No	N.t.
Further test results are attached	Yes	No	Page no.

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

Tested with a Laptop over LAN port (ID ISC.MR102 not active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB μ V]	Spec. limit (average) [dB μ V]	Margin [dB]	Remarks
L1	0.1960	9	44.0	55.3	11.3	* ²
N	0.1960	9	44.0	55.3	11.3	* ²
L1	0.301	9	-2	51.7	53.7	* ¹
N	0.301	9	-2	51.7	53.2	* ¹
L1	0.475	9	-2	47	49.0	* ¹
N	0.475	9	-2	47	49.0	* ¹
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ²
N	0.775	9	-2	46	48.0	* ²
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.787	9	29.0	46	17.0	* ²
N	1.787	9	29.0	46	17.0	* ²
L1	2.084	9	29.5	46	16.5	* ²
N	2.084	9	29.5	46	16.5	* ²
L1	2.423	9	25.0	46	21.0	* ²
N	2.423	9	25.0	46	21.0	* ²
L1	6.7644	9	-2	50	52.0	* ¹
N	6.7644	9	-2	50	52.0	* ¹
L1	13.5288	9	-2	50	52.0	* ¹
N	13.5288	9	-2	50	52.0	* ¹
L1	20.2931	9	-2	50	52.0	* ¹
N	20.2931	9	-2	50	52.0	* ¹
L1	27.0575	9	-2	50	52.0	* ¹
N	27.0575	9	-2	50	52.0	* ¹

Remark: *¹ Noise level of the measuring instrument $\leq$ -2dB μ V (0.009 – 30MHz)Remark: *² Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	---------------	-----------------

Further test results are attached	Yes	No	Page no.
-----------------------------------	----------------	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

Tested with a Laptop over LAN port (ID ISC.MR102 active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dBμV]	Spec. limit (average) [dBμV]	Margin [dB]	Remarks
L1	0.1680	9	50.0	55.4	5.4	* ²
N	0.1680	9	50.0	55.4	5.4	* ²
L1	0.1960	9	44.0	55.3	11.3	* ²
N	0.1960	9	44.0	55.3	11.3	* ²
L1	0.301	9	-2	51.7	53.7	* ¹
N	0.301	9	-2	51.7	53.2	* ¹
L1	0.475	9	-2	47	49.0	* ¹
N	0.475	9	-2	47	49.0	* ¹
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ²
N	0.775	9	-2	46	48.0	* ²
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.150	9	-2	46	48.0	* ¹
N	1.150	9	-2	46	48.0	* ¹
L1	1.787	9	-2	46	48.0	* ¹
N	1.787	9	-2	46	48.0	* ¹
L1	2.833	9	33.0	46	13.0	* ²
N	2.833	9	33.0	46	13.0	* ²
L1	4.500	9	-2	46	48.0	* ¹
N	4.500	9	-2	46	48.0	* ¹
L1	5.297	9	35.0	46	11.0	* ²
N	5.297	9	35.0	46	11.0	* ²
L1	10.060	9	37.0	50	13.0	* ²
N	10.060	9	37.0	50	13.0	* ²
L1	12.199	9	40.0	50	10.0	* ²
N	12.199	9	40.0	50	10.0	* ²
L1	14.151	9	40.0	50	10.0	* ²
N	14.151	9	40.0	50	10.0	* ²
L1	16.228	9	42.0	50	8.0	* ²
N	16.228	9	42.0	50	8.0	* ²
L1	21.665	9	39.0	50	11.0	* ²
N	21.665	9	39.0	50	11.0	* ²
L1	27.120	9	30.0	50	20.0	* ²
N	27.120	9	30.0	50	20.0	* ²

 Remark: *¹ Noise level of the measuring instrument ≤ -2dBμV (0.009 – 30MHz)

 Remark: *² Quasi peak measurements lower than “Specified Average Limit”

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	------------	---------------	-----------------

Further test results are attached	Yes	No	Page no.
-----------------------------------	----------------	-----------	----------

N.t.* See page no. 42

8.4 Radiated emission limits

8.4.1 Regulation

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in §§ 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

8.4.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2010/11	2012/11
Pre-amplifier (100kHz - 1.3GHz)	Hewlett Packard 8447 E (166a)	1726A00705	2010/02	2012/02
Pre-amplifier (1GHz - 18GHz)	Narda (345)	---	2010/02	2012/02
Magnetic loop antenna (9 kHz - 30 MHz)	Schwarzbeck FMZB 1516 (23)	---	2010/05	2013/05
Bilog antenna (30- 1000 MHz)	Schwarzbeck VULP 9168 (406)	---	2007/02	2013/02
Horn antenna (0.86-8.5 GHz)	Schwarzbeck BBHA 9120 A (284)	236	2008/01	2013/01
Horn antenna (2.0-14.0 GHz)	Schwarzbeck BBHA 9120 C (169)	305	2008/01	2013/01
RF- cable	Kabelmetal 18m [N]	K1	2011/01	2012/01
RF- cable	Aircell 0.5m [BNC]	K40	2011/01	2012/01
RF- cable	Aircell 1m [BNC/N]	K56	2011/01	2012/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K74	2011/01	2012/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K75	2011/01	2012/01

8.4.3 Test procedure

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8 m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3m. To find the maximum emission, the polarization of the receiving antenna is changed in horizontal and vertical polarization; the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4-2009 Section 8 “Radiated Emissions Testing”

Measurement procedures for electric field radiated emissions above 1 GHz are covered in Clause 8 of ANSI C63.4-2009. The ANSI C63.4-2009 measurement procedure consists of both an exploratory test and a final measurement. The exploratory test is critical to determine the frequency of all significant emissions. For each mode of operation required to be tested, the frequency spectrum is monitored. Variations in antenna height, antenna orientation, antenna polarization, EUT azimuth, and cable or wire placement is explored to produce the emission that has the highest amplitude relative to the limit.

The final measurements are made based on the findings in the exploratory testing. When making exploratory and final measurements it is necessary to maximize the measured radiated emission. Subclause 8.3.1.2 of ANSI C63.4-2009 states that the measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” We consider the “cone of radiation” to be the 3 dB beam width of the measurement antenna.

While the “bore-sighting” technique is not explicitly mentioned in ANSI C63.4-2009, it is a useful technique for measurements using a directional antenna, such as a double-ridged waveguide antenna. Several precautions must be observed, including: knowledge of the beam width of the antenna and the resulting illumination area relative to the size of the EUT, estimation for source of the emission and general location within larger EUTS, measuring system sensitivity, etc.

ANSI C63.4-2009 requires that the measurement antenna is kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. That means that if the directional radiation pattern of the EUT results in a maximum emission at an upwards angle from the EUT, when a directional antenna is used to make the measurement it will be necessary for it to be pointed towards the source of the emission within the EUT. This can be done by either pointing the antenna at an angle towards the source of the emission, or by rotating the EUT, in both height and polarization, to maximize the measured emission. The emission must be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured.

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

Radiated emissions test characteristics	
Frequency range	30 MHz - 4,000 MHz
Test distance	3 m*
Test instrumentation resolution bandwidth	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 4,000 MHz)
Receive antenna scan height	1 m - 4 m
Receive antenna polarization	Vertical/horizontal

* According to Section 15.31 (f) (1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

8.4.4 Calculation of the field strength

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors
Correction Factor : Antenna factor + cable loss

For example:

The receiver reading is 32.7 dB μ V. The antenna factor for the measured frequency is +2.5 dB (1/m) and the cable factor for the measured frequency is 0.71 dB, giving a field strength of 35.91dB μ V/m.

The 35.91dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m = Common Antilogarithm (35.91/20) = 39.8

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements).

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

8.4.5 Result*ID ISC.MR102 in combination with ID ISC.ANT40/30*

FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)										
f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	46.5	10	20.2	-19.1	47.6	84.0 @ 30	36.4	90° / 90°	100
27.120	QPK/9kHz	10.0	10	20.2	-19.1	11.1	29.5 @ 30	18.4	0° / 0°	100
40.68	QPK/120kHz	34.0	3	-7.4	0	26.6	40.0 @ 3	13.4	V. 0°	100
54.24	QPK/120kHz	25.0	3	-8.1	0	16.9	40.0 @ 3	23.1	V. 0°	100
67.8	QPK/120kHz	≤ 6.5	3	-9.7	0	-3.2	40.0 @ 3	43.2	V/H.0-360°	100-400
81.36	QPK/120kHz	37.1	3	-11.4	0	25.7	40.0 @ 3	14.3	V. 0°	110
94.92	QPK/120kHz	35.4	3	-10.8	0	24.6	43.5 @ 3	18.9	V. 10°	110
108.48	QPK/120kHz	33.9	3	-9.7	0	24.2	43.5 @ 3	19.3	V. 20°	100
122.04	QPK/120kHz	30.7	3	-8.2	0	22.5	43.5 @ 3	21.0	V. 30°	114
135.6	QPK/120kHz	≤ 6.5	3	-7.7	0	-1.2	43.5 @ 3	44.7	V/H.0-360°	100-400
149.16	QPK/120kHz	≤ 6.5	3	-6.6	0	-0.1	43.5 @ 3	43.6	V/H.0-360°	100-400
162.72	QPK/120kHz	≤ 6.5	3	-7.2	0	-0.7	43.5 @ 3	44.2	V/H.0-360°	100-400
176.28	QPK/120kHz	≤ 6.5	3	-8.3	0	-1.8	43.5 @ 3	45.3	V/H.0-360°	100-400
189.84	QPK/120kHz	≤ 6.5	3	-10.0	0	-3.5	43.5 @ 3	47.0	V/H.0-360°	100-400
203.4	QPK/120kHz	≤ 6.5	3	-9.8	0	-3.3	43.5 @ 3	46.8	V/H.0-360°	100-400
216.96	QPK/120kHz	30.0	3	-9.4	0	20.6	46.0 @ 3	25.4	V. 0°	113
230.52	QPK/120kHz	≤ 6.5	3	-8.7	0	-2.2	46.0 @ 3	48.2	V/H.0-360°	100-400
244.08	QPK/120kHz	≤ 6.5	3	-8.5	0	-2.0	46.0 @ 3	48.0	V/H.0-360°	100-400
257.64	QPK/120kHz	≤ 6.5	3	-8.1	0	-1.6	46.0 @ 3	47.6	V/H.0-360°	100-400
271.2	QPK/120kHz	≤ 6.5	3	-7.5	0	-1.0	46.0 @ 3	47.0	V/H.0-360°	100-400
284.76	QPK/120kHz	29.5	3	-7.4	0	22.1	46.0 @ 3	23.9	V. 20°	110
298.32	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
311.88	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
325.44	QPK/120kHz	≤ 6.5	3	-5.7	0	0.8	46.0 @ 3	45.2	V/H.0-360°	100-400
339	QPK/120kHz	≤ 6.5	3	-5.9	0	0.6	46.0 @ 3	45.4	V/H.0-360°	100-400
352.56	QPK/120kHz	≤ 6.5	3	-5.0	0	1.5	46.0 @ 3	44.5	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT40/30

FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm	
366.12	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
379.68	QPK/9kHz	33.9	3	-4.9	0	29.0	46.0 @ 3	17.0	V. 0°	173
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400
406.8	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
433.92	QPK/120kHz	≤ 6.5	3	-4.4	0	2.1	46.0 @ 3	43.9	V/H.0-360°	100-400
447.48	QPK/120kHz	≤ 6.5	3	-4	0	2.5	46.0 @ 3	43.5	V/H.0-360°	100-400
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360°	100-400
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
488.16	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0 dBμV @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5 dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	----	------

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT100/100

FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	55.5	10	20.2	-19.1	56.6	84.0 @ 30	27.4	0° / 90°	100
27.120	QPK/9kHz	19.5	10	20.2	-19.1	20.6	29.5 @ 30	8.9	90° / 90°	100
40.68	QPK/120kHz	34.0	3	-7.4	0	26.6	40.0 @ 3	13.4	V. 30°	109
54.24	QPK/120kHz	≤ 6.5	3	-8.1	0	-1.6	40.0 @ 3	41.6	V/H.0-360°	100-400
67.8	QPK/120kHz	≤ 6.5	3	-9.7	0	-3.2	40.0 @ 3	43.2	V/H.0-360°	100-400
81.36	QPK/120kHz	31.0	3	-11.4	0	19.6	40.0 @ 3	20.4	V. 30°	100
94.92	QPK/120kHz	38.2	3	-10.8	0	27.4	43.5 @ 3	16.1	V. 30°	100
108.48	QPK/120kHz	40.1	3	-9.7	0	30.4	43.5 @ 3	13.1	V. 30°	110
122.04	QPK/120kHz	29.1	3	-8.2	0	20.9	43.5 @ 3	22.6	V. 30°	110
135.6	QPK/120kHz	≤ 6.5	3	-7.7	0	-1.2	43.5 @ 3	44.7	V/H.0-360°	100-400
149.16	QPK/120kHz	≤ 6.5	3	-6.6	0	-0.1	43.5 @ 3	43.6	V/H.0-360°	100-400
162.72	QPK/120kHz	≤ 6.5	3	-7.2	0	-0.7	43.5 @ 3	44.2	V/H.0-360°	100-400
176.28	QPK/120kHz	≤ 6.5	3	-8.3	0	-1.8	43.5 @ 3	45.3	V/H.0-360°	100-400
189.84	QPK/120kHz	30.4	3	-10.0	0	20.4	43.5 @ 3	22.1	V. 30°	118
203.4	QPK/120kHz	≤ 6.5	3	-9.8	0	-3.3	43.5 @ 3	46.8	V/H.0-360°	100-400
216.96	QPK/120kHz	≤ 6.5	3	-9.4	0	-2.9	46.0 @ 3	48.9	V/H.0-360°	100-400
230.52	QPK/120kHz	≤ 6.5	3	-8.7	0	-2.2	46.0 @ 3	48.2	V/H.0-360°	100-400
244.08	QPK/120kHz	≤ 6.5	3	-8.5	0	-2.0	46.0 @ 3	48.0	V/H.0-360°	100-400
257.64	QPK/120kHz	≤ 6.5	3	-8.1	0	-1.6	46.0 @ 3	47.6	V/H.0-360°	100-400
271.2	QPK/120kHz	≤ 6.5	3	-7.5	0	-1.0	46.0 @ 3	47.0	V/H.0-360°	100-400
284.76	QPK/120kHz	29.5	3	-7.4	0	22.1	46.0 @ 3	23.9	V. 20°	110
298.32	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
311.88	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
325.44	QPK/120kHz	≤ 6.5	3	-5.7	0	0.8	46.0 @ 3	45.2	V/H.0-360°	100-400
339	QPK/120kHz	≤ 6.5	3	-5.9	0	0.6	46.0 @ 3	45.4	V/H.0-360°	100-400
352.56	QPK/120kHz	≤ 6.5	3	-5.0	0	1.5	46.0 @ 3	44.5	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT100/100
FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm	
366.12	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
379.68	QPK/9kHz	30.0	3	-4.9	0	25.1	46.0 @ 3	20.9	V. 30°	122
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400
406.8	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
433.92	QPK/120kHz	≤ 6.5	3	-4.4	0	2.1	46.0 @ 3	43.9	V/H.0-360°	100-400
447.48	QPK/120kHz	≤ 6.5	3	-4	0	2.5	46.0 @ 3	43.5	V/H.0-360°	100-400
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360°	100-400
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
488.16	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0 dBμV @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5 dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	----	------

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANTH200/200
FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	44.0	10	20.2	-19.1	45.1	84.0 @ 30	38.9	90° / 90°	100
27.120	QPK/9kHz	≤ 4.0	10	20.2	-19.1	5.1	29.5 @ 30	24.4	90° / 90°	100
40.68	QPK/120kHz	25.0	3	-7.4	0	17.6	40.0 @ 3	22.4	V. 40°	100
54.24	QPK/120kHz	27.9	3	-8.1	0	19.8	40.0 @ 3	20.2	V. 40°	100
67.80	QPK/120kHz	28.0	3	-9.7	0	18.0	40.0 @ 3	22.0	V. 40°	133
81.36	QPK/120kHz	46.6	3	-11.4	0	35.2	40.0 @ 3	4.8	V. 40°	120
94.92	QPK/120kHz	44.2	3	-10.8	0	33.4	43.5 @ 3	10.1	V. 40°	115
108.48	QPK/120kHz	43.8	3	-9.7	0	34.1	43.5 @ 3	9.4	V. 40°	100
122.04	QPK/120kHz	38.6	3	-8.2	0	30.4	43.5 @ 3	13.1	V. 50°	107
135.60	QPK/120kHz	32.7	3	-7.7	0	25.3	43.5 @ 3	18.2	V. 40°	111
149.16	QPK/120kHz	27.5	3	-6.6	0	20.9	43.5 @ 3	22.6	V. 40°	128
162.72	QPK/120kHz	≤ 6.5	3	-7.2	0	-0.7	43.5 @ 3	44.2	V/H.0-360°	100-400
176.28	QPK/120kHz	35.3	3	-8.3	0	27.0	43.5 @ 3	16.5	V. 40°	100
189.84	QPK/120kHz	34.4	3	-10.0	0	24.4	43.5 @ 3	19.1	V. 40°	116
203.40	QPK/120kHz	29.8	3	-9.8	0	19.4	43.5 @ 3	24.1	V. 40°	101
216.96	QPK/120kHz	34.1	3	-9.4	0	24.7	46.0 @ 3	18.8	V. 40°	161
230.52	QPK/120kHz	≤ 6.5	3	-8.7	0	-2.2	46.0 @ 3	48.2	V/H.0-360°	100-400
244.08	QPK/120kHz	≤ 6.5	3	-8.5	0	-2.0	46.0 @ 3	48.0	V/H.0-360°	100-400
257.64	QPK/120kHz	≤ 6.5	3	-8.1	0	-1.6	46.0 @ 3	47.6	V/H.0-360°	100-400
271.20	QPK/120kHz	≤ 6.5	3	-7.5	0	-1.0	46.0 @ 3	47.0	V/H.0-360°	100-400
284.76	QPK/120kHz	≤ 6.5	3	-7.4	0	-0.9	46.0 @ 3	46.9	V/H.0-360°	100-400
298.32	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
311.88	QPK/120kHz	29.0	3	-6.3	0	22.7	46.0 @ 3	23.3	V. 40°	109
325.44	QPK/120kHz	≤ 6.5	3	-5.7	0	0.8	46.0 @ 3	45.2	V/H.0-360°	100-400
339.00	QPK/120kHz	≤ 6.5	3	-5.9	0	0.6	46.0 @ 3	45.4	V/H.0-360°	100-400
352.56	QPK/120kHz	≤ 6.5	3	-5.0	0	1.5	46.0 @ 3	44.5	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANTH200/200
FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm	
366.12	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
379.68	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400
406.8	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
433.92	QPK/120kHz	≤ 6.5	3	-4.4	0	2.1	46.0 @ 3	43.9	V/H.0-360°	100-400
447.48	QPK/120kHz	≤ 6.5	3	-4	0	2.5	46.0 @ 3	43.5	V/H.0-360°	100-400
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360°	100-400
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
488.16	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0 dBμV @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5 dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	----	------

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT310/310

FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	63.5	10	20.2	-19.1	64.6	84.0 @ 30	19.4	90° / 90°	100
27.120	QPK/9kHz	17.5	10	20.2	-19.1	18.6	29.5 @ 30	10.9	90° / 90°	100
40.68	QPK/120kHz	20.0	3	-7.4	0	12.6	40.0 @ 3	17.4	V. 20°	102
54.24	QPK/120kHz	28.6	3	-8.1	0	20.5	40.0 @ 3	19.5	V. 30°	119
67.80	QPK/120kHz	33.5	3	-9.7	0	23.5	40.0 @ 3	16.5	V. 30°	140
81.36	QPK/120kHz	43.0	3	-11.4	0	31.6	40.0 @ 3	8.4	V. 30°	100
94.92	QPK/120kHz	40.0	3	-10.8	0	29.2	43.5 @ 3	14.3	V. 30°	130
108.48	QPK/120kHz	43.5	3	-9.7	0	33.8	43.5 @ 3	9.7	V. 40°	110
122.04	QPK/120kHz	37.1	3	-8.2	0	28.9	43.5 @ 3	14.6	V. 40°	108
135.60	QPK/120kHz	28.8	3	-7.7	0	21.4	43.5 @ 3	22.1	V. 40°	114
149.16	QPK/120kHz	≤ 6.5	3	-6.6	0	-0.1	43.5 @ 3	43.6	V/H.0-360°	100-400
162.72	QPK/120kHz	30.7	3	-7.2	0	24.1	43.5 @ 3	19.4	V. 40°	215
176.28	QPK/120kHz	30.8	3	-8.3	0	22.5	43.5 @ 3	21.0	V. 30°	100
189.84	QPK/120kHz	≤ 6.5	3	-10.0	0	-3.5	43.5 @ 3	47.0	V/H.0-360°	100-400
203.40	QPK/120kHz	33.3	3	-9.8	0	22.9	43.5 @ 3	20.6	V. 30°	124
216.96	QPK/120kHz	34.6	3	-9.4	0	25.2	46.0 @ 3	18.3	V. 30°	131
230.52	QPK/120kHz	≤ 6.5	3	-8.7	0	-2.2	46.0 @ 3	48.2	V/H.0-360°	100-400
244.08	QPK/120kHz	34.9	3	-8.5	0	26.2	46.0 @ 3	19.8	V. 30°	100
257.64	QPK/120kHz	29.3	3	-8.1	0	21.0	46.0 @ 3	25.0	V. 30°	140
271.20	QPK/120kHz	30.6	3	-7.5	0	23.1	46.0 @ 3	22.9	V. 30°	112
284.76	QPK/120kHz	≤ 6.5	3	-7.4	0	-0.9	46.0 @ 3	46.9	V/H.0-360°	100-400
298.32	QPK/120kHz	33.3	3	-6.3	0	26.8	46.0 @ 3	19.2	V. 40°	112
311.88	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
325.44	QPK/120kHz	29.0	3	-5.7	0	23.3	46.0 @ 3	22.7	V/H.0-360°	100-400
339.00	QPK/120kHz	≤ 6.5	3	-5.9	0	0.6	46.0 @ 3	45.4	V/H.0-360°	100-400
352.56	QPK/120kHz	≤ 6.5	3	-5.0	0	1.5	46.0 @ 3	44.5	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT310/310

FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm
366.12	QPK/9kHz	31.5	3	-4.9	0	26.6	46.0 @ 3	19.4	V/H.0-360° 100-400
379.68	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360° 100-400
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360° 100-400
406.8	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360° 100-400
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360° 100-400
433.92	QPK/120kHz	≤ 6.5	3	-4.4	0	2.1	46.0 @ 3	43.9	V/H.0-360° 100-400
447.48	QPK/120kHz	≤ 6.5	3	-4	0	2.5	46.0 @ 3	43.5	V/H.0-360° 100-400
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360° 100-400
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360° 100-400
488.16	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360° 100-400
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360° 100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360° 100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360° 100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360° 100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360° 100-400
Measurement uncertainty			4 dB						

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0 dBμV @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5 dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	----	------

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT340/240
FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	63.5	10	20.2	-19.1	64.6	84.0 @ 30	19.4	90° / 90°	100
27.120	QPK/9kHz	8.0	10	20.2	-19.1	9.1	29.5 @ 30	21.4	90° / 90°	100
40.68	QPK/120kHz	39.7	3	-7.4	0	32.3	40.0 @ 3	7.7	V. 30°	205
54.24	QPK/120kHz	46.7	3	-8.1	0	38.6	40.0 @ 3	1.4	V. 30°	105
67.80	QPK/120kHz	24.7	3	-9.7	0	15.0	40.0 @ 3	25.0	V. 30°	105
81.36	QPK/120kHz	36.4	3	-11.4	0	25.0	40.0 @ 3	15.0	V. 30°	156
94.92	QPK/120kHz	42.6	3	-10.8	0	31.8	43.5 @ 3	11.9	V. 30°	126
108.48	QPK/120kHz	48.3	3	-9.7	0	38.6	43.5 @ 3	4.9	V. 30°	133
122.04	QPK/120kHz	50.3	3	-8.2	0	42.1	43.5 @ 3	1.4	V. 30°	100
135.60	QPK/120kHz	27.3	3	-7.7	0	19.6	43.5 @ 3	23.9	V. 30°	150
149.16	QPK/120kHz	≤ 6.5	3	-6.6	0	-0.1	43.5 @ 3	43.6	V. 30°	115
162.72	QPK/120kHz	32.6	3	-7.2	0	25.4	43.5 @ 3	18.1	V. 30°	100
176.28	QPK/120kHz	36.1	3	-8.3	0	27.8	43.5 @ 3	15.7	V. 20°	100
189.84	QPK/120kHz	32.4	3	-10.0	0	22.4	43.5 @ 3	21.1	V. 20°	100-400
203.40	QPK/120kHz	29.4	3	-9.8	0	19.6	43.5 @ 3	23.9	V. 20°	101
216.96	QPK/120kHz	25.0	3	-9.4	0	15.6	46.0 @ 3	27.9	V. 20°	161
230.52	QPK/120kHz	33.1	3	-8.7	0	24.4	46.0 @ 3	21.6	V. 20°	100-400
244.08	QPK/120kHz	≤ 6.5	3	-8.5	0	-2.0	46.0 @ 3	48.0	V/H.0-360°	100-400
257.64	QPK/120kHz	≤ 6.5	3	-8.1	0	-1.6	46.0 @ 3	47.6	V/H.0-360°	100-400
271.20	QPK/120kHz	≤ 6.5	3	-7.5	0	-1.0	46.0 @ 3	47.0	V/H.0-360°	100-400
284.76	QPK/120kHz	≤ 6.5	3	-7.4	0	-0.9	46.0 @ 3	46.9	V/H.0-360°	100-400
298.32	QPK/120kHz	33.4	3	-6.3	0	27.1	46.0 @ 3	18.9	V. 20°	163
311.88	QPK/120kHz	31.0	3	-6.3	0	24.7	46.0 @ 3	21.3	V. 20°	170
325.44	QPK/120kHz	≤ 6.5	3	-5.7	0	0.8	46.0 @ 3	45.2	V/H.0-360°	100-400
339.00	QPK/120kHz	≤ 6.5	3	-5.9	0	0.6	46.0 @ 3	46.6	V/H.0-360°	100-400
352.56	QPK/120kHz	29.5	3	-5.0	0	24.5	46.0 @ 3	21.5	V. 20°	132
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT340/240

FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm	
366.12	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
379.68	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400
406.8	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
433.92	QPK/120kHz	≤ 6.5	3	-4.4	0	2.1	46.0 @ 3	43.9	V/H.0-360°	100-400
447.48	QPK/120kHz	≤ 6.5	3	-4	0	2.5	46.0 @ 3	43.5	V/H.0-360°	100-400
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360°	100-400
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
488.16	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0 dBμV @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5 dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	----	------

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANTS370/270
FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	59.0	10	20.2	-19.1	60.1	84.0 @ 30	23.9	90° / 90°	100
27.120	QPK/9kHz	≤ 6.5	10	20.2	-19.1	7.6	29.5 @ 30	21.9	90° / 90°	100
40.68	QPK/120kHz	26.8	3	-7.4	0	19.4	40.0 @ 3	20.6	V. 30°	106
54.24	QPK/120kHz	26.1	3	-8.1	0	18.0	40.0 @ 3	22.0	V. 0°	104
67.80	QPK/120kHz	21.6	3	-9.7	0	11.9	40.0 @ 3	28.1	V. 0°	108
81.36	QPK/120kHz	22.0	3	-11.4	0	10.6	40.0 @ 3	29.4	V. 0°	108
94.92	QPK/120kHz	49.3	3	-10.8	0	38.5	43.5 @ 3	5.0	V. 0°	111
108.48	QPK/120kHz	25.9	3	-9.7	0	16.2	43.5 @ 3	27.3	V. 0°	115
122.04	QPK/120kHz	25.8	3	-8.2	0	17.6	43.5 @ 3	25.9	V. 0°	116
135.60	QPK/120kHz	31.1	3	-7.7	0	23.4	43.5 @ 3	20.1	V. 0°	150
149.16	QPK/120kHz	30.2	3	-6.6	0	23.6	43.5 @ 3	19.9	V. 0°	190
162.72	QPK/120kHz	25.0	3	-7.2	0	17.8	43.5 @ 3	25.7	V. 30°	137
176.28	QPK/120kHz	≤ 6.5	3	-8.3	0	-1.8	43.5 @ 3	41.7	V. 40°	100
189.84	QPK/120kHz	27.6	3	-10.0	0	17.6	43.5 @ 3	25.9	V. 30°	137
203.40	QPK/120kHz	30.5	3	-9.8	0	20.7	43.5 @ 3	22.8	V. 30°	101
216.96	QPK/120kHz	≤ 6.5	3	-9.4	0	-2.9	46.0 @ 3	48.9	V/H.0-360°	100-400
230.52	QPK/120kHz	26.9	3	-8.7	0	18.2	46.0 @ 3	27.8	V. 30°	100
244.08	QPK/120kHz	34.5	3	-8.5	0	26.0	46.0 @ 3	20.0	V. 30°	227
257.64	QPK/120kHz	23.7	3	-8.1	0	15.6	46.0 @ 3	30.4	V. 30°	314
271.20	QPK/120kHz	29.9	3	-7.5	0	22.4	46.0 @ 3	23.6	V. 30°	241
284.76	QPK/120kHz	≤ 6.5	3	-7.4	0	-0.9	46.0 @ 3	46.9	V/H.0-360°	100-400
298.32	QPK/120kHz	27.7	3	-6.3	0	21.4	46.0 @ 3	24.6	V. 30°	236
311.88	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
325.44	QPK/120kHz	≤ 6.5	3	-5.7	0	0.8	46.0 @ 3	45.2	V/H.0-360°	100-400
339.00	QPK/120kHz	≤ 6.5	3	-5.9	0	0.6	46.0 @ 3	45.4	V/H.0-360°	100-400
352.56	QPK/120kHz	≤ 6.5	3	-5.0	0	1.5	46.0 @ 3	44.5	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANTS370/270
FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm	
366.12	QPK/9kHz	22.6	3	-4.9	0	17.7	46.0 @ 3	28.3	V. 30°	223
379.68	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400
406.8	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
433.92	QPK/120kHz	≤ 6.5	3	-4.4	0	2.1	46.0 @ 3	43.9	V/H.0-360°	100-400
447.48	QPK/120kHz	28.6	3	-4	0	24.6	46.0 @ 3	21.4	V. 30°	130
461.04	QPK/120kHz	29.8	3	-3.9	0	25.9	46.0 @ 3	20.1	V. 30°	130
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
488.16	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0 dBμV @ 10m distance (0,009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5 dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	----	------

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT800/600
FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	62.0	10	20.2	-19.1	63.1	84.0 @ 30	20.9	90° / 90°	100
27.120	QPK/9kHz	5.0	10	20.2	-19.1	6.1	29.5 @ 30	23.4	90° / 90°	100
40.68	QPK/120kHz	41.6	3	-7.4	0	34.2	40.0 @ 3	5.8	H. 0°	273
54.24	QPK/120kHz	44.0	3	-8.1	0	35.9	40.0 @ 3	4.1	H. 0°	107
67.80	QPK/120kHz	≤ 6.5	3	-9.7	0	-3.2	40.0 @ 3	43.2	V/H.0-360°	100-400
81.36	QPK/120kHz	44.6	3	-11.4	0	33.2	40.0 @ 3	6.8	H. 0°	288
94.92	QPK/120kHz	≤ 6.5	3	-10.8	0	-4.3	43.5 @ 3	47.8	V/H.0-360°	100-400
108.48	QPK/120kHz	43.9	3	-9.7	0	34.2	43.5 @ 3	9.3	H. 0°	192
122.04	QPK/120kHz	42.9	3	-8.2	0	34.7	43.5 @ 3	8.8	H. 0°	129
135.60	QPK/120kHz	24.0	3	-7.7	0	16.3	43.5 @ 3	27.2	H. 0°	180
149.16	QPK/120kHz	≤ 6.5	3	-6.6	0	-0.1	43.5 @ 3	43.6	V/H.0-360°	100-400
162.72	QPK/120kHz	47.0	3	-7.2	0	39.8	43.5 @ 3	3.7	H. 10°	135
176.28	QPK/120kHz	25.0	3	-8.3	0	16.7	43.5 @ 3	26.8	H. 40°	124
189.84	QPK/120kHz	27.0	3	-10.0	0	17.0	43.5 @ 3	26.5	H. 30°	144
203.40	QPK/120kHz	46.2	3	-9.8	0	36.4	43.5 @ 3	7.1	H. 10°	114
216.96	QPK/120kHz	29.9	3	-9.4	0	20.5	46.0 @ 3	25.5	H. 30°	167
230.52	QPK/120kHz	49.4	3	-8.7	0	40.7	46.0 @ 3	5.3	H. 20°	156
244.08	QPK/120kHz	24.5	3	-8.5	0	16.0	46.0 @ 3	30.0	H. 20°	123
257.64	QPK/120kHz	43.7	3	-8.1	0	35.6	46.0 @ 3	10.4	H. 20°	106
271.20	QPK/120kHz	≤ 6.5	3	-7.5	0	-1.0	46.0 @ 3	47.0	V/H.0-360°	100-400
284.76	QPK/120kHz	37.8	3	-7.4	0	30.4	46.0 @ 3	15.6	H. 20°	118
298.32	QPK/120kHz	26.0	3	-6.3	0	19.7	46.0 @ 3	26.3	H. 20°	115
311.88	QPK/120kHz	34.6	3	-6.3	0	28.3	46.0 @ 3	17.7	H. 0°	113
325.44	QPK/120kHz	≤ 6.5	3	-5.7	0	0.8	46.0 @ 3	45.2	V/H.0-360°	100-400
339.00	QPK/120kHz	≤ 6.5	3	-5.9	0	0.6	46.0 @ 3	45.4	V/H.0-360°	100-400
352.56	QPK/120kHz	≤ 6.5	3	-5.0	0	1.5	46.0 @ 3	44.5	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

ID ISC.MR102 in combination with ID ISC.ANT800/600

FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm	
366.12	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
379.68	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400
406.8	QPK/120kHz	29.9	3	-4.8	0	25.1	46.0 @ 3	20.9	H. 20°	113
420.36	QPK/120kHz	30.6	3	-4.8	0	25.8	46.0 @ 3	20.2	H. 20°	115
433.92	QPK/120kHz	31.3	3	-4.4	0	26.9	46.0 @ 3	19.1	H. 20°	140
447.48	QPK/120kHz	≤ 6.5	3	-4	0	2.5	46.0 @ 3	43.5	V/H.0-360°	100-400
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360°	100-400
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
488.16	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0 dBμV @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5 dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	No	N.t.
--------------------------------------	-----	----	------

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

N.t.* See page no. 42

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

SPURIOUS RADIATION (Section 15.209)

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m	Margin dBμV/m	Polarisation EUT / antenna orientation
0.1200	0.2, PK	< 4.0	10	20.2	-59.1	-34.9	46.0- @ 300 m	80.90	V, H/0-360°
	0.2, AV	< 4.0	10	20.2	-59.1	-34.9	26.0 @ 300 m	80.90	V, H/0-360°
0.5000	0.2, AV	< 4.0	10	20.2	-19.1	5.1	33.6 @ 30 m	28.5	V, H/0-360°
1.5000	0.2, AV	< 4.0	10	20.2	-19.1	5.1	24.1 @ 30 m	19.00	V, H/0-360°
3.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
5.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
8.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
10.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
20.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
30.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
35.0000	100, AV	≤ 3.5	3	-3.1* ⁶	0	0	0.4	40.0	H,V/H,V
88.0000	100, AV	≤ 3.5	3	-10.8* ⁶	0	-7.3	40.0	47.3	H,V/H,V
216.0000	100, AV	≤ 3.5	3	-10.3* ⁶	0	-6.8	43.5	50.3	H,V/H,V
960.0000	100, AV	≤ 3.5	3	8.5* ⁶	0	12.0	43.5	31.5	H,V/H,V
1700.0000	1000, AV	≤ 4.5	3	3.8* ⁷	0	8.3	54.0	45.7	H,V/H,V
2250.0000	1000, AV	≤ 10	3	8.0* ⁷	0	18.0	54.0	36.0	H,V/H,V
4000.0000	1000, AV	≤ 10	3	8.4* ⁷	0	18.4	54.0	35.6	H,V/H,V
5000.0000	1000, AV	≤ 10	3	9.1* ⁷	0	19.4	54.0	34.6	H,V/H,V
7500.0000	1000, AV	≤ 14	3	12.9* ⁷	0	26.9	54.0	27.1	H,V/H,V
8300.0000	1000, AV	≤ 14	3	14.0* ⁷	0	28.8	54.0	25.2	H,V/H,V
9400.0000	1000, AV	≤ 14	3	16.0* ⁷	0	30.0	54.0	24.0	H,V/H,V
11000.0000	1000, AV	≤ 14	3	18.3* ⁷	0	32.3	54.0	21.7	H,V/H,V

All other emissions than harmonics in the restricted bands are lower than the noise level of the measuring equipment!

Measurement uncertainty

4 dB

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0dBμV @ 10m distance (0.009 MHz – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 3.5dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 4.5dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 10dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ noise floor noise level of the measuring instrument ≤ 14dBμV @ 3m distance (5,500 – 14,500 MHz)
 Remark: *⁶ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
 Remark: *⁷ for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements

Yes

~~No~~~~N/A~~

Further test results are attached

~~Yes~~

No

Page no.

N.t.* See page no. 42

Date: 2011-03-14

Vers. no. 1.11

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

8.5 Frequency tolerance

8.5.1 Regulation

(e) The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency over a temperature variation of -20 °C to $+55$ °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C.

8.5.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2010/11	2012/11
Low noise signal generator (10kHz – 5.4GHz)	Marconi Instruments 2042 (6)	119347/003	2010/01	2012/01
Temperature chamber	Brabender TTE 32/40 H (87)	---	2010/03	2013/03
RF- cable	RG58 2.5m [BNC]	K21	2011/01	2012/01

11.5.3 Test procedures

Stability with respect to ambient temperature:

Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. If possible, a dummy load should be connected to the EUT, because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, the EUT should be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn the EUT on, and tune it to one of the number of frequencies required

Couple the intentional radiator output to the measuring instrument by connecting an antenna to the measurement instrument with a suitable length of coaxial cable and placing the measurement antenna near the EUT (e.g., 15 cm away) or by connecting a dummy load to the measuring instrument through an attenuator, if necessary.

Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. Turn the EUT on, and couple its output to the measuring instrument by connecting an antenna to the measurement instrument with a suitable length of coaxial cable.

Adjust the location of the measurement antenna and the controls on the measuring instrument to obtain a suitable signal level (i.e., a level that will not overload the measuring instrument, but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

Tune the EUT to any one of the number of frequencies specified. Turn the EUT off, and place it inside an environmental chamber if appropriate. Allow the chamber to stabilize at +20 °C before proceeding. Turn on the EUT, and record the operating frequency of the intentional radiator at start up and two, five, and ten minutes after start up. Turn the EUT off and allow it to cool to the ambient temperature, and then repeat this procedure for the number of the frequencies specified. Four measurements are made at each operating frequency.

Stability with respect to input voltage:

Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. If possible, a dummy load should be connected to the EUT, because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, the EUT should be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn the EUT on, and tune it to one of the number of frequencies required.

Couple the intentional radiator output to the measuring instrument by connecting an antenna to the measurement instrument with a suitable length of coaxial cable and placing the measurement antenna near the EUT (e.g., 15 cm away) or by connecting a dummy load to the measuring instrument through an attenuator, if necessary.

Adjust the location of the measurement antenna and the controls on the measuring instrument to obtain a suitable signal level (i.e., a level that will not overload the measuring instrument, but is strong enough to allow measurement of the operating or fundamental frequency of the EUT). Turn the EUT off, and place it inside an environmental temperature chamber. For devices that are normally operated continuously, the EUT may be energized while inside the test chamber. For devices that have oscillator heaters, energize only the heater circuit while the EUT is inside the chamber.

Set the temperature control on the chamber to the highest specified EUT operating temperature, and allow the temperature inside the chamber to stabilize at the set temperature before starting frequency measurements.

While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at start up and two, five, and ten minutes after the EUT is energized. Four measurements in total are made.

Repeat the above procedure until the number of frequencies specified has been measured. After all measurements have been made at the highest specified temperature, turn the EUT off. Repeat the above measurement process for the EUT with the test chamber set at the lowest temperature specified by the regulatory or procuring agency. Measurements shall be made at the number of frequencies specified.

EUT: ID ISC.MR102
 FCC ID: PJMMR102

Date of issue: 2011-07-12

8.5.4 Result

Frequency tolerance (Section 15.225(e))			
Test conditions		Carrier Frequency 13.560 MHz	
		Frequency error / (kHz) ppm	Limit ppm
T _{min} -20 °C	V _{min} 20.4 V DC	(-0.014) -1.0	100
	V _{max} 27.6 V DC	(-0.014) -1.0	100
T -10 °C	V _{min} 20.4 V DC	(0.0) 0.0	100
	V _{max} 27.6 V DC	(0.0) 0.0	100
T 0 °C	V _{min} 20.4 V DC	(+0.116) +8.6	100
	V _{max} 27.6 V DC	(+0.116) +8.6	100
T +10 °C	V _{min} 20.4 V DC	(+0.072) +5.3	100
	V _{max} 27.6 V DC	(+0.072) +5.3	100
T _{nom} +20 °C	V _{min} 20.4 V DC	(+0.101) +7.4	100
	V _{max} 27.6 V DC	(+0.101) +7.4	100
T +30 °C	V _{min} 20.4 V DC	(+0.105) +7.7	100
	V _{max} 27.6 V DC	(+0.105) +7.7	100
T +40 °C	V _{min} 20.4 V DC	(+0.110) +8.1	100
	V _{max} 27.6 V DC	(+0.110) +8.1	100
T +50 °C	V _{min} 20.4 V DC	(+0.140) +10.3	100
	V _{max} 27.6 V DC	(+0.140) +10.3	100
T _{max} +60 °C	V _{min} 20.4 V DC	(+0.160) +11.8	100
	V _{max} 27.6 V DC	(+0.160) +11.8	100
Maximum frequency error (kHz)		(+0.160) +11.8	100
Measurement uncertainty		$\pm 5 \cdot 10^{-8}$	

The equipment meets the requirements	Yes	No	N.t.
Further test results are attached	Yes	No	Page no.

N.t.* See page no. 42

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

9. Additional information to the test report

Remarks

- | | |
|-------------------|---|
| N.t. ¹ | Not tested, because the antenna is part of the PCB |
| N.t. ² | Not tested, because the EUT is directly battery powered |
| N.t. ³ | Not tested, because not applicable to the EUT |
| N.t. ⁴ | Not tested, because not ordered |

EUT: ID ISC.MR102
FCC ID: PJMMR102

Date of issue: 2011-07-12

End of test report