

## Electromagnetic Emission

### F C C M E A S U R E M E N T R E P O R T

#### CERTIFICATION OF COMPLIANCE FCC Part 15 Certification Measurement

**PRODUCT** : Wireless Karaoke Microphone  
**MODEL/TYPE NO** : KT-113MHR  
**FCC ID** : PK8KT-113MHR  
**APPLICANT** : KORI TECH Co., Ltd.  
Rm .407, Daeryung Techno 2nd Town,  
569-21 Kasan-Dong, Keumcheon-Ku, Seoul, Korea,  
Attn. : Kim, Kwang Yeoul / President of Company  
**FCC CLASSIFICATION** : Low Power Communication Device Transmitter :  
Intentional Radiator  
Part 15 Class B Unintentional Radiators  
Computing Device Peripheral (JBP)  
**FCC RULE PART(S)** : FCC Part 15 Subpart B & Subpart C § 15.239  
**FCC PROCEDURE** : Certification  
**TRADE NAME** : Koritech  
**TEST REPORT No.** : E03.0219.FCC.083N  
**DATES OF TEST** : February 13 ~ 14, 2003  
**DATES OF ISSUE** : February 19, 2003  
**TEST LAB.** : ETL Inc ( FCC Registration Number : 95422)  
#584 Sangwhal-ri, Kanam-myon, Yoju-kun,  
Kyounggi-do, 469-885, Korea  
Tel : +82-31-885-0072 Fax : +82-31-885-0074

This wireless karaoke microphone, KT-113MHR has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part 15 Subpart B & Subpart C section15.239. I attest to the accuracy of data. All measurement herein performed by me or made under my supervision and correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Name : Yo Han, Park

Title : Chief Engineer

**E-RAE Testing Laboratory Inc.**

**#584 Sangwhal-ri, Kanam-myon, Yoju-kun,  
Kyounggi-do, 469-885, Korea**

*This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the ETL, Inc.*

## Table of Contents

### ATTACHMENT A: COVER LETTER(S)

#### FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
  - 5.1 Summary of Test Results
  - 5.2 Conducted Emission
  - 5.3 Radiated Emission
  - 5.4 Radiated Emissions of RF Carrier frequency
  - 5.5 Out-of-band Radiated Emissions
  - 5.6 Emission Bandwidth Measurement
6. Antenna Requirement
7. Sample Calculations
8. List of test Equipment used for Measurement

**Appendix A. FCC ID Label and Location**

**Appendix B. Test Setup Photographs**

**Appendix C. External Photographs**

**Appendix D. Internal Photographs**

**Appendix E. Block Diagram**

**Appendix F. Schematics**

**Appendix G. User Manual**

## FCC MEASUREMENT REPORT

**Scope** - *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

### General Information

**Applicant Name** : KORI TECH Co., Ltd.  
**Address** : Rm .407, Daeryung Techno 2nd Town,  
569-21 Kasan-Dong, Keumcheon-Ku,  
Seoul, Korea  
**Attention** :Kim, Kwang Yeoul / President of Company

- **EUT Type :** Wireless Karaoke Microphone
- **Model Number :** KT-113MHR
- **FCC Identifier :** PK8KT-113MHR
- **S/N :** Prototype
- **Freq. Range :** 104.0 MHz – 108.0 MHz
- **FCC Rule Part(s) :** FCC Part 15 Subpart B & Subpart C § 15.239
- **Test Procedure :** ANSI C63.4-1992
- **FCC Classification :** DXX - Low Power Communication Device Transmitter :  
Intentional Radiator & Part 15 Class B Unintentional Radiators  
Computing Device Peripheral (JBP)
- **Dates of Tests :** February 14, 2003
- **Place of Tests :** ETL Inc  
EMC Testing Lab (FCC Registration Number : 95422)  
584, Sangwhal-Ri, Kanam-Myon, Yoju-Kun,  
Kyounggi-Do, 469-885 Korea.  
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No. :** E03.0219.FCC.083N

## **1. INTRODUCTION**

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyoungki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission(Registration Number : 95422 ).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the KORI TECH Co.,Ltd. Wireless karaoke microphone Model : KT-113MHR.

## 2. PRODUCT INFORMATION

---

### 2.1 Equipment Description

The Equipment Under Test(EUT) is the KORI TECH Co., Ltd. Wireless karaoke microphone Model:KT-113MHR(FCC ID : PK8KT-113MHR). This microphone is supply powered by AC/DC Adaptor and Battery. This equipment is low power transmitter intended for wireless microphone with audio data stored in the karaoke DSP chip. And transmit video and audio to CCTV Monitor.

The wireless is support with audio source for FM frequency band of 104.0 ~ 108.0 MHz and Voice support with dynamic microphone.

### 2.2 General Specification

- Chassis Type	Plastic ( Internal copper coating)
- List of Each OSC. Or X-Tal. Freq.(>=1MHz)	X-TAL:11.2896 MHz, 27 MHz, 9.6 MHz, OSC:48 MHz
- Chipset Number	SAM9703 / dream, KT-9703cw32-1 / hynix, 39VF400A / SST HY57V641620HG / hynix, K9F5608UCB / Samsung TMS320DSC21 / DSP, D7225GB / NEC
- RF Frequency Out	104.0 MHz – 108.0 MHz
- Antenna Type	Herix Antenna tunned to 106MHz
- I/O Cable(s)	Unshielded
- Power Requirement	Internal : Lithium Ion Battery (3.7V, 900mA) AC/DC Adapter : DC 5.7 V, 1.2A
- Electric Power	1.5W
- Dimension(LxD)	215 x 48 mm
- Sound source	SAM9703
- Weight	240g
- Image method	NTSC(Standard signal method used in Japan and the U.S.)
- Memory built in	48Mbyte
- SD Card	Available to use 64mbyte at maximum
- Method for PC communication	USB V1.1

### **3. DESCRIPTION OF TESTS**

---

#### **3.1 Conducted Emission Measurement**

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-1992. The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1m x 1.5m x 0.8m wooden table in which is placed 40cm away from the vertical wall, and 1.5m away from the side wall of the chamber room. Two EMCO 3825/2 LISNs are bonded to the shielded room. The EUT is powered from the EMCO LISN and the support equipment is powered from another EMCO LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling(serprntine fashion) to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the R3261A Spectrum Analyzer to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using the detector function set to the CISPR Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable, whichever determined the worst-case emission. Each emission reported was calibrated using self-calibrating mode. Photographs of the worst-case emission can be seen in photographs of conducted emission test setup.

### **3. DESCRIPTION OF TESTS**

---

#### **3.2 Radiated Emission Measurement**

Preliminary measurements were made at indoors 3meter semi EMC Anechoic Chamber using broadband antennas, broadband amplifier, and spectrum analyzer to determine the emission frequencies producing the maximum EME.

Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna and above 1000MHz, linearly polarized double ridge horn antennas were used. Above 1GHz, linearly polarized double ridge horn antennas were used. The measurements were performed with three frequencies which were selected as bottom, middle and top frequency in the operating band. Emission level from the EUT with various configurations were examined on the spectrum analyzer connected with the RF amplifier and plotted graphically.

Final measurements were made outdoors open site at 10-meter test range using SchwarzBeck Log-Bicon antenna. The output from the antenna was connected, via a pre-selector or a preamplifier, to the input of the EMI Measuring Receiver and Spectrum analyzer(for above 1GHz). The detector function was set to the quasi-peak or peak and average mode as appropriate. The measurement bandwidth on the Field strength receiver was set to at least 120kHz (1MHz for measurement above 1GHz), with all post-detector filtering no less than 10 times the measurement bandwidth. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during preliminary measurement was examined and investigated as the same set up and configuration which produced the maximum emission. The EUT, support equipment and interconnecting cables were configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1m x 1.5 meter table. The turntable containing the system was rotated and the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by varying the mode of operating frequencies of the EUT. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20dB/decade) as per section 15.31(f).

Photographs of the worst-case emission test setup can be seen in Appendix B.

### **3. DESCRIPTION OF TESTS**

---

#### **3.3 Emission Bandwidth Measurement**

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88 – 108 MHz. Position the EUT as shown in the radiated emission measurement and set it to any one measured frequency within its operating range and make sure the measuring instrument is operated in its linear range. Set both RBW and VBW of the spectrum analyzer to 10 kHz and 30 kHz respectively with a convenient frequency span including 200kHz bandwidth of the emission.

The bandwidth of emission shall be no wider than of 200kHz of the center frequency for EUT operating within 88.0 MHz to 108.0 MHz. The bandwidth is determined at the frequency 26dB down from the modulated carrier. Plot the graph on spectrum analyzer.

## 4. TEST CONDITION

---

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

#### Radiated Emission Test

Preliminary radiated emission tests were conducted using the procedure in ANSI C63.4/1992 Clause 8.3.1.1 to determine the worst operating condition. Final radiated emission tests were conducted at 3meter & 10meter open field test site.

To complete the test configuration required by the FCC, the EUT was tested in all three orthogonal planes. All testing was performed at AC/DC Adaptor.

### 4.2 EUT operation

The EUT connected user's Guide.

The EUT was set to the normal audio transmitting mode in a FM band with karaoke music play and play music(video & audio) on the CCTV Monitor, and PC Data download mode. During all the testing in a manner similar to a typical use.

### 4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

#### EUT- Wireless karaoke microphone

FCC ID	: PK8KT-113MHR
Model Name	: KT-113MHR
Serial No.	: Prototype
Manufacturer	: KORI TECH Co.,Ltd.
Power Supply Type	: AC/DC Adapter
Power Cord	: N/A
Data Cable	: Shielded, Detachable, RCA cable 4m : USB 1.0m, DC Power cable 1.0m

#### Support Unit 1 – CCTV Monitor

FCC ID	: N/A
Model Name	: MCM-144
Serial No.	: 11AA500030
Manufacturer	: Samyang Electronics Co., Ltd.
Power Supply Type	: Switching
Data Port	: Video in: 2, Video out: 2, Audio in: 2, Audio out: 2
Power Cord	: Non-Shielded, Detachable, 1.2m

#### Support Unit 2 – AC/DC Adapter

FCC ID	: N/A
Model Name	: DRS-051200
Serial No.	: None
Manufacturer	: DREAM ELECTRONIC CO.,LTD.
Power Supply Type	: Linear
Power Cord	: N/A

#### Support Unit 3 – PC

FCC ID : DOC  
Model Name : DHM  
Serial No. : H9MB71S  
Manufacturer : Dell Computer corporation  
Power Supply Type : Switching  
Data port : Parallel: 1, USB: 2, Keyboard: 1, Mouse: 1, RS-232: 2, RGB: 1  
RJ-45:1, Audio in: 1, Audio out: 1, MIC in: 1  
Power Cord : Non-Shielded, Detachable, 1.2m

#### Support Unit 4 – Monitor

FCC ID : N/A  
Model Name : ELM-150B  
Serial No. : None  
Manufacturer : E-RAE ELECTRONIC CO., LTD.  
Power Supply Type : Switching  
Data cable : Shielded detachable 15-pin D-sub and ferrite core on signal cable

#### Support Unit 5 – Keyboard

FCC ID : N/A  
Model Name : SK-8000  
Serial No. : None  
Manufacturer : Dell Computer corporation  
Power Supply Type : Linear  
Data cable : Non-shielded 1.2m

#### Support Unit 6 – Mouse

FCC ID : N/A  
Model Name : M-S34  
Serial No. : LZC01002314  
Manufacturer : Logitech  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Non-shielded 1.2m

#### Support Unit 7 – Earphone

FCC ID : N/A  
Model Name : N/A  
Serial No. : N/A  
Manufacturer : N/A  
Power Supply Type : N/A  
Data Cable : Non-shielded 1.2m

## 5. TEST RESULTS

---

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule Parts	Measurement Required	Result
15.107	Conducted Emissions	Passed by -3.24dB
15.109(g)	Radiated Emissions	Passed by -3.50dB
15.239(b)	Radiated Emissions of RF Carrier frequency	Passed by -3.21dB
15.239(c)	Out-of-band Radiated Emissions	Passed by -3.67dB
15.239(a)	Emission Bandwidth Measurement	Passed

The data collected shows that the **KORI TECH Co.,Ltd. Wireless Karaoke Microphone KT-113MHR** complies with technical requirements of the Part 15.239, 15.107, 15.109(g) of the FCC Rules.

This equipment is the operated device by AC/DC Adaptor. The Conducted emission measurement according to the section 15.107 is applicable to this equipment.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement.

No EMI suppression device(s) was added and/or modified during testing.

## 5. TEST RESULTS

### 5.2 Conducted Emissions Measurement

EUT	Wireless Karaoke Microphone /KT-113MHR (SN: Prototype)
Limit apply to	FCC Part15 Subpart B Section 15.107
Test Date	February 13, 2002
Operating Condition	RF transmit with karaoke music play & download mode
Environment Condition	Humidity Level : 34 %RH, Temperature : 19
Result	Passed by -3.24dB

#### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarization of live and neutral line.

Detector mode : CISPR Quasi-Peak mode ( 6dB Bandwidth : 9 KHz )

Frequency [MHz]	Reading [dB $\mu$ V]		Phase (*H/**N)	Limit [dB $\mu$ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q. Peak	Average
0.195	51.18	32.86	N	63.82	53.82	12.64	20.96
0.260	50.03	32.70	N	61.43	51.43	11.40	18.73
0.390	50.27	34.37	N	58.06	48.06	7.79	13.69
0.455	49.88	36.44	H	56.78	46.78	6.90	10.34
0.715	51.08	34.68	H	56.00	46.00	4.92	11.32
0.905	52.46	34.84	H	56.00	46.00	3.54	11.16
1.980	50.37	30.21	H	56.00	46.00	5.63	15.79
4.720	52.76	37.76	H	56.00	46.00	3.24	8.24
9.160	44.95	-	H	60.00	50.00	15.05	-
10.02	44.27	-	H	60.00	50.00	15.73	-

NOTES :

1. \* H : HOT Line , \*\*N : Neutral Line
2. Margin value = Limit – Reading
3. Measurement were performed at the AC/DC Power Inlet in the frequency band of 150kHz ~ 30MHz





FCC ID : PK8KT-113MHR  
Report No: E03.0219.FCC.083N  
Date of Issue : February 19, 2003

Tested by : Chon Sik, Kim  
Test Engineer

## 5. TEST RESULTS

---

Line Polarity : Hot

**ETL Inc.**  
#584 Sangwhal-ri,  
Kanam-myeon, Yeoju-kun,  
Kyounggi-do, 469-880, Korea

**KORI TECH Co., Ltd.**  
**Wireless Karaoke Microphone**  
**Model : KT-113MHR**

13 of

## 5. TEST RESULTS

---

Line Polarity : Neutral

## 5. TEST RESULTS

### 5.3 Radiated Emissions Measurement

EUT	Wireless Karaoke Microphone / KT-113MHR (SN: Prototype)
Limit apply to	FCC Part 15 Subpart B Section 15.109(g)
Test Date	February 13, 2003
Operating Condition	RF transmit with karaoke music play & download mode
Environment Condition	Humidity Level : 34%RH, Temperature : 19
Result	Passed by – 3.50dB

#### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode ( 6dB Bandwidth : 120 kHz )

Measurement Distance : 10 meters

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
33.50	12.69	V	11.91	1.40	26.00	30.0	4.00
144.0	11.00	H	12.50	3.00	26.50	30.0	3.50
150.0	10.65	V	12.76	3.00	26.41	30.0	3.59
166.5	7.87	H	12.24	3.30	23.41	30.0	6.59
183.4	9.06	H	10.81	3.70	23.57	30.0	6.43
239.9	16.43	H	10.27	4.00	30.70	37.0	6.30
493.9	6.29	H	16.49	6.20	28.98	37.0	8.02
510.8	3.91	H	17.21	6.30	27.42	37.0	9.58
533.3	4.64	H	17.31	6.30	28.25	37.0	8.75
550.3	4.92	H	17.78	6.40	29.10	37.0	7.90

#### NOTES :

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Emission Level = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Emission Level
4. All other emissions not reported were more than 25dB below the permitted limit.
5. The EUT was tested in all the three orthogonal planes and the worst case of emissions was vertical axes.

Tested by : Chon Sik, Kim  
Test Engineer

## 5. TEST RESULTS

### 5.4 Radiated Emissions of RF Carrier frequency

EUT	Wireless Karaoke Microphone /KT-113MHR (SN: Prototype)
Limit apply to	FCC Part15 Subpart C Section 15.239(b)
Test Date	February 14, 2003
Operating Condition	RF transmit with karaoke music play mode
Environment Condition	Humidity Level : 35 %RH, Temperature : 21
Result	Passed by - 3.21 dB

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Measurement Distance : 3 meters

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
104.0	33.07	H	9.15	2.40	44.62	48.0	3.38
106.0	31.79	V	9.15	2.40	43.34	48.0	4.66
108.0	33.24	H	9.15	2.40	44.79	48.0	3.21

NOTES :

4. \* H : Horizontal polarization , \*\* V : Vertical polarization
5. Emission Level = Reading + Antenna factor + Cable loss
6. Margin value = Limit - Emission Level
7. Measurement was performed at three frequencies as bottom, middle and top of the operating frequency range.
5. The EUT was tested in all the three orthogonal planes and the worst case emissions was vertical axes.



Tested by : Chon Sik, Kim

Test Engineer

## 5. TEST RESULTS

### 5.5 Out-of-band Radiated Emissions

EUT	Wireless Karaoke Microphone / KT-113MHR (SN: Prototype)
Limit apply to	FCC Part15 Subpart C Section 15.239(c)
Test Date	February 14, 2003
Operating Condition	RF transmit with karaoke music play mode
Environment Condition	Humidity Level : 34%RH, Temperature : 19
Result	Passed by – 3.67dB

#### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode ( 6dB Bandwidth : 120 kHz )

Measurement Distance : 3 meters

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
33.50	12.69	V	11.91	1.40	35.20	40.0	4.80
144.0	11.00	V	12.50	3.00	36.33	40.0	3.67
150.0	10.65	V	12.76	3.00	33.41	40.0	6.59
166.5	7.87	V	12.24	3.30	33.57	40.0	6.43
183.4	9.06	V	10.81	3.70	33.29	40.0	6.71
239.9	16.43	H	10.27	4.00	39.58	47.0	7.42
493.9	6.29	H	16.49	6.20	38.49	47.0	8.51
510.8	3.91	H	17.21	6.30	40.00	47.0	7.00
533.3	4.64	H	17.31	6.30	39.21	47.0	7.79
550.3	4.92	H	17.78	6.40	42.67	47.0	4.33

#### NOTES :

5. \* H : Horizontal polarization , \*\* V : Vertical polarization
6. Emission Level = Reading + Antenna factor + Cable loss
7. Margin value = Limit - Emission Level
8. All other emissions not reported were more than 25dB below the permitted limit.
5. The EUT was tested in all the three orthogonal planes and the worst case of emissions was vertical axes.

Tested by : Chon Sik, Kim  
Test Engineer

## 5. TEST RESULTS

### 5.6 Emission Bandwidth Measurement

EUT	Wireless Karaoke Microphone / KT-113MHR (SN: Prototype)
Limit apply to	FCC Part15 Subpart C Section 15.239(a)
Test Date	February 14, 2003
Operating Condition	RF transmit with karaoke music play mode
Environment Condition	Humidity Level : 35 %RH, Temperature : 21
Result	Passed

#### Measurement Data

Emission Frequency [MHz]	Emission Bandwidth [kHz]	Limit [kHz]	Remark
104.0	< 160	200	


#### NOTES :

1. Please see the measured bandwidth plot in next page.
2. The emission bandwidth shall be no wider than 200kHz of the center frequency of the equipment operating within 88.0 MHz to 108,00 MHz. The bandwidth is determined at the points 26dB down from the modulated carrier.
3. Spectrum analyzer settings  
Resolution bandwidth : 10 kHz  
Video bandwidth : 100 kHz  
Frequency span : 200 kHz



Tested by : Chon Sik, Kim  
Test Engineer

## 5. TEST RESULTS

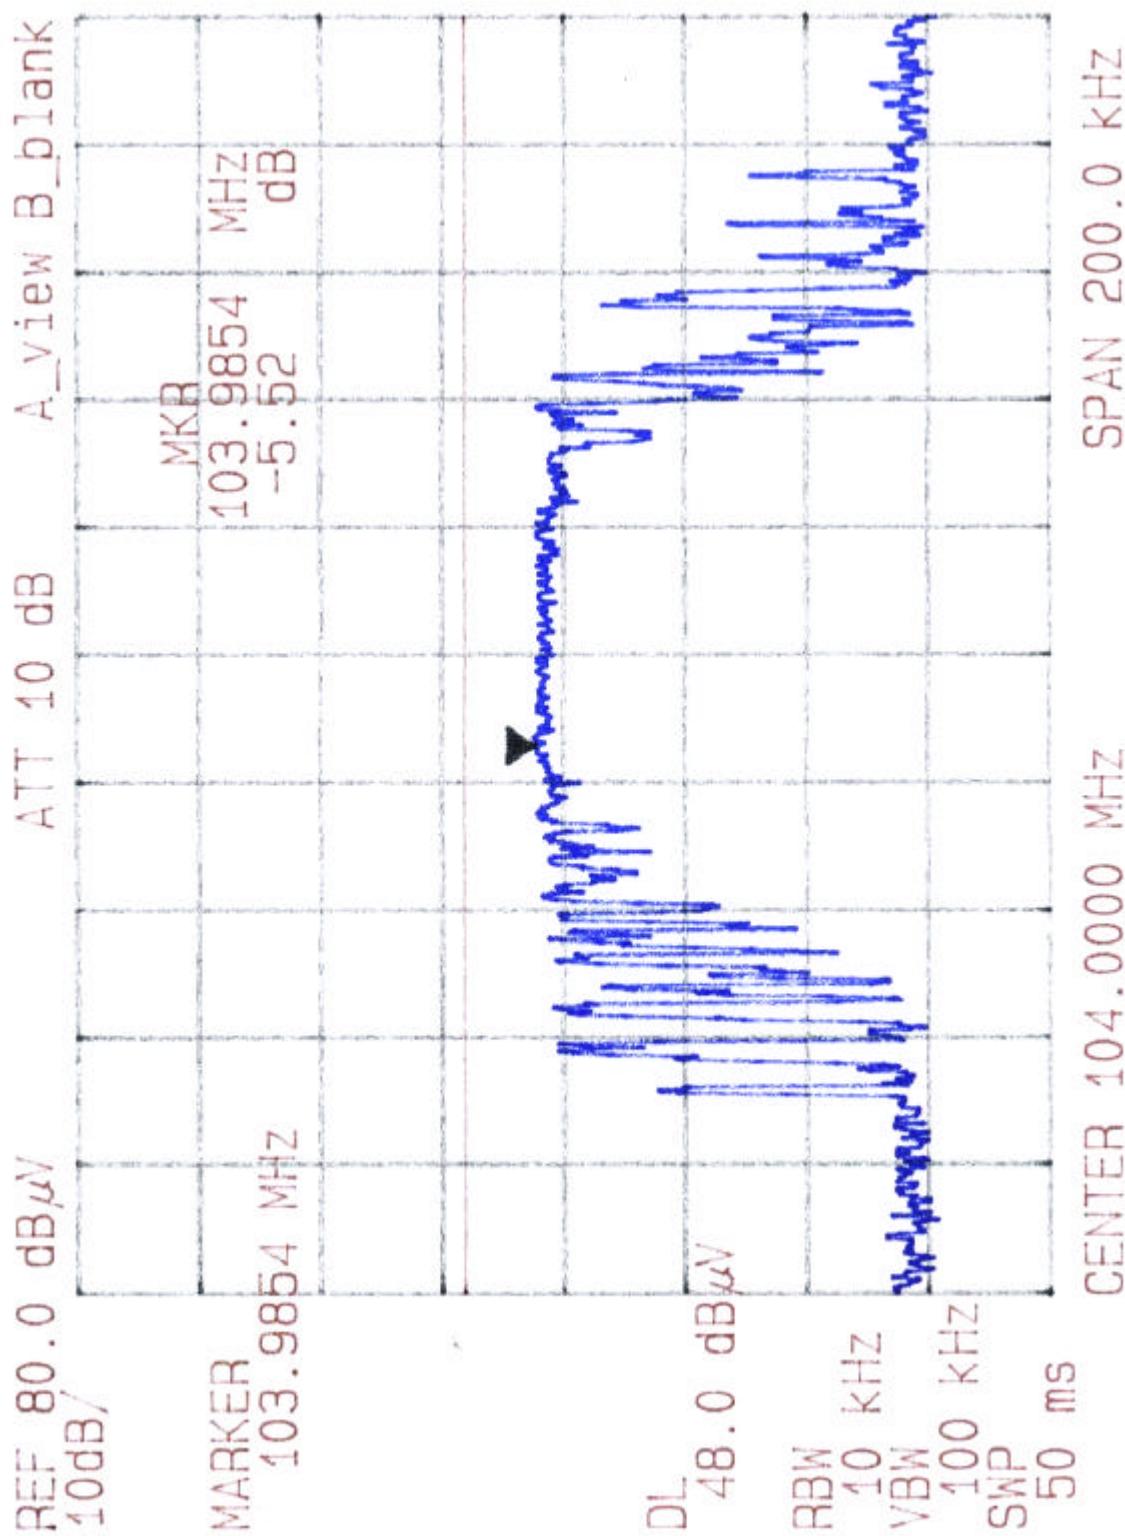

## 6. ANTENNA REQUIREMENT

---

### 6.1 Antenna Requirement

According to the section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to be complied.

### 6.2 Antenna Construction

The antenna used for the EUT is so designed that antenna other than that furnished by the manufacturer shall not be used with this device. The antenna supplied is a unique coupling to this wireless karaoke microphone. The detailed design specification is attached to this report Appendix.G Schematics.

## 7. SAMPLE CALCULATION

---

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V / m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example 1 : @ 4.720 MHz

Class B Limit	=	630 uV	=	56 dBuV
Reading	=	52.76 dBuV		
Convert to uV	=	434.51 uV		
Margin	=	52.76 - 56.00	=	-3.24
			=	-3.24 dB below Limit

Example 2 : @ 144.0 MHz

Class B Limit	=	31.62 uV	=	30.0 dBuV/m
Reading	=	11.00 dBuV		
Antenna Factor + Cable Loss	=	15.50 dB		
Total	=	26.50 dBuV/m		
Margin	=	26.5 - 30.0	=	-3.50
			=	-3.50 dB below Limit

## 8. TEST EQUIPMENT LIST

---

### List of Test Equipments Used for Measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3261A	Advantest	21720033	03-10-26
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7402A	H.P	US39110107	03-05-21
<input checked="" type="checkbox"/>	Receiver	ESVS 30	R & S	84190/002	04-01-24
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	03-04-06
<input checked="" type="checkbox"/>	Preamplifier	HP8447D	HP	2944A07626	04-01-10
<input type="checkbox"/>	Preamplifier	HP 8347A	HP	2834A00544	03-05-23
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	03-12-27
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	03-12-27
<input checked="" type="checkbox"/>	TriLog Antenna	VULB9160	Schwarz Beck	3082	03-05-08
<input type="checkbox"/>	LogBicon	VULB9165	Schwarz Beck	2023	03-05-08
<input checked="" type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	03-05-03
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	03-05-03
<input checked="" type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	03-05-03
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	03-05-03
<input type="checkbox"/>	Double Ridged Horn	3115	EMCO	9809-2334	03-09-20
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Plotter	7440A	H.P	2725A 75722	N/A
<input checked="" type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input type="checkbox"/>	Impedance Matching Pad	6001.01.A	SUNNER	3252	03-09-22
<input checked="" type="checkbox"/>	Thermo Hygrograph	3-3122	ISUZU	3312201	03-12-20
<input checked="" type="checkbox"/>	BaroMeter	-	Regulus	-	-