

RF TEST REPORT

Applicant	Inseego Corp.
FCC ID	PKRISGX702
Product	Indoor Mesh Node
Brand	Inseego
Model	X702
Report No.	EFTA25020129-IE-02-R2
Issue Date	April 18, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2024)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report	4
1.2. Test facility	4
1.3. Testing Location.....	4
2. General Description of Equipment under Test	5
2.1. Applicant and Manufacturer Information	5
2.2. General information	5
3. Applied Standards	7
4. Test Configuration.....	8
5. Test Case Results.....	11
5.1. Occupied Bandwidth.....	11
5.2. Average Power Output	109
5.3. Frequency Stability	121
5.4. Power Spectral Density	125
5.5. Unwanted Emission	275
5.6. Conducted Emission.....	414
6. Main Test Instruments	417
ANNEX A: The EUT Appearance.....	418
ANNEX B: Test Setup Photos	419

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS
Date of Testing: March 11, 2025 ~ April 10, 2025 Date of Sample Received: February 24, 2025			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Inseego Corp.
Applicant address	9710 Scranton Rd Suite 200, California, San Diego 92121, USA
Manufacturer	Inseego Corp.
Manufacturer address	9710 Scranton Rd Suite 200, California, San Diego 92121, USA

2.2. General information

EUT Description					
Model	X702				
SN	ANNX015106000044				
Hardware Version	P2				
Software Version	23.05				
Power Supply	AC adapter				
Antenna Type	Internal Antenna				
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)				
Antenna Gain	Frequency	Antenna 1 (dBi)	Antenna 2 (dBi)	For Power (dBi)	For PSD (dBi)
	U-NII-1& U-NII-2A	3.82	4.22	4.22	7.23
	U-NII-2C	3.72	4.10	4.10	7.11
	U-NII-3	3.86	5.98	5.98	8.99
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-2A: 5250MHz -5350MHz U-NII-2C: 5470MHz-5725MHz U-NII-3: 5725MHz -5850MHz				
Modulation Type	802.11a: OFDM 802.11n (HT20/HT40): OFDM 802.11ac (VHT20/VHT40/VHT80/VHT160): OFDM 802.11ax (HE20/ HE40/ HE80/HE160): OFDMA 802.11be (EHT20/ EHT40/ EHT80/ EHT160): OFDMA				
Max. Output Power	21.7 dBm				
Operating temperature range	-25 ° C to 70 ° C				
Operating voltage range	5 V to 18 V				
Testing temperature range	-30 ° C to 50° C				
Testing voltage range	5 V - 12 V - 18 V				
State voltage	12 V				
EUT Accessory					

Adapter	Manufacturer: Dongguan Sunun Power Co.Ltd Model: P307
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. This device support automatically discontinue transmission, while the device is not transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission. 3. (a) Manufacturers implements security features in any digitally modulated devices capable of operating in any of the U-NII bands, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software prevents the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers uses means including, but not limited to the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment authorization. (b) Manufacturers take steps to ensure that DFS functionality cannot be disabled by the operator of the U-NII device.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2024) Unlicensed National Information Infrastructure Devices

ANSI C63.10-2013

Reference standard:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

The EUT have two antenna (antenna 1, antenna 2) , and only the worst data was recorded in this report.

Worst-case data rates are shown as following table.

Mode	Data Rate MIMO
802.11a	6 Mbps
802.11n HT20	MCS8
802.11n HT40	MCS8
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ac VHT160	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0

Wireless Technology and Frequency Range

Wireless Technology		Bandwidth	Channel	Frequency
Wi-Fi	U-NII-1	20 MHz	36	5180MHz
			40	5200MHz
			44	5220MHz
			48	5240MHz
		40 MHz	38	5190MHz
			46	5230MHz
		80 MHz	42	5210MHz
		160 MHz	50	5250MHz
	U-NII-2A	20 MHz	52	5260MHz
			56	5280MHz
			60	5300MHz
			64	5320MHz
		40 MHz	54	5270MHz
			62	5310MHz
		80 MHz	58	5290MHz
	U-NII-2C	20 MHz	100	5500MHz
			104	5520MHz
			108	5540MHz
			112	5560MHz
			116	5580MHz
			120	5600MHz
			124	5620MHz
			128	5640MHz
			132	5660MHz
			136	5680MHz
			140	5700MHz
			144	5720MHz
		40 MHz	102	5510MHz
			110	5550MHz
			118	5590MHz
			126	5630MHz
			134	5670MHz
			142	5710MHz
		80 MHz	106	5530MHz
			122	5610MHz
			138	5690MHz

	U-NII-3	160 MHz	114	5570MHz
		20 MHz	149	5745MHz
			153	5765MHz
			157	5785MHz
			161	5805MHz
			165	5825MHz
		40 MHz	151	5755MHz
			159	5795MHz
		80 MHz	155	5775MHz
		Does this device support TPC Function? ☐ Yes ☒ No		
		Does this device support TDWR Band? ☒ Yes ☐ No		

5. Test Case Results

5.1. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2A/U-NII-2C, set RBW $\approx 1\%$ OCB kHz, VBW $\geq 3 \times$ RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW $\geq 3 \times$ RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

Test Setup



Limits

For U-NII-1/U-NII-2A/U-NII-2C

No specific occupied bandwidth requirements in Part 15.407.

For U-NII-3

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:
U-NII-1

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5180	16.838	22.029	Pass
802.11a	5200	16.864	22.010	Pass
802.11a	5240	16.886	22.387	Pass
802.11ac(VHT160)	5250	155.435	175.218	Pass
802.11ac(VHT20)	5180	17.834	21.870	Pass
802.11ac(VHT20)	5200	17.841	22.653	Pass
802.11ac(VHT20)	5240	17.912	22.821	Pass
802.11ac(VHT40)	5190	36.783	43.822	Pass
802.11ac(VHT40)	5230	36.883	44.218	Pass
802.11ac(VHT80)	5210	76.422	88.041	Pass
802.11ax(HE160)	5250	157.187	176.738	Pass
802.11ax(HE20)	5180	18.935	21.332	Pass
802.11ax(HE20)	5200	18.967	21.372	Pass
802.11ax(HE20)	5240	18.965	21.925	Pass
802.11ax(HE40)	5190	38.140	43.208	Pass
802.11ax(HE40)	5230	38.112	43.967	Pass
802.11ax(HE80)	5210	77.916	87.033	Pass
802.11be(160)	5250	157.379	175.181	Pass
802.11be(20)	5180	18.967	21.986	Pass
802.11be(20)	5200	18.950	21.976	Pass
802.11be(20)	5240	19.017	21.990	Pass
802.11be(40)	5190	38.153	42.974	Pass
802.11be(40)	5230	38.165	43.127	Pass
802.11be(80)	5210	77.882	85.874	Pass
802.11n(HT20)	5180	17.830	22.857	Pass
802.11n(HT20)	5200	17.831	22.171	Pass
802.11n(HT20)	5240	17.870	22.626	Pass
802.11n(HT40)	5190	36.883	44.280	Pass
802.11n(HT40)	5230	36.807	43.611	Pass

U-NII-2A

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5260	16.905	22.357	Pass
802.11a	5300	16.942	22.296	Pass
802.11a	5320	16.931	22.750	Pass
802.11ac(VHT160)	5250	155.435	175.218	Pass
802.11ac(VHT20)	5260	18.013	23.143	Pass
802.11ac(VHT20)	5300	18.066	23.099	Pass
802.11ac(VHT20)	5320	18.118	23.847	Pass
802.11ac(VHT40)	5270	36.694	44.332	Pass
802.11ac(VHT40)	5310	36.602	43.703	Pass
802.11ac(VHT80)	5290	76.131	88.860	Pass
802.11ax(HE160)	5250	157.187	176.738	Pass
802.11ax(HE20)	5260	19.021	21.551	Pass
802.11ax(HE20)	5300	19.124	22.618	Pass
802.11ax(HE20)	5320	19.119	22.710	Pass
802.11ax(HE40)	5270	36.691	44.335	Pass
802.11ax(HE40)	5310	38.060	43.228	Pass
802.11ax(HE80)	5290	77.763	86.487	Pass
802.11be(160)	5250	157.379	175.181	Pass
802.11be(20)	5260	19.020	22.048	Pass
802.11be(20)	5300	19.046	22.380	Pass
802.11be(20)	5320	19.085	22.493	Pass
802.11be(40)	5270	38.046	43.271	Pass
802.11be(40)	5310	38.055	43.413	Pass
802.11be(80)	5290	77.686	87.113	Pass
802.11n(HT20)	5260	17.951	23.724	Pass
802.11n(HT20)	5300	18.030	23.010	Pass
802.11n(HT20)	5320	18.041	23.191	Pass
802.11n(HT40)	5270	36.745	44.033	Pass
802.11n(HT40)	5310	36.547	44.017	Pass

U-NII-2C

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5500	16.957	22.244	Pass
802.11a	5600	16.916	22.986	Pass
802.11a	5700	16.920	21.519	Pass
802.11a	5720	16.971	22.438	Pass
802.11ac(VHT160)	5570	155.927	172.917	Pass
802.11ac(VHT20)	5500	18.360	23.947	Pass
802.11ac(VHT20)	5600	18.233	23.201	Pass
802.11ac(VHT20)	5700	18.110	23.873	Pass
802.11ac(VHT20)	5720	18.155	23.604	Pass
802.11ac(VHT40)	5510	36.425	44.039	Pass
802.11ac(VHT40)	5590	36.528	44.129	Pass
802.11ac(VHT40)	5670	36.576	43.942	Pass
802.11ac(VHT40)	5710	36.668	43.195	Pass
802.11ac(VHT80)	5530	76.061	90.786	Pass
802.11ac(VHT80)	5610	75.998	91.225	Pass
802.11ac(VHT80)	5690	76.141	87.821	Pass
802.11ax(HE160)	5570	156.918	174.150	Pass
802.11ax(HE20)	5500	19.238	24.063	Pass
802.11ax(HE20)	5600	19.233	23.443	Pass
802.11ax(HE20)	5700	19.132	22.934	Pass
802.11ax(HE20)	5720	19.099	23.094	Pass
802.11ax(HE40)	5510	37.742	43.014	Pass
802.11ax(HE40)	5590	37.806	43.077	Pass
802.11ax(HE40)	5670	38.058	43.048	Pass
802.11ax(HE40)	5710	37.990	42.450	Pass
802.11ax(HE80)	5530	77.256	86.818	Pass
802.11ax(HE80)	5610	77.439	86.535	Pass
802.11ax(HE80)	5690	77.638	84.996	Pass
802.11be(160)	5570	157.035	175.275	Pass
802.11be(20)	5500	19.241	23.418	Pass
802.11be(20)	5600	19.155	23.008	Pass
802.11be(20)	5700	19.126	22.471	Pass
802.11be(20)	5720	19.102	22.658	Pass
802.11be(40)	5510	37.737	43.182	Pass
802.11be(40)	5590	37.929	42.704	Pass
802.11be(40)	5670	37.987	42.284	Pass
802.11be(40)	5710	37.988	43.477	Pass
802.11be(80)	5530	77.245	86.040	Pass

802.11be(80)	5610	77.478	86.898	Pass
802.11be(80)	5690	77.683	87.822	Pass
802.11n(HT20)	5500	18.381	24.180	Pass
802.11n(HT20)	5600	18.225	23.866	Pass
802.11n(HT20)	5700	18.083	23.146	Pass
802.11n(HT20)	5720	18.133	22.397	Pass
802.11n(HT40)	5510	36.403	44.731	Pass
802.11n(HT40)	5590	36.472	44.086	Pass
802.11n(HT40)	5670	36.456	44.092	Pass
802.11n(HT40)	5710	36.699	43.584	Pass


U-NII-3

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5720	16.941	16.061	500	Pass
802.11a	5745	16.948	13.807	500	Pass
802.11a	5785	16.942	11.645	500	Pass
802.11a	5825	16.886	14.429	500	Pass
802.11ac(VHT20)	5720	18.100	17.422	500	Pass
802.11ac(VHT20)	5745	18.036	17.635	500	Pass
802.11ac(VHT20)	5785	17.936	16.277	500	Pass
802.11ac(VHT20)	5825	17.853	15.735	500	Pass
802.11ac(VHT40)	5710	36.637	36.196	500	Pass
802.11ac(VHT40)	5755	36.607	36.445	500	Pass
802.11ac(VHT40)	5795	36.775	36.468	500	Pass
802.11ac(VHT80)	5690	76.243	75.398	500	Pass
802.11ac(VHT80)	5775	76.270	75.523	500	Pass
802.11ax(HE20)	5720	19.155	12.883	500	Pass
802.11ax(HE20)	5745	19.088	13.167	500	Pass
802.11ax(HE20)	5785	19.029	18.689	500	Pass
802.11ax(HE20)	5825	18.973	18.745	500	Pass
802.11ax(HE40)	5710	37.969	36.878	500	Pass
802.11ax(HE40)	5755	38.132	37.848	500	Pass
802.11ax(HE40)	5795	38.146	37.465	500	Pass
802.11ax(HE80)	5690	77.640	75.342	500	Pass
802.11ax(HE80)	5775	77.745	77.379	500	Pass
802.11be(20)	5720	19.120	16.723	500	Pass
802.11be(20)	5745	19.113	18.983	500	Pass
802.11be(20)	5785	18.984	16.627	500	Pass
802.11be(20)	5825	18.988	18.565	500	Pass
802.11be(40)	5710	38.037	38.047	500	Pass
802.11be(40)	5755	38.105	37.852	500	Pass
802.11be(40)	5795	38.193	38.055	500	Pass
802.11be(80)	5690	77.613	69.767	500	Pass
802.11be(80)	5775	77.928	75.057	500	Pass
802.11n(HT20)	5720	18.090	17.328	500	Pass
802.11n(HT20)	5745	17.995	15.020	500	Pass
802.11n(HT20)	5785	17.912	17.581	500	Pass
802.11n(HT20)	5825	17.777	17.098	500	Pass
802.11n(HT40)	5710	36.610	36.173	500	Pass
802.11n(HT40)	5755	36.688	36.170	500	Pass
802.11n(HT40)	5795	36.737	35.732	500	Pass


99% bandwidth

U-NII-1


OBW 802.11a 5180MHz

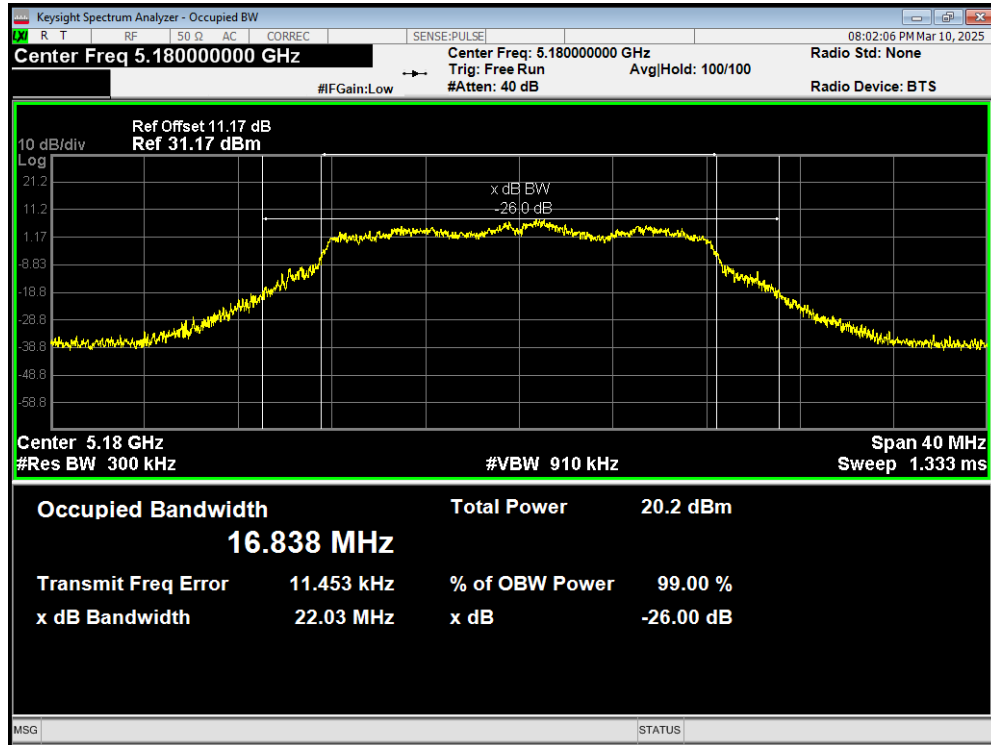


OBW 802.11a 5200MHz

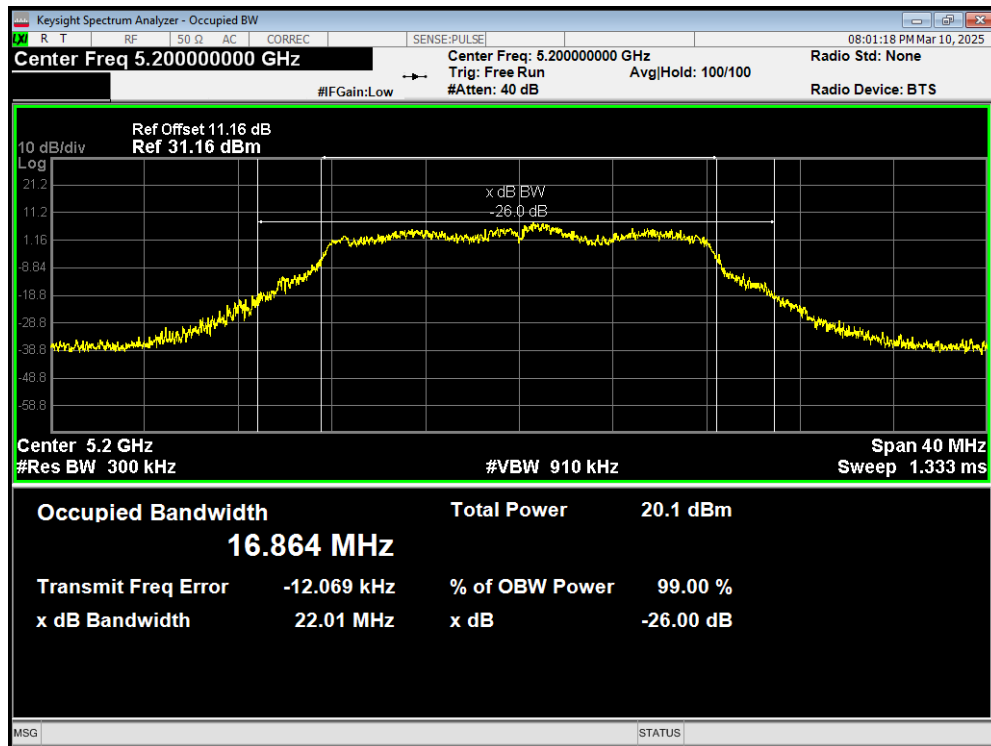


OBW 802.11a 5240MHz

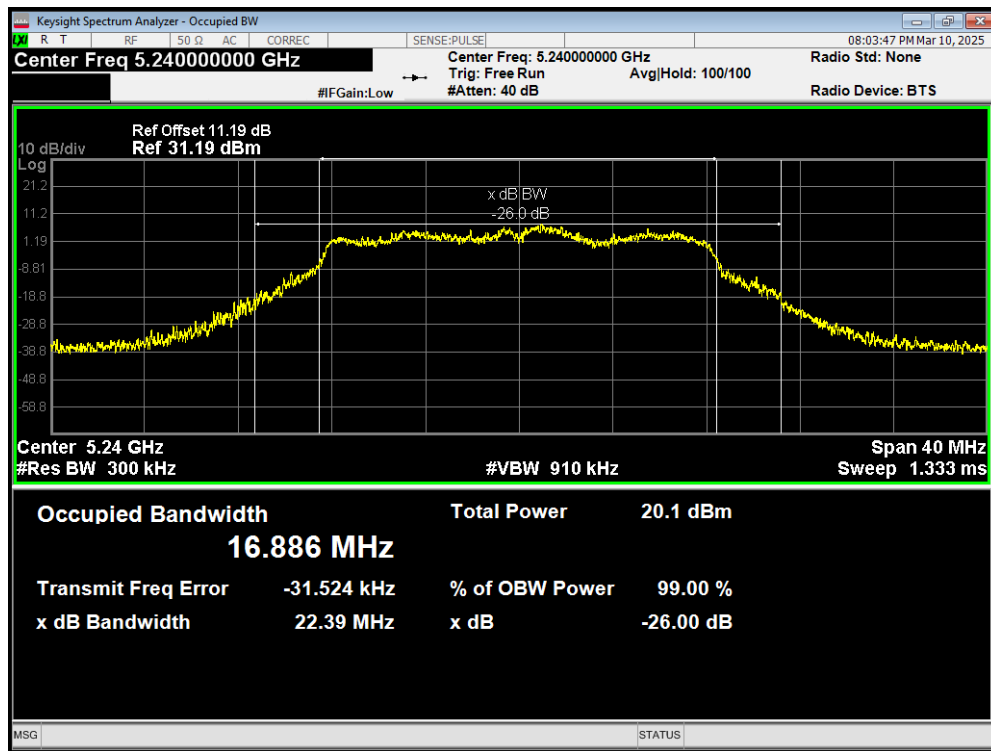


OBW 802.11ac(VHT160) 5250MHz

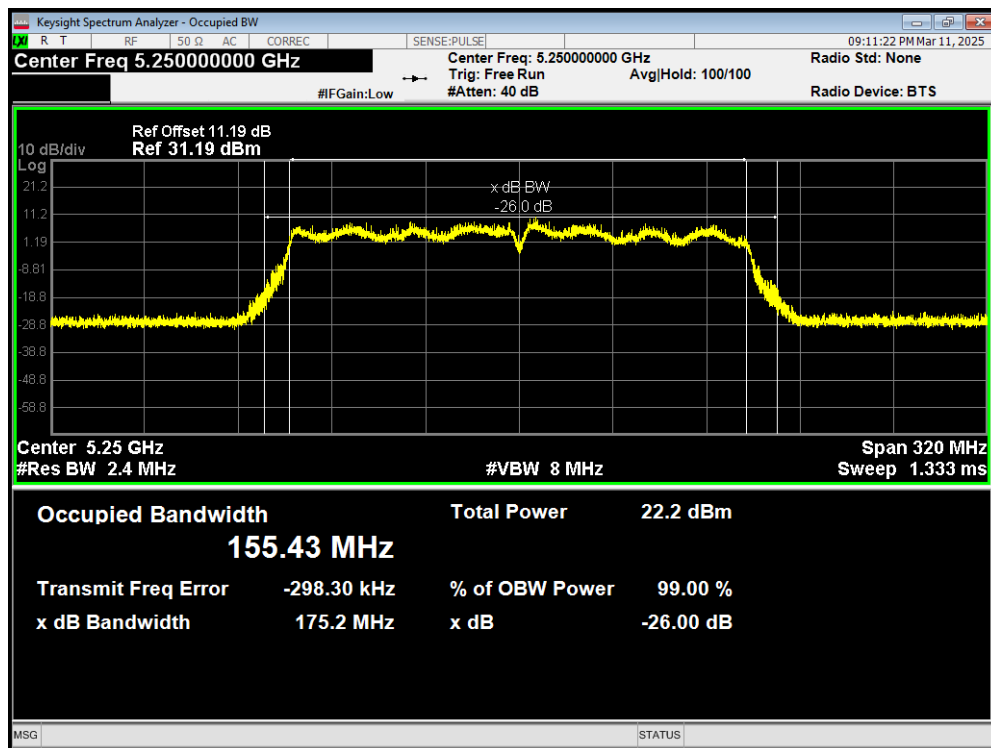


OBW 802.11ac(VHT20) 5180MHz

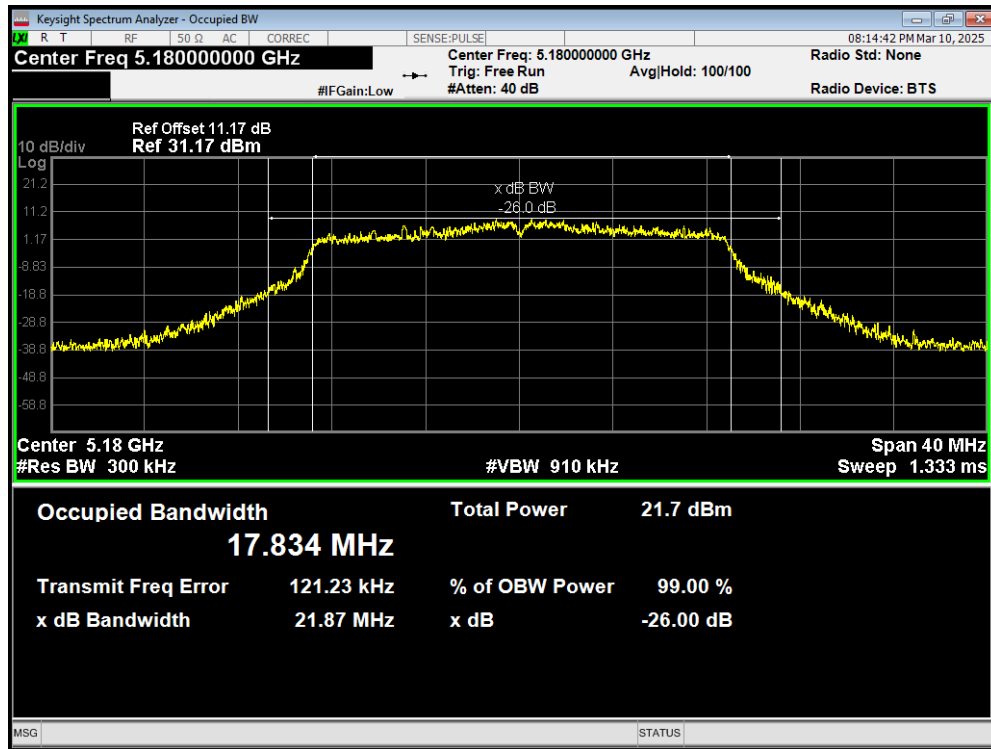


OBW 802.11ac(VHT20) 5200MHz

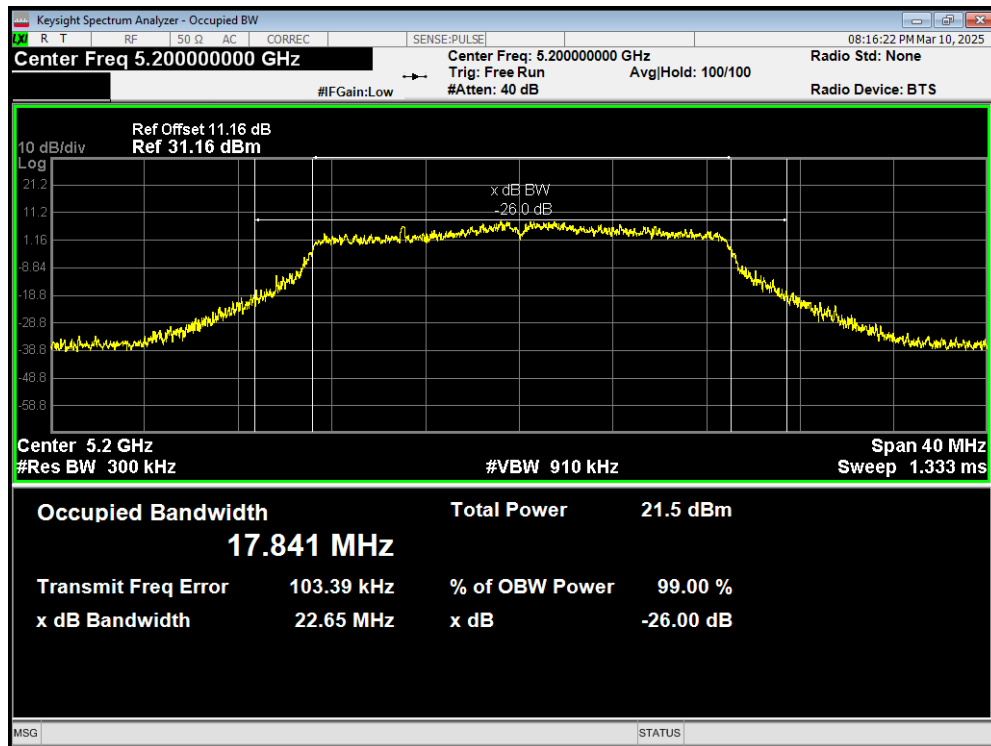


OBW 802.11ac(VHT20) 5240MHz

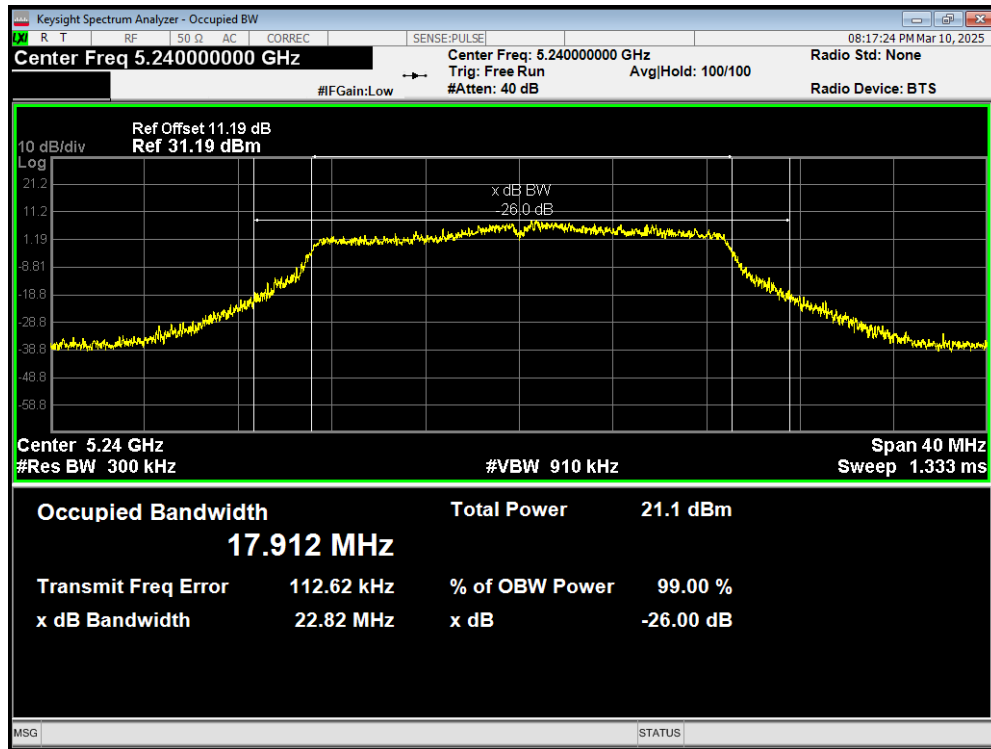


OBW 802.11ac(VHT40) 5190MHz

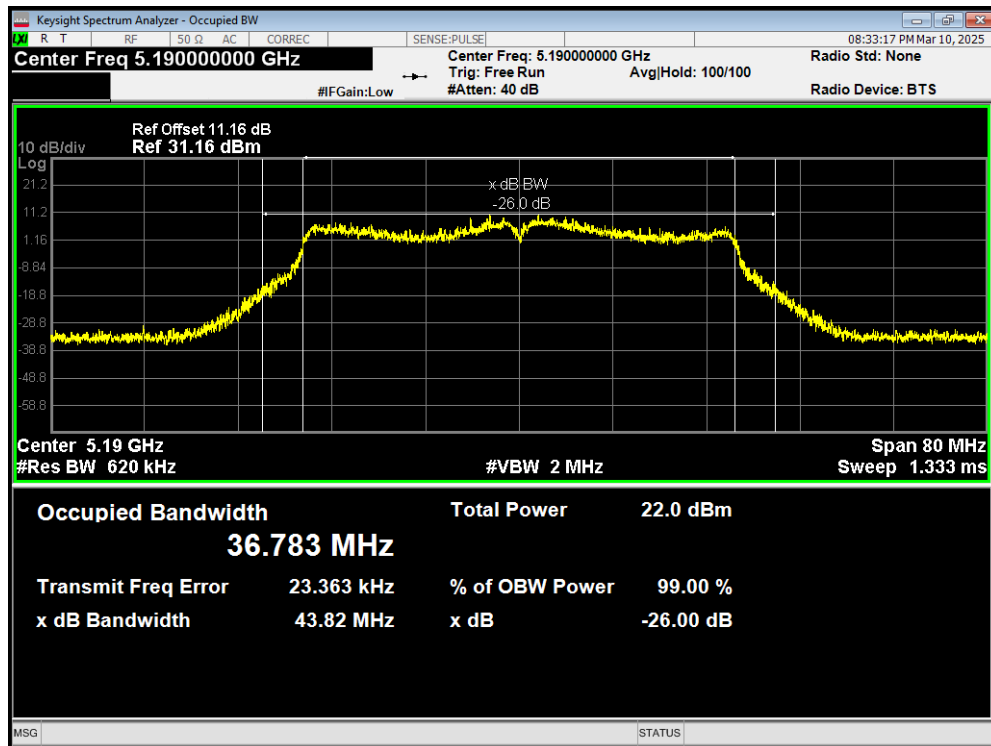


OBW 802.11ac(VHT40) 5230MHz

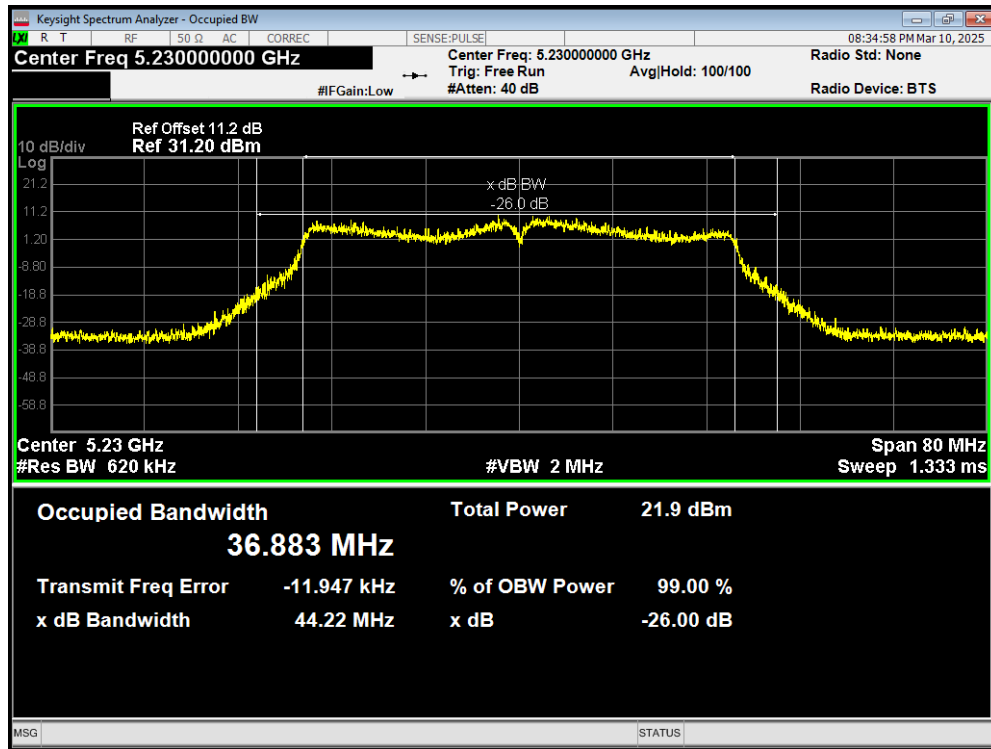


OBW 802.11ac(VHT80) 5210MHz

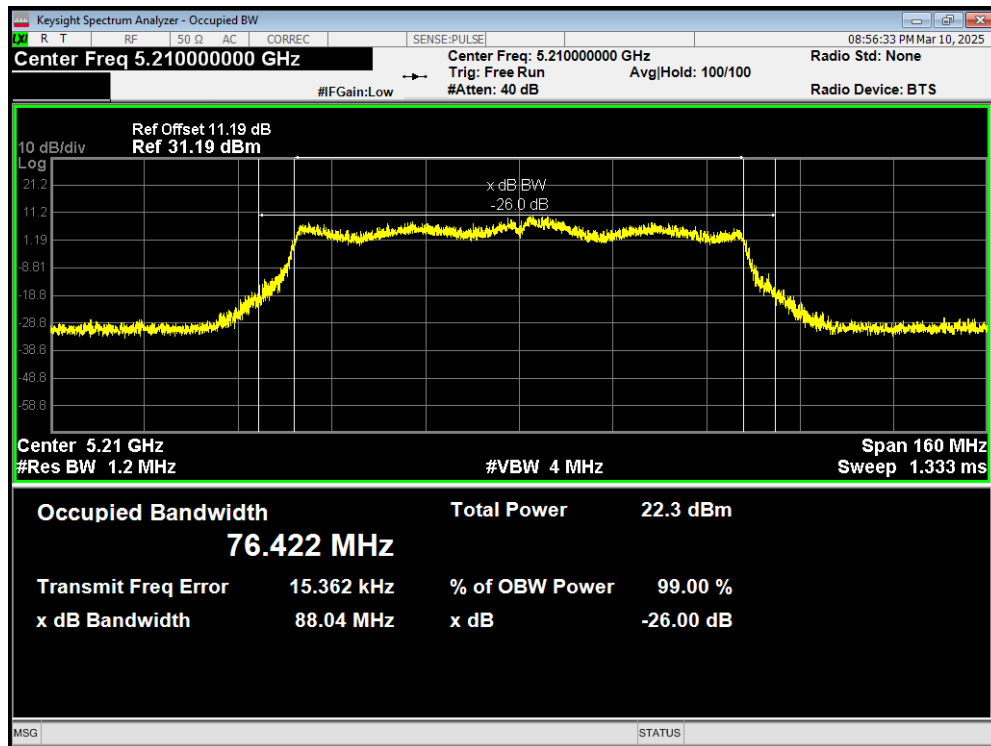


OBW 802.11ax(HE160) 5250MHz

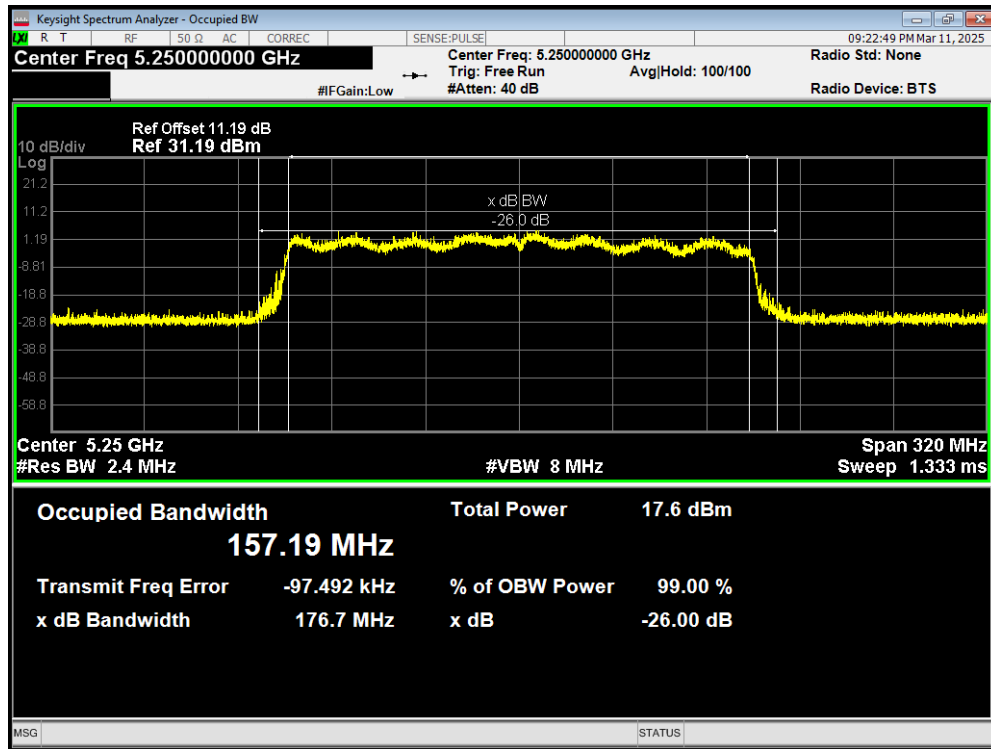


OBW 802.11ax(HE20) 5180MHz

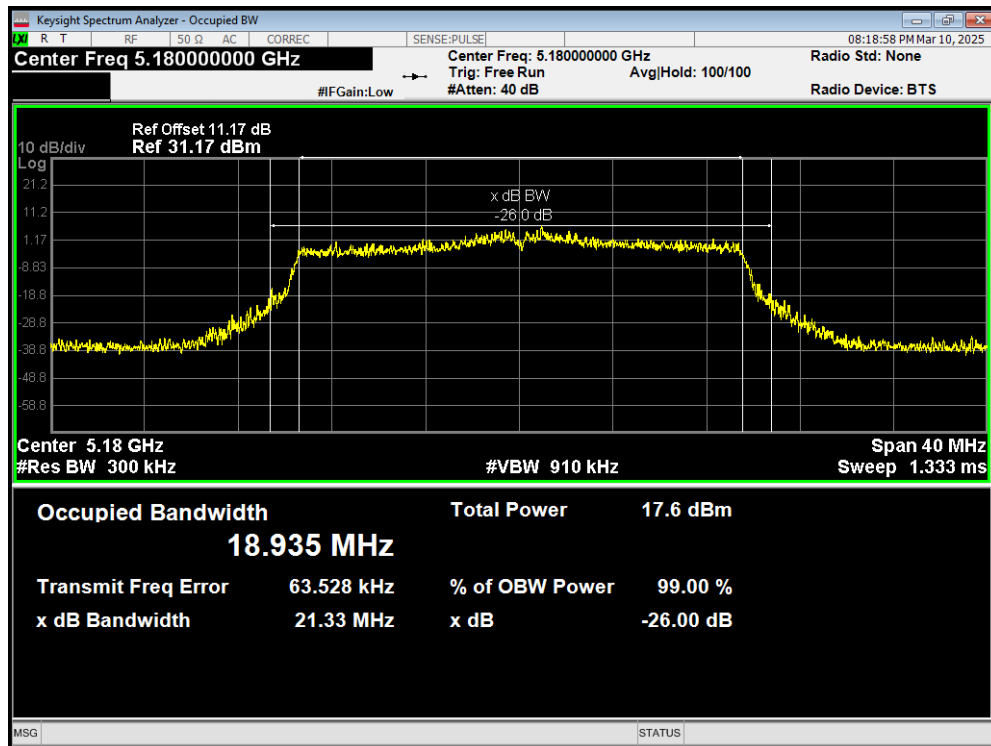


OBW 802.11ax(HE20) 5200MHz

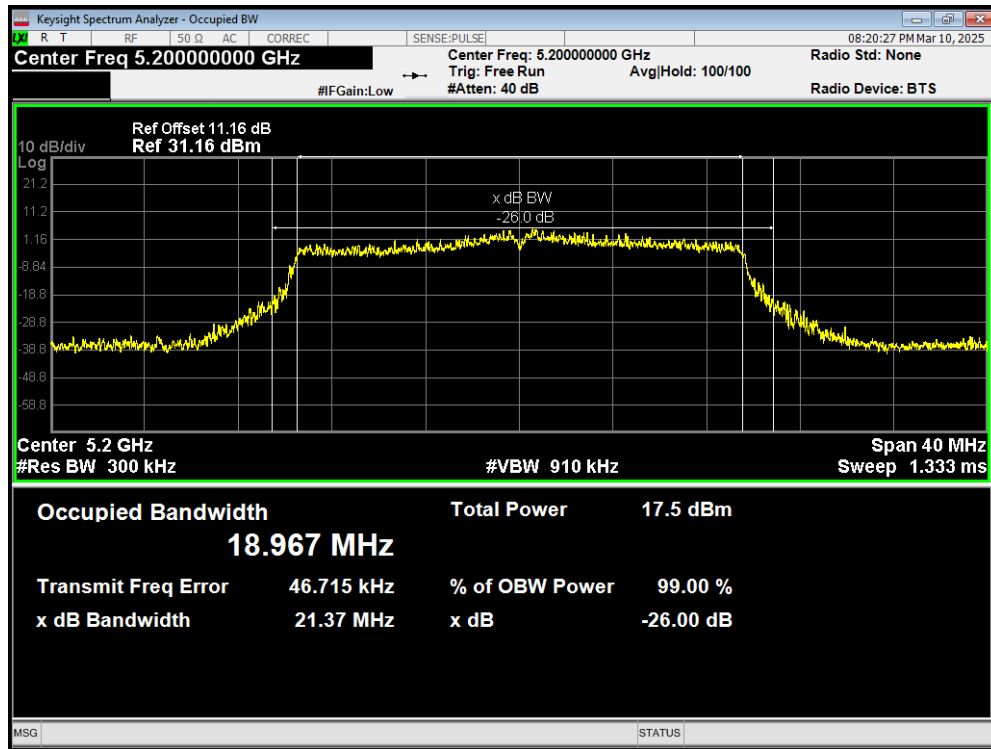


OBW 802.11ax(HE20) 5240MHz

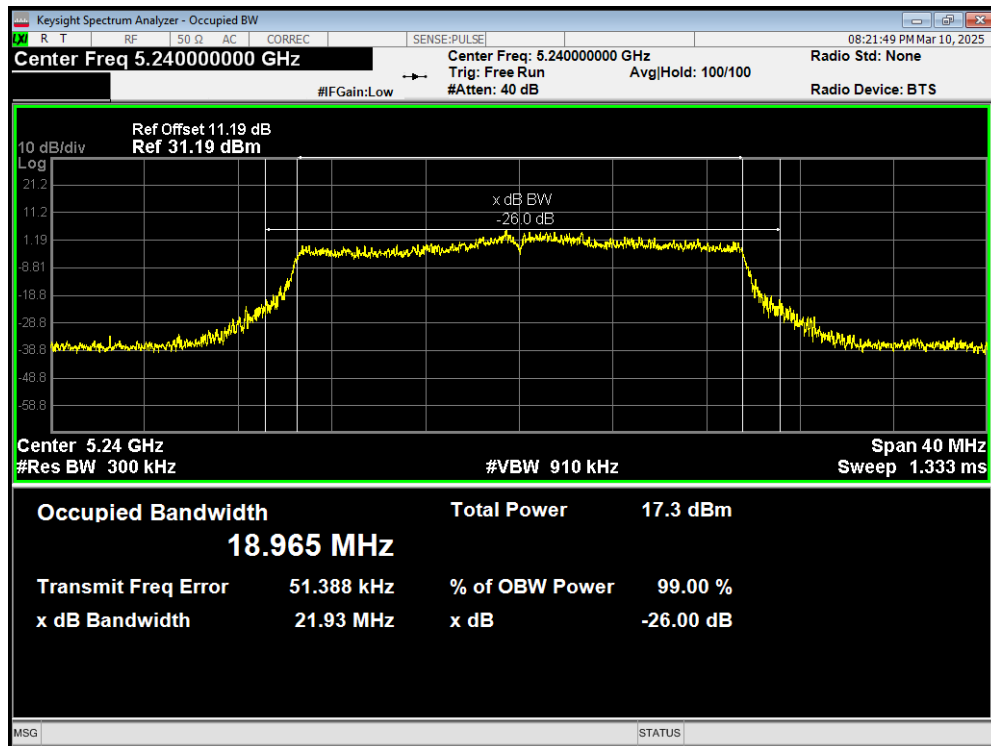


OBW 802.11ax(HE40) 5190MHz

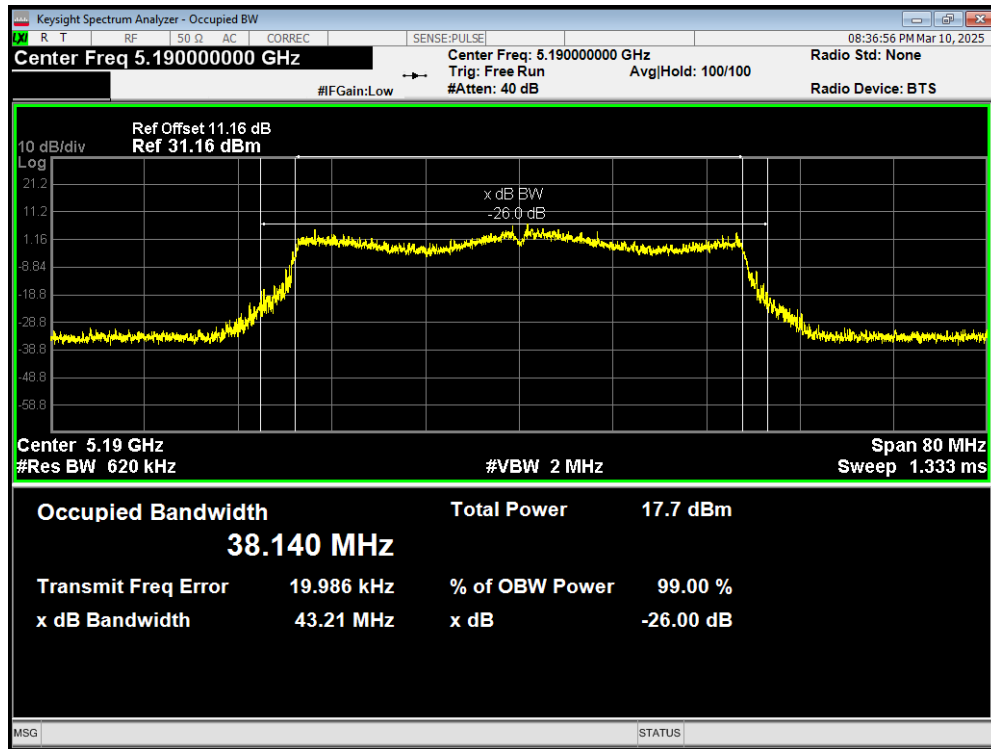


OBW 802.11ax(HE40) 5230MHz

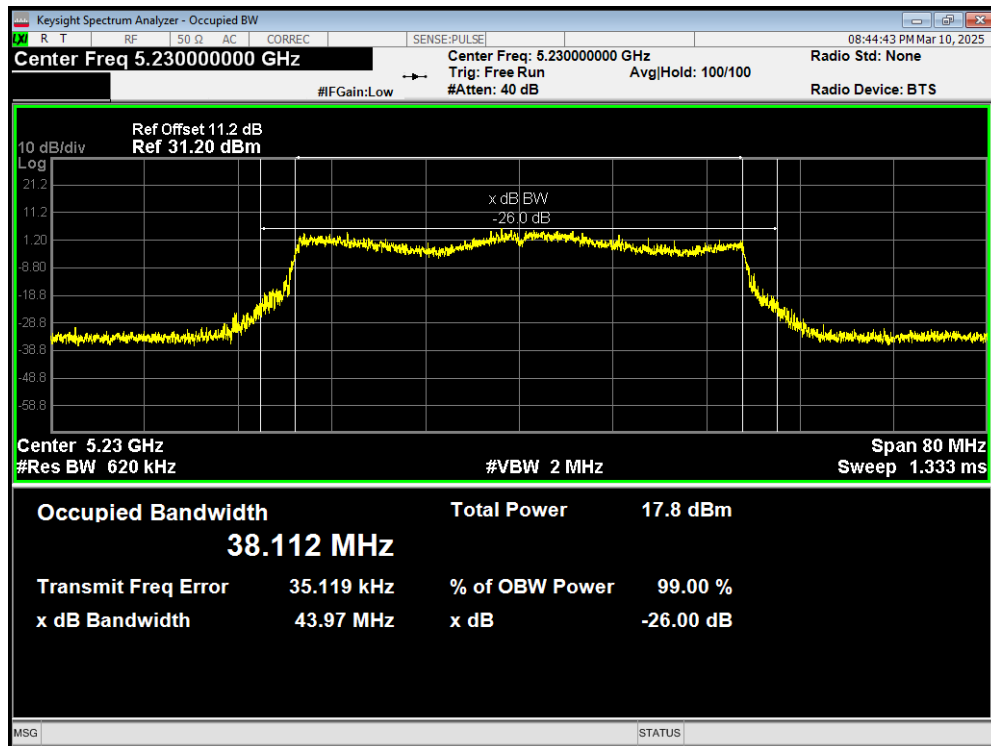


OBW 802.11ax(HE80) 5210MHz

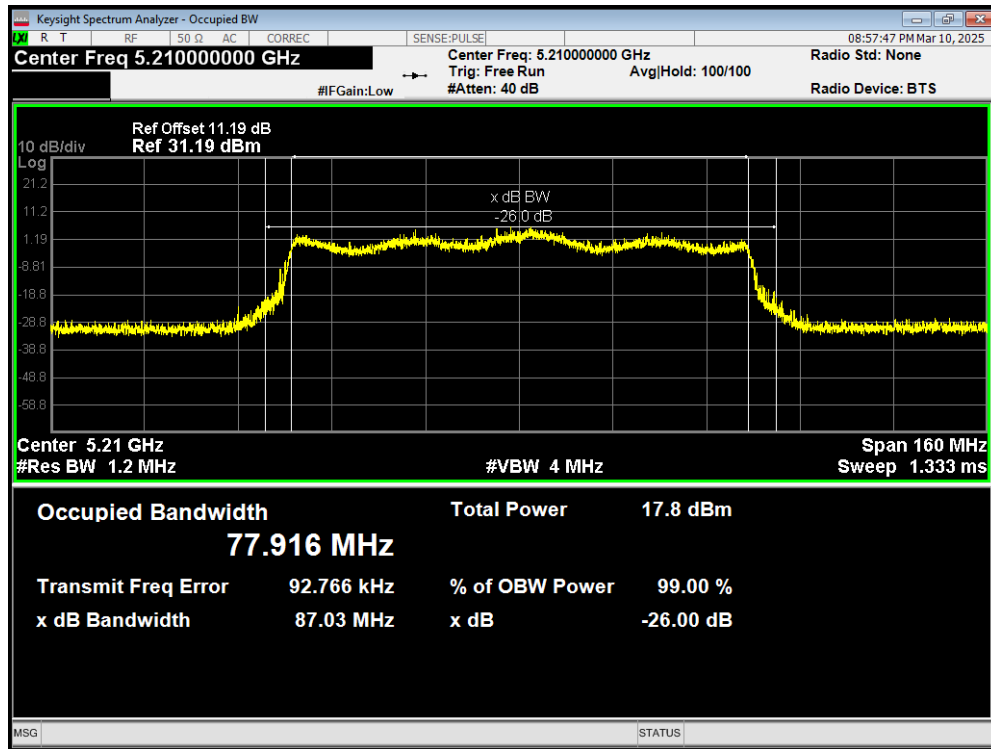


OBW 802.11be(160) 5250MHz

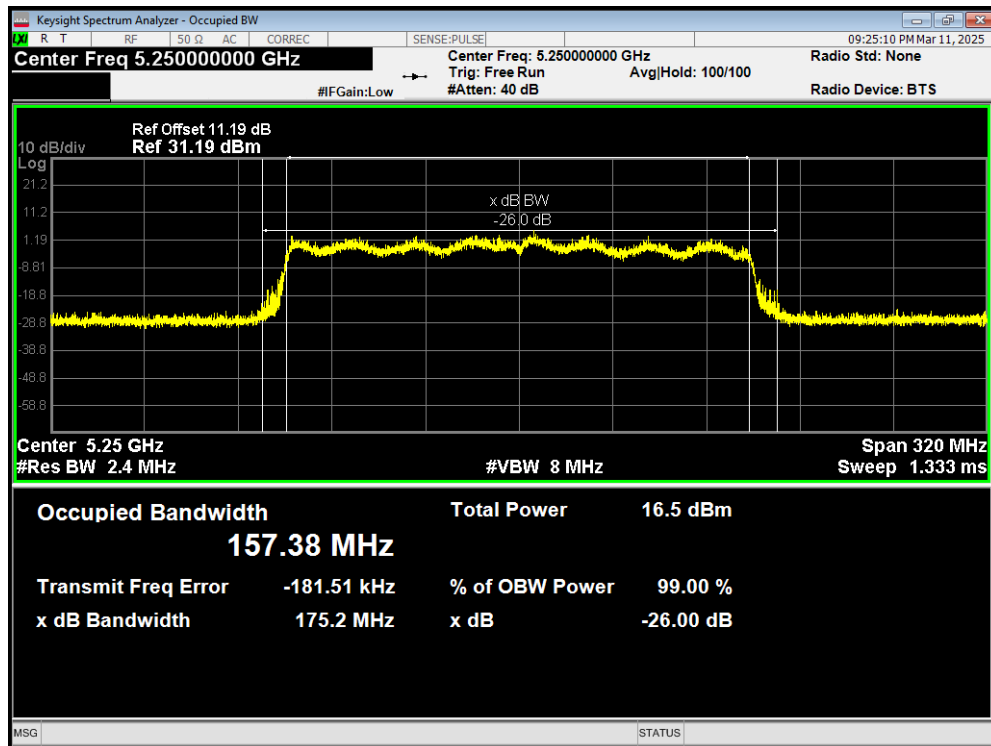


OBW 802.11be(20) 5180MHz

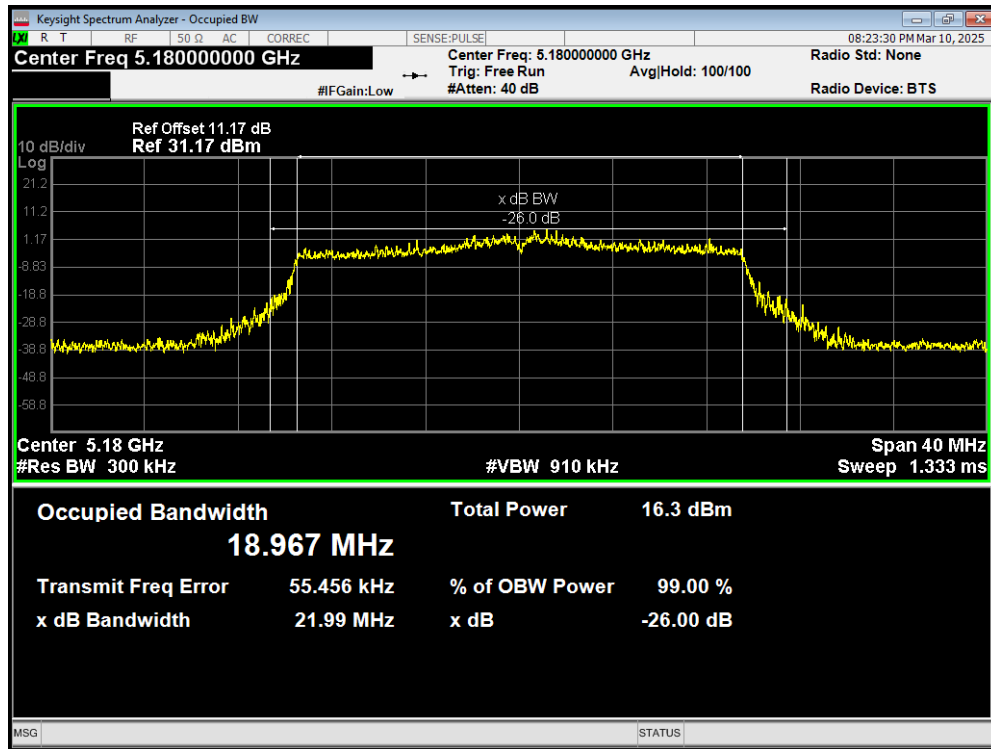


OBW 802.11be(20) 5200MHz

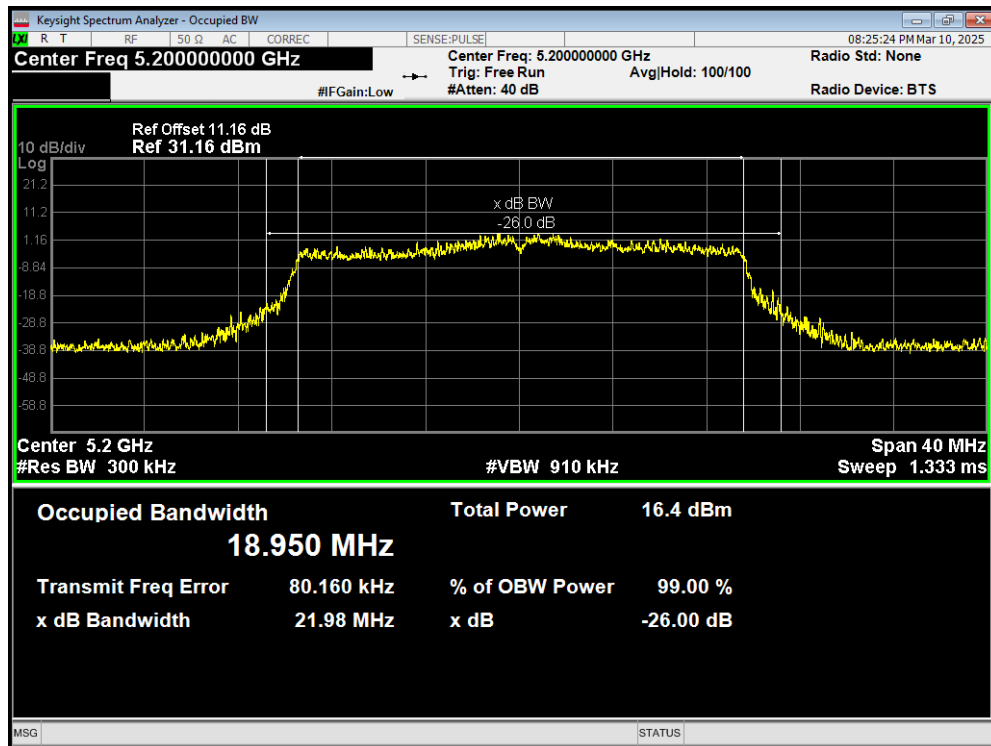


OBW 802.11be(20) 5240MHz

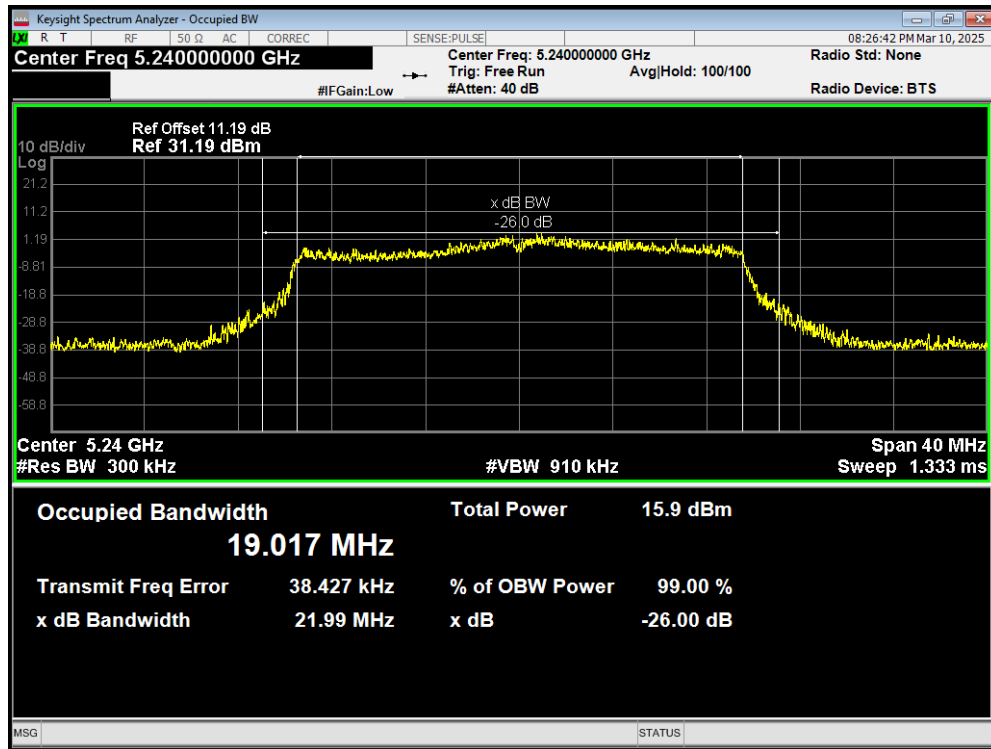


OBW 802.11be(40) 5190MHz

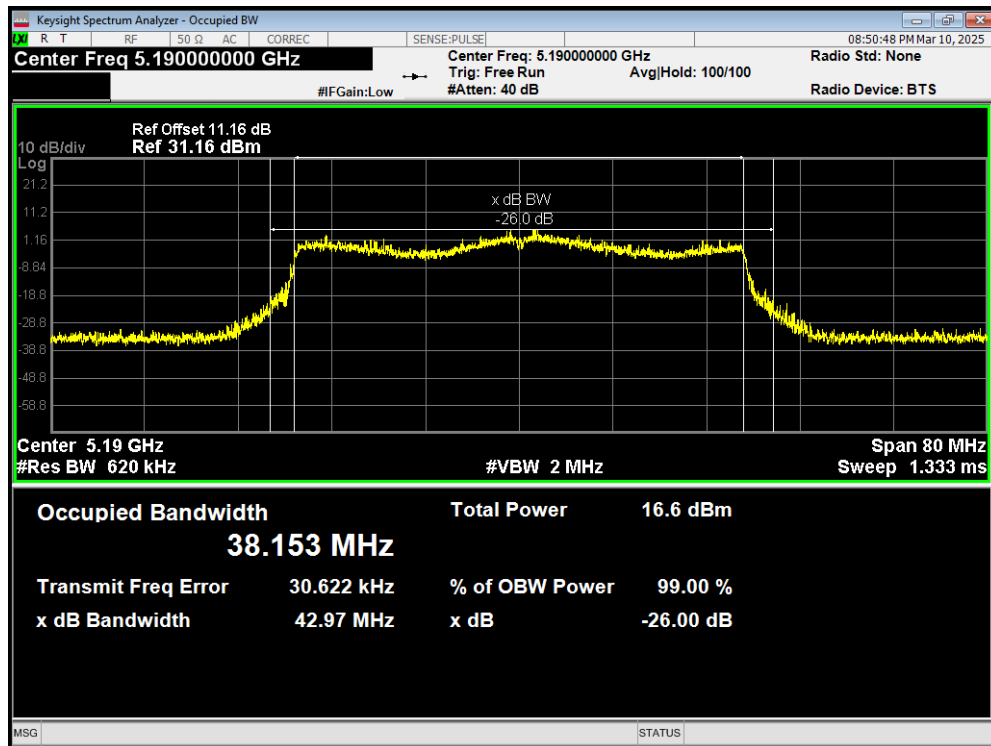


OBW 802.11be(40) 5230MHz

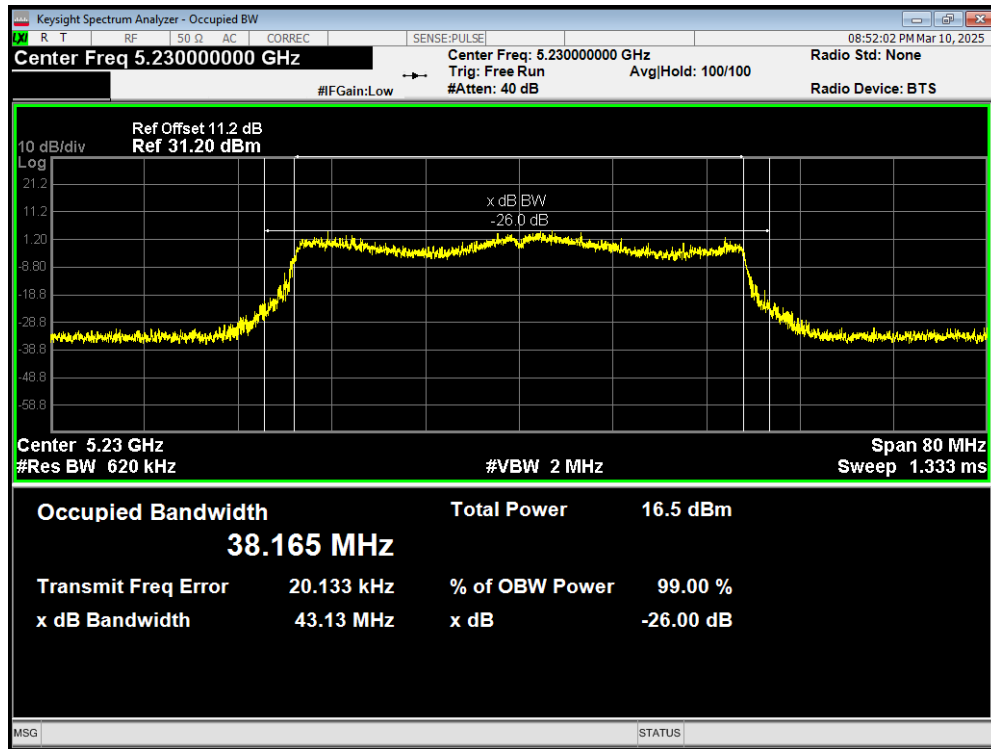


OBW 802.11be(80) 5210MHz

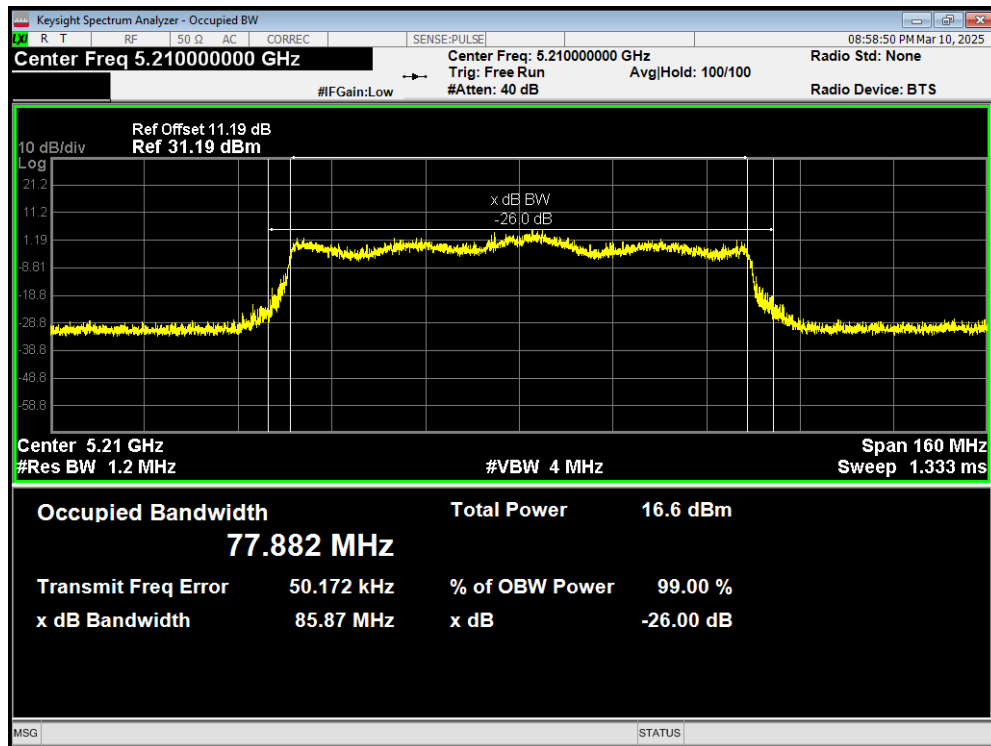


OBW 802.11n(HT20) 5180MHz

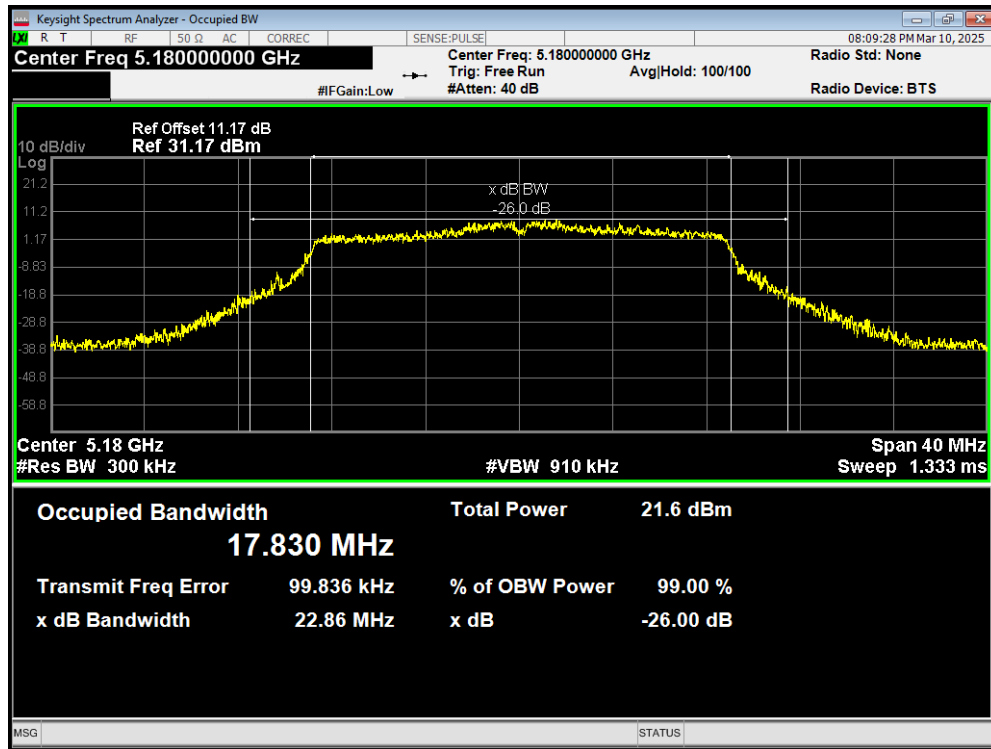


OBW 802.11n(HT20) 5200MHz

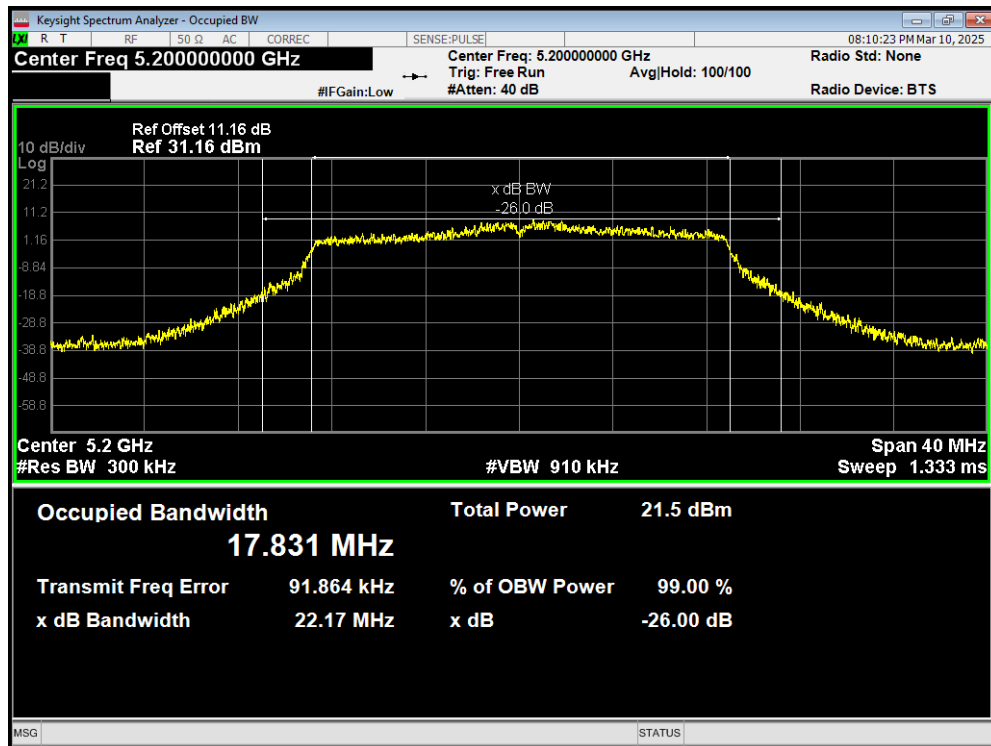


OBW 802.11n(HT20) 5240MHz

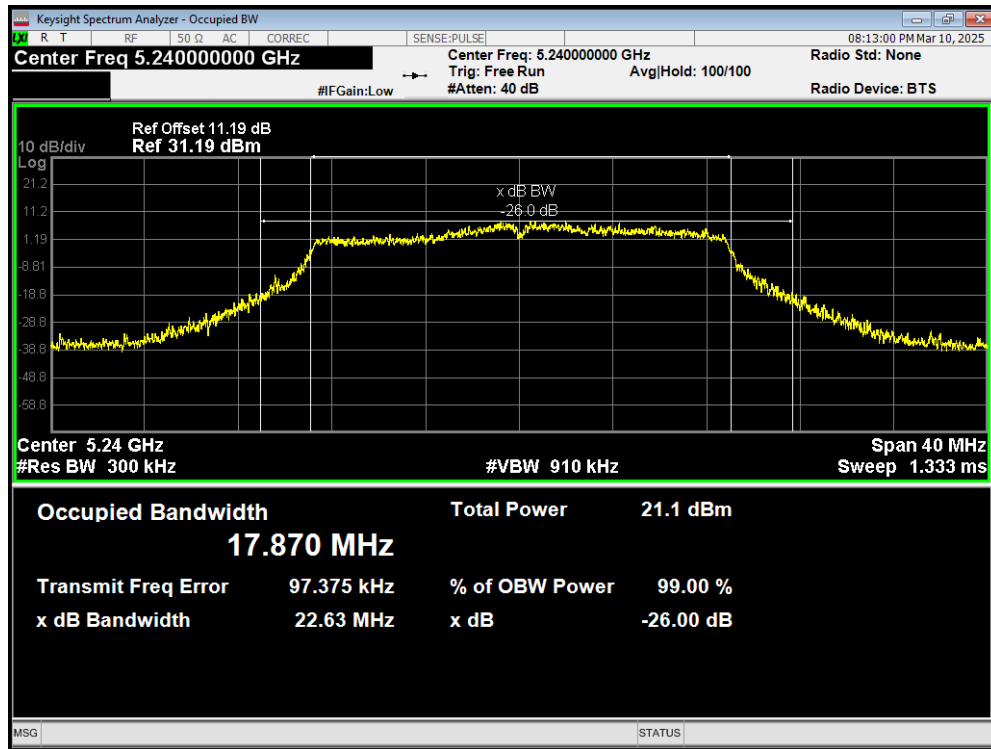


OBW 802.11n(HT40) 5190MHz

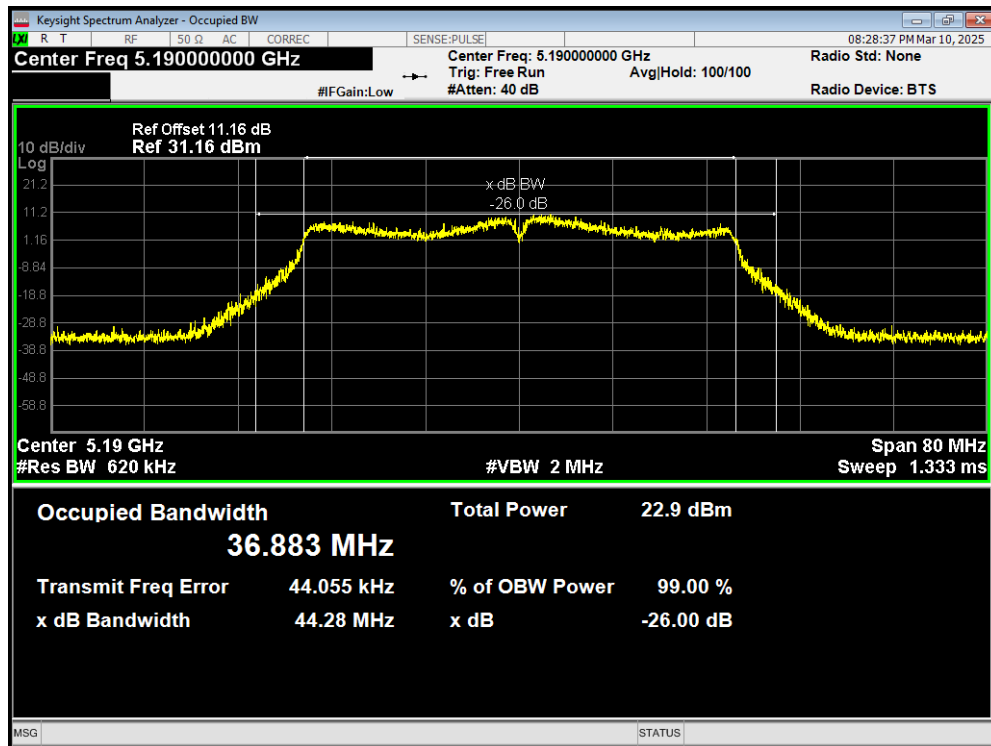


OBW 802.11n(HT40) 5230MHz

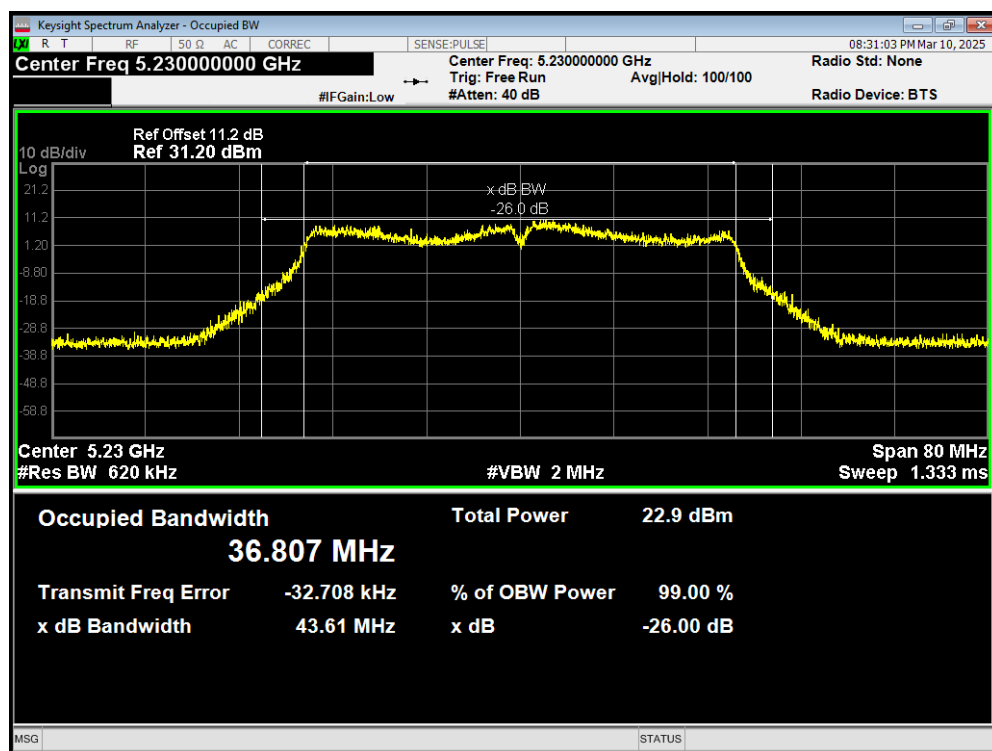


OBW 802.11a 5260MHz

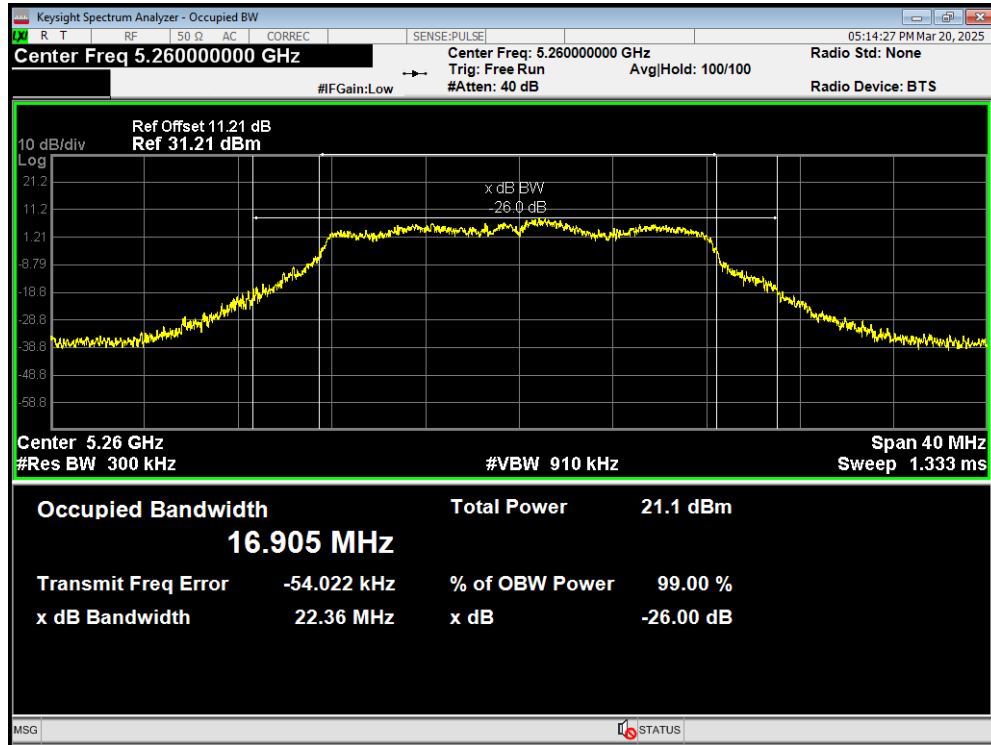


OBW 802.11a 5300MHz

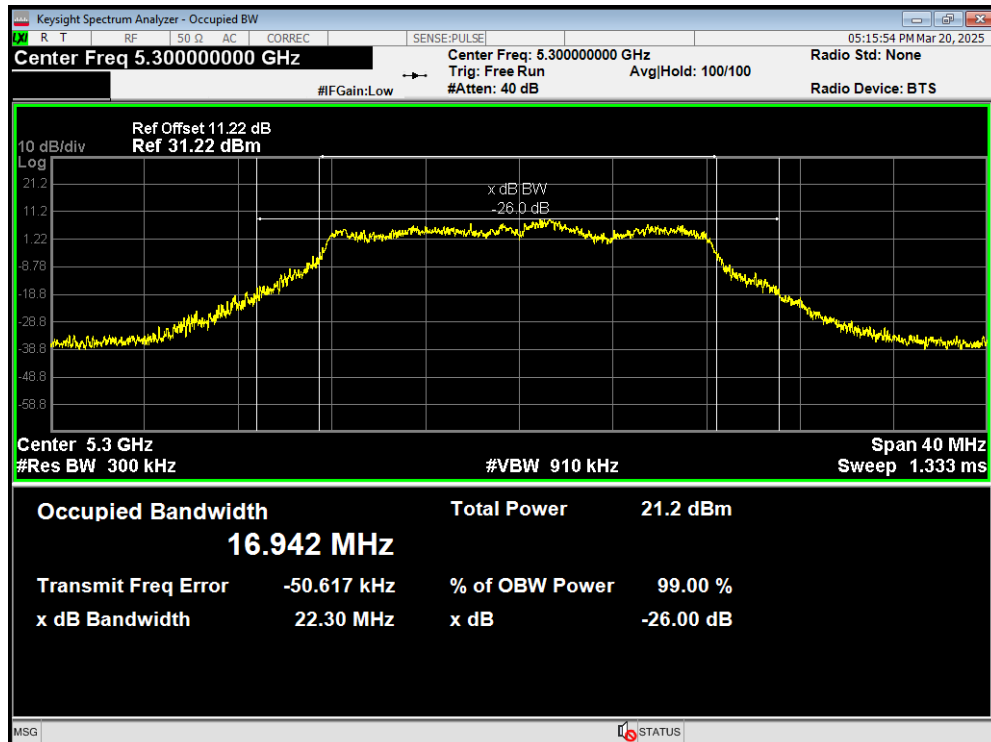


OBW 802.11a 5320MHz

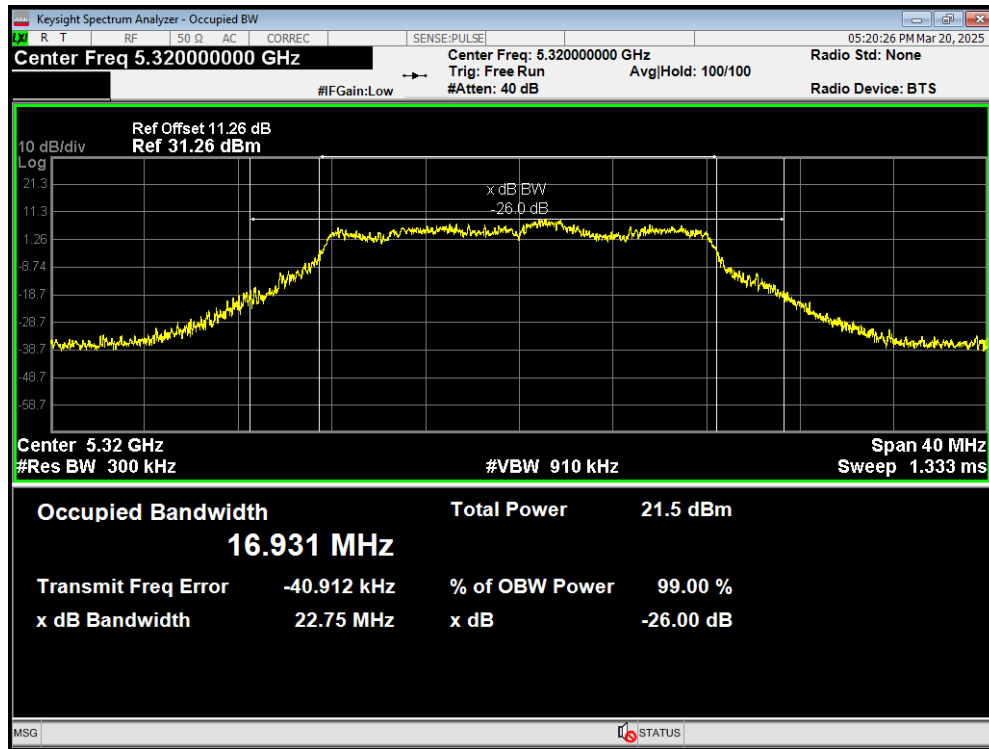


OBW 802.11ac(VHT160) 5250MHz

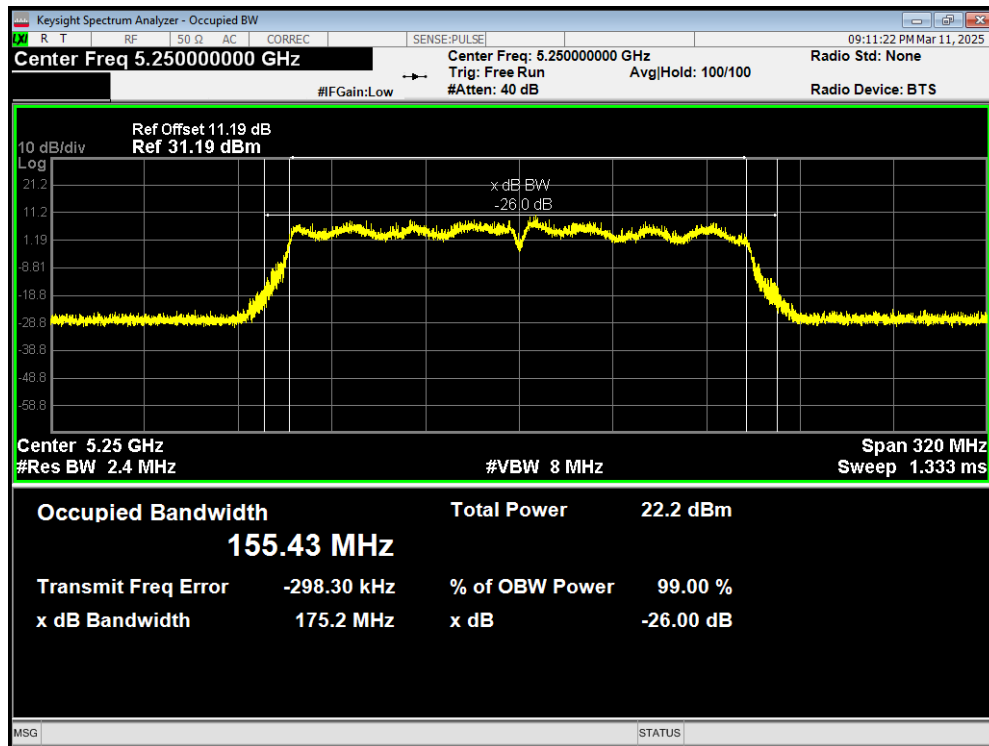


OBW 802.11ac(VHT20) 5260MHz

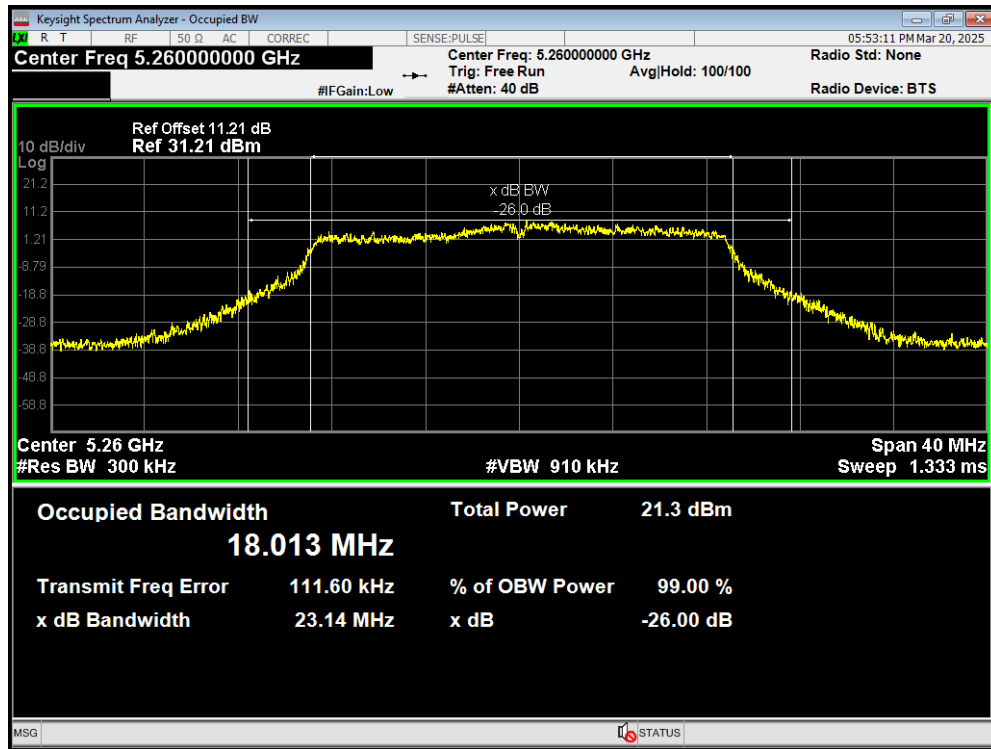


OBW 802.11ac(VHT20) 5300MHz

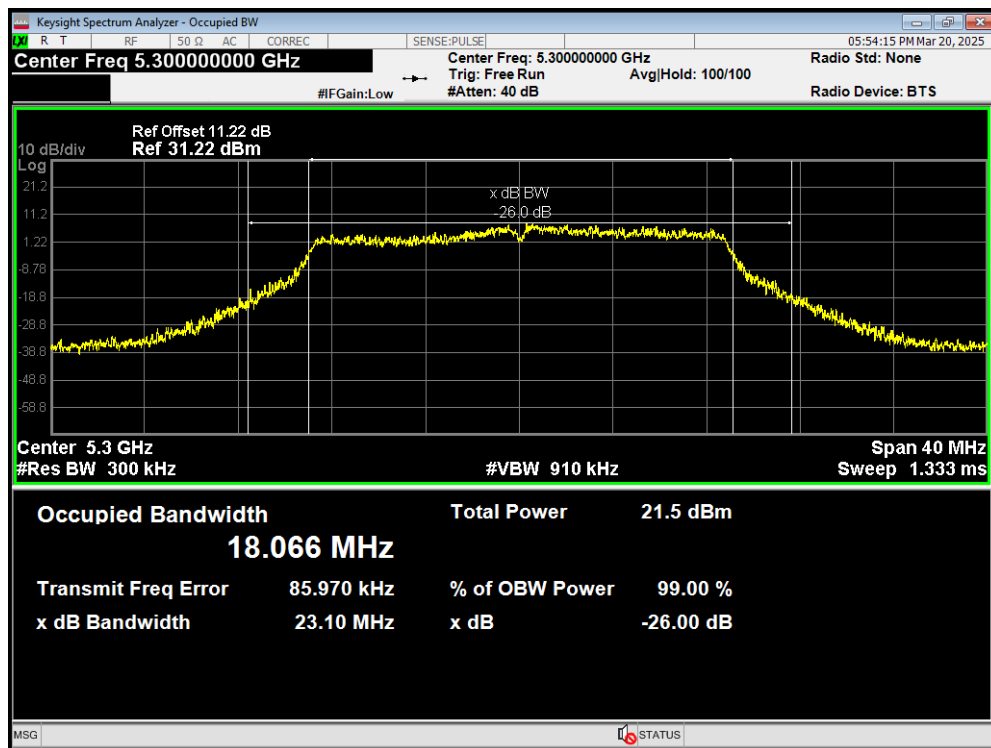


OBW 802.11ac(VHT20) 5320MHz

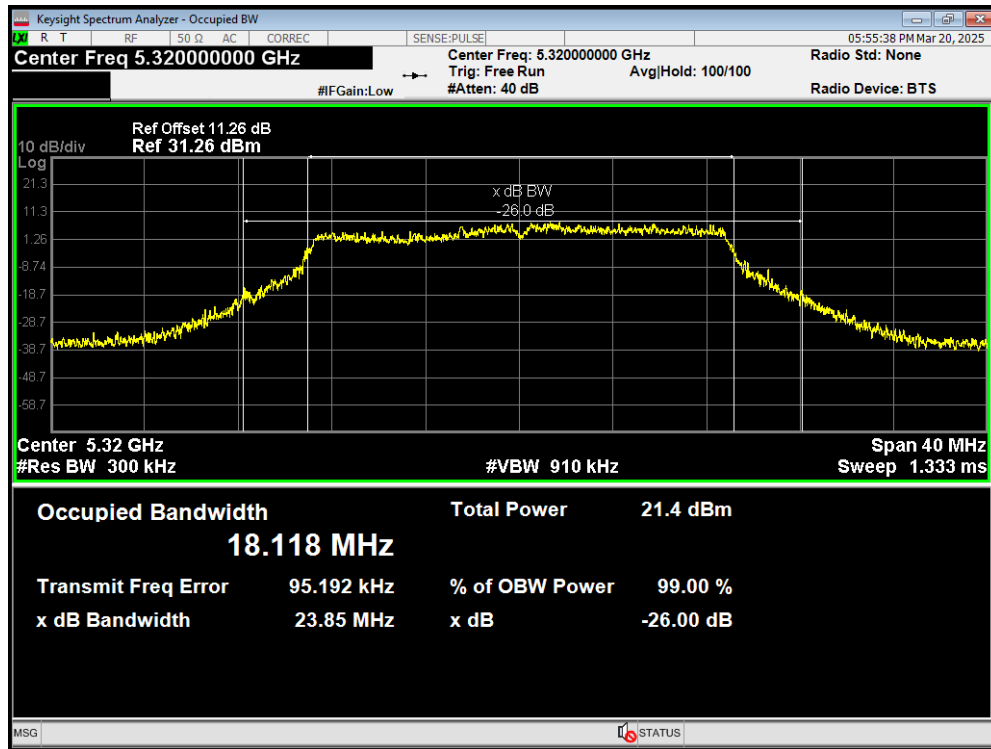


OBW 802.11ac(VHT40) 5270MHz

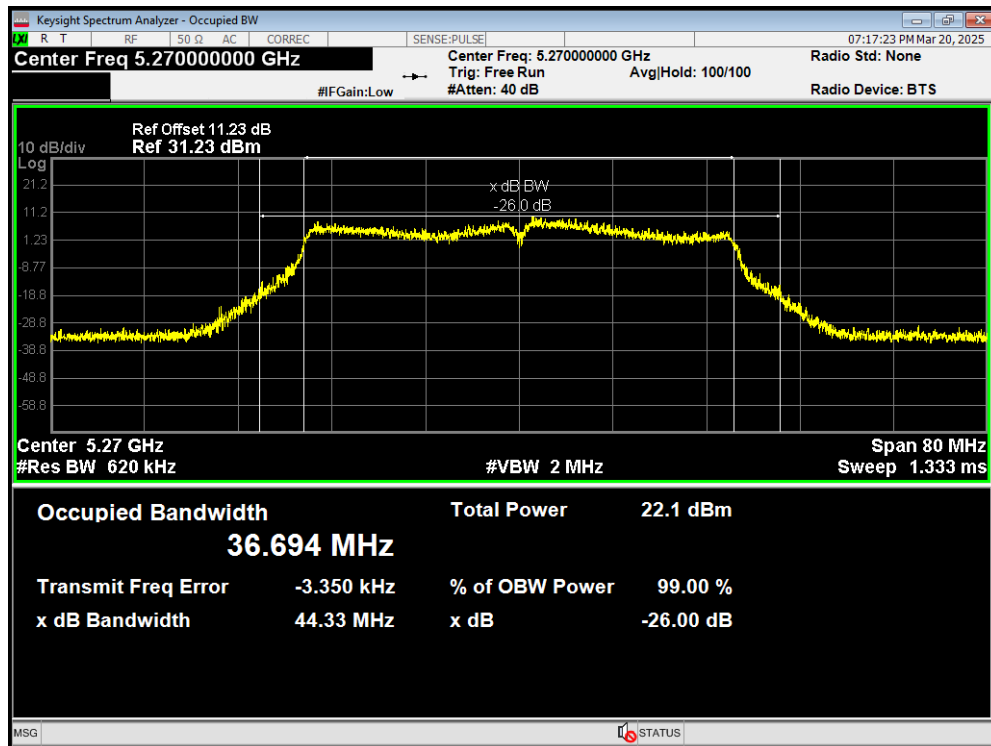


OBW 802.11ac(VHT40) 5310MHz

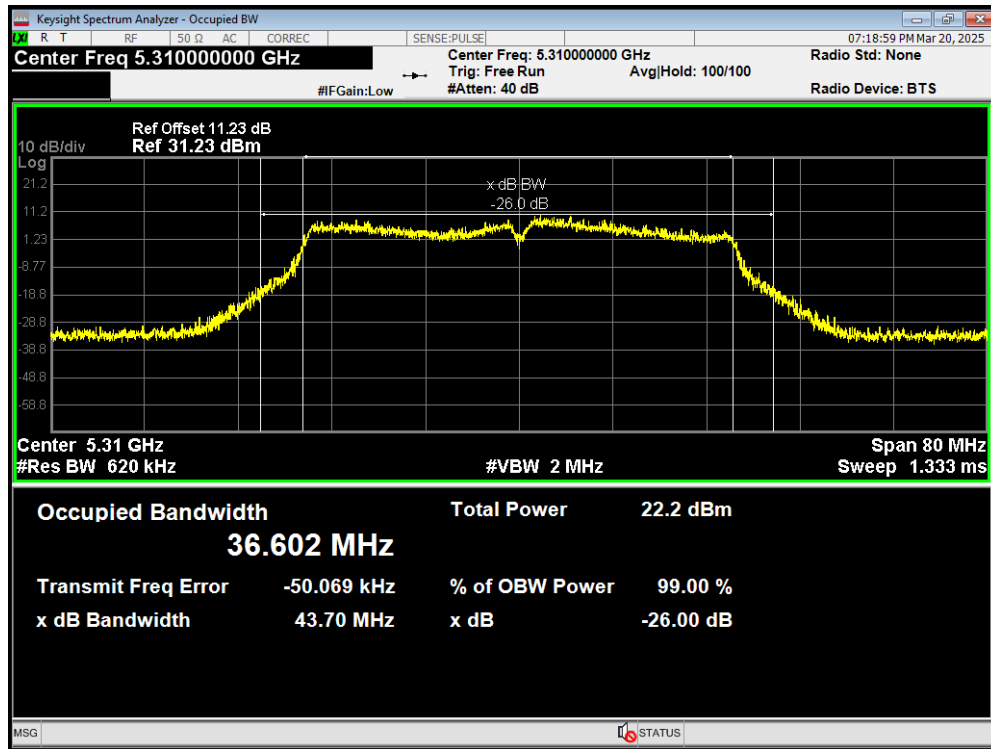


OBW 802.11ac(VHT80) 5290MHz

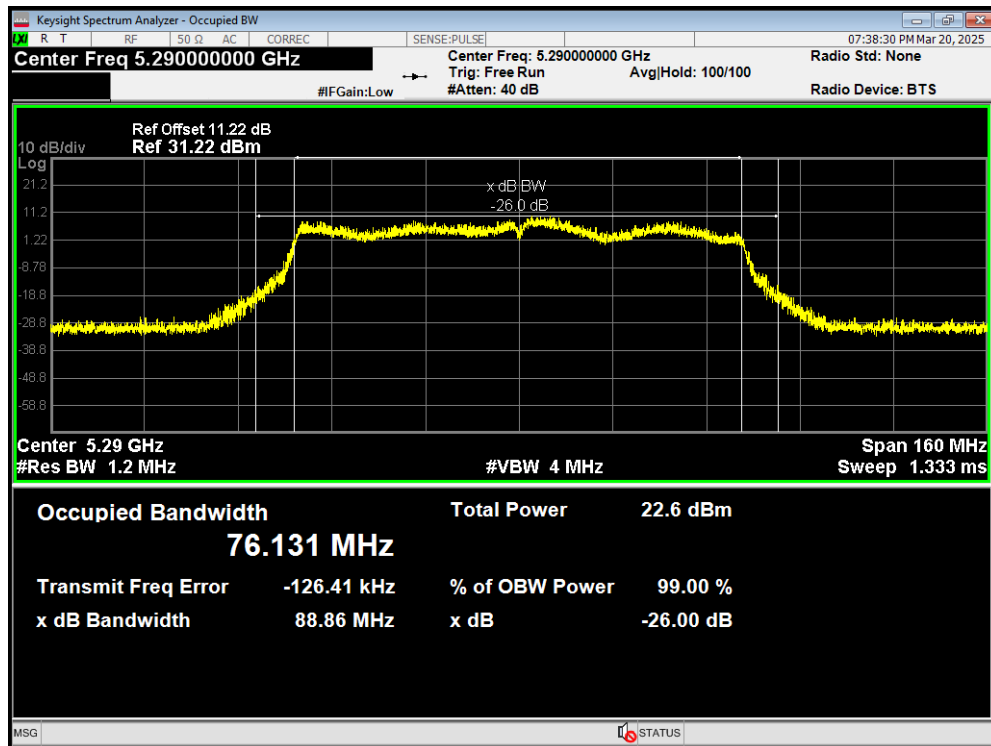


OBW 802.11ax(HE160) 5250MHz

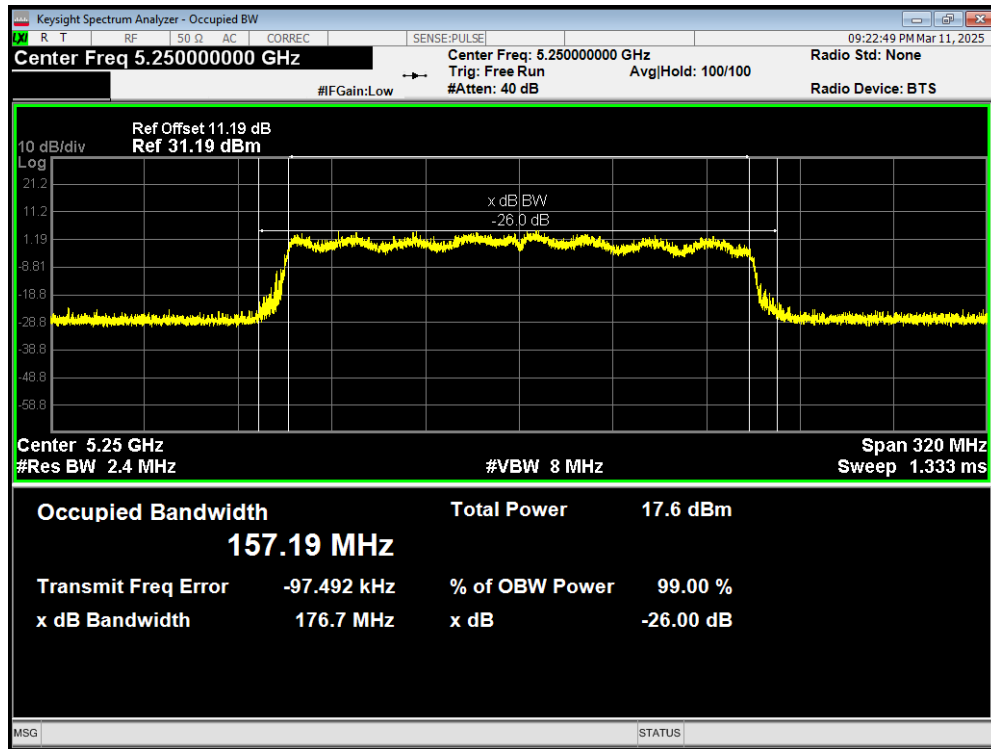


OBW 802.11ax(HE20) 5260MHz

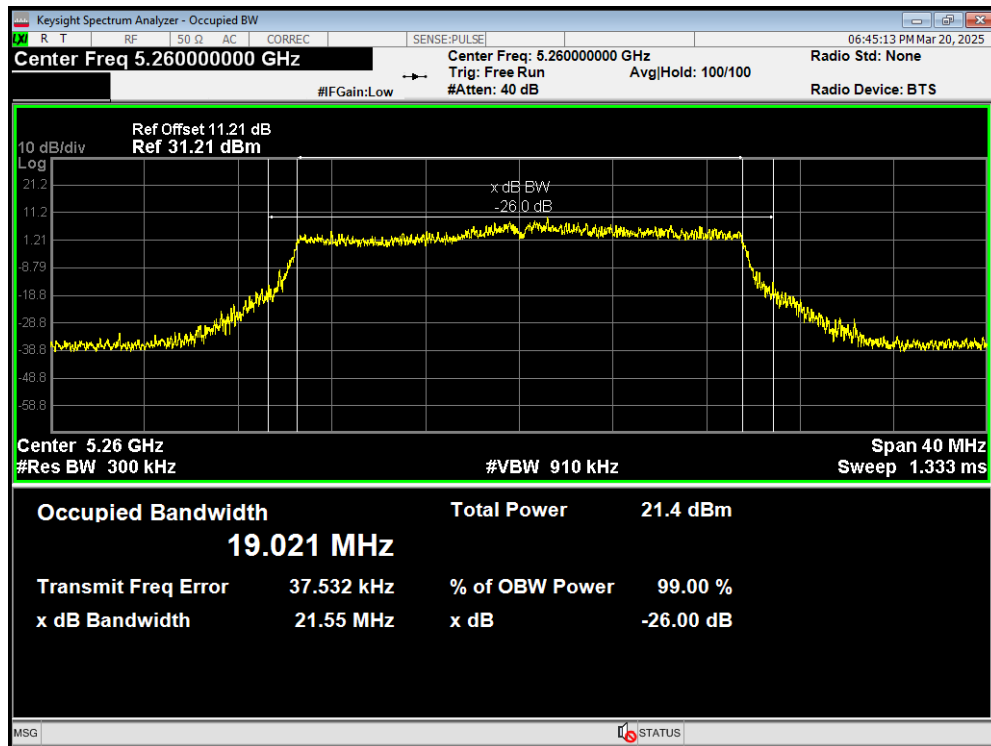


OBW 802.11ax(HE20) 5300MHz

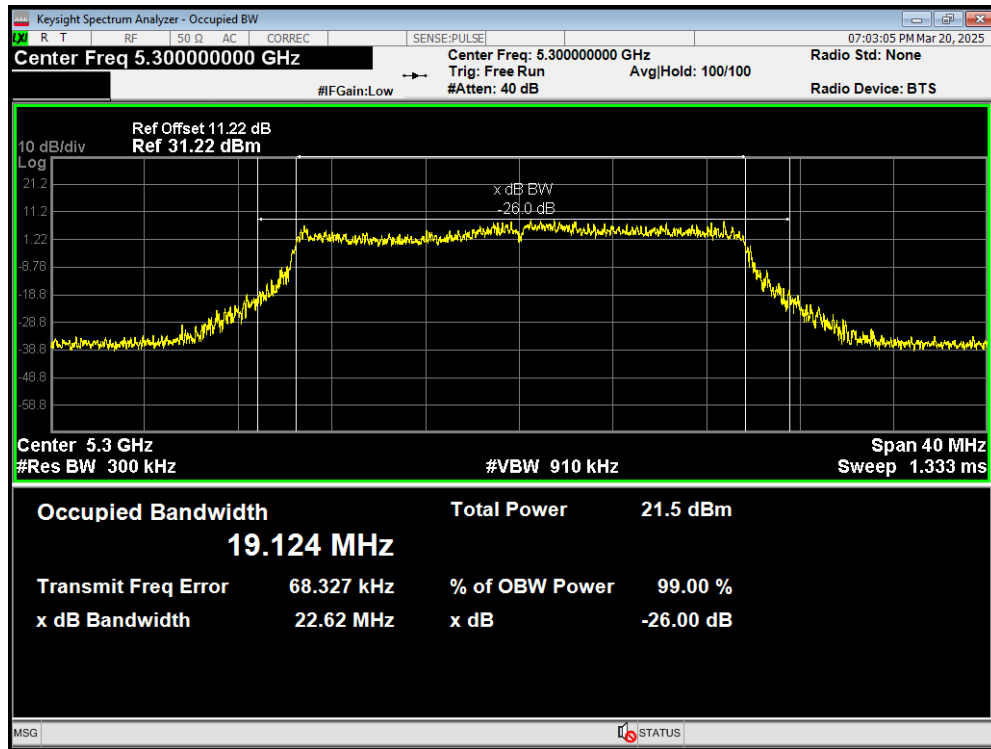


OBW 802.11ax(HE20) 5320MHz

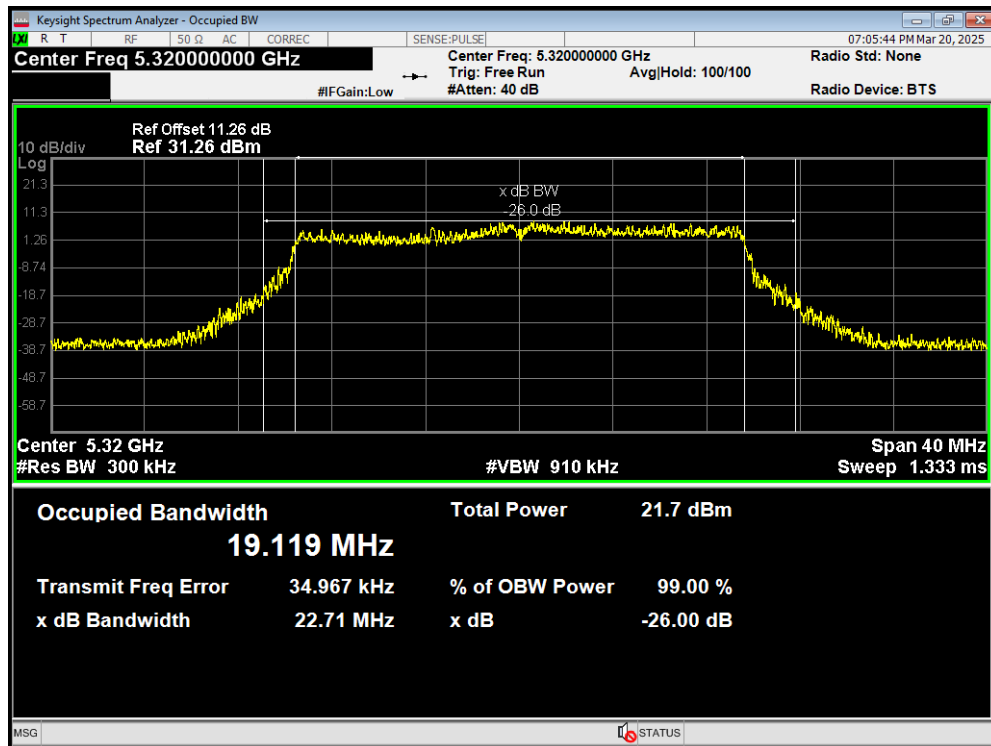


OBW 802.11ax(HE40) 5270MHz

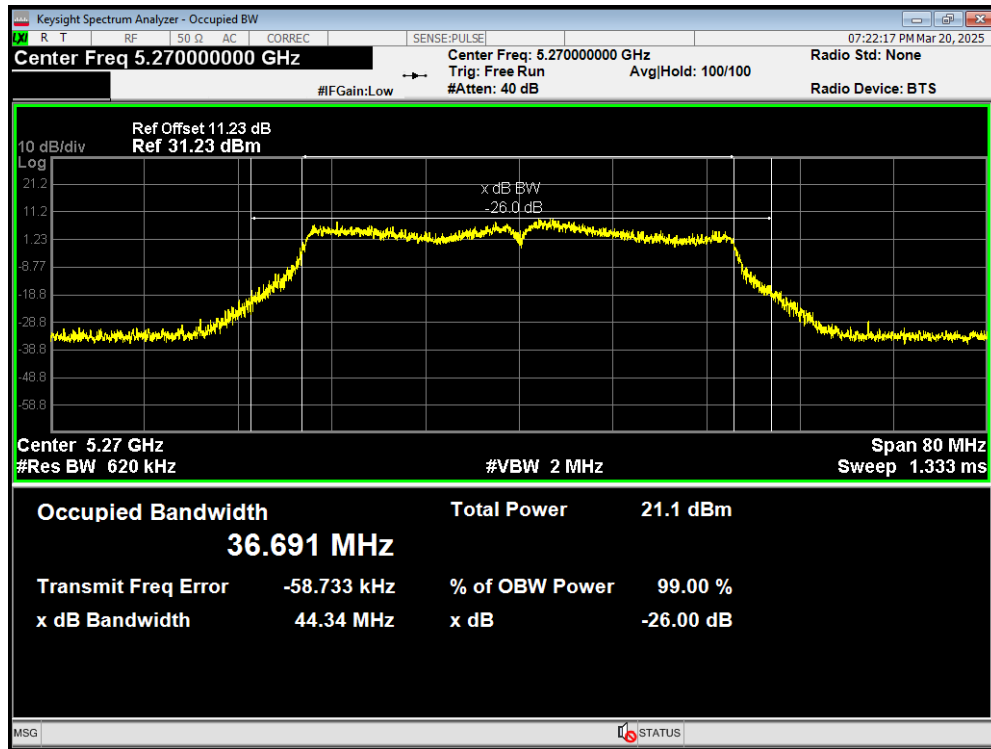


OBW 802.11ax(HE40) 5310MHz

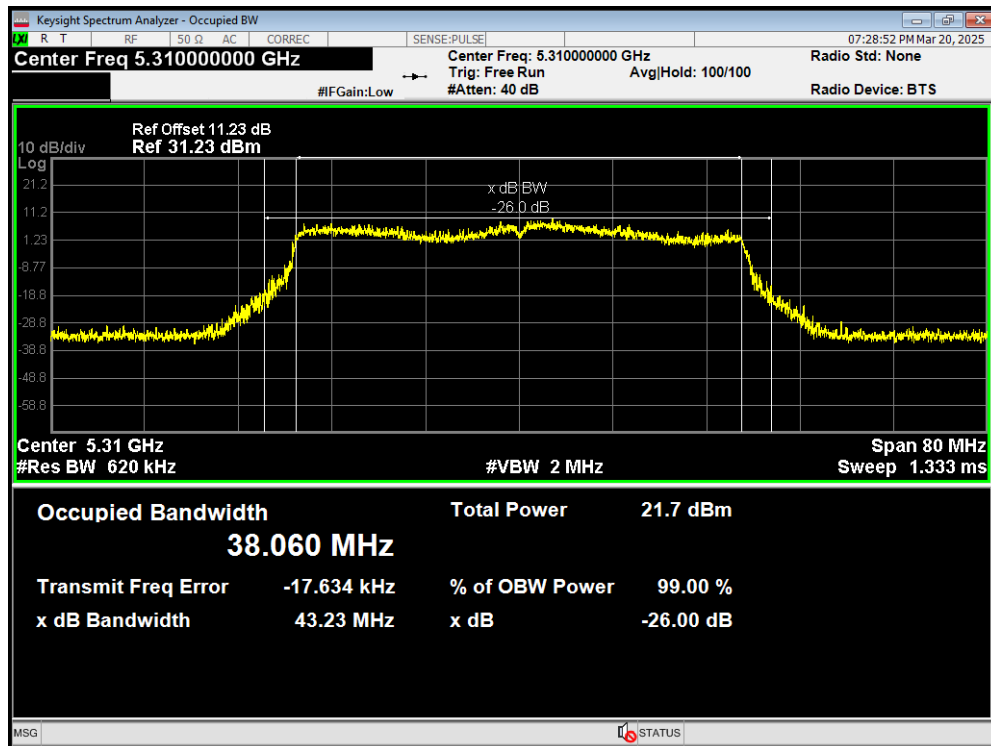


OBW 802.11ax(HE80) 5290MHz

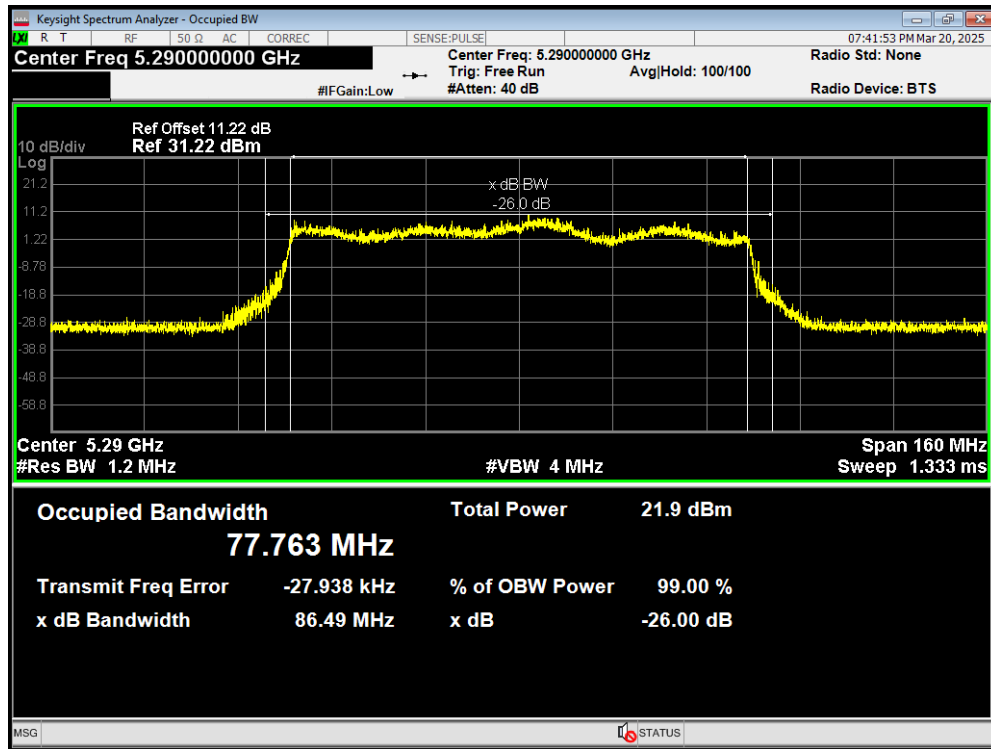


OBW 802.11be(160) 5250MHz

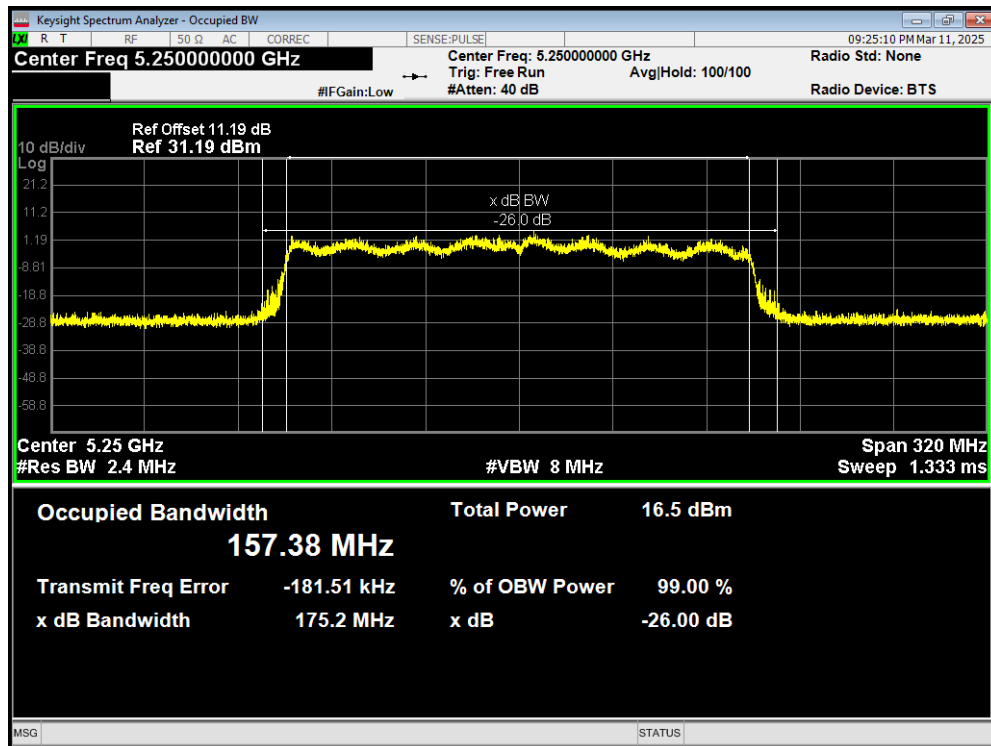


OBW 802.11be(20) 5260MHz

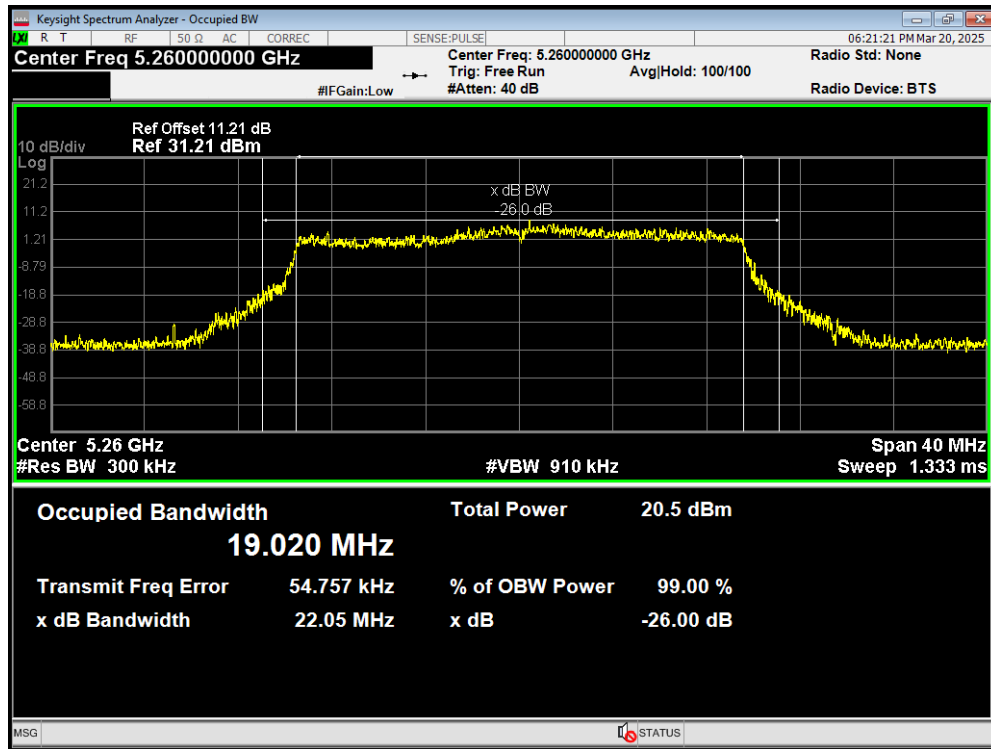


OBW 802.11be(20) 5300MHz

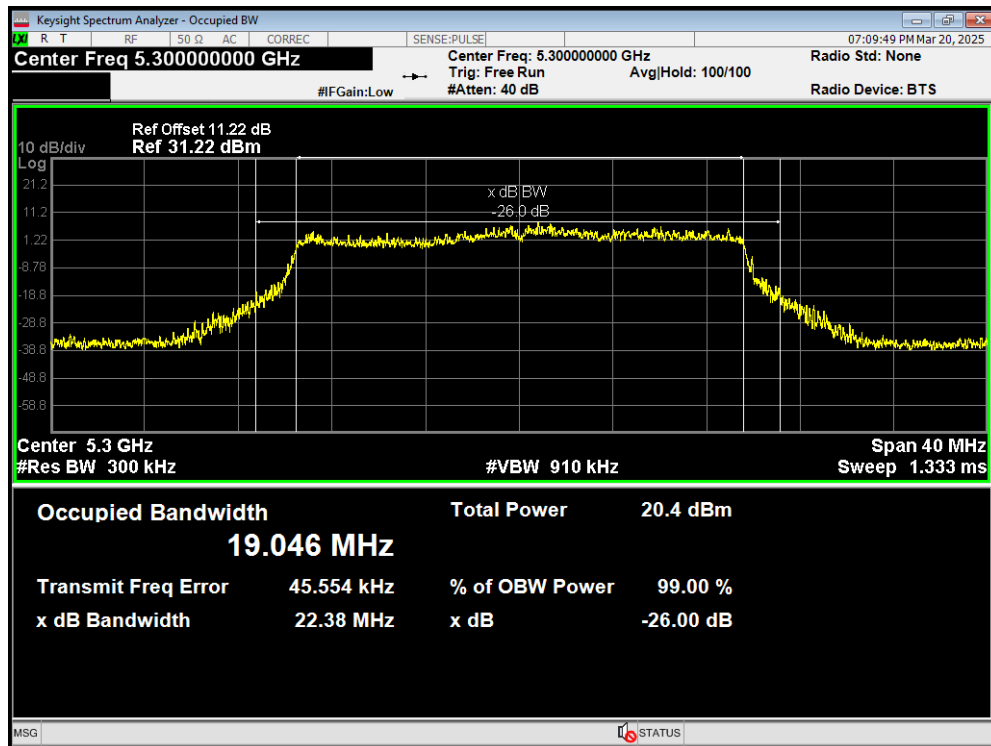


OBW 802.11be(20) 5320MHz

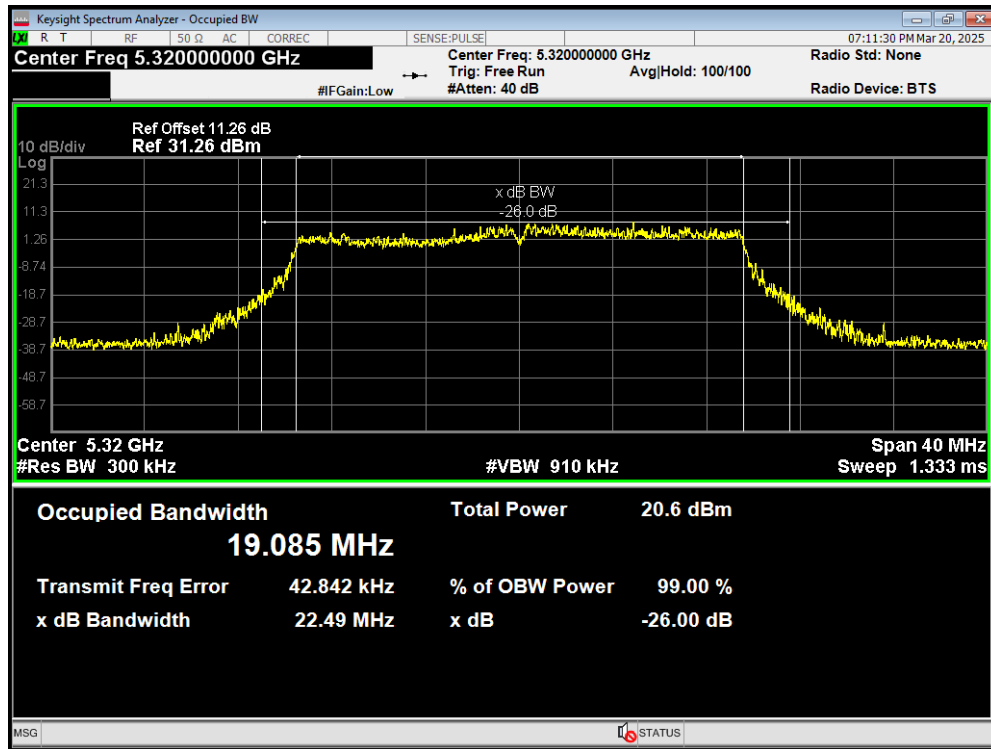


OBW 802.11be(40) 5270MHz

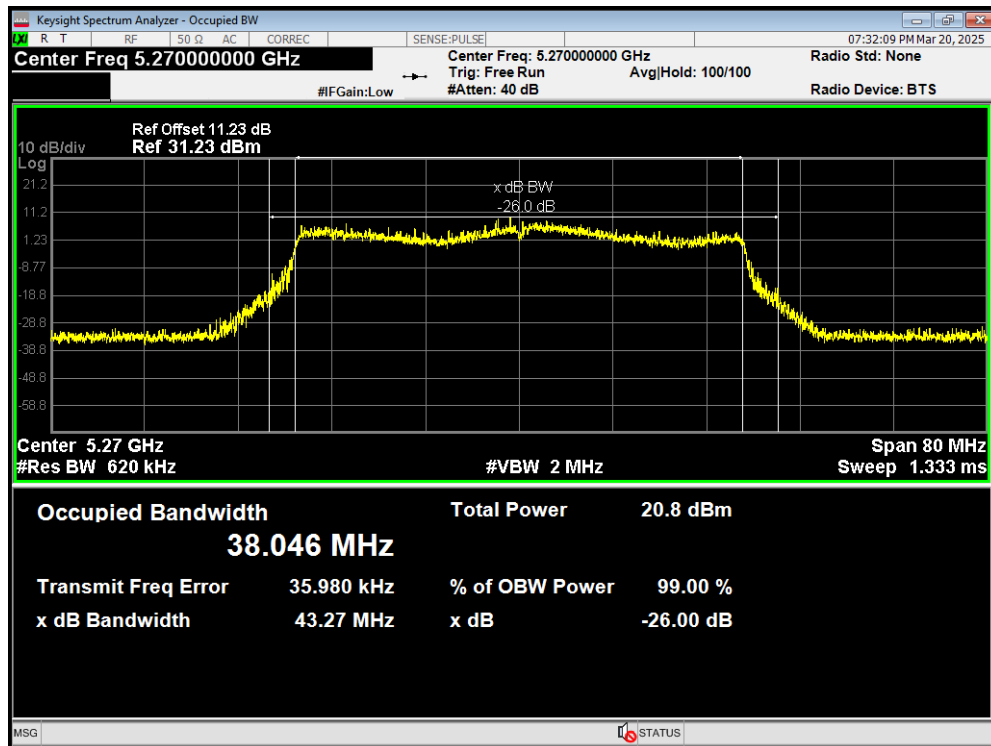


OBW 802.11be(40) 5310MHz

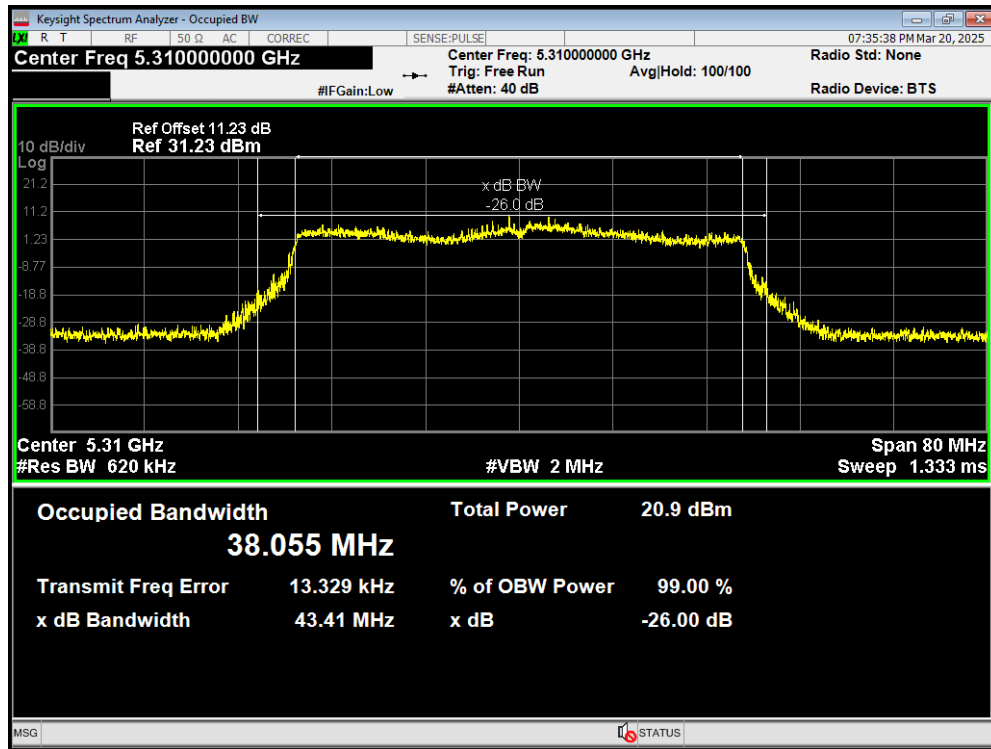


OBW 802.11be(80) 5290MHz

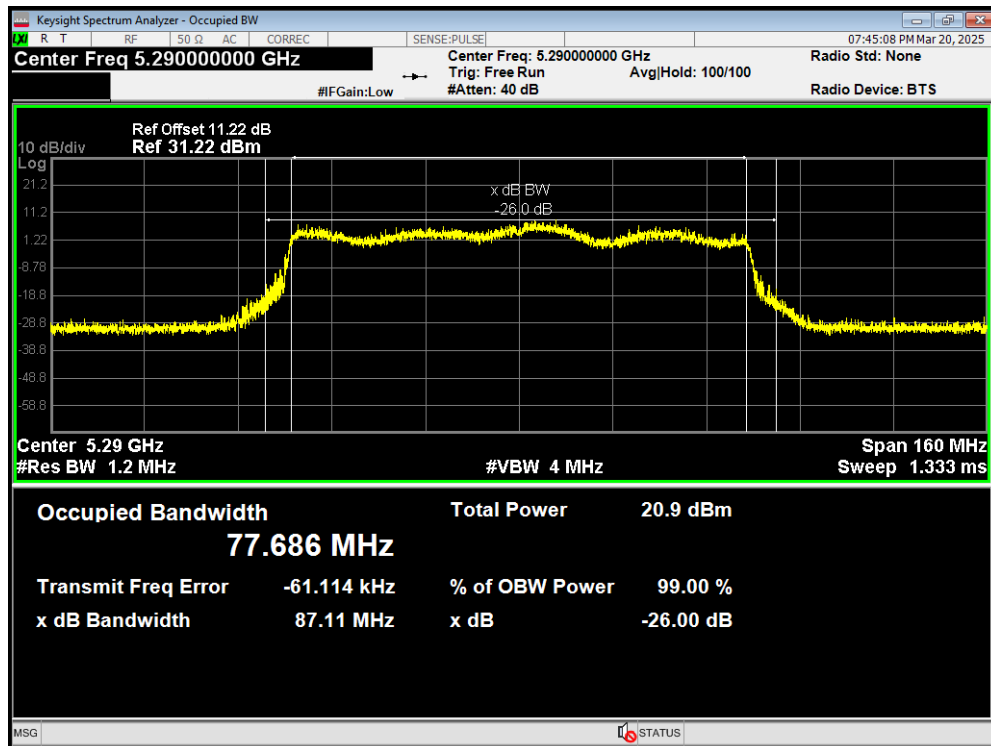


OBW 802.11n(HT20) 5260MHz

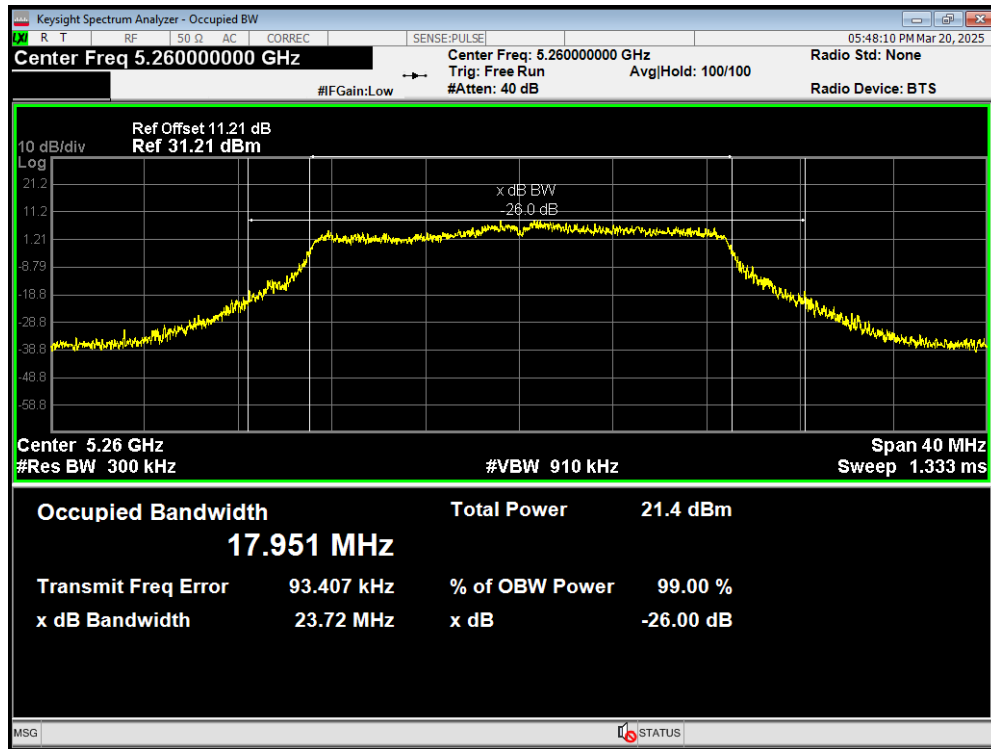


OBW 802.11n(HT20) 5300MHz

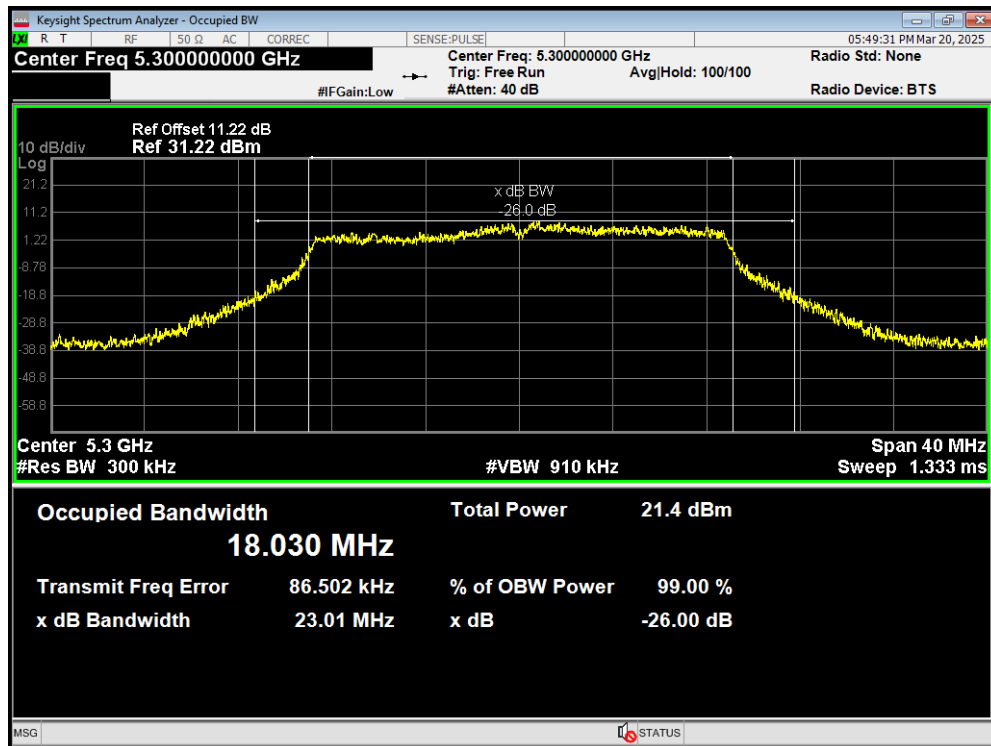


OBW 802.11n(HT20) 5320MHz

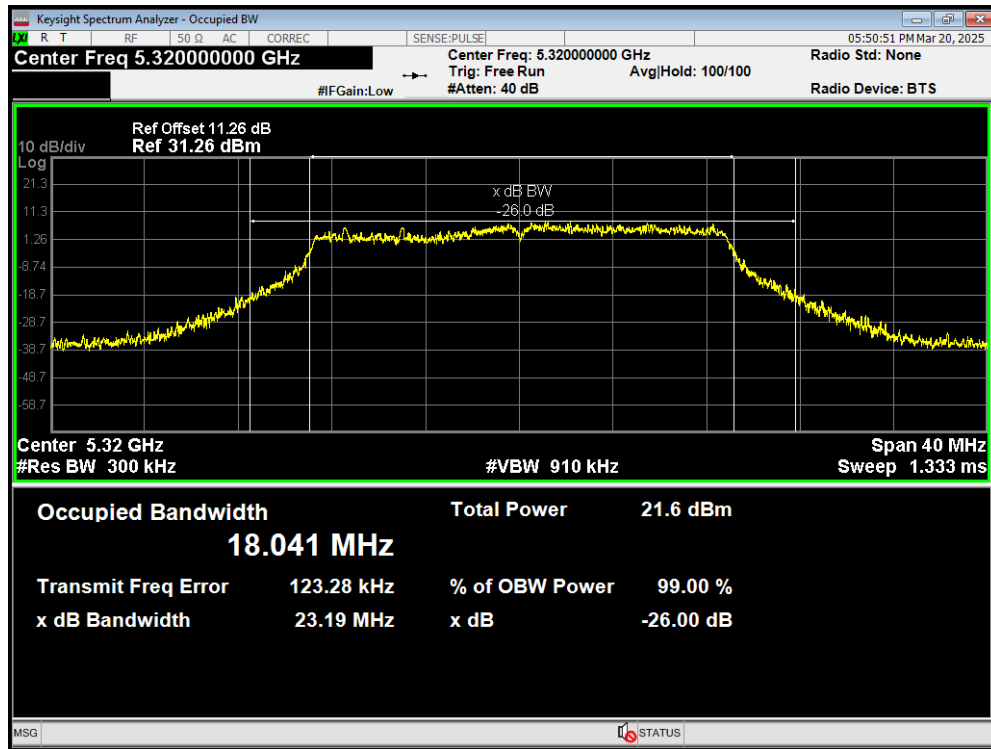


OBW 802.11n(HT40) 5270MHz

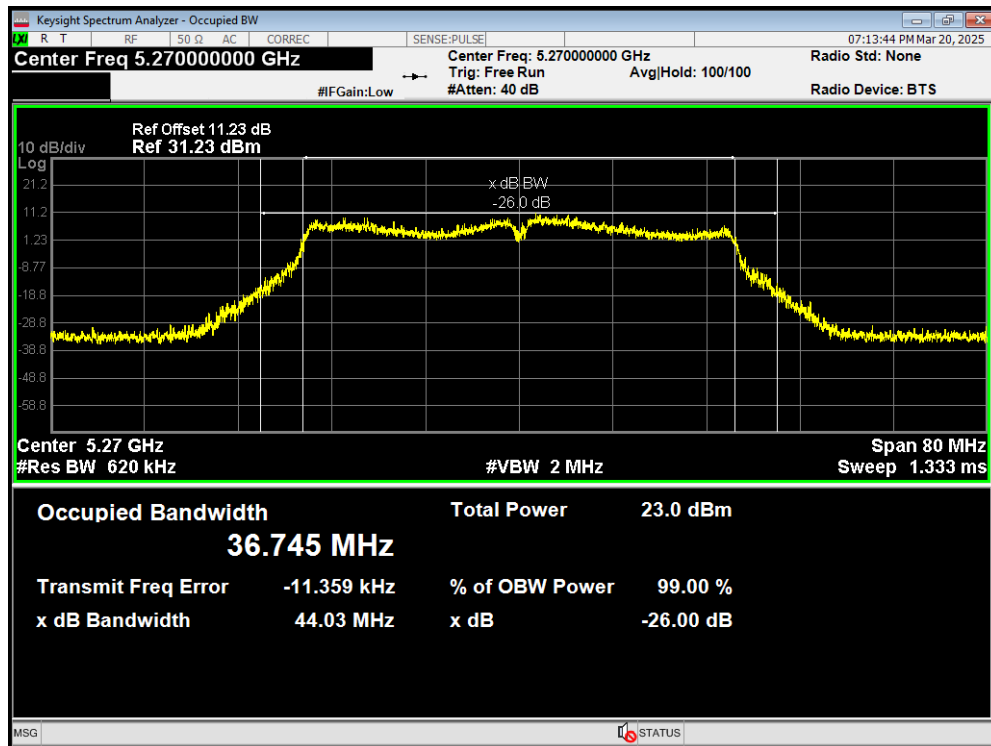


OBW 802.11n(HT40) 5310MHz

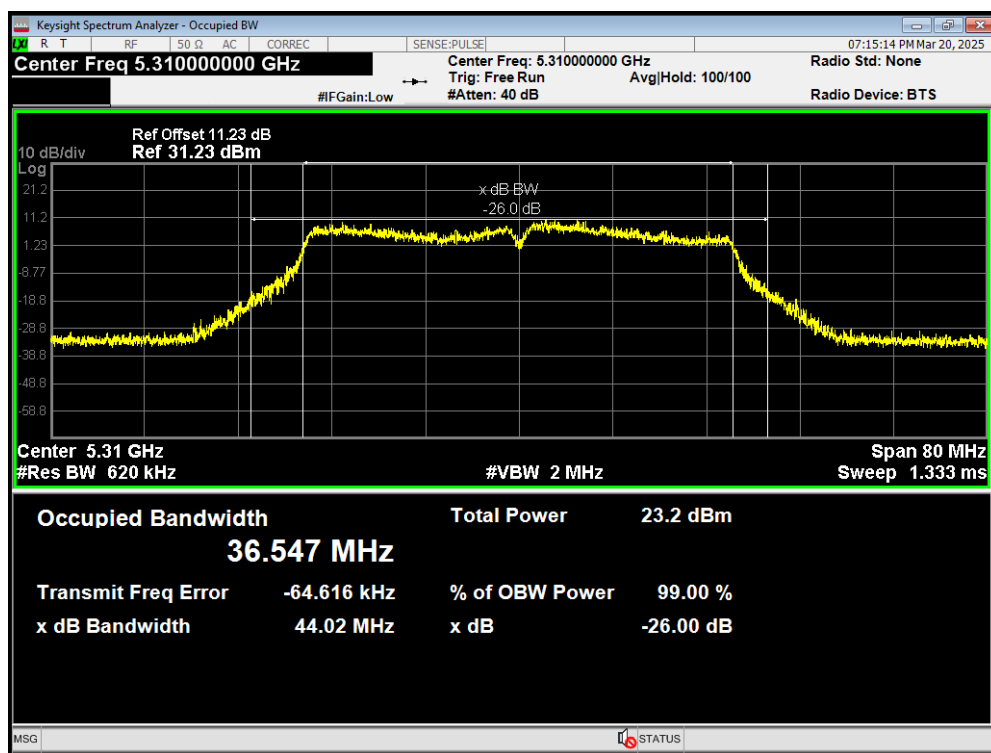


OBW 802.11a 5500MHz

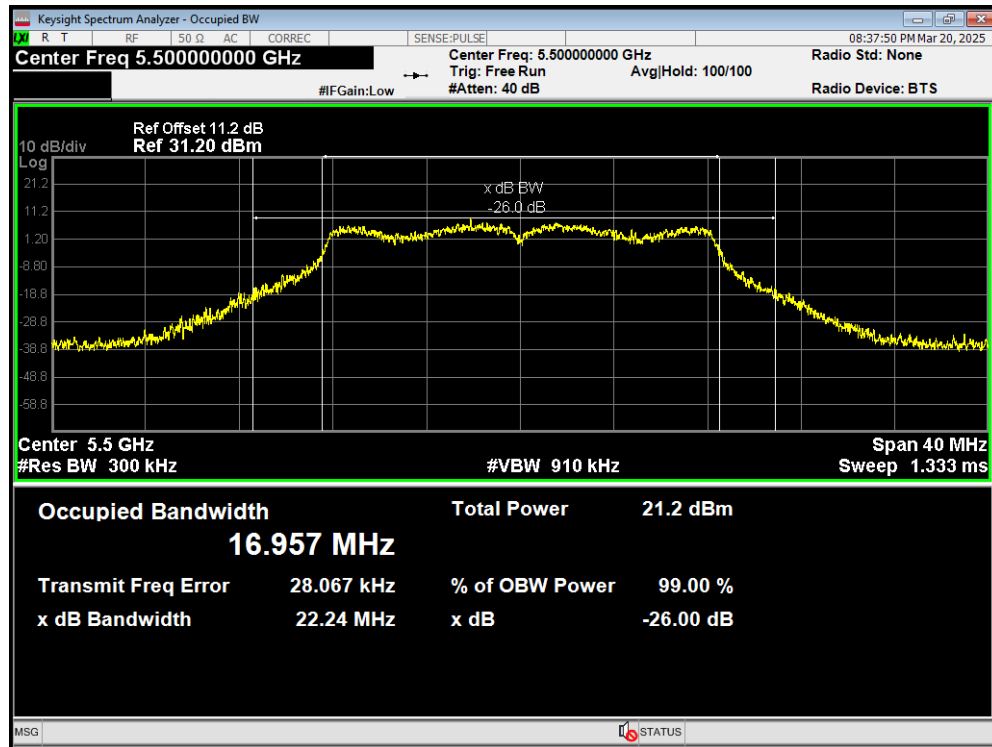


OBW 802.11a 5600MHz

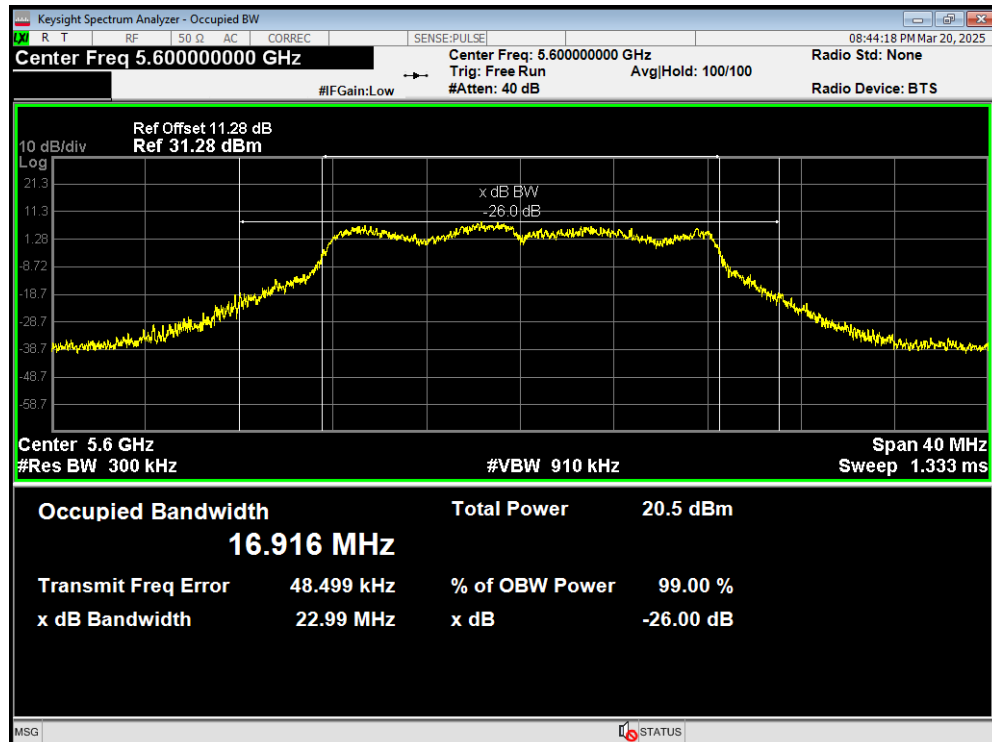


OBW 802.11a 5700MHz

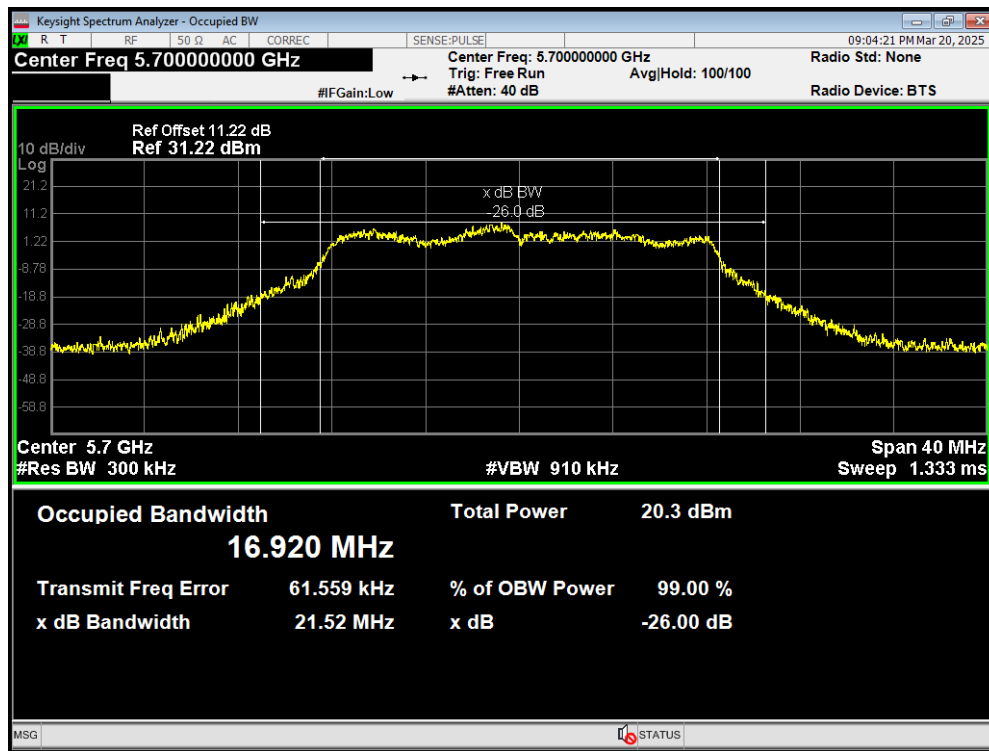


OBW 802.11a 5720MHz

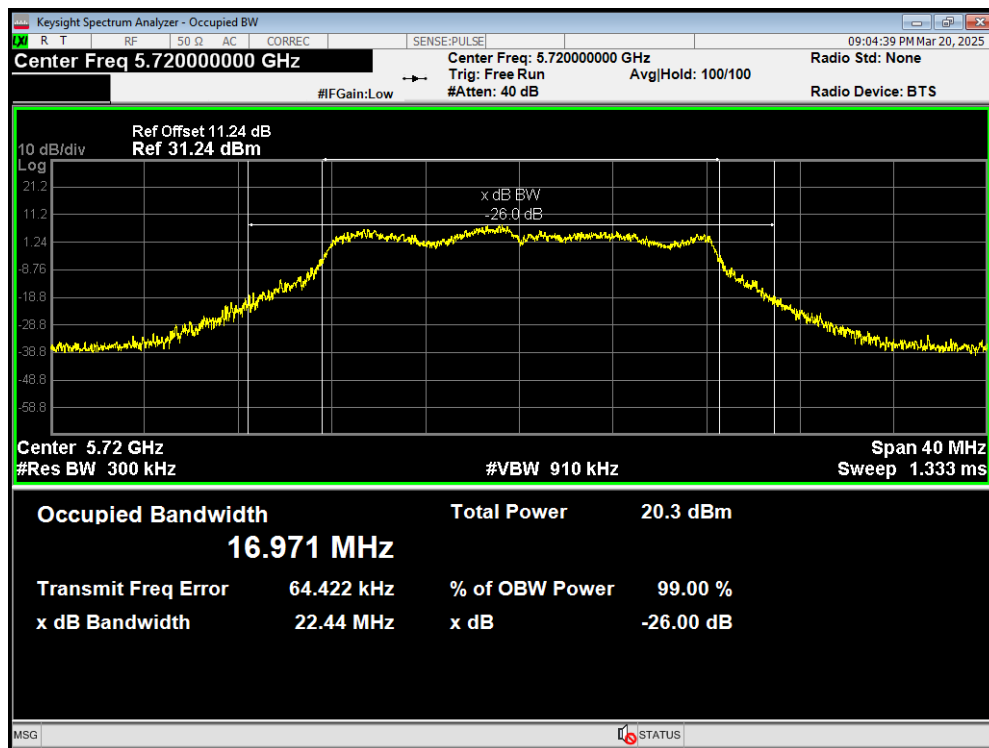


OBW 802.11ac(VHT160) 5570MHz

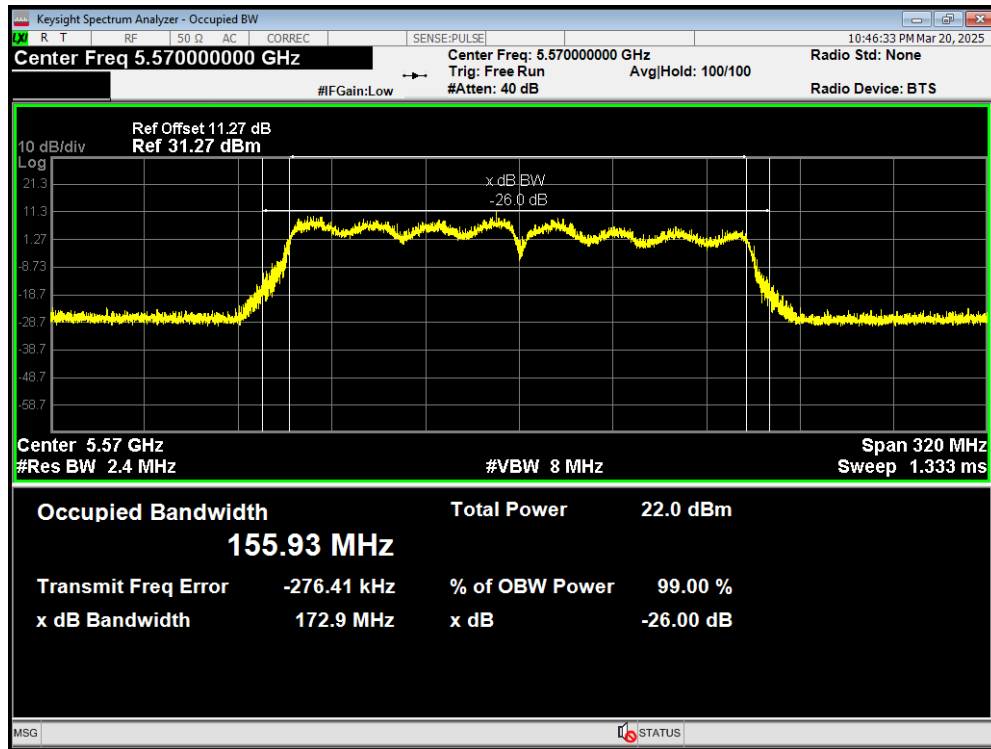


OBW 802.11ac(VHT20) 5500MHz

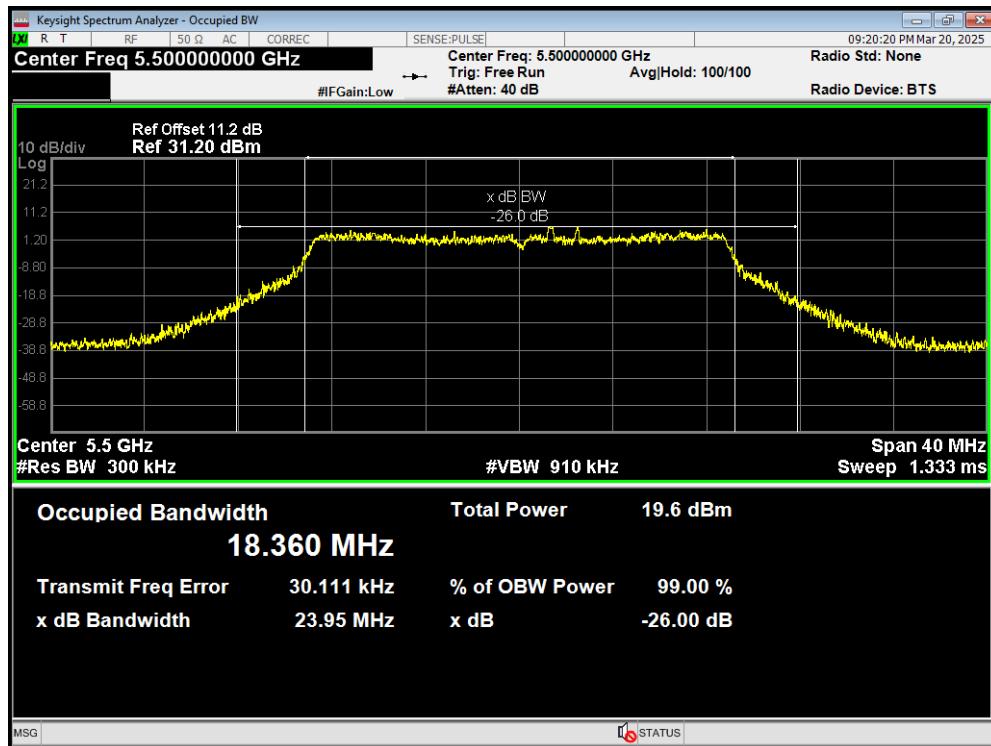


OBW 802.11ac(VHT20) 5600MHz

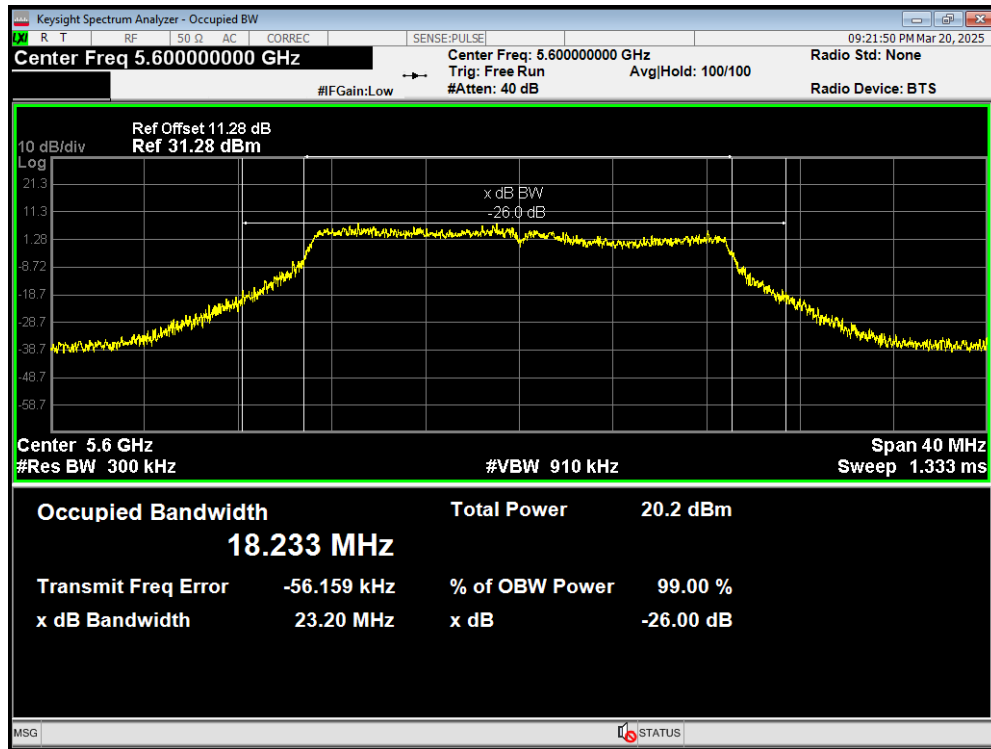


OBW 802.11ac(VHT20) 5700MHz

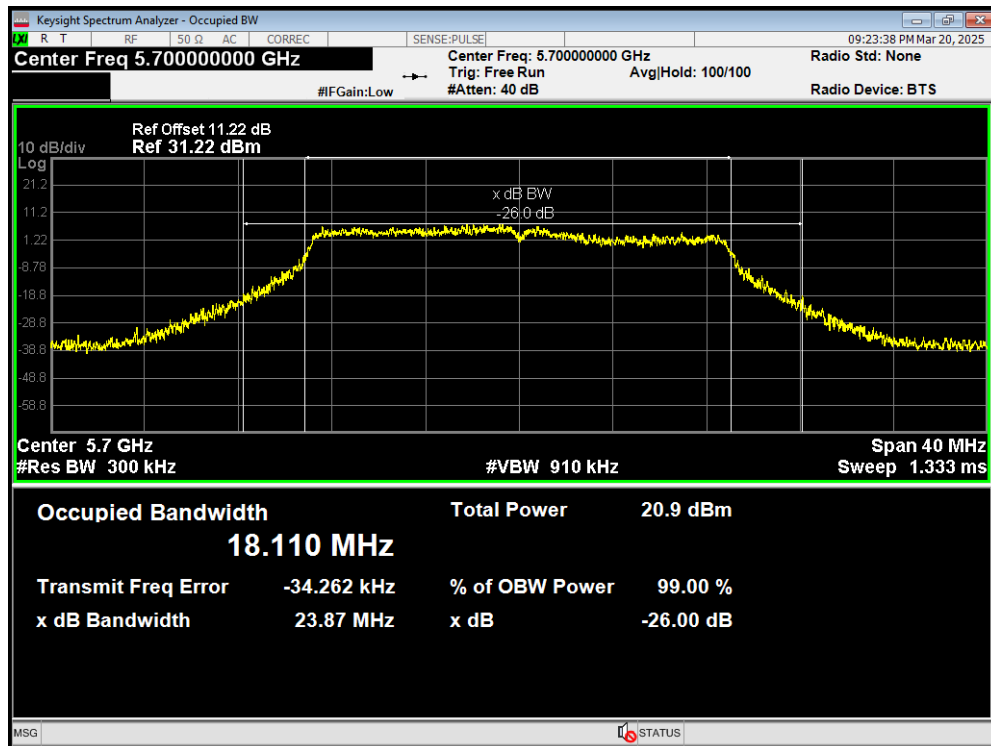


OBW 802.11ac(VHT20) 5720MHz

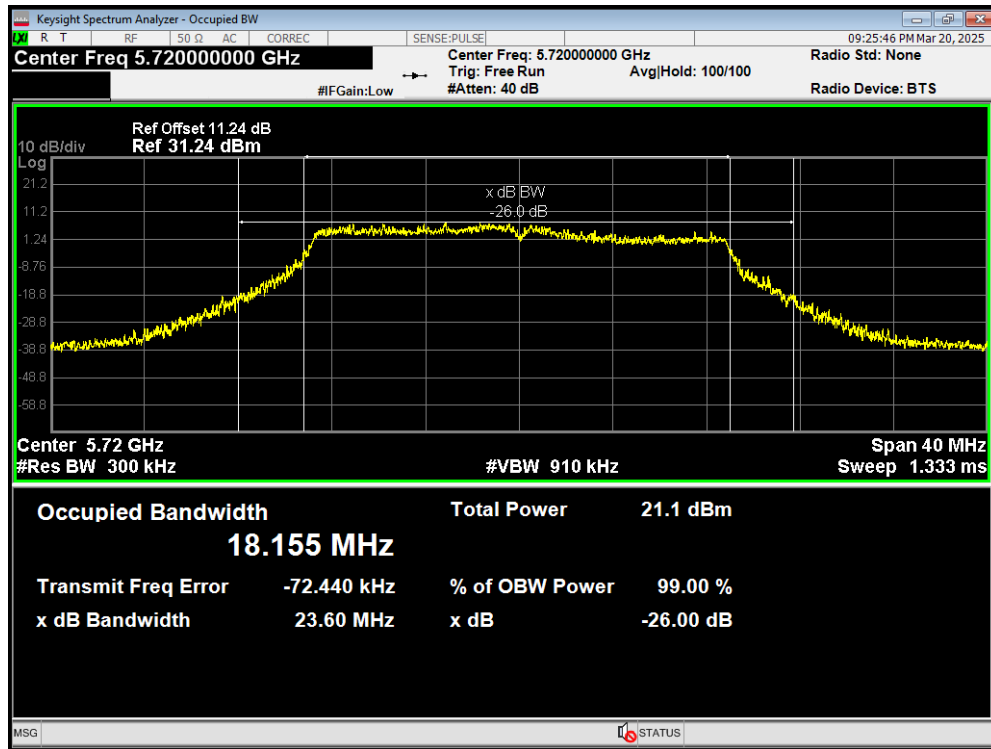


OBW 802.11ac(VHT40) 5510MHz

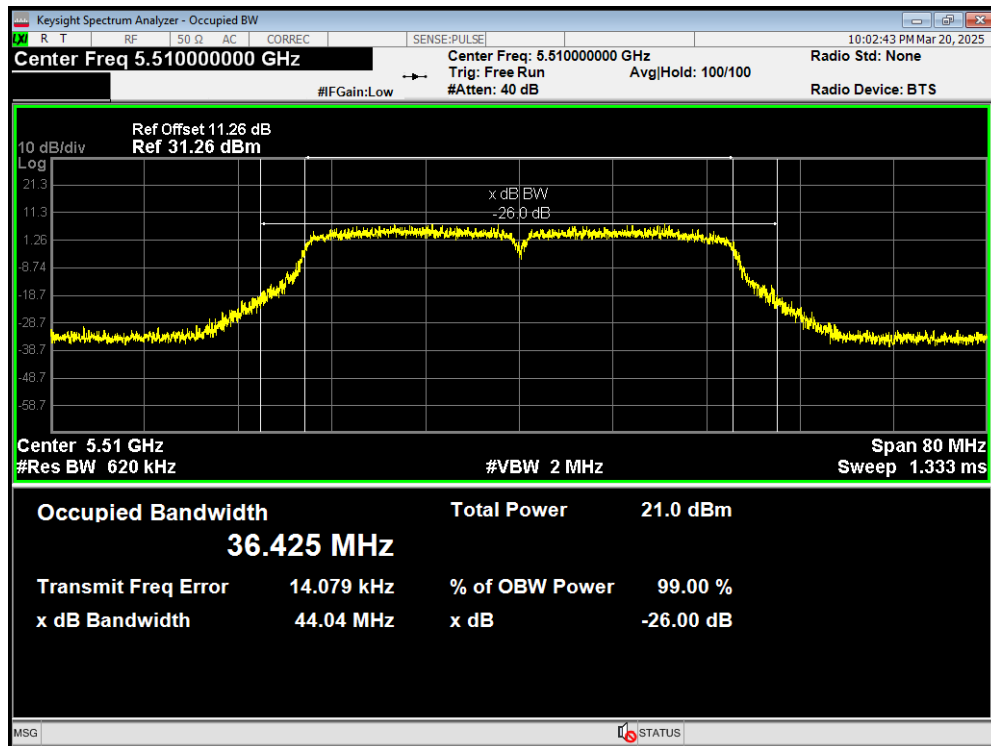


OBW 802.11ac(VHT40) 5590MHz

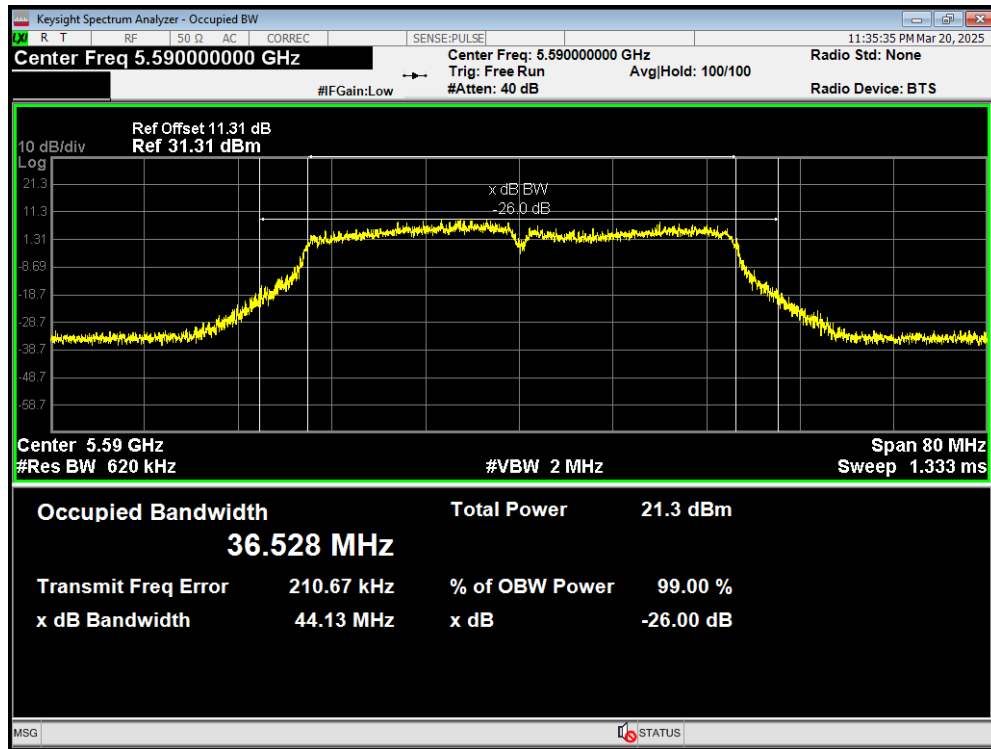


OBW 802.11ac(VHT40) 5670MHz

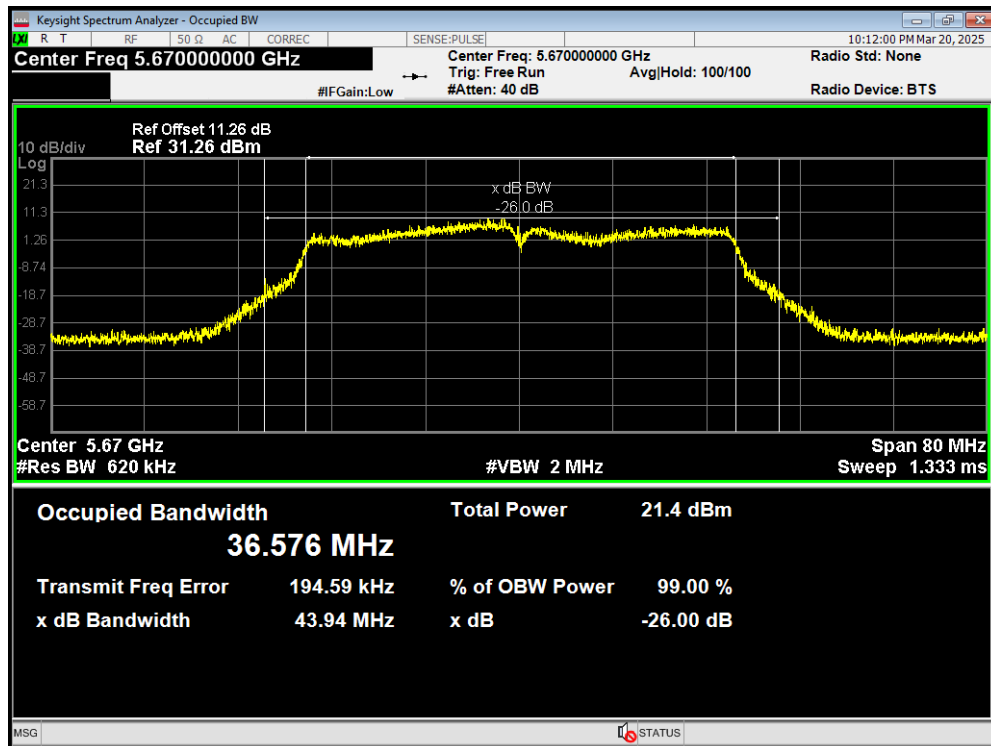


OBW 802.11ac(VHT40) 5710MHz

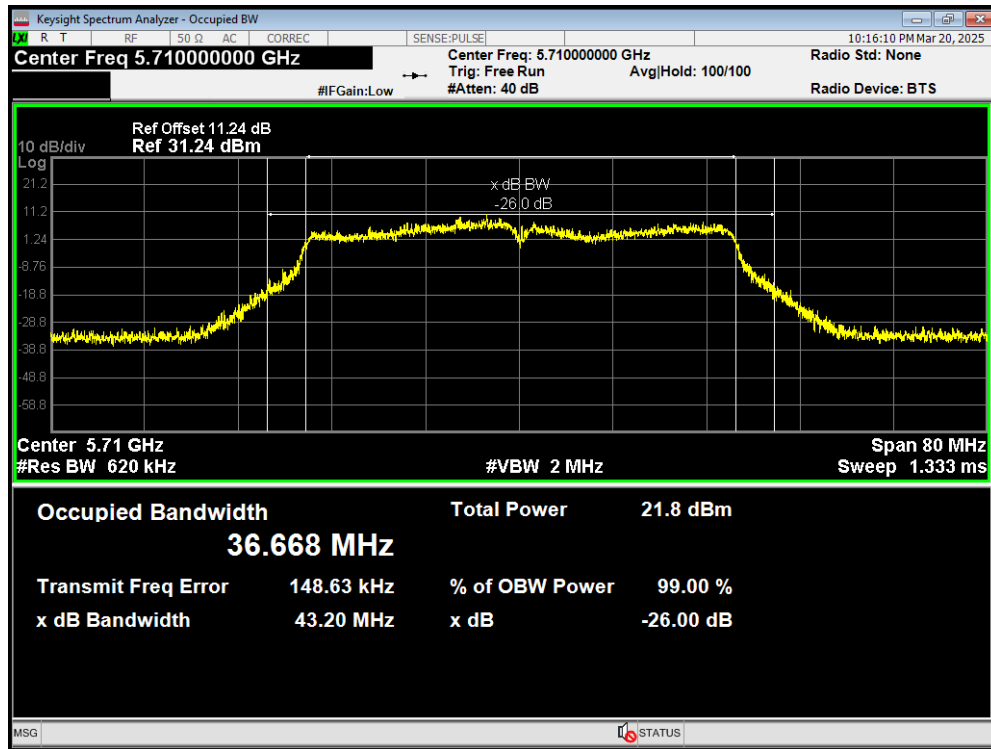


OBW 802.11ac(VHT80) 5530MHz

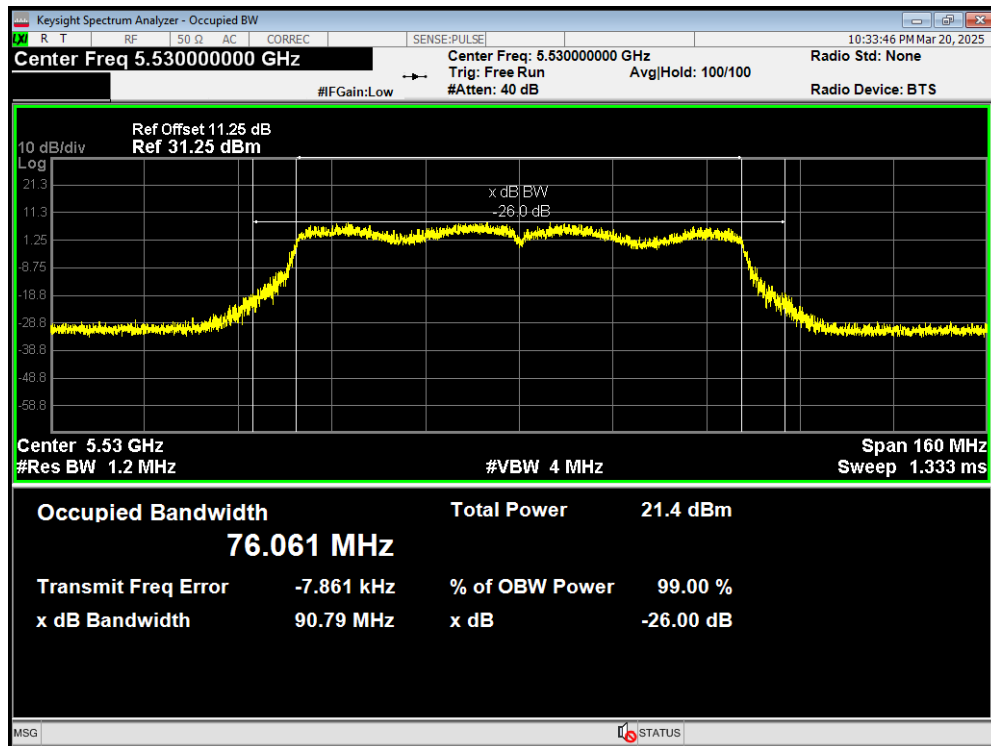


OBW 802.11ac(VHT80) 5610MHz

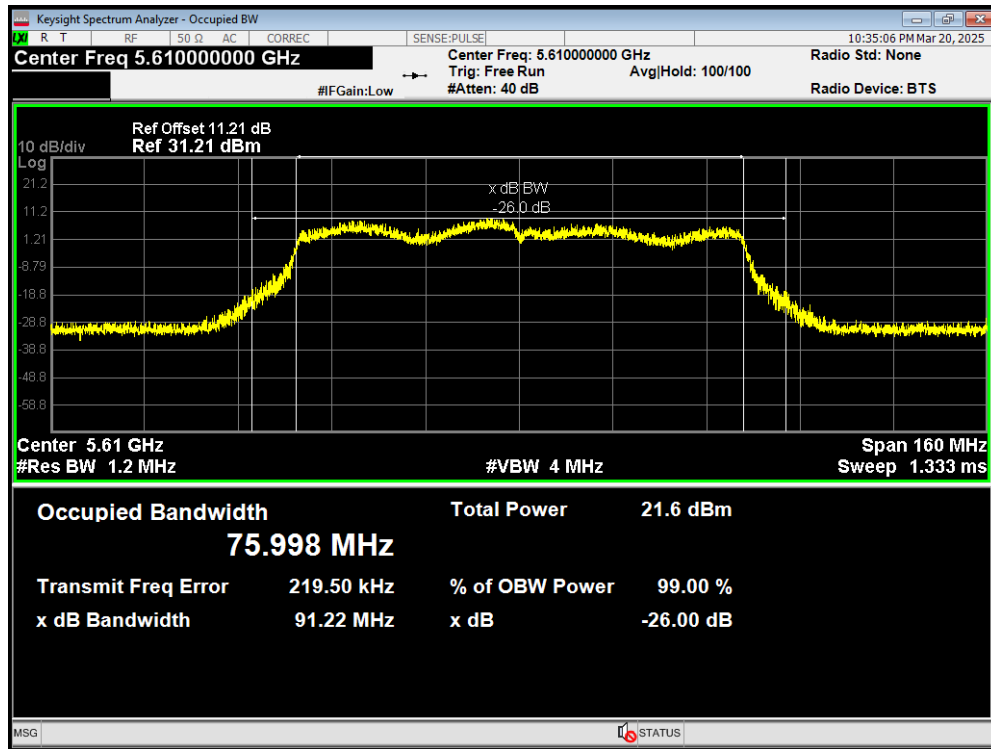


OBW 802.11ac(VHT80) 5690MHz

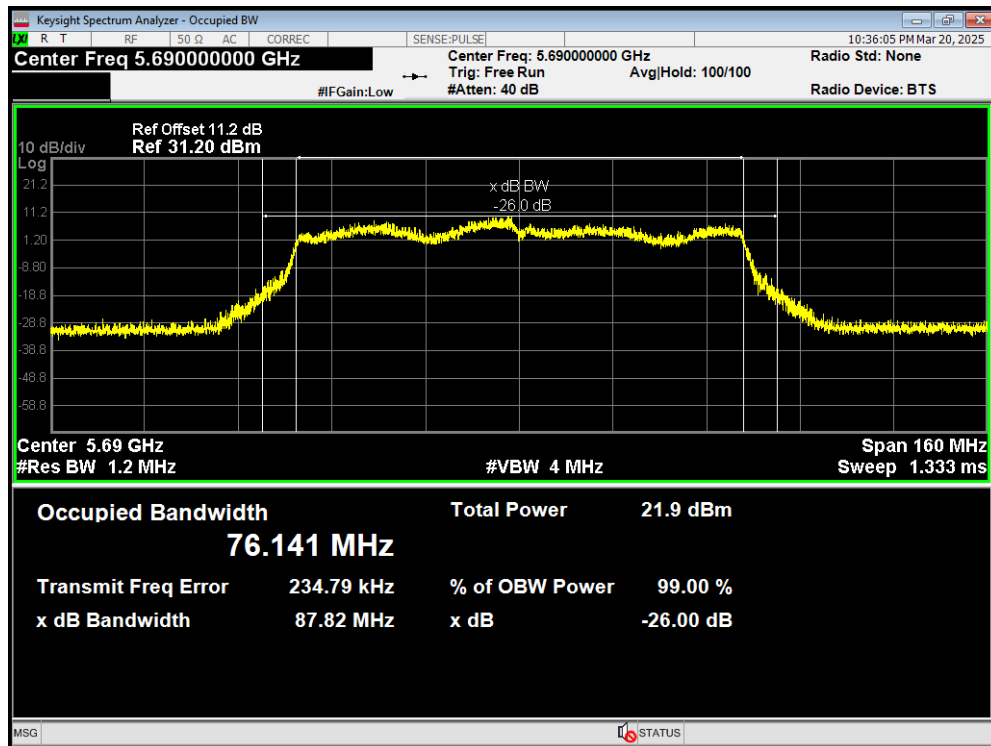


OBW 802.11ax(HE160) 5570MHz

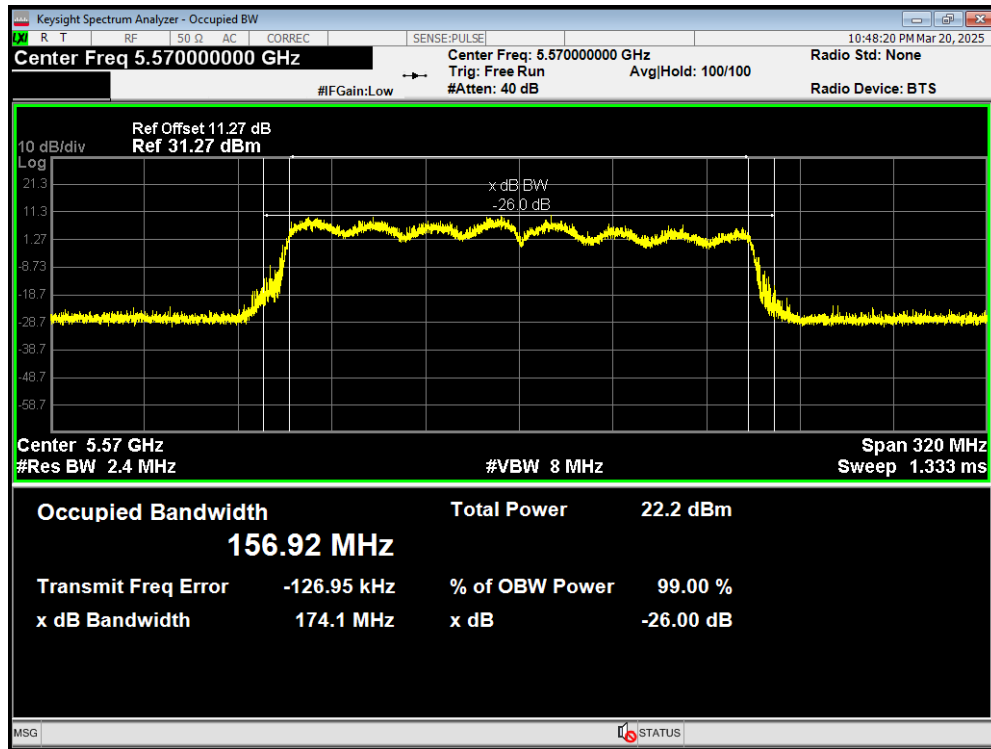


OBW 802.11ax(HE20) 5500MHz

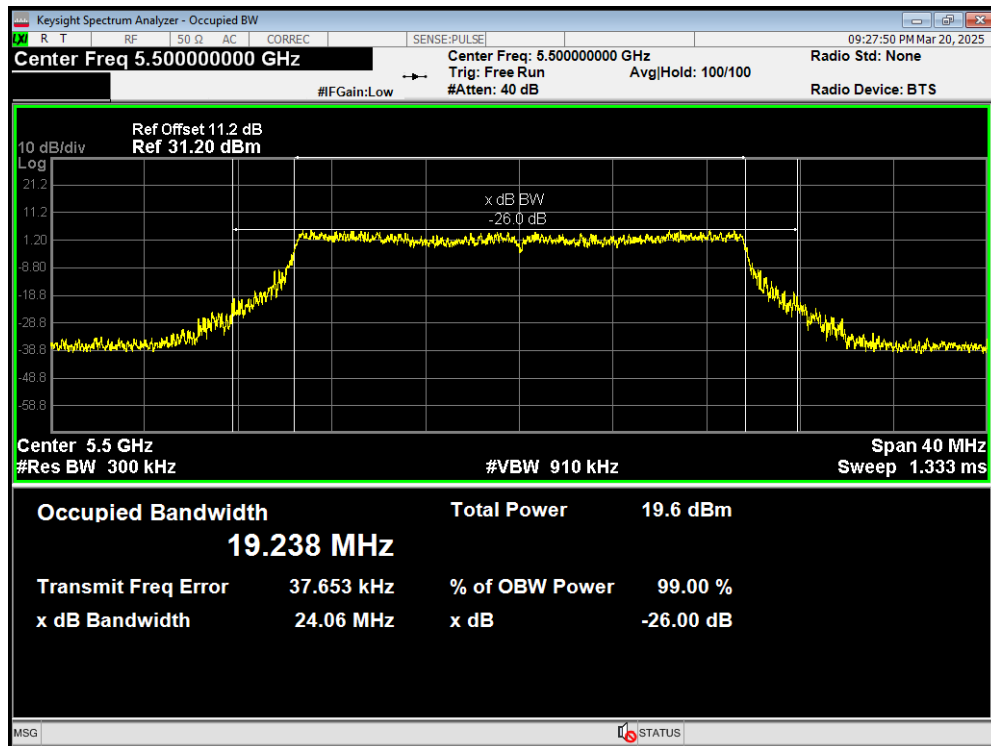


OBW 802.11ax(HE20) 5600MHz

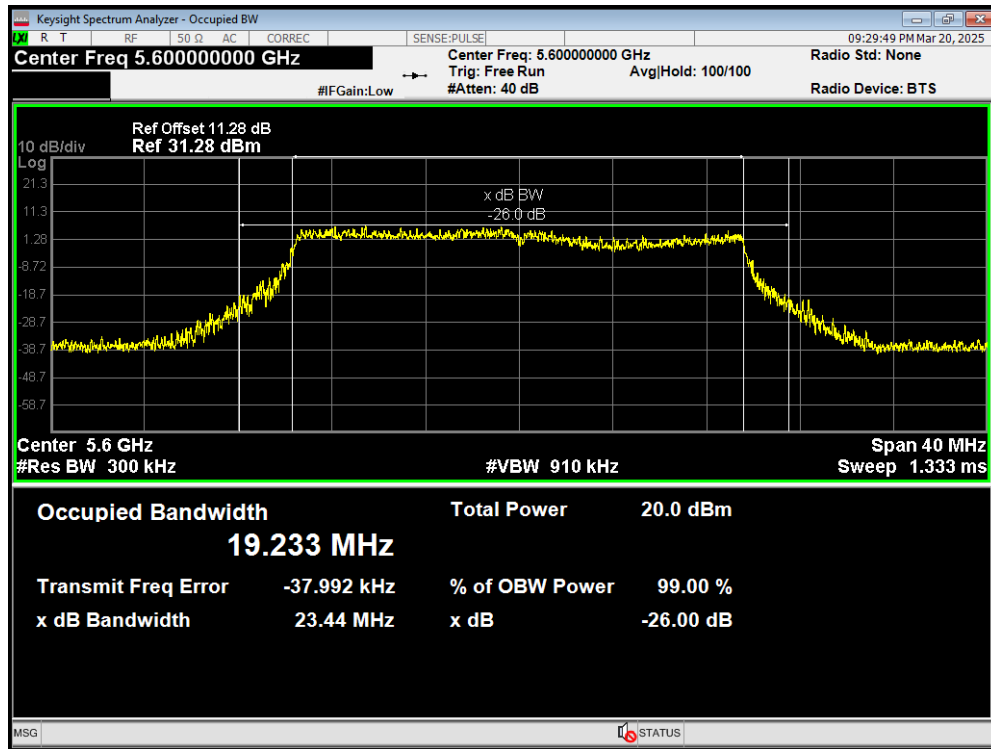


OBW 802.11ax(HE20) 5700MHz

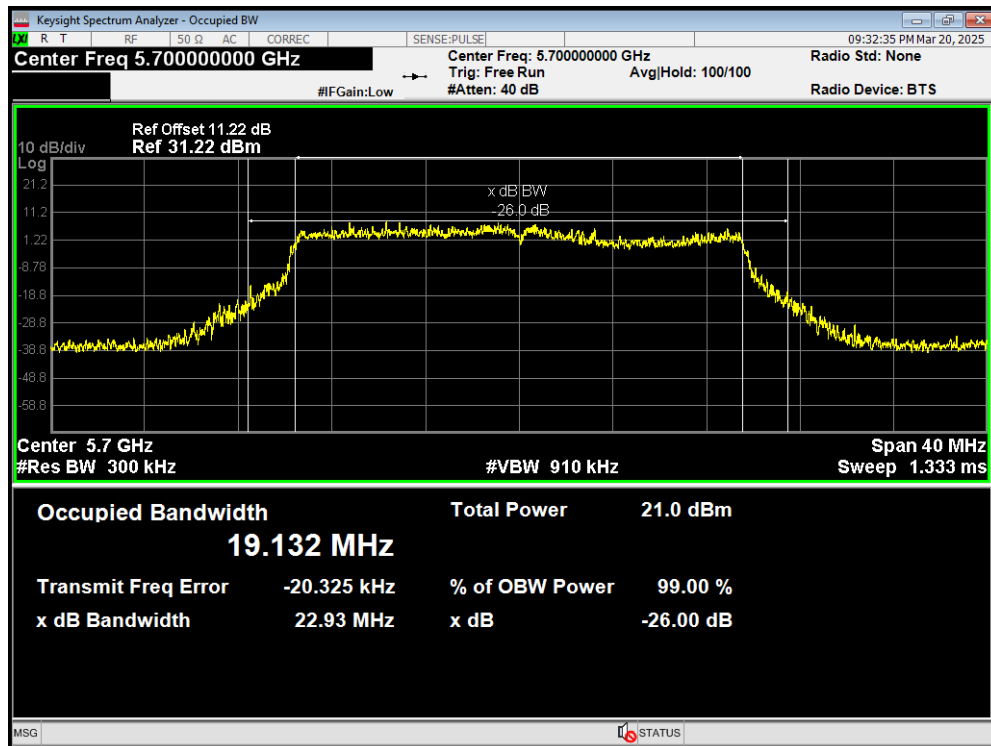


OBW 802.11ax(HE20) 5720MHz

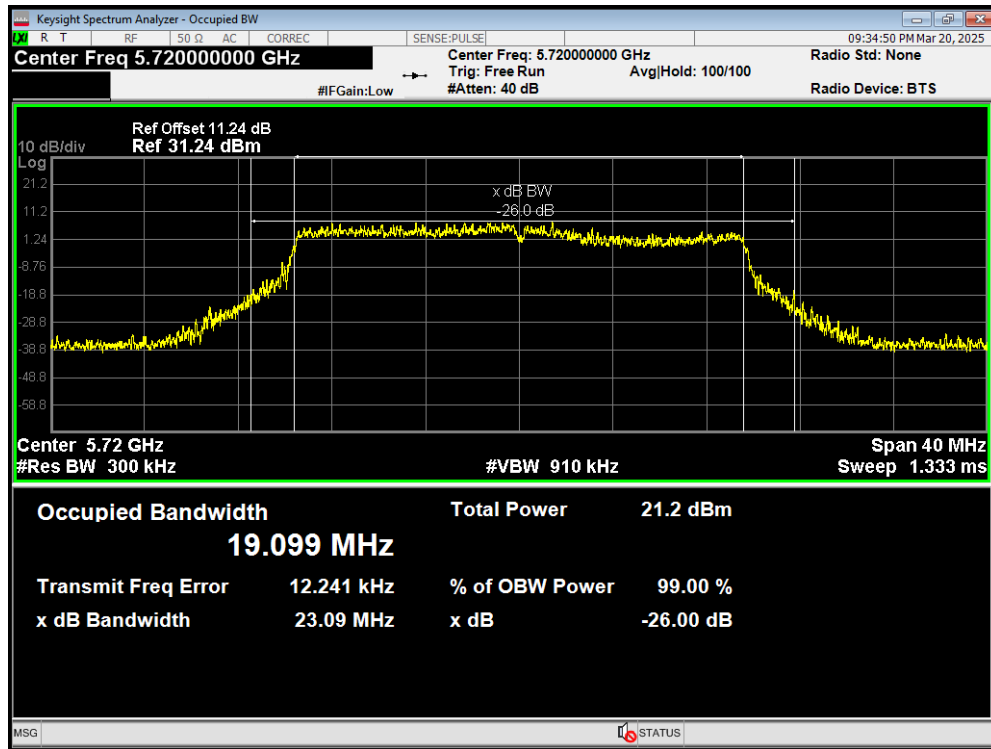


OBW 802.11ax(HE40) 5510MHz

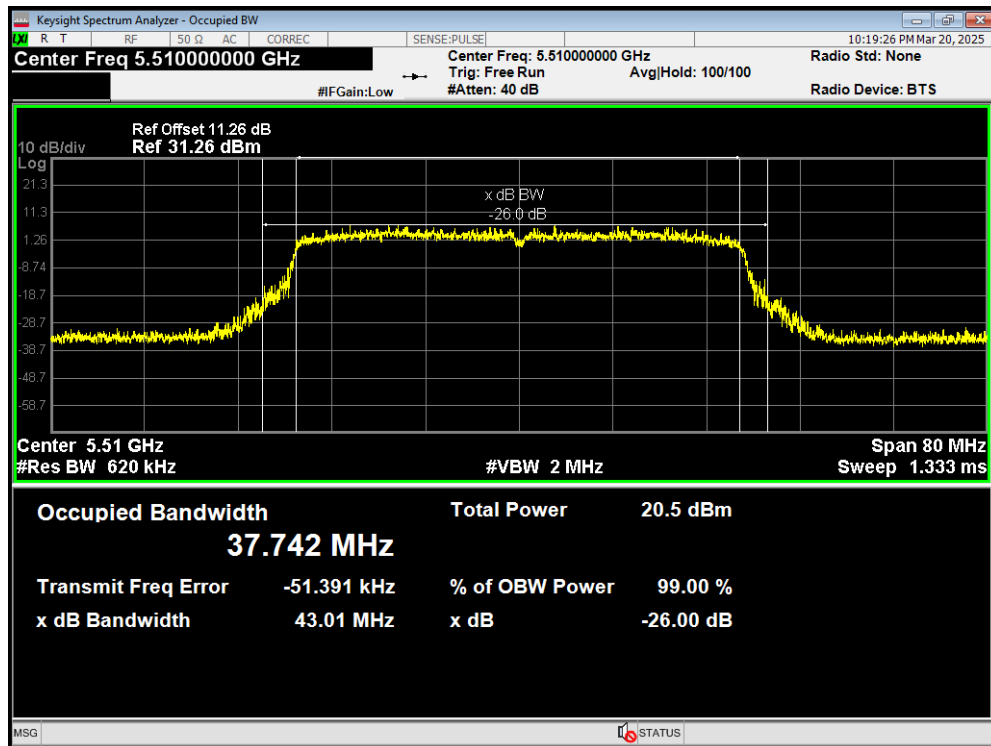


OBW 802.11ax(HE40) 5590MHz

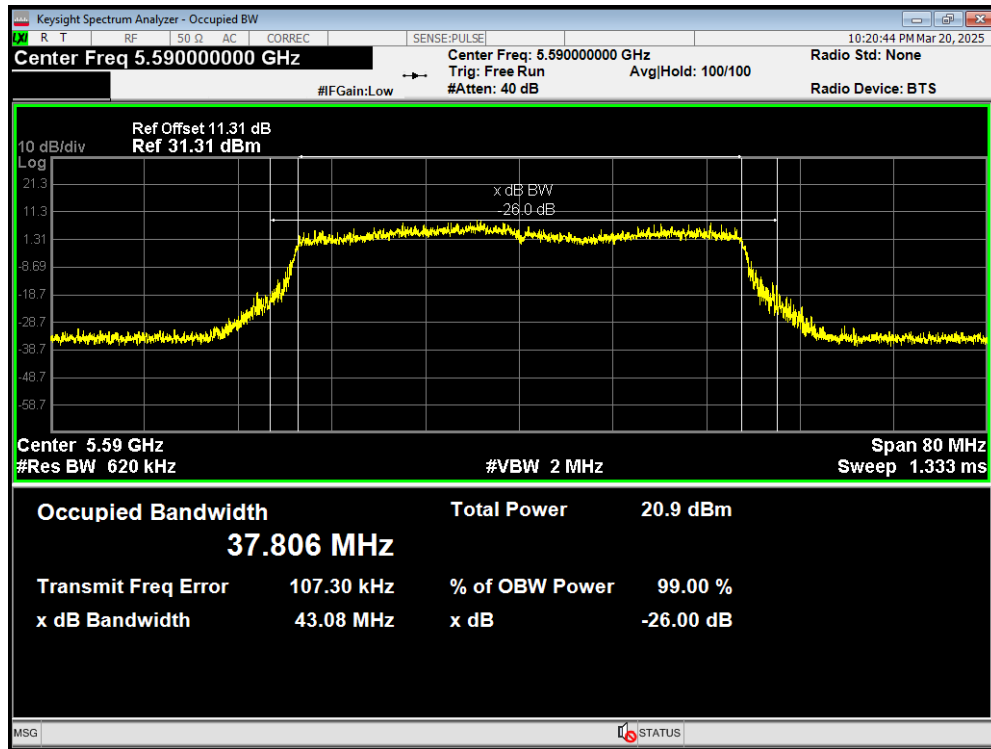


OBW 802.11ax(HE40) 5670MHz

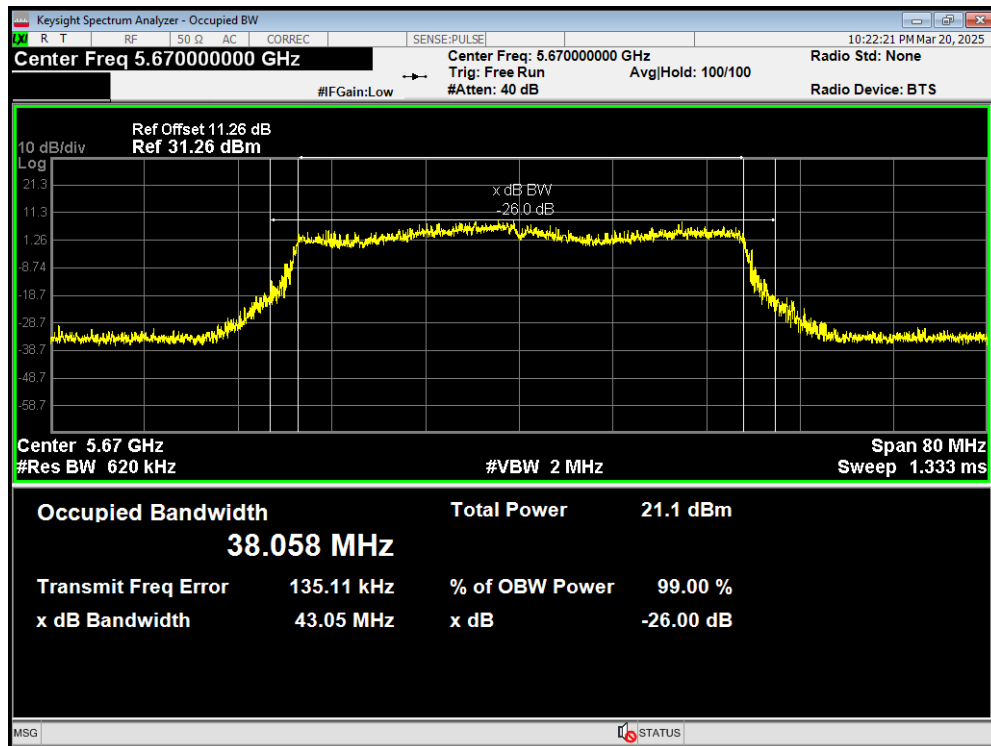


OBW 802.11ax(HE40) 5710MHz

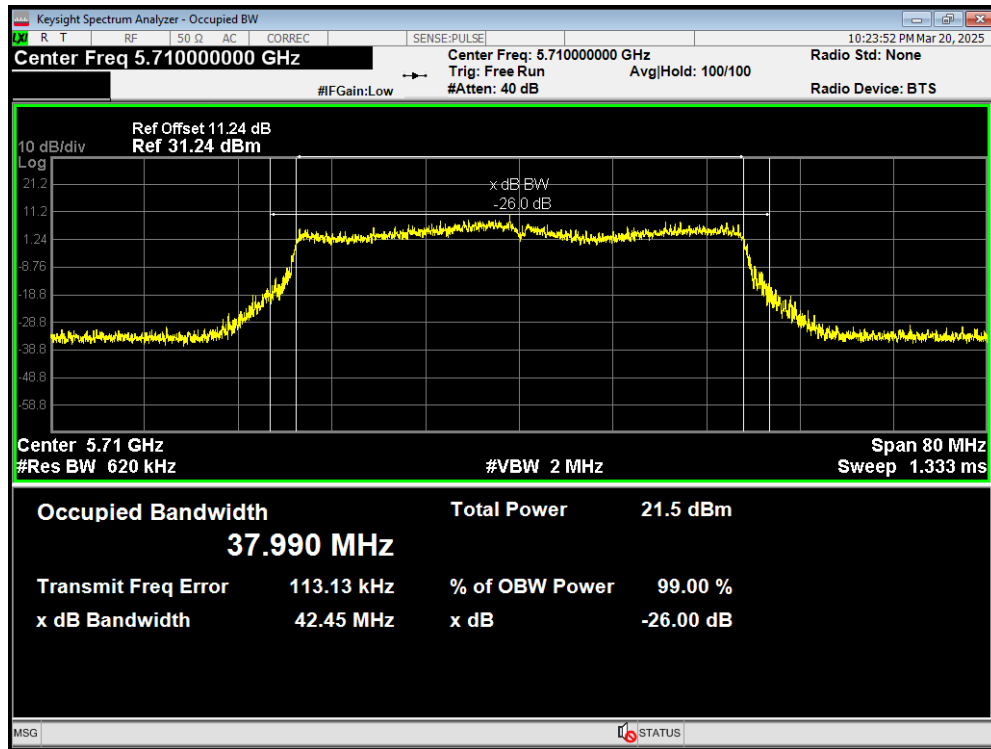


OBW 802.11ax(HE80) 5530MHz

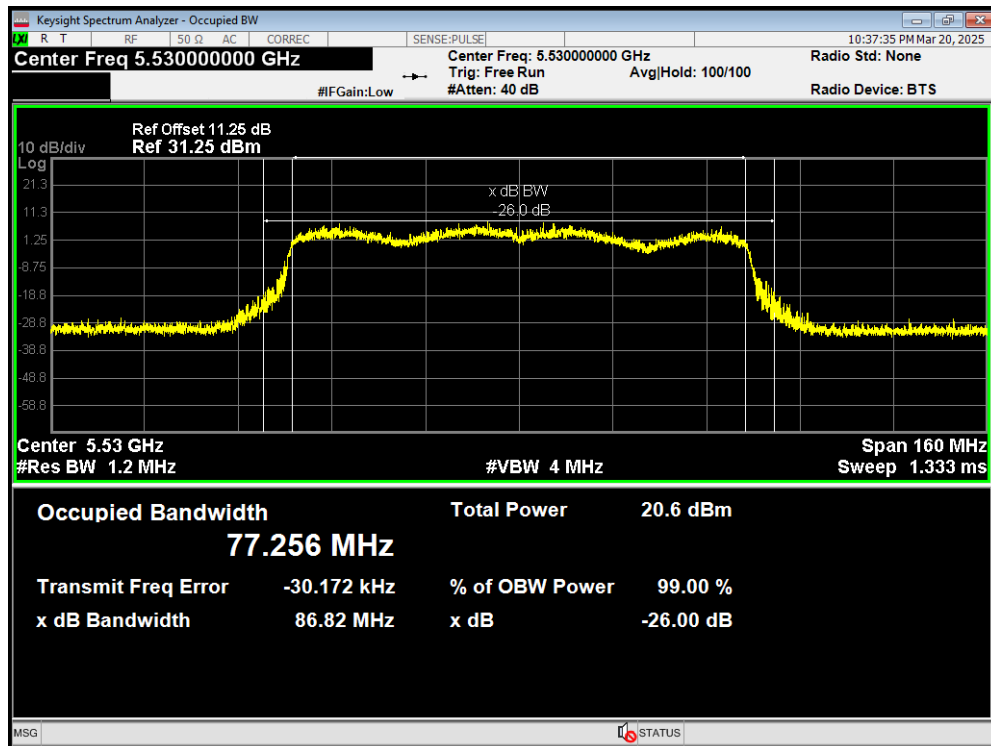


OBW 802.11ax(HE80) 5610MHz

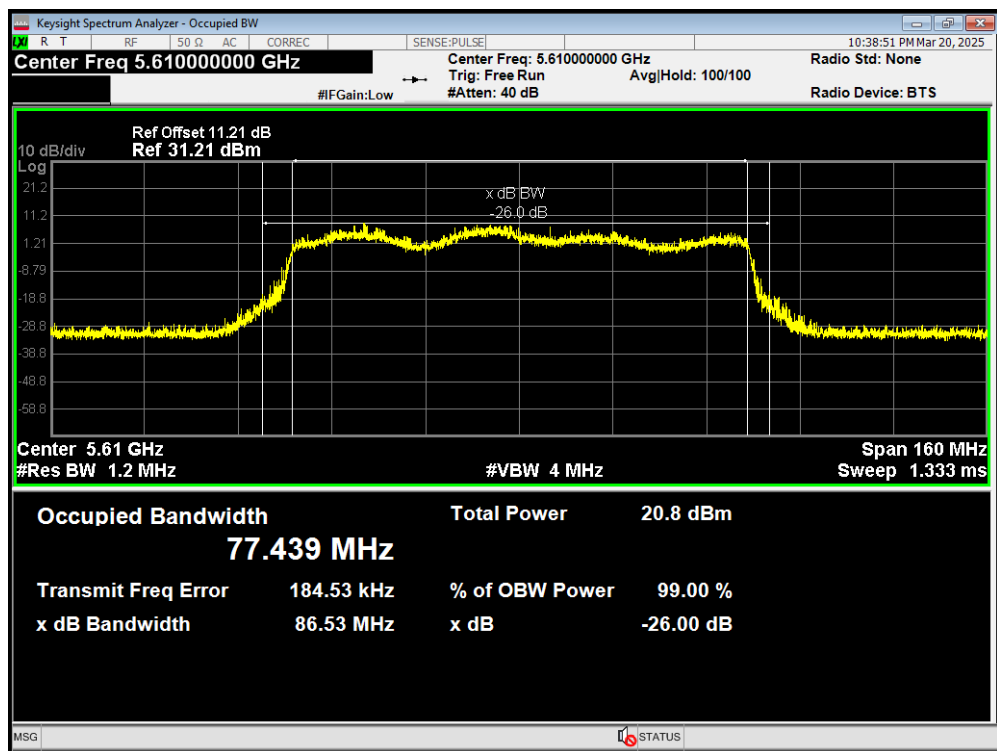


OBW 802.11ax(HE80) 5690MHz

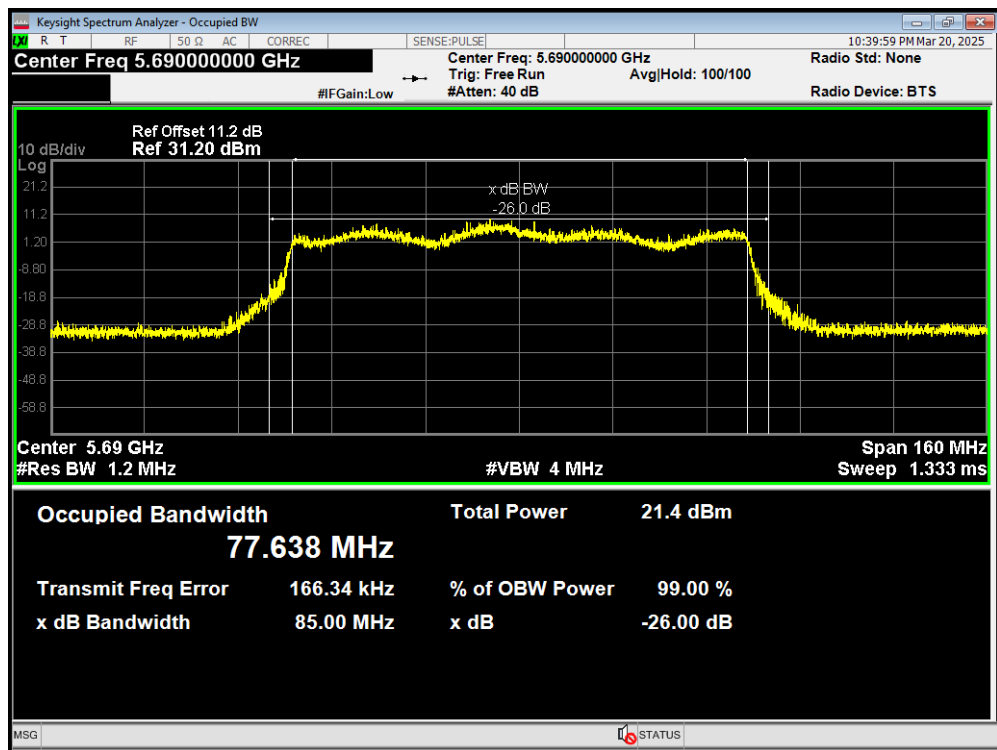


OBW 802.11be(160) 5570MHz

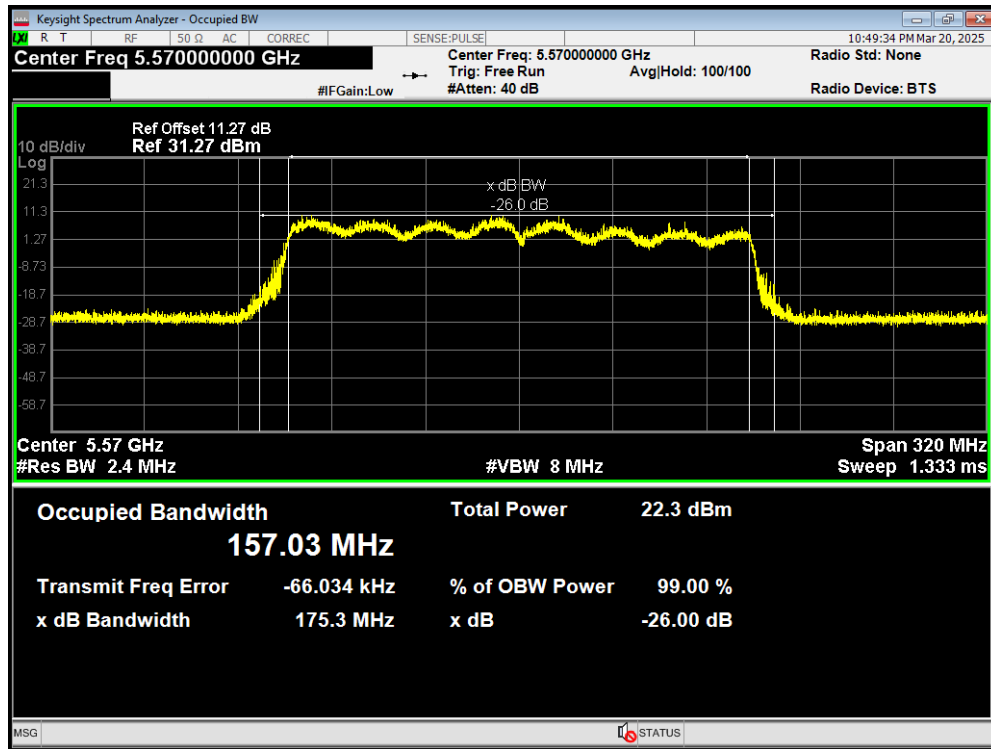


OBW 802.11be(20) 5500MHz

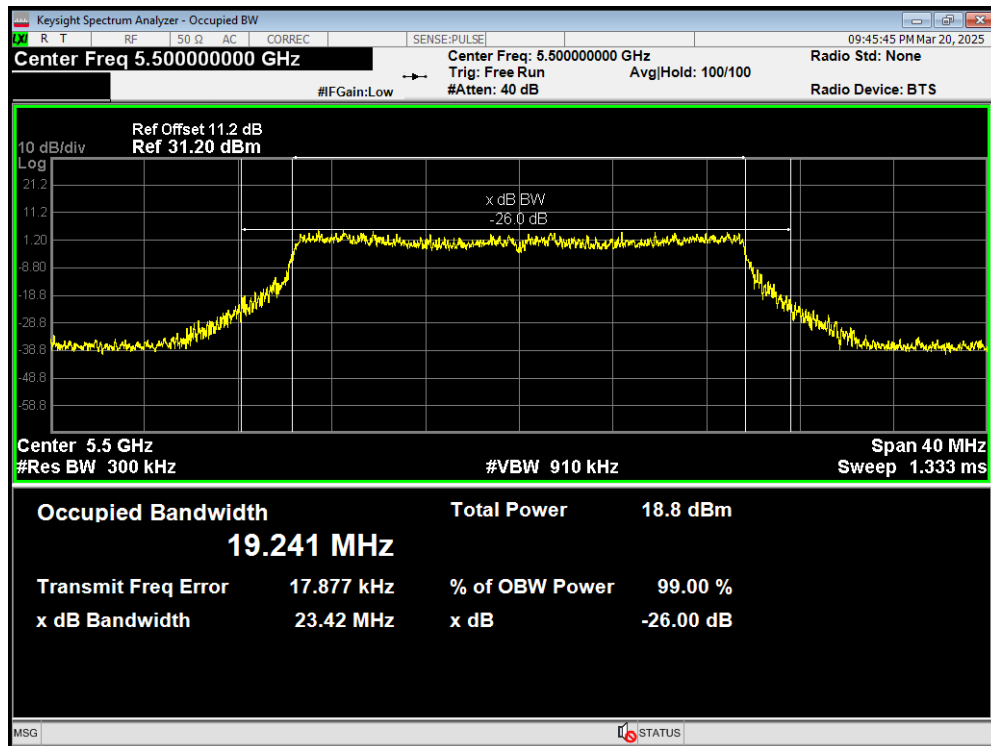


OBW 802.11be(20) 5600MHz

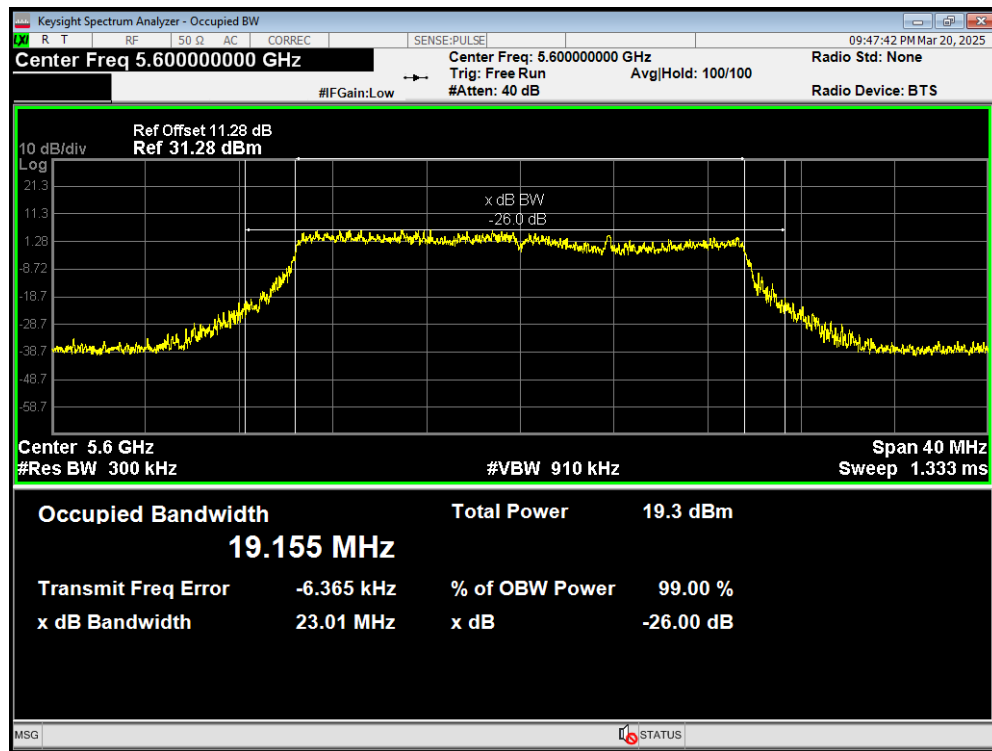


OBW 802.11be(20) 5700MHz

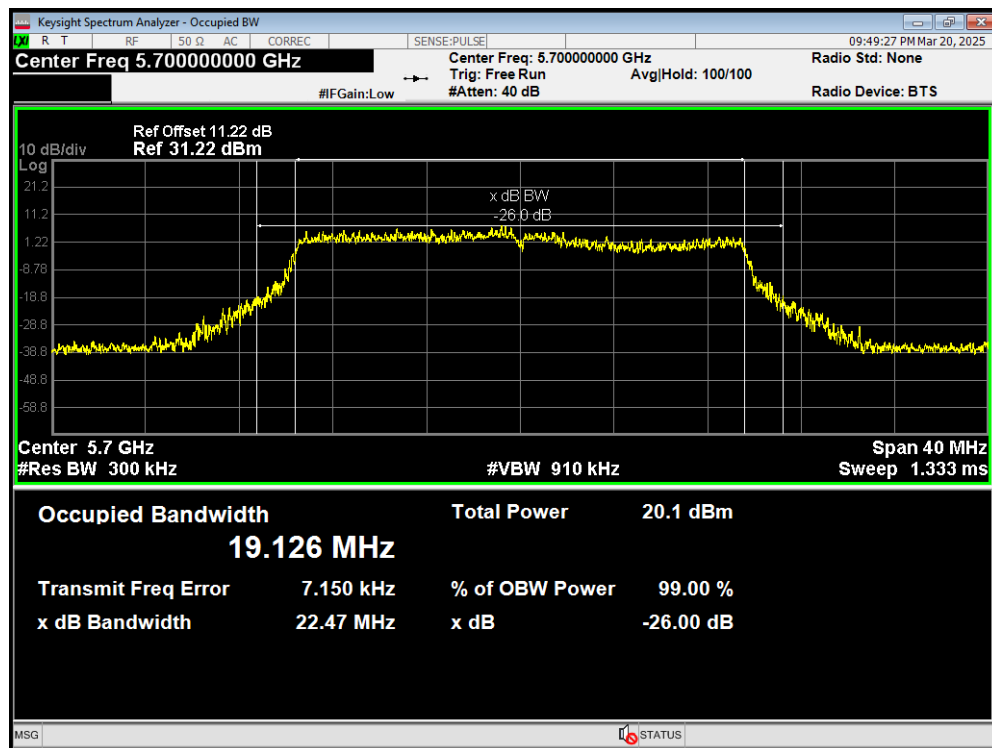


OBW 802.11be(20) 5720MHz

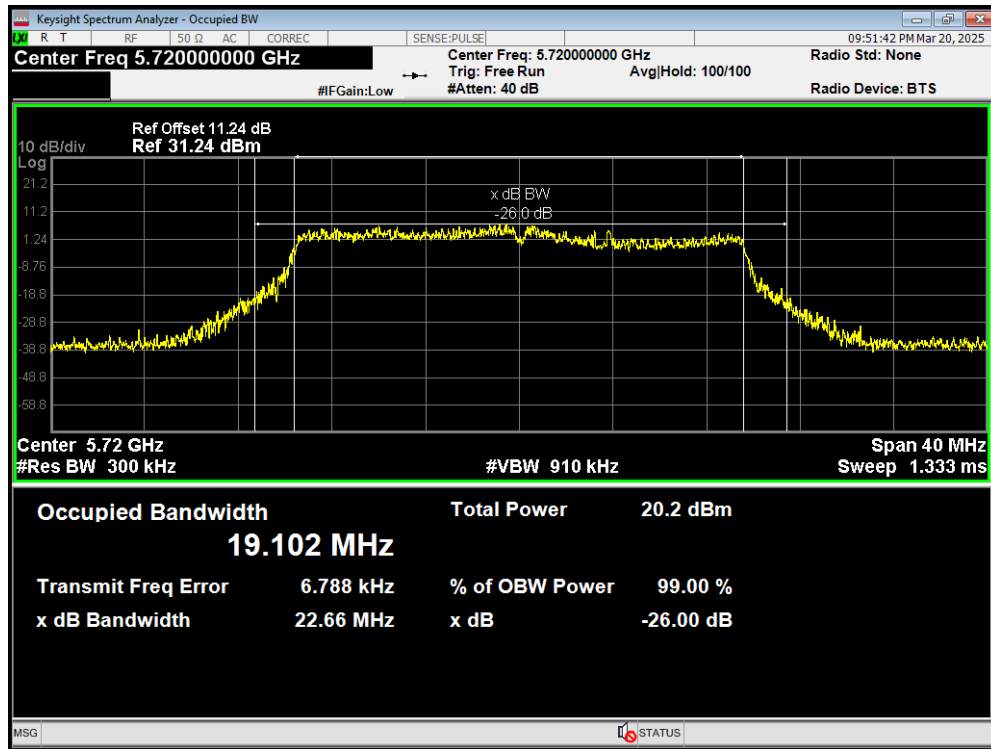


OBW 802.11be(40) 5510MHz

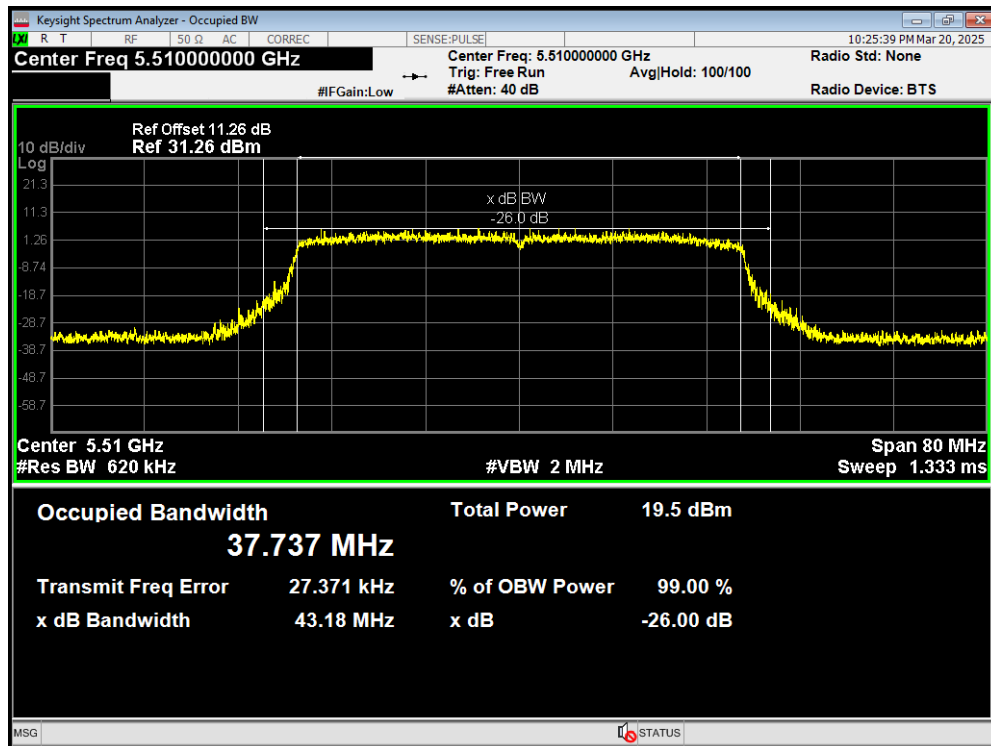


OBW 802.11be(40) 5590MHz

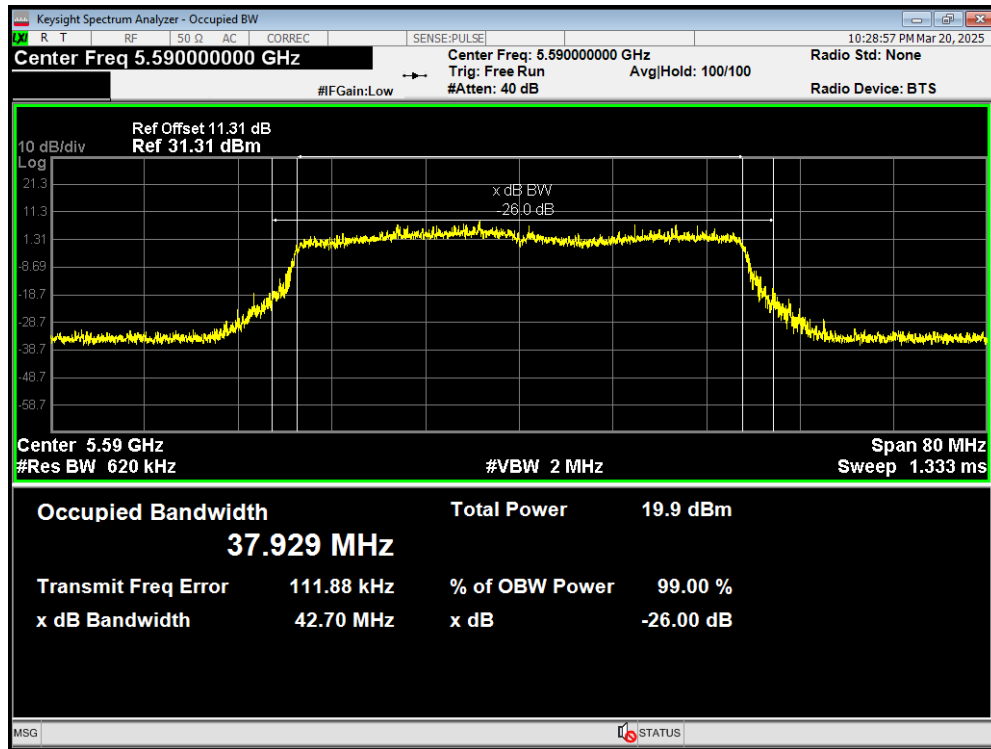

OBW 802.11be(40) 5670MHz

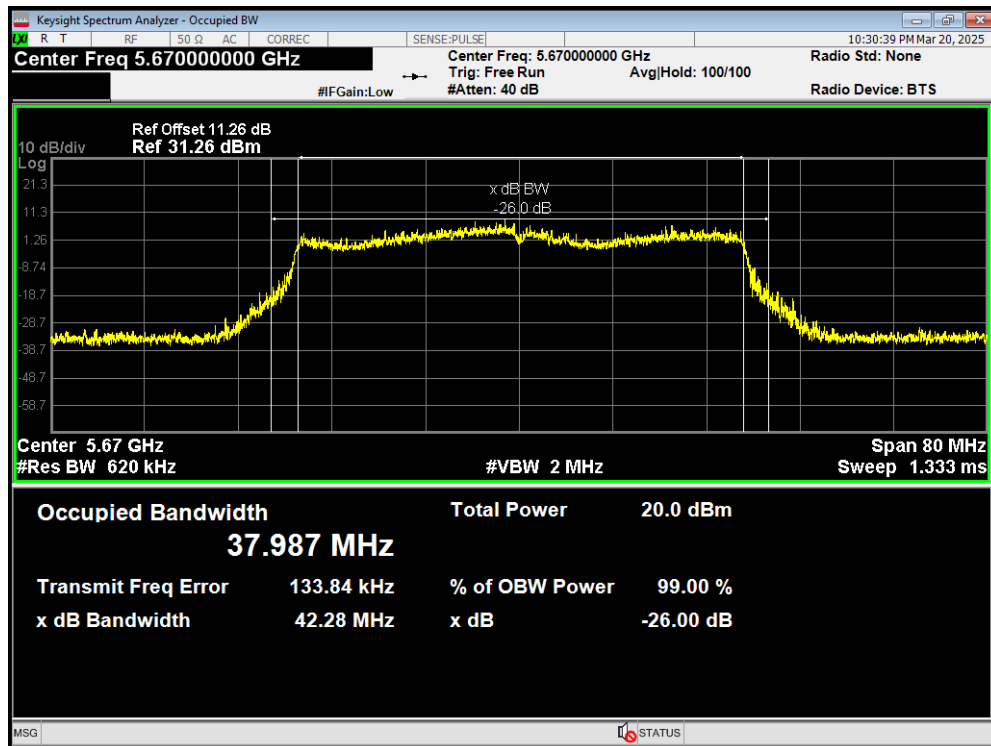

OBW 802.11be(40) 5710MHz

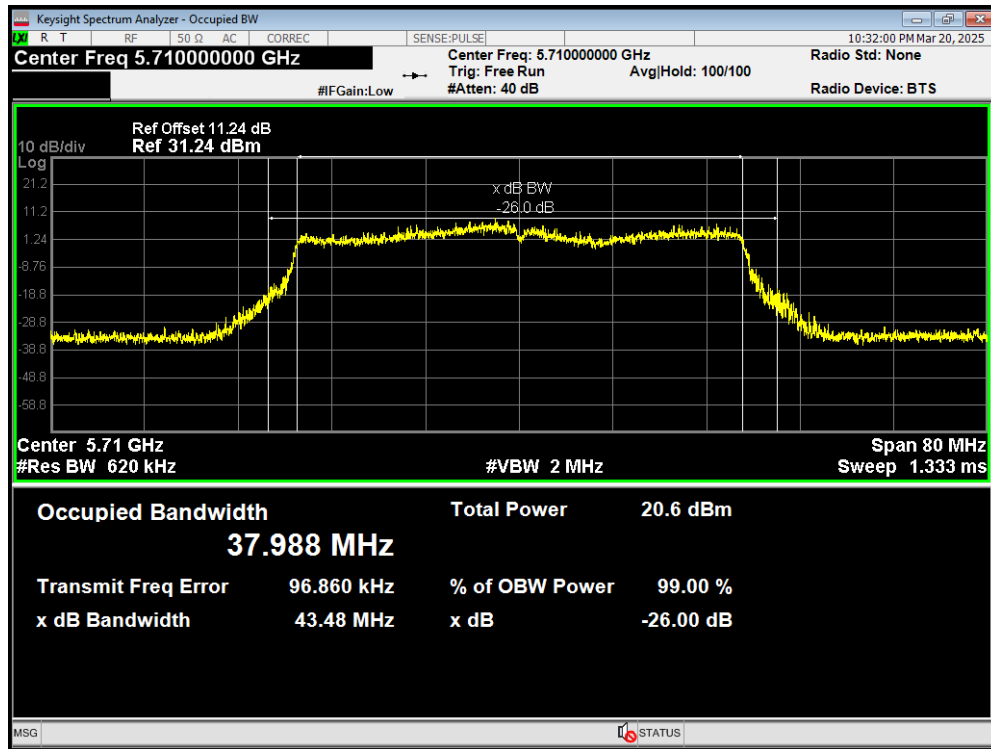

OBW 802.11be(80) 5530MHz

