


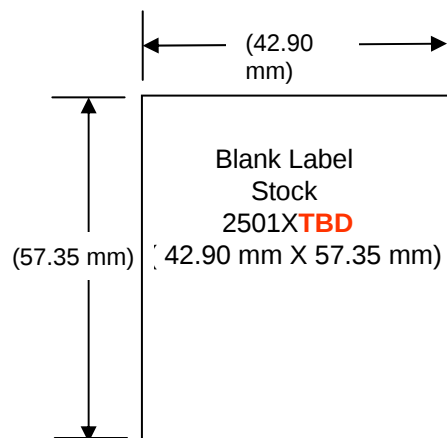


Barcode 128-B "YYYYYYYYYYYYYY"
Text: "MEID-HEX: YYYYYYYYYYYYYY"
YYYYYYYYYYYYYY is modem's 14 digit MEID-HEX
Calibri – 6pt bold

Barcode 128-B "XXXXXXXXXXXXX"
Text: "WIMAX MAC: XX:XX:XX:XX:XX:XX"
XXXXXXXXXXXXX is modem's WIMAX MAC ID
Calibri – 6pt bold

Text:
MODEL: MIFI4082
FCC ID: PKRNVWMIFI4082
IC: 3229B-MIFI4082
Arial Black - 4pt

"Novatel Wireless" logo

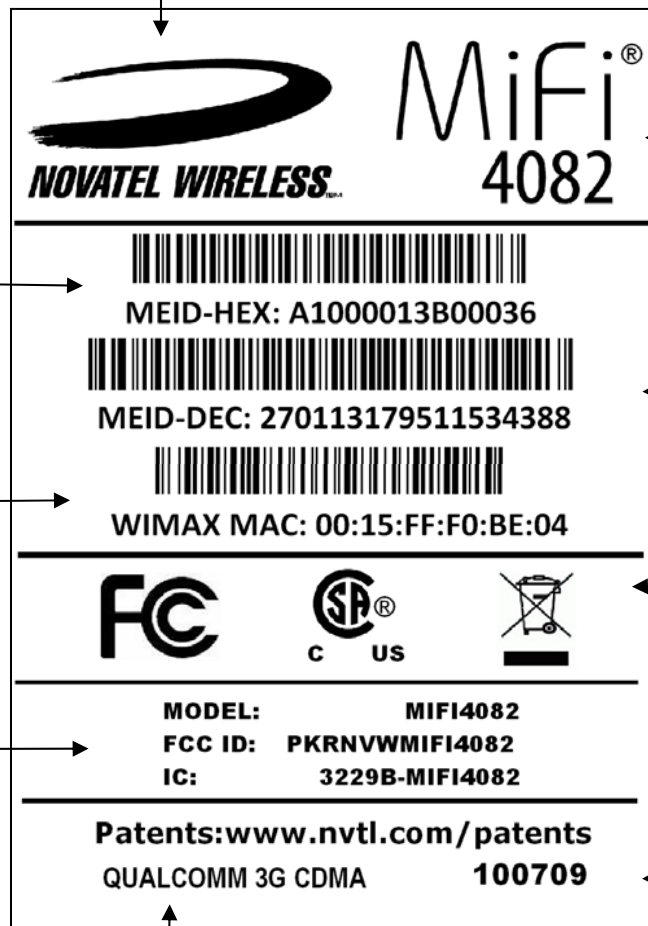

"MiFi 4082" Logo

Barcode 128-B
"XXXXXXXXXXXXXXXXXXXXX"
Text:
"MEID-DEC: XXXXXXXXXXXXXXXXXXXX"
XXXXXXXXXXXXXXXXXXXXX is modem's 18 digit Decimal MEID
Calibri – 6pt bold

Symbols for "FCC", "CSA", and "Recycling" to be displayed here.

Text
*Patents:www.nvtl.com/patents"
Verdana – 5pt Bold

Text *YYMMDD"
Date Code
"YY" – Last 2 digits of year
"MM" – Month
"DD" – Day
Arial Black – 5pt **BOLD**

Text *QUALCOMM 3G CDMA"
Arial Narrow – 5pt



PKRNVWMIFI4081 - Label Location

The label will be located inside the battery well. When the device is packaged the battery will be located outside of the device.

