



America

Choose certainty.
Add value.

Report On

Application for Grant of Equipment Authorization of the
Novatel Wireless Inc.
MIFI8800L Wireless Hotspot Modem

FCC CFR 47 Part 2 and 90
RSS-140 Issue 1 April 2018

Report No. 72139211C


August 2018

REPORT ON Radio Testing of the
Novatel Wireless Inc.
MIFI8800L Wireless Hotspot Modem

TEST REPORT NUMBER 72139211C

PREPARED FOR Novatel Wireless Inc.
9605 Scranton Road, Suite 300
San Diego, CA 92121
USA

CONTACT PERSON Roman Olmos
Senior Regulatory Engineer
(858) 812-3400
rolmos@nvtl.com



Xiaoying Zhang

Name
Authorized Signatory
Title: EMC/Wireless Test Engineer



Ferdinand S. Custodio

Name
Authorized Signatory
Title: Senior EMC Test Engineer/Wireless Team Lead

APPROVED BY

DATED August 27, 2018

FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C



Revision History

72139211C Novatel Wireless Inc. MIFI8800L Wireless Hotspot Modem					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
08/27/2018	Initial Release				Ferdinand Custodio

CONTENTS

Section	Page No
1 REPORT SUMMARY.....	5
1.1 Introduction	6
1.2 Brief Summary of Results.....	7
1.3 Product Information	8
1.4 EUT Test Configuration	10
1.5 Deviations from the Standard.....	12
1.6 Modification Record	12
1.7 Test Methodology.....	12
1.8 Test Facility Location.....	12
1.9 Test Facility Registration.....	12
1.10 Sample Calculations.....	14
2 TEST DETAILS	15
2.1 Transmitter Conducted Power Measurements	16
2.2 Effective Radiated Power.....	19
2.3 Occupied Bandwidth.....	21
2.4 Peak-Average Power Ratio.....	25
2.5 Band Edge	28
2.6 Conducted Spurious Emissions	34
2.7 Field Strength of Spurious Radiation	44
2.8 Frequency Stability	50
2.9 Conducted Emissions	53
3 TEST EQUIPMENT USED	57
3.1 Test Equipment Used.....	58
3.2 Measurement Uncertainty	60
4 DIAGRAM OF TEST SETUP	61
4.1 Test Setup Diagram.....	62
5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT	66
5.1 Accreditation, Disclaimers and Copyright.....	67

FCC ID PKRNVWMIFI8800
IC: 3229A-MIFI8800
Report No. 72139211C



SECTION 1

REPORT SUMMARY

Radio Testing of the
Novatel Wireless Inc.
MIFI8800L Wireless Hotspot Modem

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Novatel Wireless Inc. MIFI8800L Wireless Hotspot Modem to the requirements of the following:

- FCC CFR 47 Part 2 and 90
- RSS-Gen Issue 5 April 2018
- RSS-140 Issue 1 April 2018

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Novatel Wireless Inc.
Product Trademark/Brand	Inseego
Product Marketing Name	MiFi 8800L
Model Number(s)	MIFI8800L
FCC ID Number	PKRNVWMIFI8800
IC Number	3229A-MIFI8800
Serial Number(s)	AZ280418A00044
Number of Samples Tested	1
Test Specification/Issue/Date	<ul style="list-style-type: none">• FCC CFR 47 Part 2 and 90 (October 1, 2017)• KDB412172 D01 Determining ERP and EIRP v01r01 August 07, 2015: Guidelines for determining the Effective Radiated Power (ERP) and Equivalent Isotropically Radiated Power (EIRP) of an RF transmitting system• KDB971168 D01 Power Meas License Digital Systems v03r01: April 9 2018: Measurement guidance for certification of licensed digital transmitters• RSS-140 Issue 1: April 2018 – Equipment Operating in the Public Safety Broadband Frequency Bands 758-768 MHz and 788-798 MHz• RSS-Gen Issue 5: April 2018 - General Requirements for Compliance of Radio Apparatus• ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
Start of Test	June 11, 2018
Finish of Test	July 18, 2018
Name of Engineer(s)	Xiaoying Zhang
Related Document(s)	Supporting documents for EUT certification are separate exhibits.



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and 90 with cross-reference to the corresponding ISED RSS standard is shown below.

Section	FCC Part Sections(s)	RSS Section(s)	Test Description	Result
2.1	2.1046	RSS-140 (4.3)	Transmitter Conducted Output Power	Compliant
2.2	2.1046 90.542(a)(7)	RSS-140 (6.5)	Effective Radiated Power	Compliant
2.3	2.1049	RSS-Gen (6.7)	Occupied Bandwidth	Compliant
2.4	-	RSS-140 (4.3)	Peak-Average Ratio	Compliant
2.5	2.1051 90.543(e)(3)(5)	RSS-140 (4.4)	Band Edge	Compliant
2.6	2.1051 90.543(e)(2)(3)(4)(5)(f)	RSS-140 (4.4)	Conducted Spurious Emissions	Compliant
2.7	2.1053 90.543(e)	RSS-140 (4.4)	Field Strength of Spurious Radiation	Compliant
2.8	2.1055 90.539	RSS-140 (4.2)	Frequency Stability	Compliant
-	-	RSS-Gen 7.4	Receiver Spurious Emissions	N/A*
2.9	-	RSS-GEN 8.8	Power Line Conducted Emissions	Compliant

N/A* Not Applicable. No stand-alone receiver.

1.3 PRODUCT INFORMATION

1.3.1 EUT General Description

The Equipment Under Test (EUT) was a Novatel Wireless Inc. MIFI8800L Wireless Hotspot Modem. The EUT is a Wireless Hotspot Modem supporting 2G/3G/4G Technologies. The EUT comes with a USB Port.

1.3.2 Technical Description

EUT Description	Wireless Hotspot Modem
Product Marketing Name	MiFi 8800L
Model Number(s)	MIFI8800L
Rated Voltage	3.8V, 4500mAh (Rechargeable Li-Ion battery pack) Input 100-240VAC, Output 5V (External AC-DC Power Adapter)
Mode Verified	LTE Band 14: 788-798 MHz
Capability	WCDMA Band 2, 5, LTE Band 2, 4, 5, 7, 13, 14, 46, 48, 66 and 802.11 a/b/g/n/ac
Primary Unit (EUT)	<input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

(Client declaration, max. antenna gain covered under this test report)

LTE Bands	Frequency(ies)	Antenna Gains
Band 14	788-798 MHz	-0.6 dBi

FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C



1.3.3 Transmit Frequency Table

LTE Band 14					
Modulation	Bandwidth (MHz)	Tx Frequency (MHz)	Emission Designator	ERP	
				Max Power (dBm)	Max Power (Watts)
QPSK	5	788 – 798	4M49G7D	21.13	0.13
	10		8M95G7D	21.1	0.13
16QAM	5	788 – 798	4M48W7D	20.23	0.11
	10		8M95W7D	20.22	0.11

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
A	Conducted antenna port measurement. EUT Tx at a max power and powered by the internal battery and/or USB via AC Adapter.
B	Radiated test setup/case spurious emissions. Antenna port terminated by the call box.

1.4.2 EUT Exercise Software

EUT is controlled by a CMW 500 Wideband Radio Communication Tester. There are no other test software used during verification.

1.4.3 Support Equipment and I/O cables


Manufacturer	Equipment/Cable	Description
Novatel Wireless	USB Cable	Standard USB Type A to USB Type C
Novatel Wireless	External AC-DC Power Adapter	Model: SSW-2783, PN: 40123126.01 Input: 100-240VAC, 50/60Hz, 0.5A Output: 5VDC, max. 2A

1.4.4 Worst Case Configuration

Worst-case configuration used in this test report as per output power measurements:


Band	Channel BW	Modulation	RB Size/Offset
Band 14	5 MHz	QPSK	1/0

For radiated measurements X, Y, and Z orientations were verified. The verification was determined "Y" as worst case configuration.




1.4.5 Simplified Test Configuration Diagram

Radiated Test Configuration

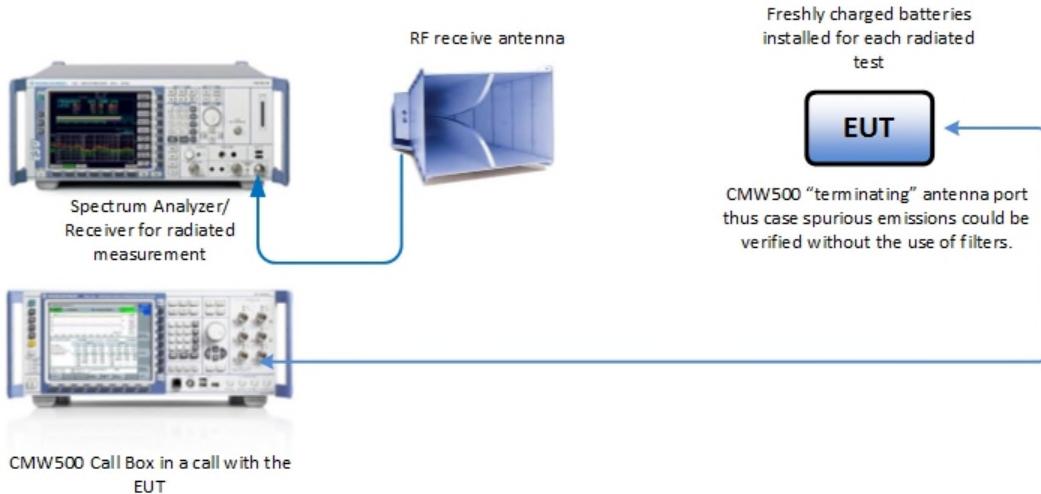

Conducted (Antenna Port) Test Configuration

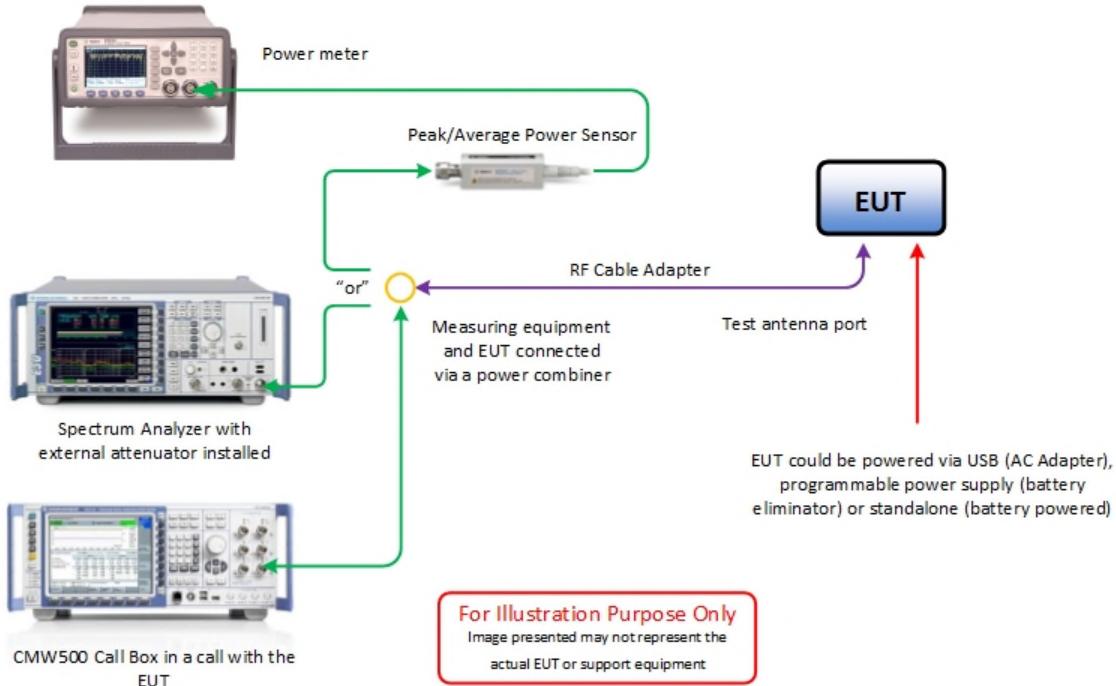

1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: AZ280418A00044		
None	—	—

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

For conducted and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 FAX: 858 546 0364

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

16936 Via Del Campo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: (858) 678-1400 Fax: (858) 546-0364.

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Designation No.: US1146

TÜV SÜD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Designation is US1146.

FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C



1.9.2 Innovation, Science and Economic Development Canada (IC) Registration No.: 3067A-1 & 22806-1

The 10m Semi-anechoic chamber of TUV SUD America Inc. (San Diego Rancho Bernardo) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A-1.

The 3m Semi-anechoic chamber of TUV SUD America Inc. (San Diego Mira Mesa) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 22806-1.

1.9.3 BSMI – Laboratory Code: SL2-IN-E-028R (US0102)

TUV Product Service Inc. (San Diego) is a recognized EMC testing laboratory by the BSMI under the MRA (Mutual Recognition Arrangement) with the United States. Accreditation includes CNS 13438 up to 6GHz.

1.9.4 NCC (National Communications Commission - US0102)

TUV SUD America Inc. (San Diego) is listed as a Foreign Recognized Telecommunication Equipment Testing Laboratory and is accredited to ISO/IEC 17025 (A2LA Certificate No.2955.13) which under APEC TEL MRA Phase 1 was designated as a Conformity Assessment Body competent to perform testing of equipment subject to the Technical Regulations covered under its scope of accreditation including RTTE01, PLMN01 and PLMN08 for TTE type of testing and LP002 for Low-Power RF Device type of testing.

1.9.5 VCCI – Registration No. A-0280 and A-0281

TUV SUD America Inc. (San Diego) is a VCCI registered measurement facility which includes radiated field strength measurement, radiated field strength measurement above 1GHz, mains port interference measurement and telecommunication port interference measurement.

1.9.6 RRA – Identification No. US0102

TUV SUD America Inc. (San Diego) is National Radio Research Agency (RRA) recognized laboratory under Phase I of the APEC Tel MRA.

1.9.7 OFCA – U.S. Identification No. US0102

TUV SUD America Inc. (San Diego) is recognized by Office of the Communications Authority (OFCA) under Appendix B, Phase I of the APEC Tel MRA.



1.10 SAMPLE CALCULATIONS

1.10.1 LTE Emission Designator (QPSK)

Emission Designator = 4M51G7D

G = Phase Modulation

7= Quantized/Digital Info

D = Data Transmission, telemetry, telecommand

1.10.2 LTE Emission Designator (16QAM)

Emission Designator = 4M50W7D

W = Frequency Modulation

7= Quantized/Digital Info

D = Data Transmission, telemetry, telecommand

1.10.3 Spurious Radiated Emission (below 1GHz)

Measuring equipment raw measurement (db μ V) @ 30 MHz			24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3	-12.6
	Asset# 1172 (cable)	0.3	
	Asset# 1016 (preamplifier)	-30.7	
	Asset# 1175(cable)	0.3	
	Asset# 1002 (antenna)	17.2	
Reported QuasiPeak Final Measurement (db μ V/m) @ 30MHz			11.8

1.10.4 Spurious Radiated Emission – Substitution Method

Example = 84dB μ V/m @ 1413 MHz (numerical sample only)

The field strength reading of 84dB μ V/m @ 1413 MHz (2nd Harmonic of 706.5 MHz) is the maximized measurement when the EUT is on the turntable measured at 3 meters. The gain of the substituted antenna is 7.8dBi while the transmit cable loss is 1.0 dB (cable between signal generator and the substituted antenna). The signal generator level is adjusted until the 84dB μ V/m level at the receiving end is replicated (identical test setup, i.e. same antenna, cable/s and preamp). If the adjusted signal generator level is -18dBm, then we have the following for both EIRP and ERP as required:

$$P_{EIRP} = -18 \text{ dBm} + 7.8 \text{ dBi} - 1 \text{ dB}$$

$$= 11.2 \text{ dBm}$$

$$P_{ERP} = P_{EIRP} - 2.15 \text{ dB}$$

$$= 11.2 \text{ dBm} - 2.15 \text{ dB}$$

$$= 9.05 \text{ dBm}$$

FCC ID PKRNVWMIFI8800
IC: 3229A-MIFI8800
Report No. 72139211C



SECTION 2

TEST DETAILS

Radio Testing of the
Novatel Wireless Inc.
MIFI8800L Wireless Hotspot Modem

2.1 TRANSMITTER CONDUCTED POWER MEASUREMENTS

2.1.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1046
RSS-140, Clause 4.3

2.1.2 Standard Applicable

The conducted power measurements were made in accordance to FCC Part 2 Clause 2.1046 and RSS-140 Clause 4.3.

2.1.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration A

2.1.4 Date of Test/Initial of test personnel who performed the test

June 20, 2018 / XYZ

2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.0 °C
Relative Humidity	44.0 %
ATM Pressure	99. 1kPa

2.1.7 Additional Observations

- This is a conducted test using Power Meter.
- The path loss were measured and entered as a level offset.
- Low, Middle and High channels for all bandwidths with different RB size and RB offset and modulations were verified and reported.




2.1.8 Test Results

LTE Band 14							
Bandwidth (MHz)	Channel	Frequency (MHz)	Modulation	No. RB	RB Start	Average Power (dBm)	Peak Power (dBm)
5	23305	790.5	QPSK	1	0	23.88	27.25
				1	13	23.82	26.87
				1	24	23.68	27.02
				25	0	22.98	26.22
			16QAM	1	0	22.98	27.85
				1	13	22.81	26.48
				1	24	22.77	27.76
				25	0	21.97	26.19
	23330	793	QPSK	1	0	23.81	26.9
				1	13	23.61	26.77
				1	24	23.36	26.59
				25	0	23.01	26.93
			16QAM	1	0	22.98	27.27
				1	13	22.97	27.63
				1	24	22.81	27.43
				25	0	21.94	26.99
	23355	795.5	QPSK	1	0	23.73	26.97
				1	13	23.68	26.67
				1	24	23.58	26.81
				25	0	23.0	27.78
			16QAM	1	0	22.85	27.62
				1	13	22.82	27.36
				1	24	22.73	27.43
				25	0	22.06	27.92

LTE Band 14							
Bandwidth (MHz)	Channel	Frequency (MHz)	Modulation	No. RB	RB Start	Average Power (dBm)	Peak Power (dBm)
10	23330	793	QPSK	1	0	23.85	27.18
				1	25	23.52	26.68
				1	49	23.56	26.75
				50	0	23.08	27.74
			16QAM	1	0	22.97	26.87
				1	25	22.86	27.65
				1	49	22.72	27.45
				50	0	22.02	27.88

2.1.9 Sample Test Measurement Screen

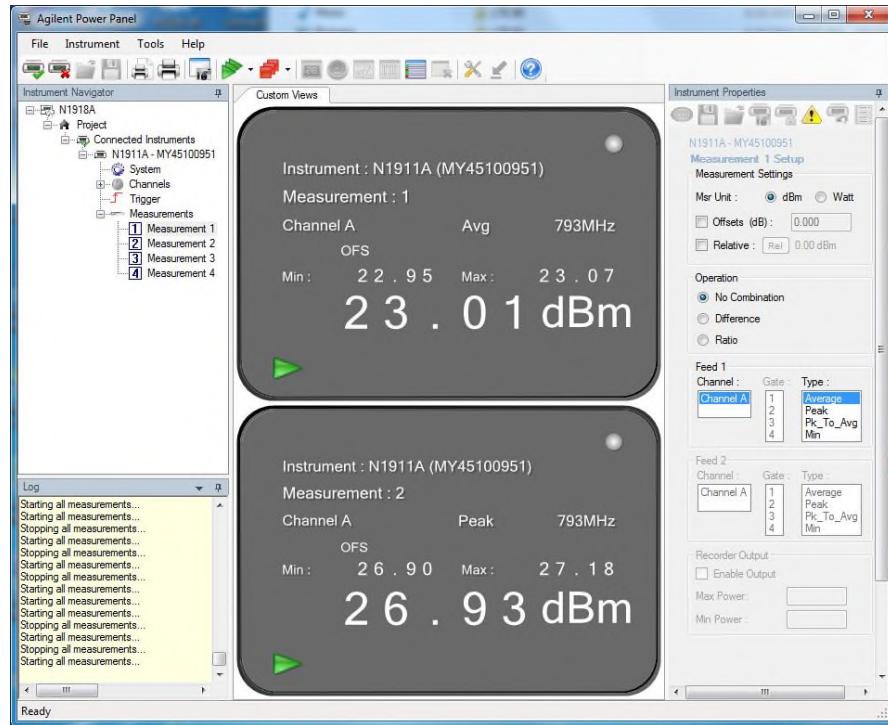

LTE Band 14 5M Bandwidth Middle Chanel QPSK Full RB

2.2 EFFECTIVE RADIATED POWER

2.2.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1046
FCC 47 CFR Part 90, Clause 90.542(a)(7)
RSS-140, Clause 4.3

2.2.2 Standard Applicable

FCC 47 CFR Part 90, Clause 90.542(a):
(7) Portable station (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

RSS-140, Clause 4.3:
The e.r.p for portable equipment including handheld devices shall not exceed 3 W.

2.2.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration (N/A, calculation only)

2.2.4 Date of Test/Initial of test personnel who performed the test

June 20, 2018 / XYZ

2.2.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.6 Additional Observations

- ERP was calculated as per Section 1.2 and 1.3 of KDB412172 D01 (Determining ERP and EIRP v01r01).
- Calculation formula in logarithmic terms:

$$\text{ERP} = P_T + G_T - L_c - 2.15 \text{dB}$$

Where:

P_T = transmitter conducted output power dBm (Section 2.1 of this test report)
 G_T = gain of the transmitting antenna, in dBi (EIRP: the -2.15 in the formula is to convert EIRP to ERP);
 L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB (EUT configuration during verification is mounted on an interface board with short direct connection to the antenna port. The loss between the EUT and the antenna port is considered negligible).



2.2.7 Test Results

LTE Band 14									
Modulation	Bandwidth (MHz)	RB Size/Offset	Channels	Frequency (MHz)	Tx Average Power (dBm)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dBm)
QPSK	5	1 / 0	23305	790.5	23.88	-0.6	21.13	34.77	13.64
		1 / 0	23330	793	23.81	-0.6	21.06	34.77	13.71
		1 / 0	23355	795.5	23.73	-0.6	20.98	34.77	13.79
	10	-	-	-	-	-	-	-	-
		1 / 0	23330	793	23.85	-0.6	21.1	34.77	13.67
		-	-	-	-	-	-	-	-
16QAM	5	1 / 0	23305	790.5	22.98	-0.6	20.23	34.77	14.54
		1 / 13	23330	793	22.97	-0.6	20.22	34.77	14.55
		1 / 0	23355	795.5	22.85	-0.6	20.1	34.77	14.67
	10	-	-	-	-	-	-	-	-
		1 / 0	23330	793	22.97	-0.6	20.22	34.77	14.55
		-	-	-	-	-	-	-	-

2.3 OCCUPIED BANDWIDTH

2.3.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1049
RSS-GEN 6.7

2.3.2 Standard Applicable

The transmitted signal bandwidth shall be reported as the 99% emission bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. 26dB Bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least 26 dB below the transmitter power.

Using the occupied bandwidth measurement function in the spectrum analyzer, the 99% occupied bandwidth was measured.

In addition, the 26dB bandwidth was measured in accordance with FCC KDB 971168 D01 V0202 Clause 4.1 using the ndB measurement function in the spectrum analyzer.

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be at least 3x RBW.

2.3.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration A

2.3.4 Date of Test/Initial of test personnel who performed the test

June 11, 2018 / XYZ

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.7 °C
Relative Humidity	51.3 %
ATM Pressure	98.5 kPa




2.3.7 Additional Observations

- This is a conducted test. Both 26dB bandwidth and 99% bandwidth presented.
- Using the occupied bandwidth measurement function in the spectrum analyzer, the 99% occupied bandwidth was measured.
- The 26dB bandwidth was measured in accordance with ANSI C63.26 clause 5.4.3 using the n dB measurement function in the spectrum analyzer.
- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be at least 3x RBW.
- Low, Mid and High channels for all bandwidths and modulations were verified. Test results of Mid channel were presented as representative.

2.3.8 Test Results

LTE Band 14					
<i>Modulation</i>	<i>Bandwidth (MHz)</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>99% OBW (MHz)</i>	<i>26dB BW (MHz)</i>
QPSK	5	23330	793.0	4.49	4.95
	10			8.95	9.68
16QAM	5	23330	793.0	4.48	4.93
	10			8.95	9.64

2.3.9 Example Test Plots

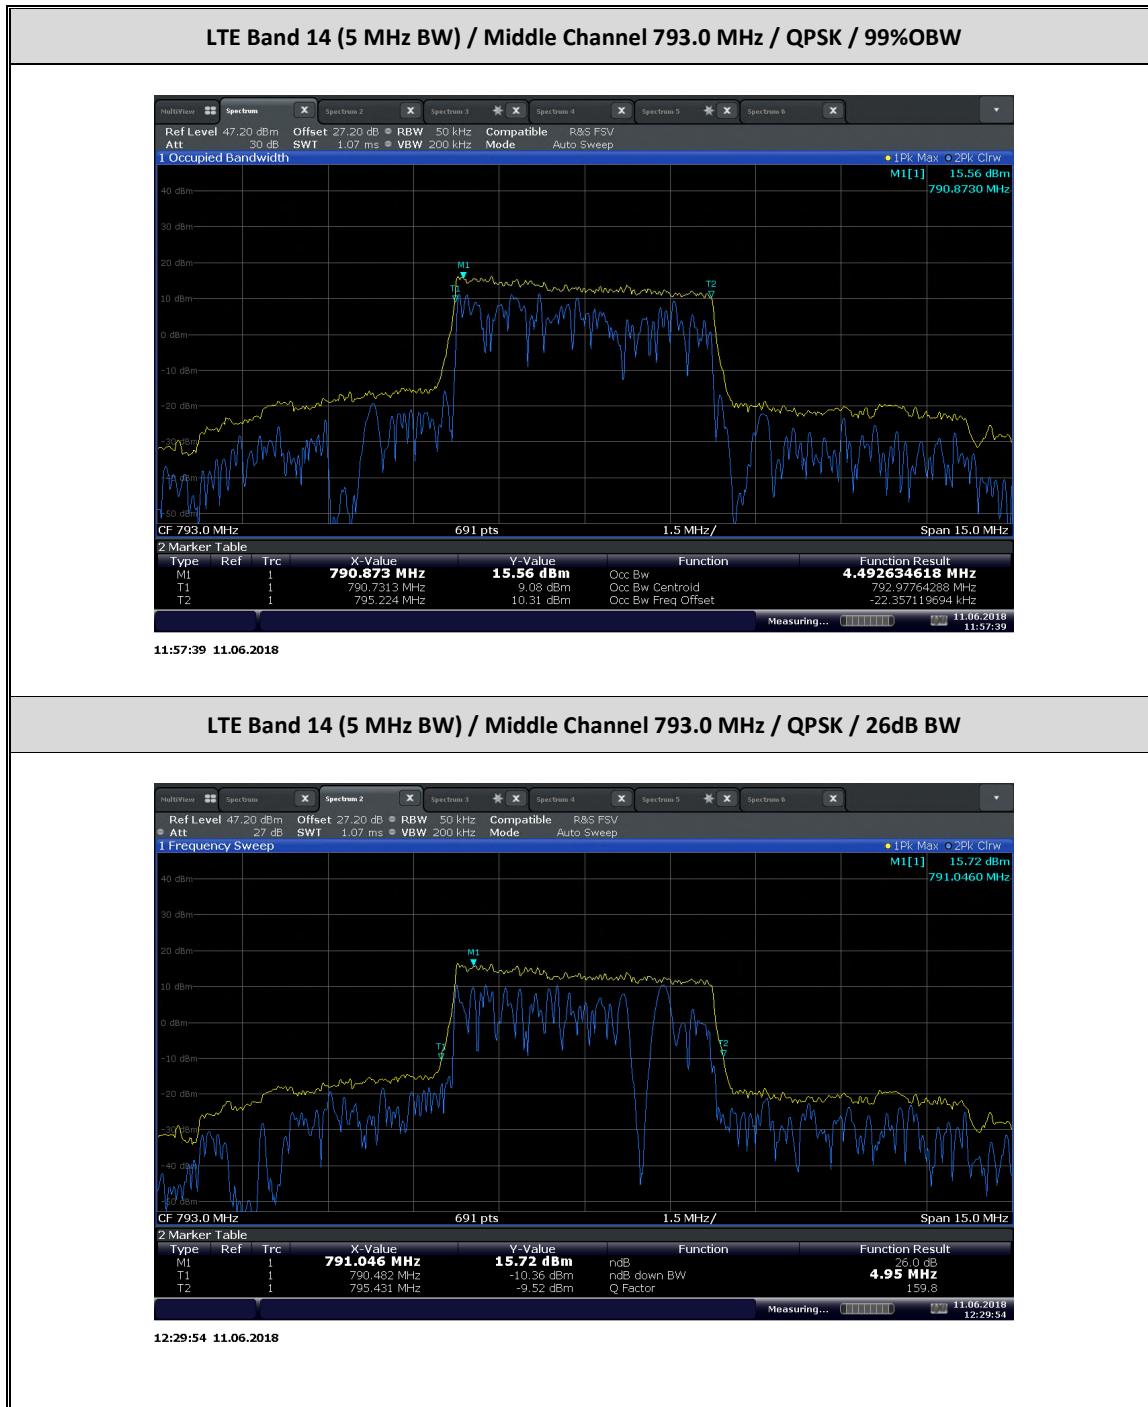



LTE Band 14 (10 MHz BW) / Middle Channel 793.0 MHz / QPSK / 99%OBW



LTE Band 14 (10 MHz BW) / Middle Channel 793.0 MHz / QPSK / 26dB BW



2.4 PEAK-AVERAGE POWER RATIO

2.4.1 Specification Reference

RSS-140, Clause 4.3

2.4.2 Standard Applicable

RSS-140, Clause 4.3:

The equivalent radiated power (e.r.p.) for control and mobile equipment shall not exceed 30 W. The e.r.p. for portable equipment including handheld devices shall not exceed 3 W.

Fixed and base station equipment shall comply with the e.r.p limits in SRSP-540.

In addition, the peak-to-average power ratio (PAPR) of the equipment shall not exceed 13 dB for more than 0.1% of the time, using a signal that corresponds to the highest PAPR during periods of continuous transmission.

2.4.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration A

2.4.4 Date of Test/Initial of test personnel who performed the test

June 13, 2018 / XYZ

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.9 °C
Relative Humidity	54.2 %
ATM Pressure	98.5 kPa




2.4.7 Additional Observations

- This is a conducted test.
- As per FCC KDB 971168 D01 v03r01 clause 5.7, the PAPR was measured in accordance with ANSI C63.26 clause 5.2.3.4.
- Measurement was done using the Spectrum Analyzer's Complementary Cumulative Distribution Function (CCDF) measurement profile. The built-in function is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth (crest factor or peak-to-average ratio) A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.
- Low, Middle and High channels for all bandwidths and modulations were verified.
- The path loss for was measured and entered as a level offset.
- There are no measured PAR levels greater than 13dB.

2.4.8 Test Results

LTE Band 14					
Modulation	Bandwidth (MHz)	Channels	Frequency (MHz)	PAR (dB)	Limit for PAR (dB)
QPSK	5	23305	790.5	4.42	13
		23330	793	5.38	13
		23355	795.5	5.19	13
	10	-	-	-	13
		23330	793	5.37	13
		-	-	-	13
16QAM	5	23305	790.5	5.62	13
		23330	793	6.49	13
		23355	795.5	5.9	13
	10	-	-	-	13
		23330	793	6.66	13
		-	-	-	13

2.4.9 Example Test Plots

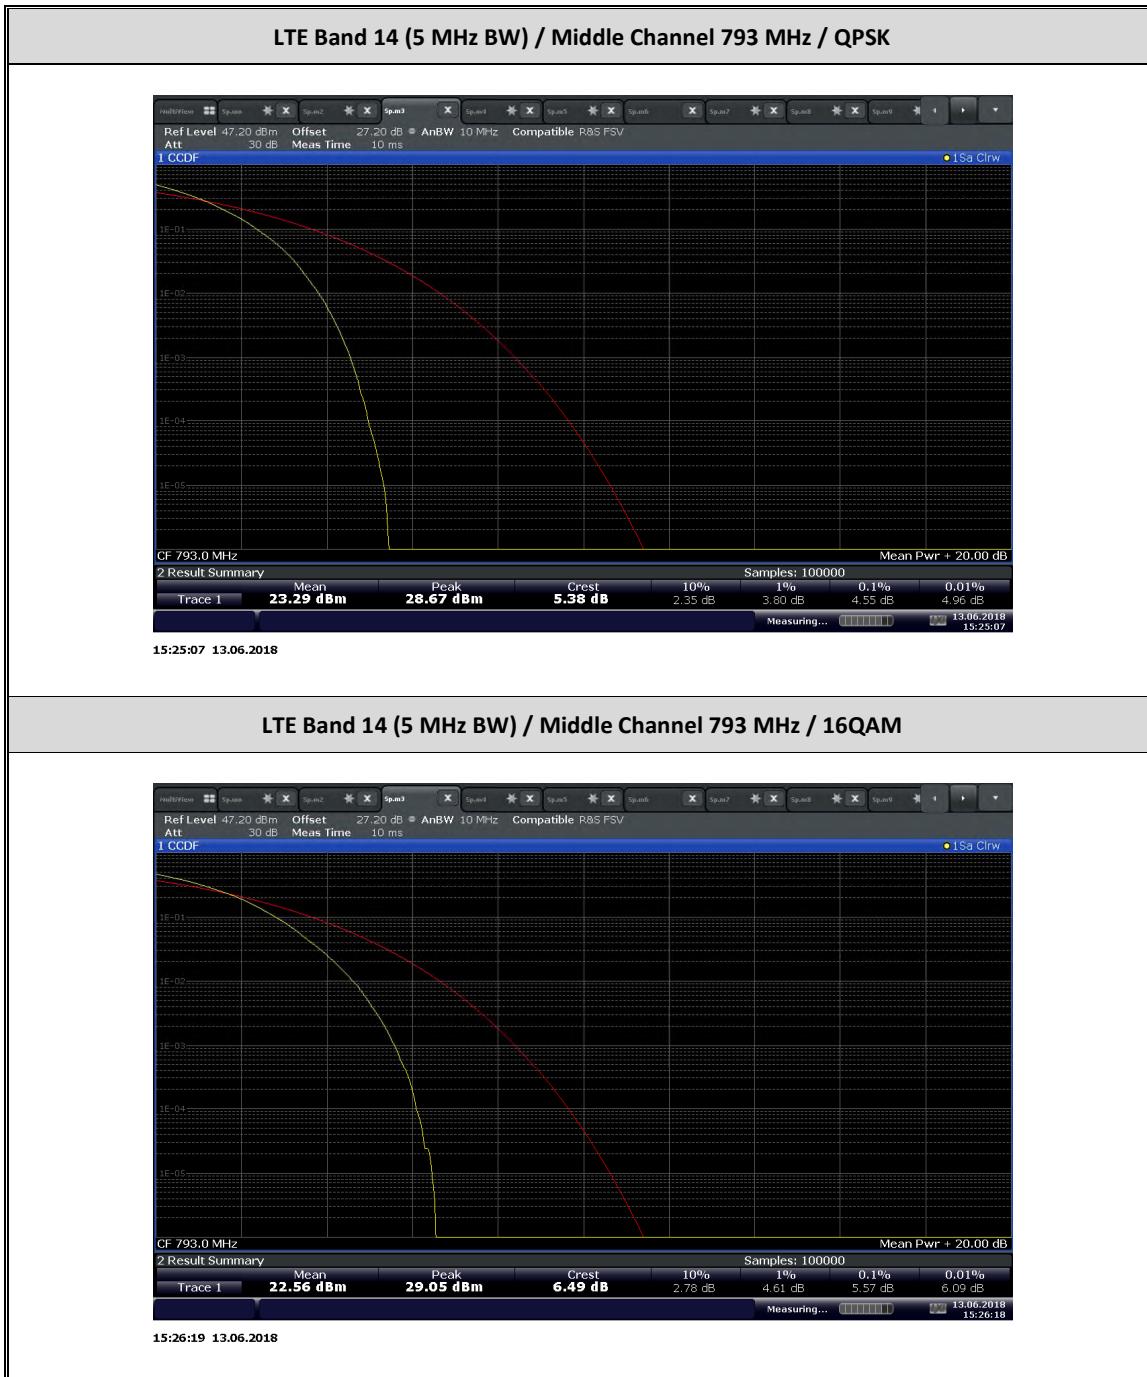



2.5 BAND EDGE

2.5.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1051
 FCC 47 CFR Part 90, Clause 90.543 (e)(2)(3)(f)
 RSS-140, Clause 6.6

2.5.2 Standard Applicable

FCC 47 CFR Part 90.543:

(e) For operations in the 758 – 768 MHz and the 788 – 798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequency between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775 – 788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

RSS-140, Clause 4.4:

The power of any unwanted emission outside the bands 758–768 MHz band and the 788–798 MHz shall be attenuated below the transmitter output power P in dBw as follows, where p is the transmitter output power in watts:

- a) For any frequency between 769–775 MHz and 799–806 MHz:
 - ii) $65 + 10 \log(p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment
- b) For any frequency between 775–788 MHz, above 806 MHz, and below 758 MHz:

$43 + 10 \log(P)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758–768 MHz and 788–798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559–1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

2.5.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration A

2.5.4 Date of Test/Initial of test personnel who performed the test

July 17, 2018 / XYZ



2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.9 °C
Relative Humidity	53.7 %
ATM Pressure	99.0 kPa

2.5.7 Additional Observations

- This is a conducted test.
- The path loss were measured and entered as a level offset.
- RBW is set to 30 kHz and VBW is set to 3 x RBW.
- All RB size available verified and only the worst case modulation (QPSK) for band edge verification presented in this test report.

2.5.8 Test Results



LTE Band 14 (5 MHz BW)/QPSK/Low Channel 790.5 MHz/1 RB 0 offset Band Edge @777 MHz



LTE Band 14 (5 MHz BW)/QPSK/High Channel 795.5 MHz/1 RB 24 offset Band Edge @787 MHz




FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C




LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz/Full RB Low Band Edge @788 MHz

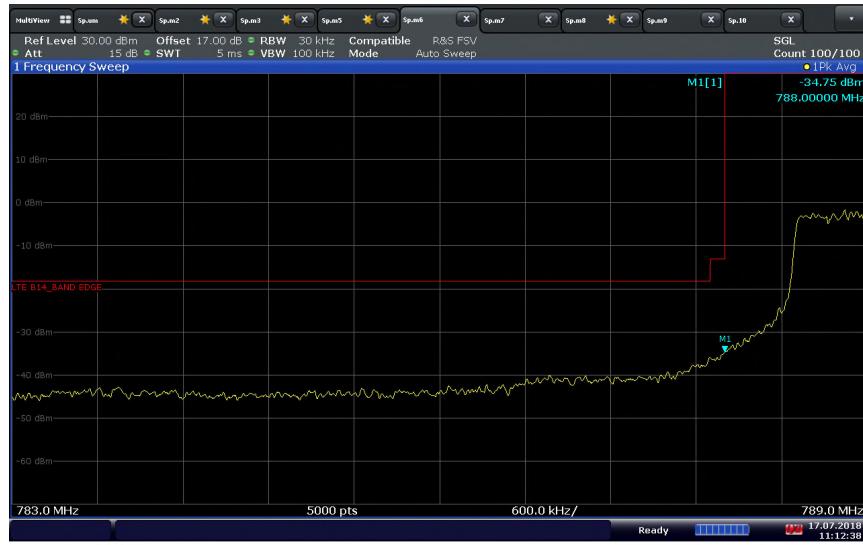

11:12:38 17.07.2018

LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz/Full RB High Band Edge @798 MHz

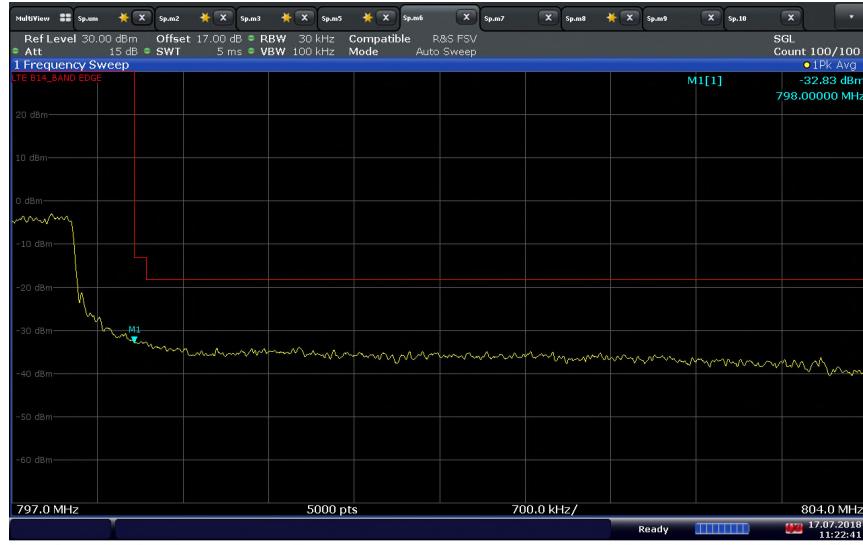

11:22:42 17.07.2018

LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz/1 RB 0 offset Low Band Edge @788 MHz



LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz/1 RB 49 offset Low Band Edge @798 MHz



2.6 CONDUCTED SPURIOUS EMISSIONS

2.6.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1051
FCC 47 CFR Part 90, Clause 90.543 (e)(2)(3)(f)
RSS-140, Clause 6.6

2.6.2 Standard Applicable

FCC 47 CFR Part 90.543:

(e) For operations in the 758 – 768 MHz and the 788 – 798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (4) On all frequencies between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (5) On all frequency between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (6) On any frequency between 775 – 788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

RSS-140, Clause 4.4:

The power of any unwanted emission outside the bands 758–768 MHz band and the 788–798 MHz shall be attenuated below the transmitter output power P in dBw as follows, where p is the transmitter output power in watts:

- c) For any frequency between 769–775 MHz and 799–806 MHz:
 - ii) $65 + 10 \log(p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment
- d) For any frequency between 775–788 MHz, above 806 MHz, and below 758 MHz:
 $43 + 10 \log(P)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758–768 MHz and 788–798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559–1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

2.6.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration A

2.6.4 Date of Test/Initial of test personnel who performed the test

June 23, 2018 / ZXY



2.6.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.6 Environmental Conditions/ Test Location


Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.6 °C
Relative Humidity	51.6 %
ATM Pressure	98.6 kPa

2.6.7 Additional Observations

- This is a conducted test.
- The path loss was measured and entered as a transducer factor (TDF).
- The spectrum was searched from 30MHz to the 10th harmonic (10GHz).
- Low, Middle and High channels on all channel bandwidth and modulation are verified. Only the worst case channel of each band presented.

2.6.8 Test Results

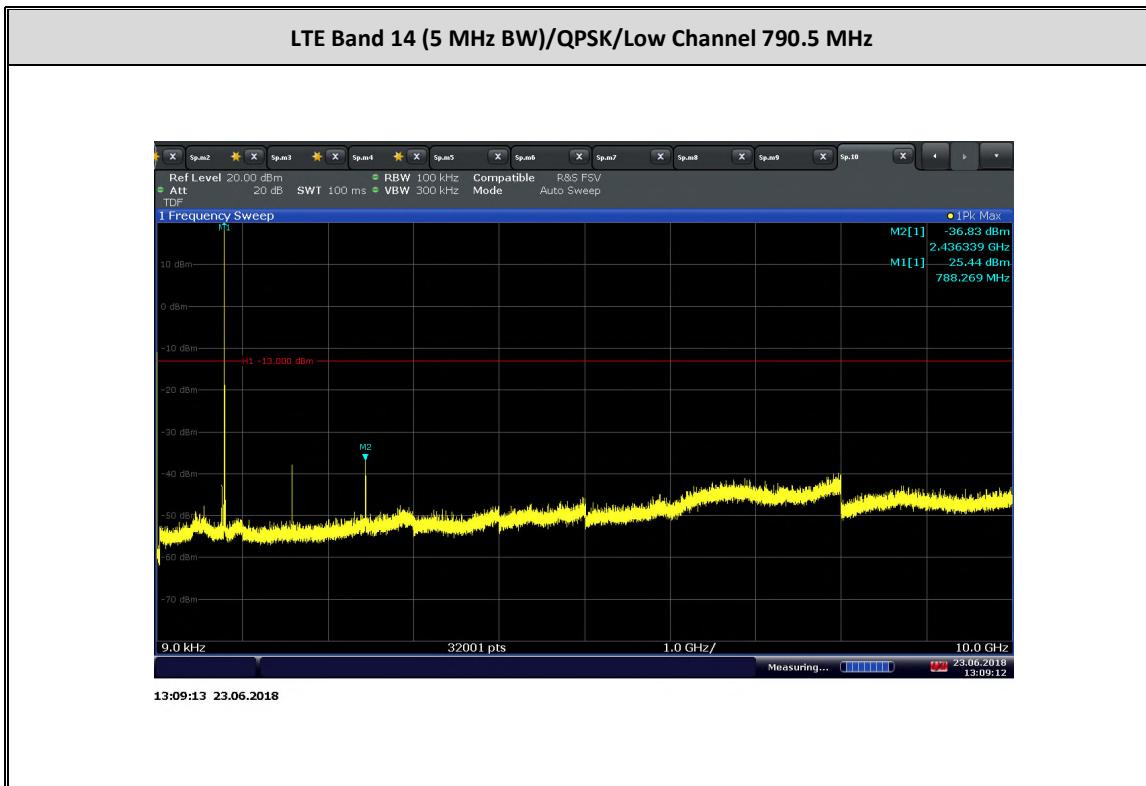


FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C



LTE Band 14 (5 MHz BW)/QPSK/Low Channel 790.5 MHz Conducted Spurious Emissions (769-775 MHz)

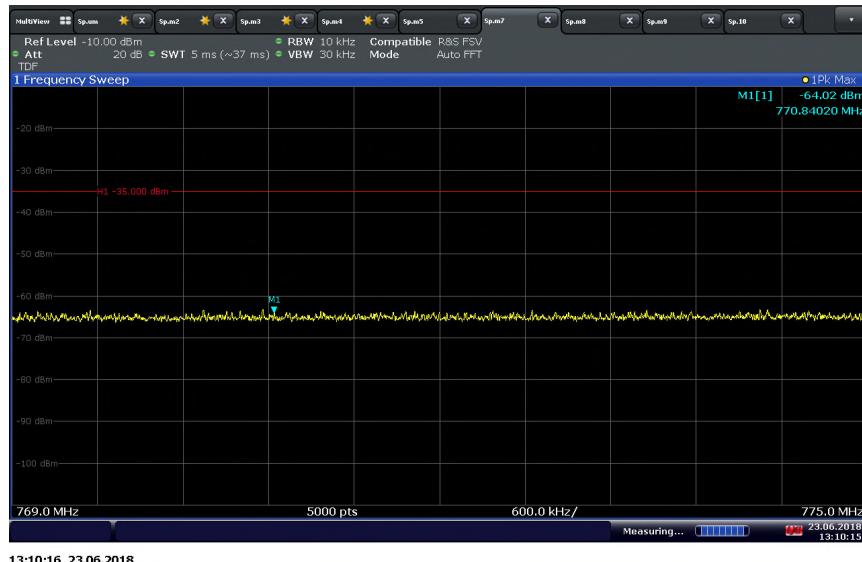

LTE Band 14 (5 MHz BW)/QPSK/Low Channel 790.5 MHz Conducted Spurious Emissions (799-806 MHz)




FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C




LTE Band 14 (5 MHz BW)/QPSK/Low Channel 790.5 MHz Conducted Spurious Emissions (1559-1610 MHz)

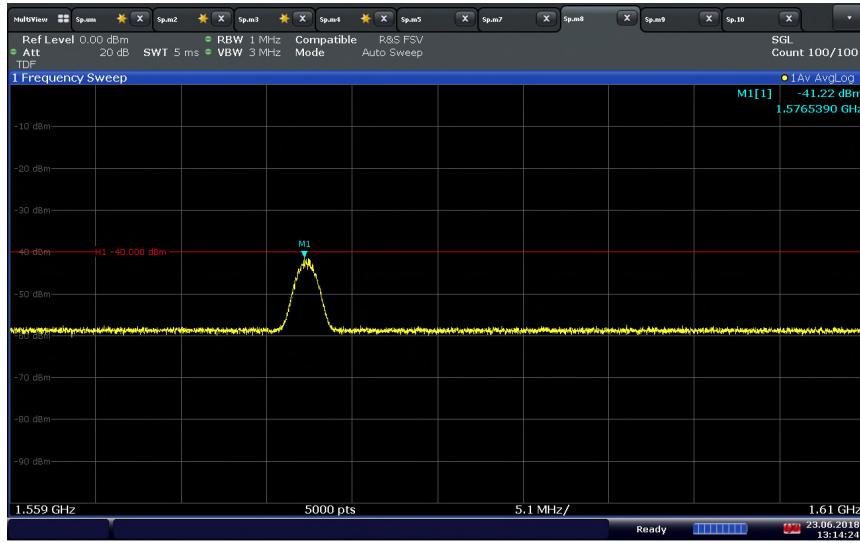

13:14:24 23.06.2018

LTE Band 14 (5 MHz BW)/QPSK/Middle Channel 793 MHz

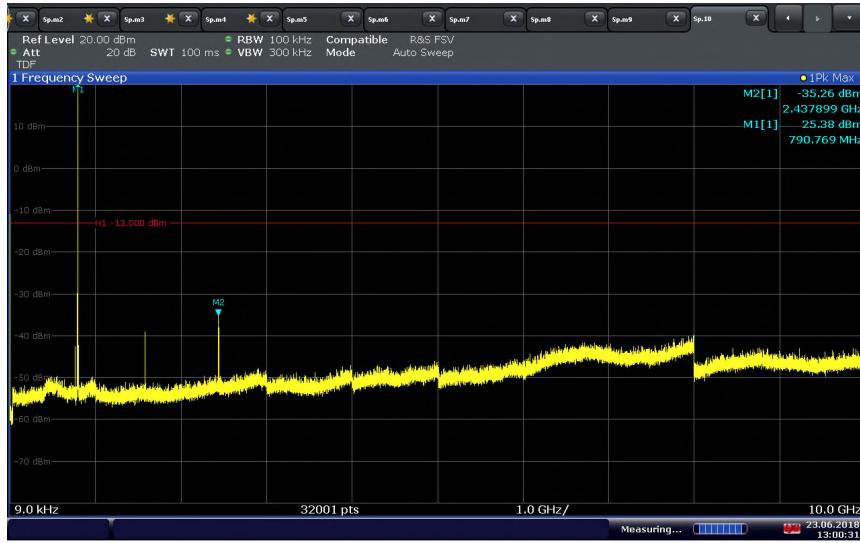

13:00:32 23.06.2018


FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C




LTE Band 14 (5 MHz BW)/QPSK/Middle Channel 793 MHz Conducted Spurious Emissions (769-775 MHz)

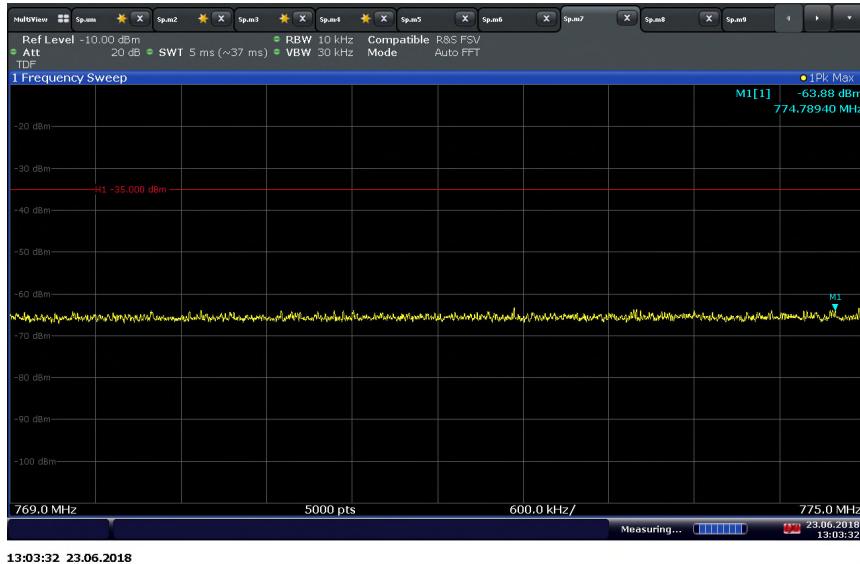

13:03:32 23.06.2018

LTE Band 14 (5 MHz BW)/QPSK/Middle Channel 793 MHz Conducted Spurious Emissions (799-806 MHz)

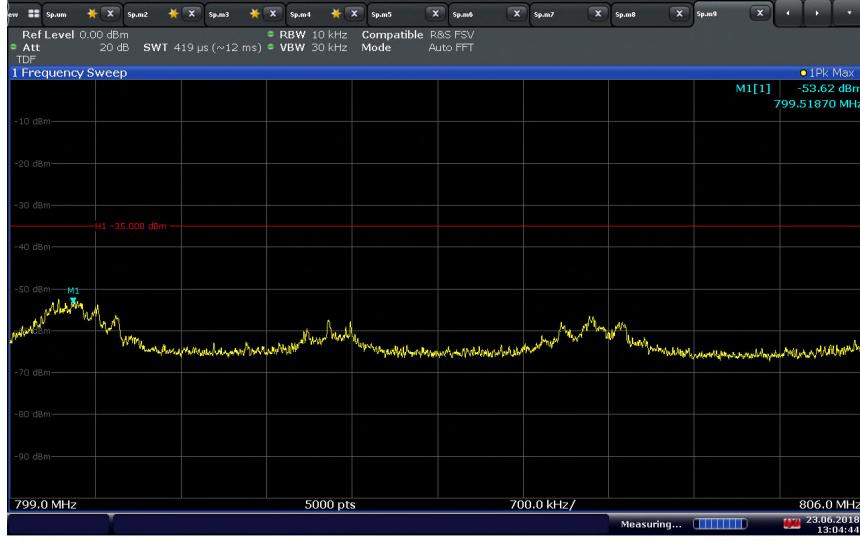

13:04:44 23.06.2018


FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C




LTE Band 14 (5 MHz BW)/QPSK/Middle Channel 793 MHz Conducted Spurious Emissions (1559-1610 MHz)

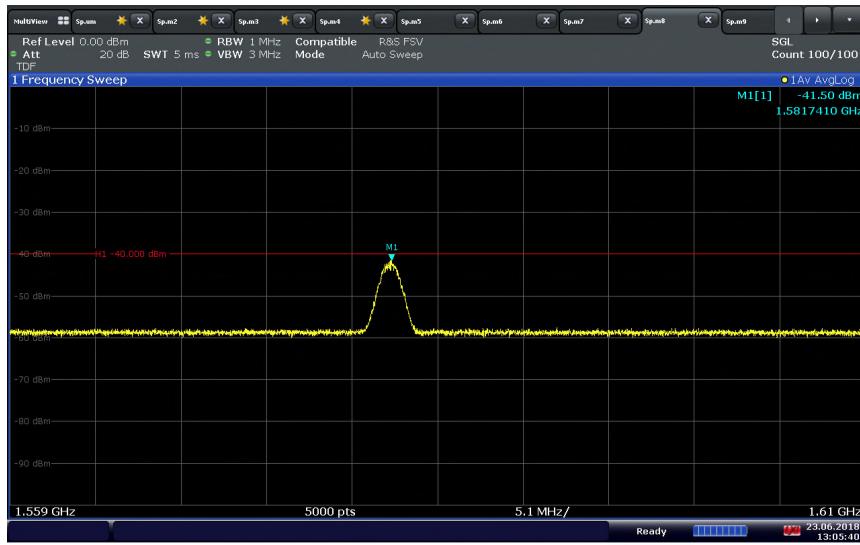

13:05:41 23.06.2018

LTE Band 14 (5 MHz BW)/QPSK/High Channel 795.5 MHz

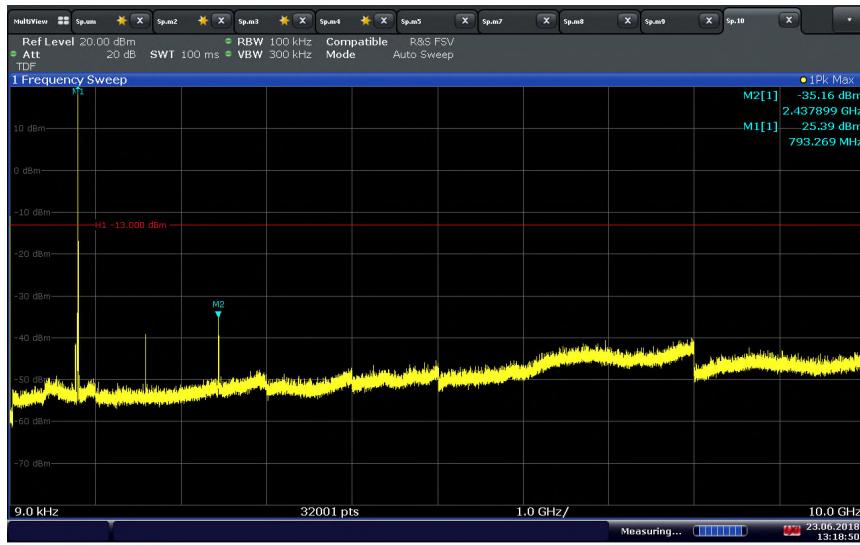

13:18:51 23.06.2018


FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C




LTE Band 14 (5 MHz BW)/QPSK/High Channel 795.5 MHz Conducted Spurious Emissions (769-775 MHz)

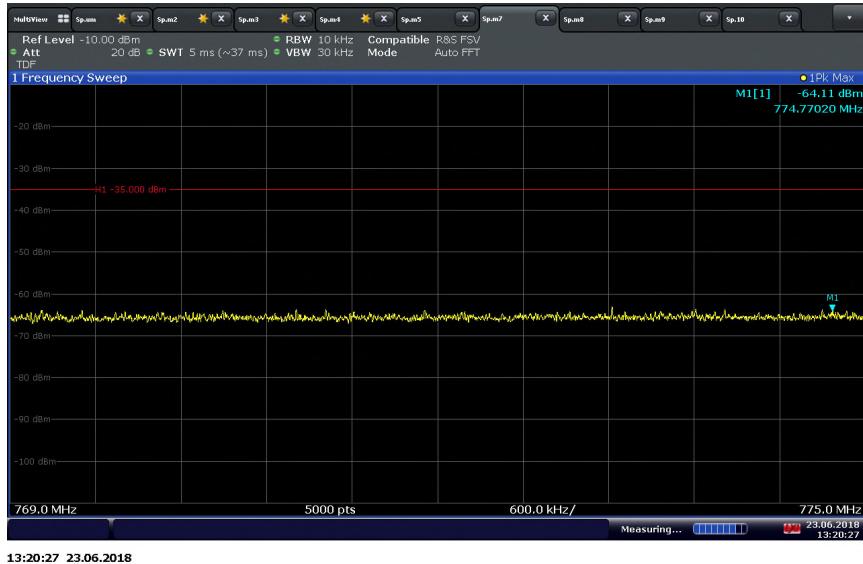

13:20:27 23.06.2018

LTE Band 14 (5 MHz BW)/QPSK/High Channel 795.5 MHz Conducted Spurious Emissions (799-806 MHz)

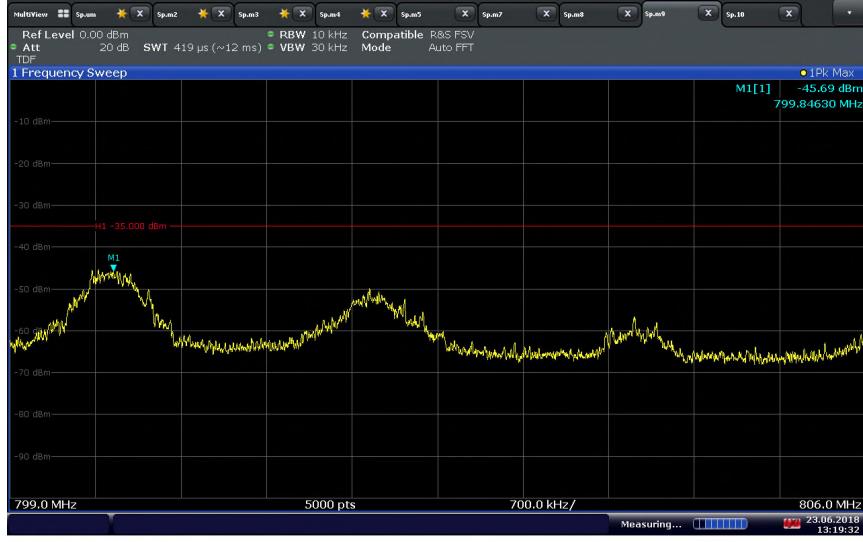

13:19:33 23.06.2018


FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800


Report No. 72139211C



LTE Band 14 (5 MHz BW)/QPSK/High Channel 795.5 MHz Conducted Spurious Emissions (1559-1610 MHz)

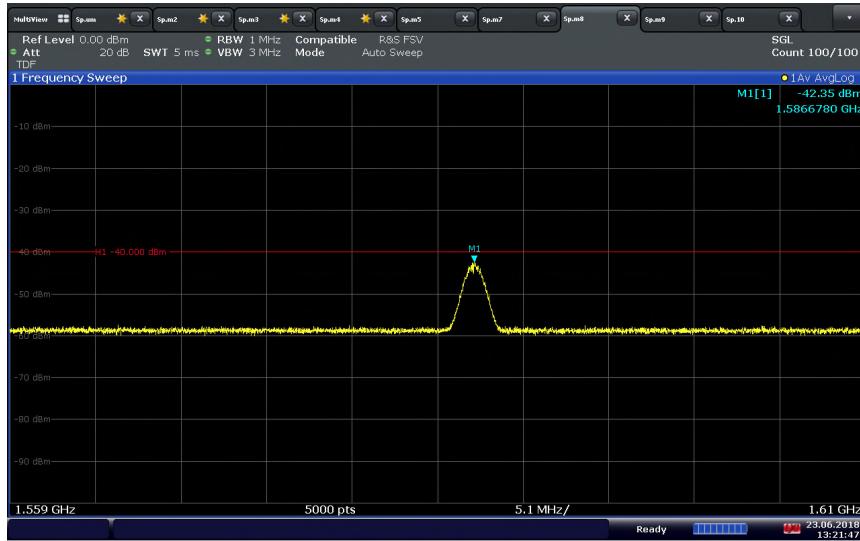

LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz

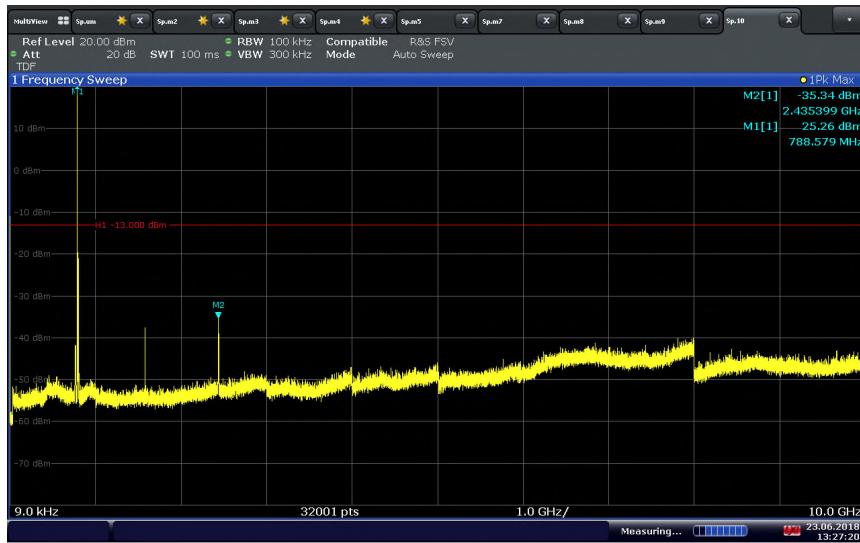


FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800


Report No. 72139211C



LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz Conducted Spurious Emissions (769-775 MHz)

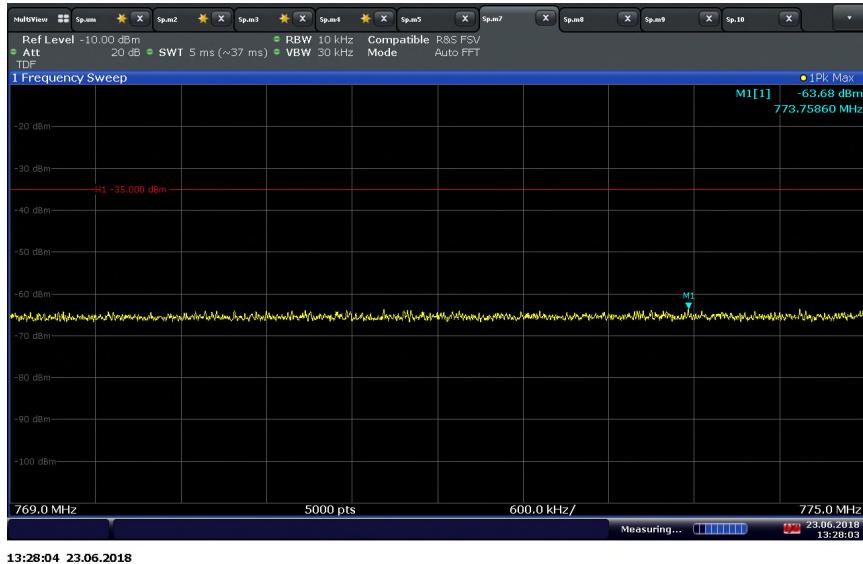

LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz Conducted Spurious Emissions (799-806 MHz)

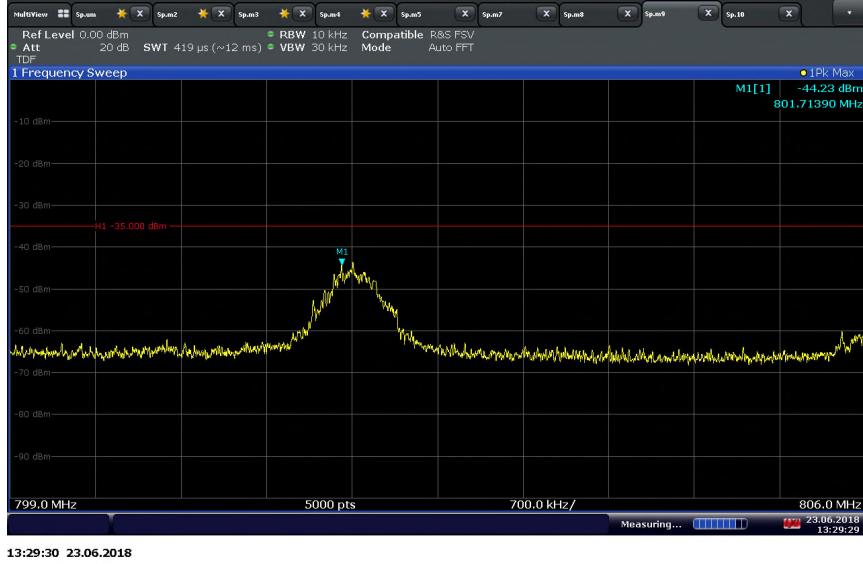


FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C



LTE Band 14 (10 MHz BW)/QPSK/Middle Channel 793 MHz Conducted Spurious Emissions (1559-1610 MHz)

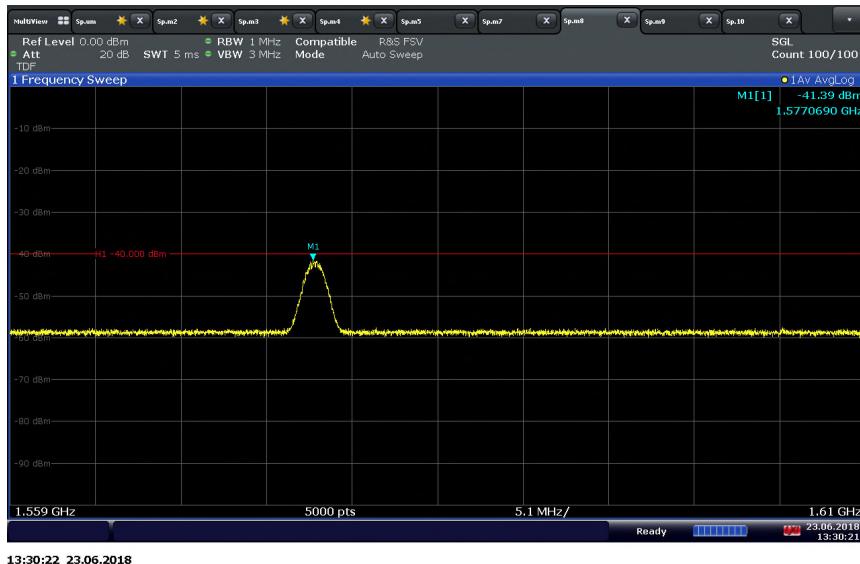



2.7 FIELD STRENGTH OF SPURIOUS RADIATION

2.7.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1053
 FCC 47 CFR Part 90, Clause 90.543(e)
 RSS-140, Clause 4.4

2.7.2 Standard Applicable

FCC 47 CFR Part 90.543
 (e) For operations in the 758 – 768 MHz and the 788 – 798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (7) On all frequencies between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (8) On all frequency between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (9) On any frequency between 775 – 788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB.

RSS-140, Clause 4.4:

The power of any unwanted emission outside the bands 758 – 768 MHz and 788 – 798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

- a) For any frequency between 769 – 775 MHz and 799 – 806 MHz:
 - i) $76 + 10 \log_{10} P$, dB in a 6.25 kHz band for fixed and base station equipment
 - ii) $65 + 10 \log_{10} P$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment.
- b) For any frequency between 775 – 788 MHz, above 806 MHz, and below 758 MHz:

$43 + 10 \log_{10}(P)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758 – 768 MHz and 788 – 798 MHz, a resolution bandwidth of 30 kHz may be employed.

2.7.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration B

2.7.4 Date of Test/Initial of test personnel who performed the test

July 14 and 18, 2018 / XYZ

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.7 - 25.7°C
Relative Humidity	54.1 - 54.8 %
ATM Pressure	98.7 - 99.1 kPa

2.7.7 Additional Observations


- This is a radiated test using substitution method as per Unwanted Emissions: Radiated Spurious method of measurement of ANSI/TIA/EIA-603-C 2004, August 17, 2004.
- Emissions within 6dB of the limit will be proven by substitution method.
- This is cabinet spurious emissions testing. Main antenna port was terminated during the test. Fundamental frequency measurement will be ignored for this test.
- Only the worst case configuration presented in this test report.
- There are no emissions found that doesn't comply with -13dBW limit in the 788-798 MHz frequency range. This limit corresponds to 84.4dB μ V/m @ 3 meters.
- Measurement was done using EMC32 V8.53 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only.

2.7.8 Test Results

Compliant. See attached plots.



2.7.9 Radiated Emission Test Results Below 1GHz – Worst Case LTE Band 14_5MHz Bandwidth_Low Channel 790.5 MHz_1 RB 0 offset_QPSK

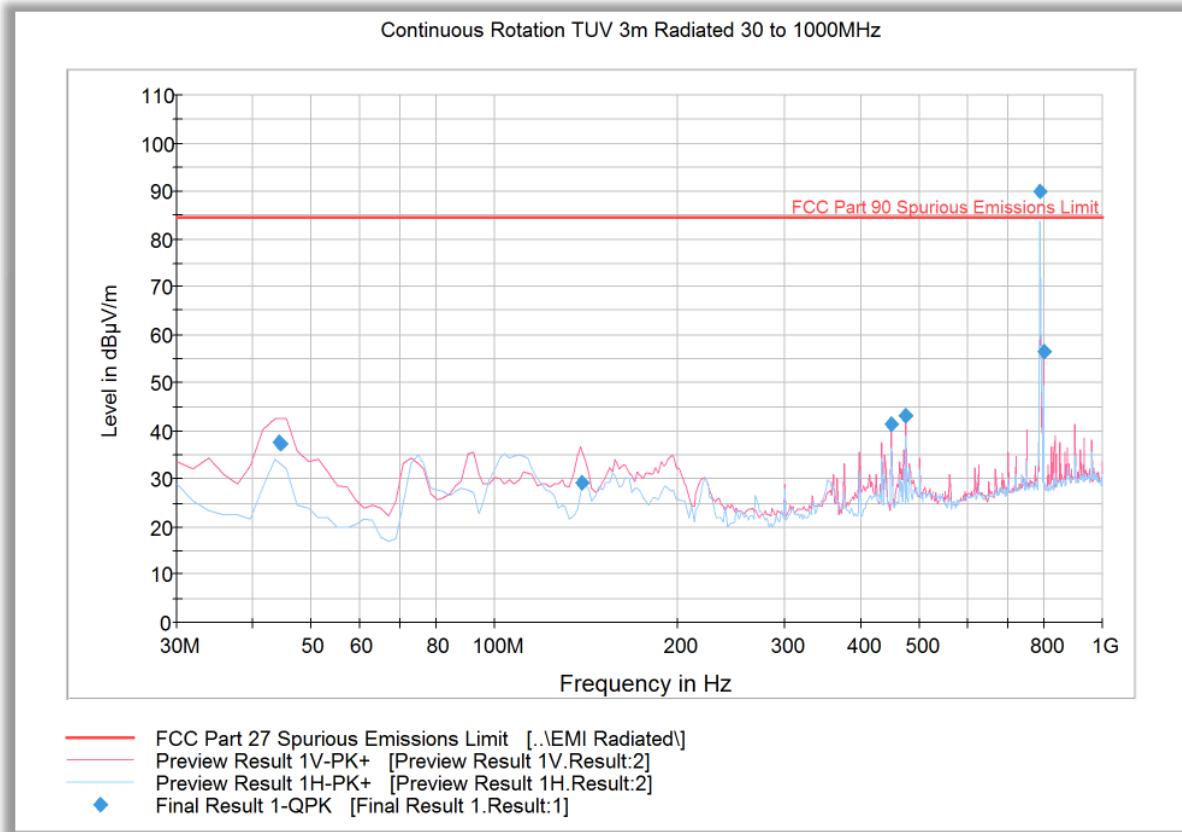


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
44.223327	37.8	1000.0	120.000	100.0	V	154.0	-13.8	46.6	84.4
44.471102	37.4	1000.0	120.000	100.0	V	75.0	-13.8	47.0	84.4
138.897715	29.2	1000.0	120.000	100.0	V	275.0	-15.1	55.2	84.4
449.999760	41.4	1000.0	120.000	201.0	V	93.0	-3.1	43.0	84.4
474.990301	43.0	1000.0	120.000	201.0	V	113.0	-1.4	41.4	84.4
788.356232	89.9	1000.0	120.000	100.0	H	134.0	4.3	Fundamental Carrier*	
800.003447	56.5	1000.0	120.000	100.0	V	185.0	4.1	27.9	84.4

* This is the fundamental frequency not part of spurious emission evaluation. Data provided for information purpose only.

**2.7.10 Radiated Emission Test Results Above 1GHz – Worst Case LTE Band 14_5MHz Bandwidth_Low Channel
790.5 MHz_1 RB 0 offset_QPSK**

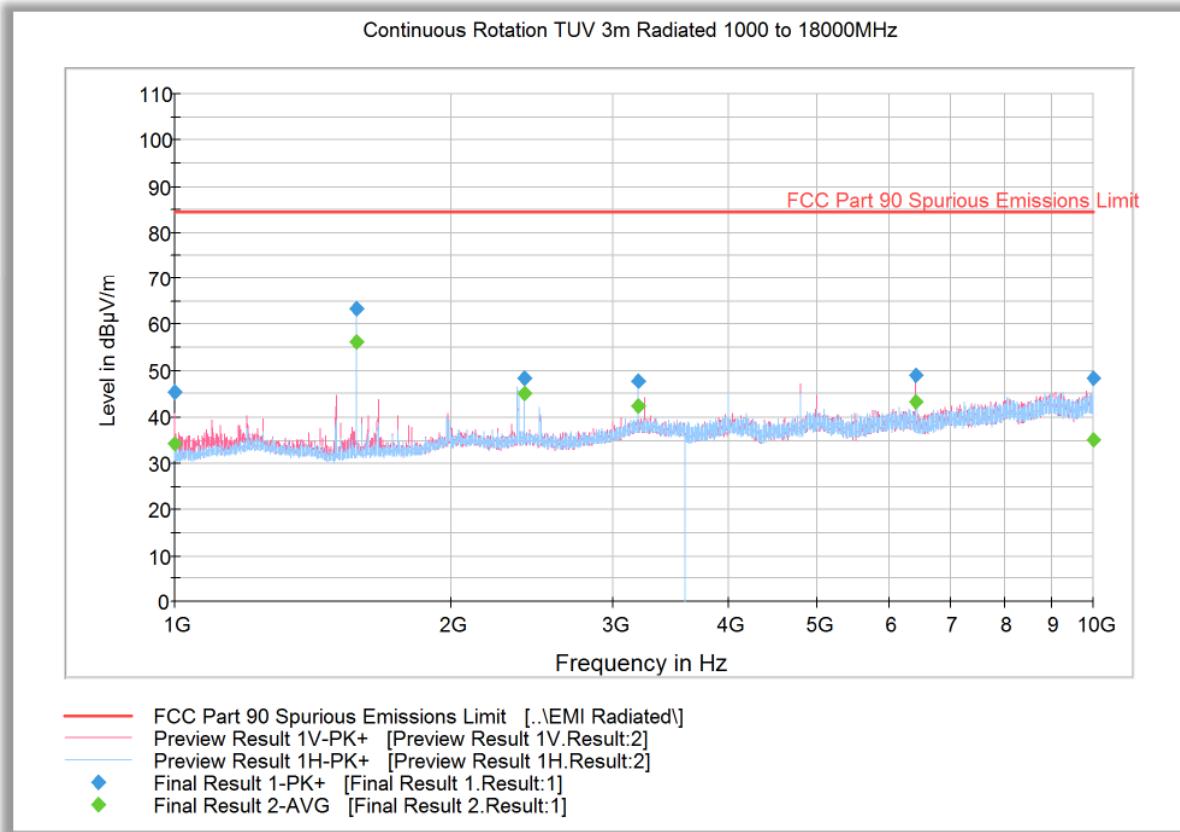


Peak Data

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	45.3	1000.0	1000.000	226.4	V	200.0	-10.7	39.0	84.4
1576.800000	63.5	1000.0	1000.000	187.5	H	192.0	-8.5	20.9	84.4
2400.000000	48.4	1000.0	1000.000	103.7	H	264.0	-4.8	35.9	84.4
3200.300000	47.7	1000.0	1000.000	191.5	H	237.0	-1.1	36.6	84.4
6399.800000	48.9	1000.0	1000.000	306.2	V	230.0	4.6	35.5	84.4
9986.300000	48.3	1000.0	1000.000	227.4	H	347.0	10.3	36.1	84.4

Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	34.4	1000.0	1000.000	226.4	V	200.0	-10.7	50.0	84.4
1576.800000	56.3	1000.0	1000.000	187.5	H	192.0	-8.5	28.1	84.4
2400.000000	45.1	1000.0	1000.000	103.7	H	264.0	-4.8	39.3	84.4
3200.300000	42.2	1000.0	1000.000	191.5	H	237.0	-1.1	42.1	84.4
6399.800000	43.3	1000.0	1000.000	306.2	V	230.0	4.6	41.1	84.4
9986.300000	35.3	1000.0	1000.000	227.4	H	347.0	10.3	49.1	84.4

2.7.11 Radiated Emission Test Results Above 1GHz – Worst Case LTE Band 14_5MHz Bandwidth_Middle Channel 793 MHz_1 RB 0 offset_QPSK

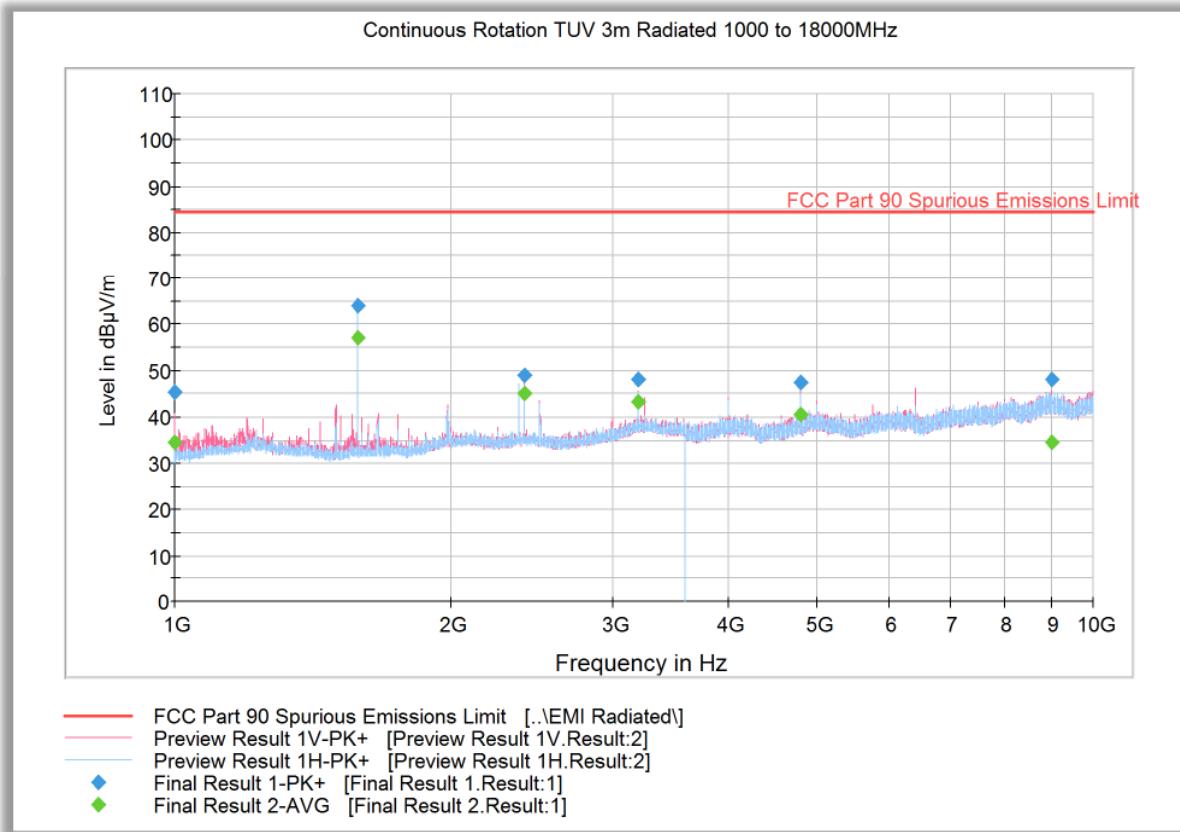

Peak Data


Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	45.5	1000.0	1000.000	208.4	V	186.0	-10.7	38.9	84.4
1581.600000	64.1	1000.0	1000.000	187.5	H	191.0	-8.5	20.3	84.4
2400.000000	48.9	1000.0	1000.000	291.2	V	133.0	-4.8	35.5	84.4
3200.100000	48.1	1000.0	1000.000	199.4	V	255.0	-1.1	36.2	84.4
4799.800000	47.4	1000.0	1000.000	112.7	V	184.0	2.2	36.9	84.4
9017.700000	48.2	1000.0	1000.000	116.7	V	162.0	9.4	36.2	84.4

Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	34.5	1000.0	1000.000	208.4	V	186.0	-10.7	49.9	84.4
1581.600000	57.2	1000.0	1000.000	187.5	H	191.0	-8.5	27.2	84.4
2400.000000	45.1	1000.0	1000.000	291.2	V	133.0	-4.8	39.3	84.4
3200.100000	43.4	1000.0	1000.000	199.4	V	255.0	-1.1	41.0	84.4
4799.800000	40.6	1000.0	1000.000	112.7	V	184.0	2.2	43.7	84.4
9017.700000	34.7	1000.0	1000.000	116.7	V	162.0	9.4	49.7	84.4



2.7.12 Radiated Emission Test Results Above 1GHz – Worst Case LTE Band 14_5MHz Bandwidth_High Channel 795.5 MHz_1 RB 0 offset_QPSK

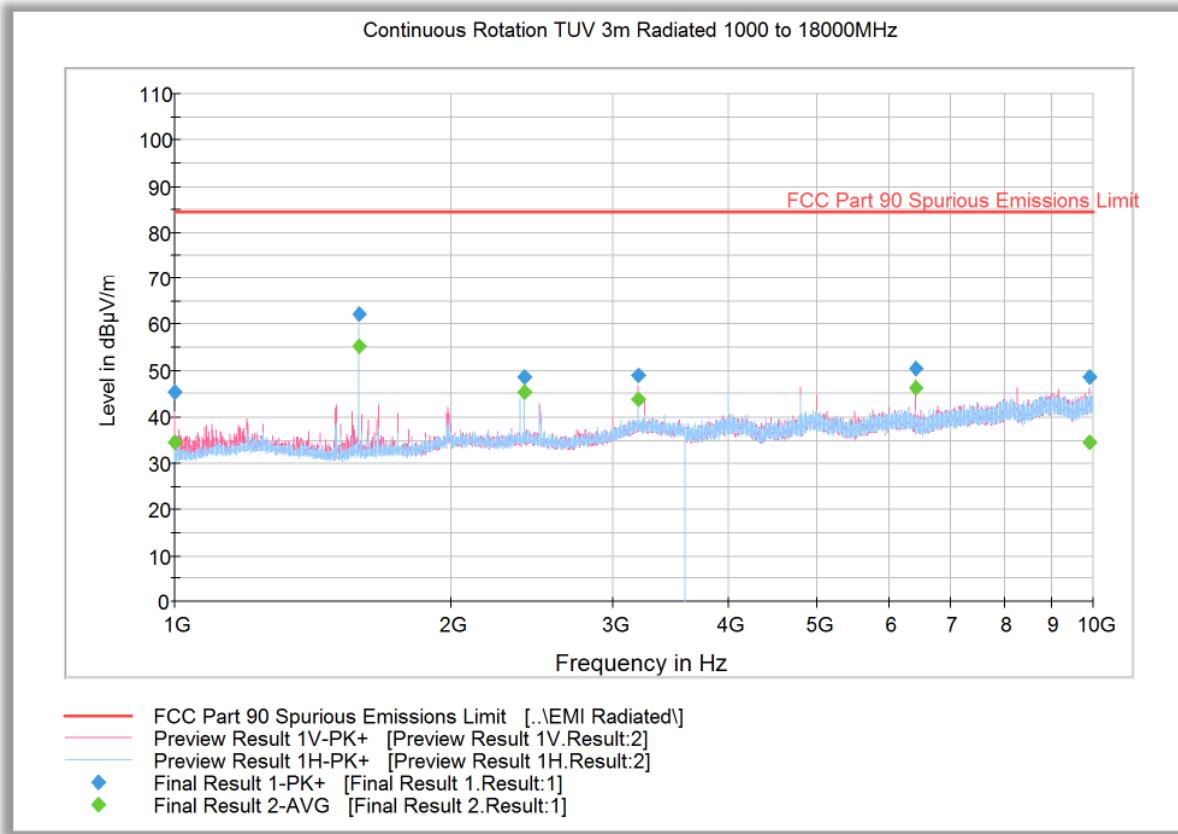

Peak Data

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	45.5	1000.0	1000.000	227.4	V	190.0	-10.7	38.9	84.4
1586.600000	62.1	1000.0	1000.000	182.5	H	190.0	-8.4	22.3	84.4
2400.000000	48.7	1000.0	1000.000	113.7	H	263.0	-4.8	35.7	84.4
3200.100000	48.9	1000.0	1000.000	200.5	V	257.0	-1.1	35.5	84.4
6399.800000	50.6	1000.0	1000.000	291.2	V	235.0	4.6	33.8	84.4
9883.800000	48.8	1000.0	1000.000	208.4	V	156.0	10.2	35.6	84.4

Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	34.6	1000.0	1000.000	227.4	V	190.0	-10.7	49.8	84.4
1586.600000	55.2	1000.0	1000.000	182.5	H	190.0	-8.4	29.2	84.4
2400.000000	45.4	1000.0	1000.000	113.7	H	263.0	-4.8	39.0	84.4
3200.100000	43.9	1000.0	1000.000	200.5	V	257.0	-1.1	40.5	84.4
6399.800000	46.2	1000.0	1000.000	291.2	V	235.0	4.6	38.2	84.4
9883.800000	34.6	1000.0	1000.000	208.4	V	156.0	10.2	49.7	84.4

2.8 FREQUENCY STABILITY

2.8.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1055
FCC 47 CFR Part 90, Clause 90.539
RSS-140, Clause 4.2

2.8.2 Standard Applicable

FCC Part 90, Clause 90.539:
(e) The frequency stability of mobile, portable, and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

RSS-140, Clause 4.2:
The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

2.8.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044 / Test Configuration A

2.8.4 Date of Test/Initial of test personnel who performed the test

July 3, and 11, 2018 / XYZ

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.7 - 26.8°C
Relative Humidity	44.4 - 54.1%
ATM Pressure	98.7 - 99.0 kPa



2.8.7 Additional Observations

- This is a conducted test. The EUT was operated at 3.7VDC nominal voltage and was placed in the temperature chamber for this evaluation. The EUT was controlled by a CMW500 and utilizing a spectrum analyzer for measurement.
- Test performed in 5 MHz Bandwidth Middle channel as the representative configuration.
- Measurement was done using the CMW 500 measurement function.
- The EUT was tested over the temperature -30°C to +50°C in 10°C steps and allowed to sit for 1 hour to allow the equipment and chamber temperature to stabilize. The measurements were then performed.
- Voltage variation was also performed at voltage 3.3VDC and higher 4.3VDC of the nominal voltage at 20°C.


2.8.8 Test Results

LTE Band 14 – QPSK 5 MHz BW-Middle Channel 793 MHz				
Voltage (VDC)	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
3.7	-30	-11.09	-0.014	± 1.25
	-20	8.71	0.011	± 1.25
	-10	11.72	0.015	± 1.25
	0	8.64	0.011	± 1.25
	+10	-6.59	-0.008	± 1.25
	+20	-6.07	-0.008	± 1.25
	+30	7.62	0.010	± 1.25
	+40	7.4	0.009	± 1.25
	+50	8.44	0.011	± 1.25
	20	-8.37	-0.011	± 1.25
3.3		-6.84	-0.009	± 1.25
4.3				

The frequency stability of the EUT is sufficient to keep it within the authorised frequency ranges at any temperature interval and voltage variations across the measured range.



2.8.9 Sample Test plot

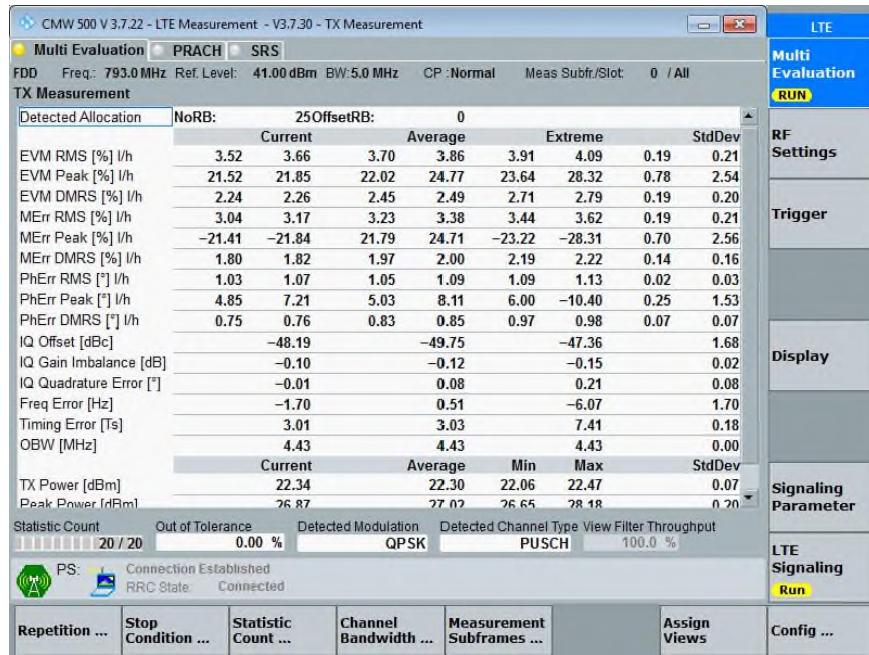

LTE Band 14_5 MHz Bandwidth_Middle Channel @20°C



2.9 CONDUCTED EMISSIONS

2.9.1 Specification Reference

FCC CFR 47 Part 15, Clause 15.207(a)
RSS-Gen, Section 8.8

2.9.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

**Decreases with the logarithm of the frequency.*

2.9.3 Equipment Under Test and Modification State

Serial No: AZ280418A00044/Test Configuration B

2.9.4 Date of Test/Initial of test personnel who performed the test

July 16, 2018/XYZ

2.9.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.9.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.1 °C
Relative Humidity	53.7 %
ATM Pressure	99.0 kPa

2.9.7 Additional Observations

Measurement was done using EMC32 V8.53 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.1.8 for sample computation.




2.9.8 Sample Computation (Conducted Emission – Quasi Peak)

Measuring equipment raw measurement (db μ V) @ 150kHz			5.5
Correction Factor (dB)	Asset# 8607 (20 dB attenuator)	19.9	20.7
	Asset# 1177 (cable)	0.15	
	Asset# 1176 (cable)	0.35	
	Asset# 7568 (LISN)	0.30	
Reported QuasiPeak Final Measurement (db μ V) @ 150kHz			26.2

2.9.9 Test Results

Compliant. See attached plots and tables.

2.9.10 MIFI8800L 120VAC 60Hz (Line 1)

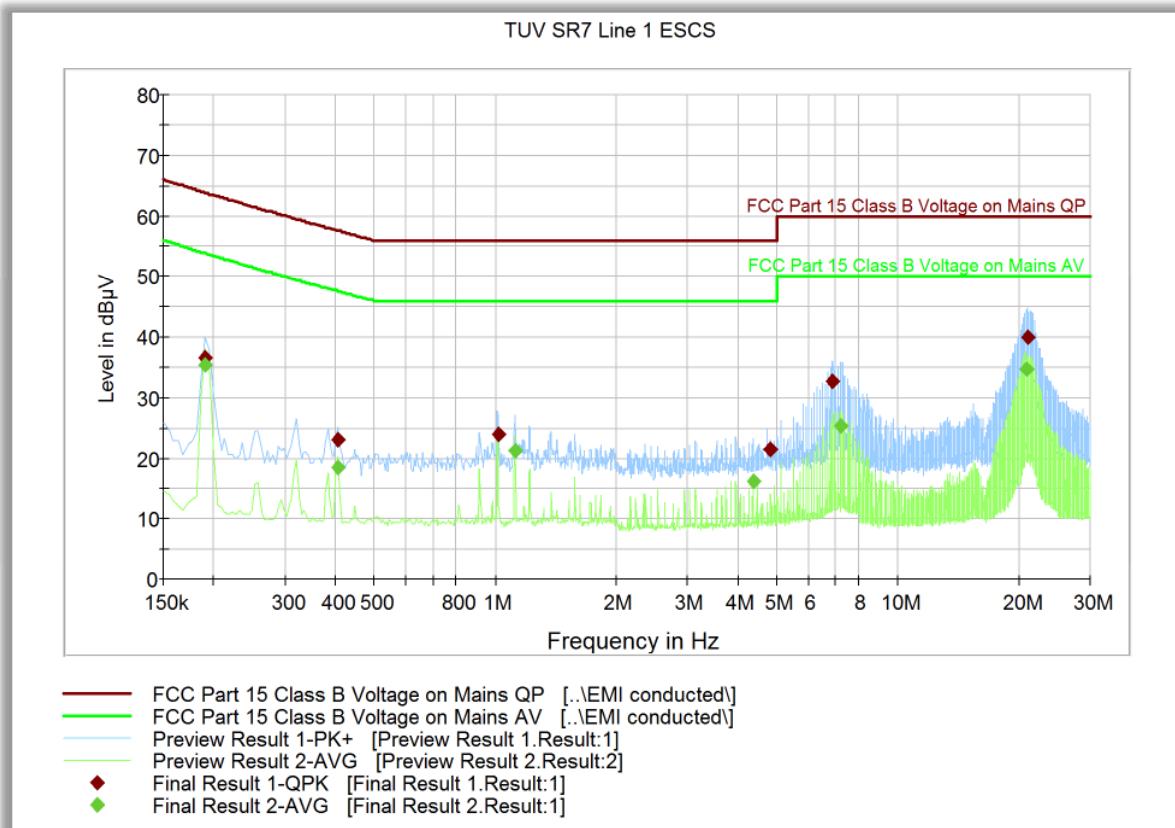


Quasi Peak

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.190500	36.6	1000.0	9.000	Off	L1	20.2	27.3	63.9
0.406500	23.1	1000.0	9.000	Off	L1	20.2	34.6	57.6
1.018500	23.9	1000.0	9.000	Off	L1	20.2	32.1	56.0
4.830000	21.4	1000.0	9.000	Off	L1	20.4	34.6	56.0
6.900000	32.6	1000.0	9.000	Off	L1	20.5	27.4	60.0
20.998500	40.1	1000.0	9.000	Off	L1	20.8	19.9	60.0

Average

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - Ave (dB)	Limit - Ave (dBμV)
0.190500	35.4	1000.0	9.000	Off	L1	20.2	18.4	53.9
0.406500	18.6	1000.0	9.000	Off	L1	20.2	29.0	47.6
1.117500	21.3	1000.0	9.000	Off	L1	20.2	24.7	46.0
4.366500	16.2	1000.0	9.000	Off	L1	20.4	29.8	46.0
7.197000	25.4	1000.0	9.000	Off	L1	20.5	24.6	50.0
20.800500	34.7	1000.0	9.000	Off	L1	20.7	15.3	50.0

2.9.11 MIFI8800L 120VAC 60Hz (Line 2)

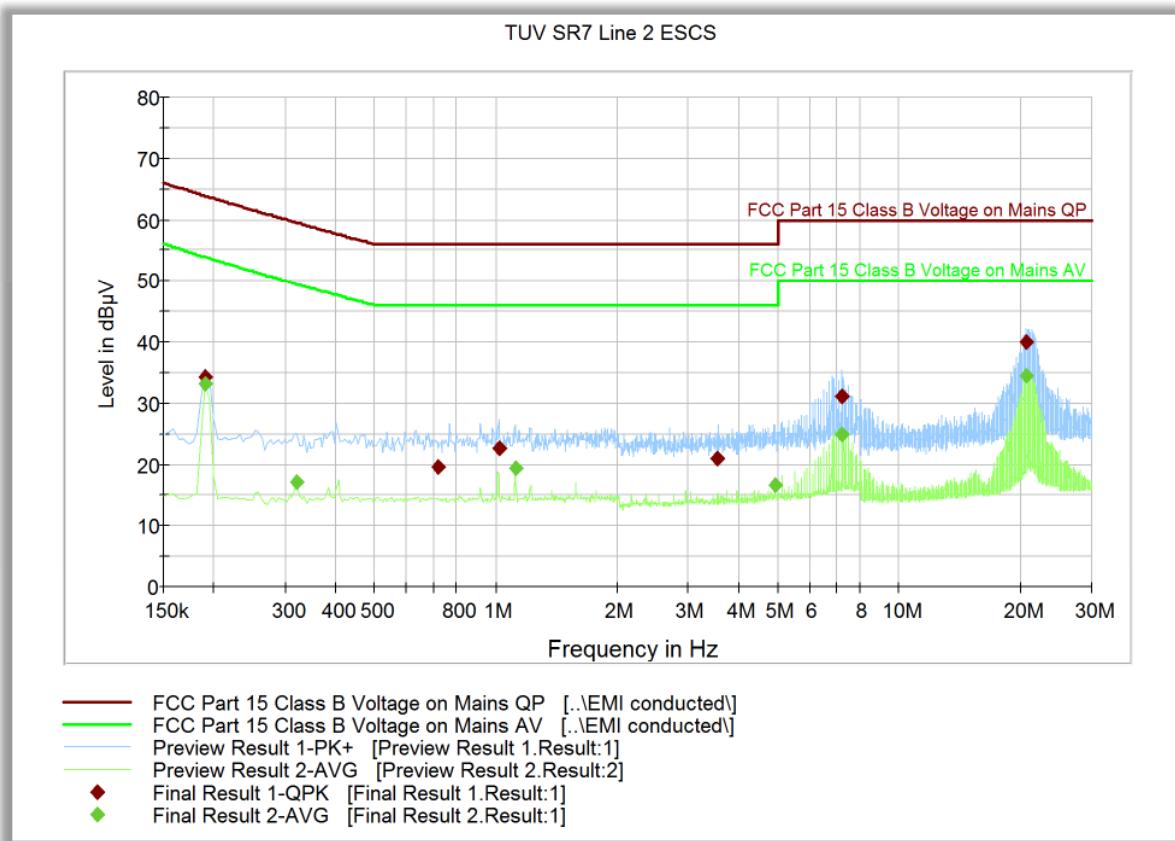

Quasi Peak

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.190500	34.3	1000.0	9.000	Off	N	20.2	29.6	63.9
0.717000	19.5	1000.0	9.000	Off	N	20.2	36.5	56.0
1.018500	22.7	1000.0	9.000	Off	N	20.2	33.3	56.0
3.547500	21.0	1000.0	9.000	Off	N	20.4	35.0	56.0
7.197000	31.0	1000.0	9.000	Off	N	20.4	29.0	60.0
20.701500	39.9	1000.0	9.000	Off	N	20.7	20.1	60.0

Average

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - Ave (dB)	Limit - Ave (dBµV)
0.190500	33.1	1000.0	9.000	Off	N	20.2	20.8	53.9
0.321000	17.1	1000.0	9.000	Off	N	20.3	32.4	49.5
1.117500	19.5	1000.0	9.000	Off	N	20.3	26.5	46.0
4.929000	16.6	1000.0	9.000	Off	N	20.5	29.4	46.0
7.197000	24.9	1000.0	9.000	Off	N	20.4	25.1	50.0
20.701500	34.4	1000.0	9.000	Off	N	20.7	15.6	50.0

FCC ID PKRNVWMIFI8800
IC: 3229A-MIFI8800
Report No. 72139211C



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Antenna Conducted Port Setup						
7662	P-Series Power Meter	N1911A	MY45100951	Agilent	06/15/18	06/15/19
7661	50MHz-18GHz Wideband Power Sensor	N1921A	MY45241383	Agilent	06/15/18	06/15/19
7608	Vector Signal Generator	SMBV100A	259021	Rhode & Schwarz	09/19/17	09/19/19
7582	Signal/Spectrum Analyzer	FSW26	101614	Rhode & Schwarz	12/14/17	12/14/18
-	Wideband Radio Communication Tester	CMW 500	158164	Rhode & Schwarz	04/04/18	04/04/19
8825	20dB Attenuator	46-20-34	BK5773	Weinschel Corp.	Verified by 7608 and 7582	
-	10dB Attenuator	VAT-10W2+2W	N/A	MCL	Verified by 7608 and 7582	
AC Conducted Emissions Test Setup						
1024	EMI Test Receiver	ESCS 30	847793/001	Rhode & Schwarz	09/15/17	09/15/18
7567	LISN	FCC-LISN-50-25-2	120304	Fischer Custom Comm.	12/14/17	12/14/19
8822	20dB Attenuator	34-20-34	N/A	MCE / Weinschel	Verified by 7608 and 7582	
8824	20dB Attenuator	34-20-34	N/A	MCE / Weinschel	Verified by 7608 and 7582	
7582	Signal/Spectrum Analyzer	FSW26	101614	Rhode & Schwarz	12/14/17	12/14/18
7608	Vector Signal Generator	SMBV100A	259021	Rhode & Schwarz	09/19/17	09/19/19
-	Wideband Radio Communication Tester	CMW 500	158164	Rhode & Schwarz	04/04/18	04/04/19
Radiated Test Setup						
7582	Signal/Spectrum Analyzer	FSW26	101614	Rhode & Schwarz	12/14/17	12/14/18
7608	Vector Signal Generator	SMBV100A	259021	Rhode & Schwarz	09/19/17	09/19/19
1033	Bilog Antenna	3142C	00044556	EMCO	10/11/16	10/11/18
7575	Double-ridged waveguide horn antenna	3117	00155511	EMCO	06/16/18	06/16/20
1193	Pre-amplifier	PAM-0202	185	A.H. Systems, Inc.	04/11/18	04/11/19
8921	High-frequency cable	SucoFlex 100 SX	N/A	Suhner	Verified by 7608 and 7582	
8923	High-frequency cable	Micropore 19057793	N/A	United Microwave Products	Verified by 7608 and 7582	
1040	EMI Test Receiver	ESIB40	100292	Rhode & Schwarz	10/25/17	10/25/18
1049	EMI Test Receiver	ESU	100133	Rhode & Schwarz	07/13/18	07/13/19
8628	Pre-amplifier	QLI-01182835-JO	8986002	Quinstar	02/06/18	02/06/19
-	Wideband Radio Communication Tester	CMW 500	158164	Rhode & Schwarz	04/04/18	04/04/19

FCC ID PKRNVWMIFI8800

IC: 3229A-MIFI8800

Report No. 72139211C



Miscellaneous						
Item ID	Product Name	Model Number	Serial Number	Manufacturer	Test Date	Expiry Date
6708	Multimeter	34401A	US36086974	Hewlett Packard	07/18/18	07/18/19
7579	Temperature Chamber	115	151617	TestQuity	08/22/17	08/22/18
11312	Mini Environmental Quality Meter	850027	CF099-56010-340	Sper Scientific	02/26/18	02/26/19
	Test Software	EMC32	V8.53	Rhode & Schwarz	N/A	



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 Radiated Emission Measurements (Below 1GHz)

Contribution	Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1 Receiver/Spectrum Analyzer	Rectangular	0.45	0.26	0.07
2 Cables	Rectangular	0.50	0.29	0.08
3 Preamp	Rectangular	0.50	0.29	0.08
4 Antenna	Rectangular	0.75	0.43	0.19
5 Site	Rectangular	3.52	1.44	2.07
6 EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty (u_c):				1.68
Coverage Factor (k):				2
Expanded Uncertainty:				3.36

3.2.2 Radiated Emission Measurements (Above 1GHz)

Contribution	Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1 Receiver/Spectrum Analyzer	Rectangular	0.57	0.33	0.11
2 Cables	Rectangular	0.70	0.40	0.16
3 Preamp	Rectangular	0.50	0.29	0.08
4 Antenna	Rectangular	0.37	0.21	0.05
5 Site	Rectangular	3.00	1.22	1.50
6 EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty (u_c):				1.49
Coverage Factor (k):				2
Expanded Uncertainty:				2.99

3.2.3 Conducted Antenna Port Measurement

Contribution	Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1 Receiver/Spectrum Analyzer	Rectangular	0.34	0.20	0.04
2 Cables	Rectangular	0.30	0.17	0.03
3 EUT Setup	Rectangular	0.50	0.29	0.08
Combined Uncertainty (u_c):				0.39
Coverage Factor (k):				1.96
Expanded Uncertainty:				0.76


FCC ID PKRNVWMIFI8800
IC: 3229A-MIFI8800
Report No. 72139211C





SECTION 4


DIAGRAM OF TEST SETUP

4.1 TEST SETUP DIAGRAM

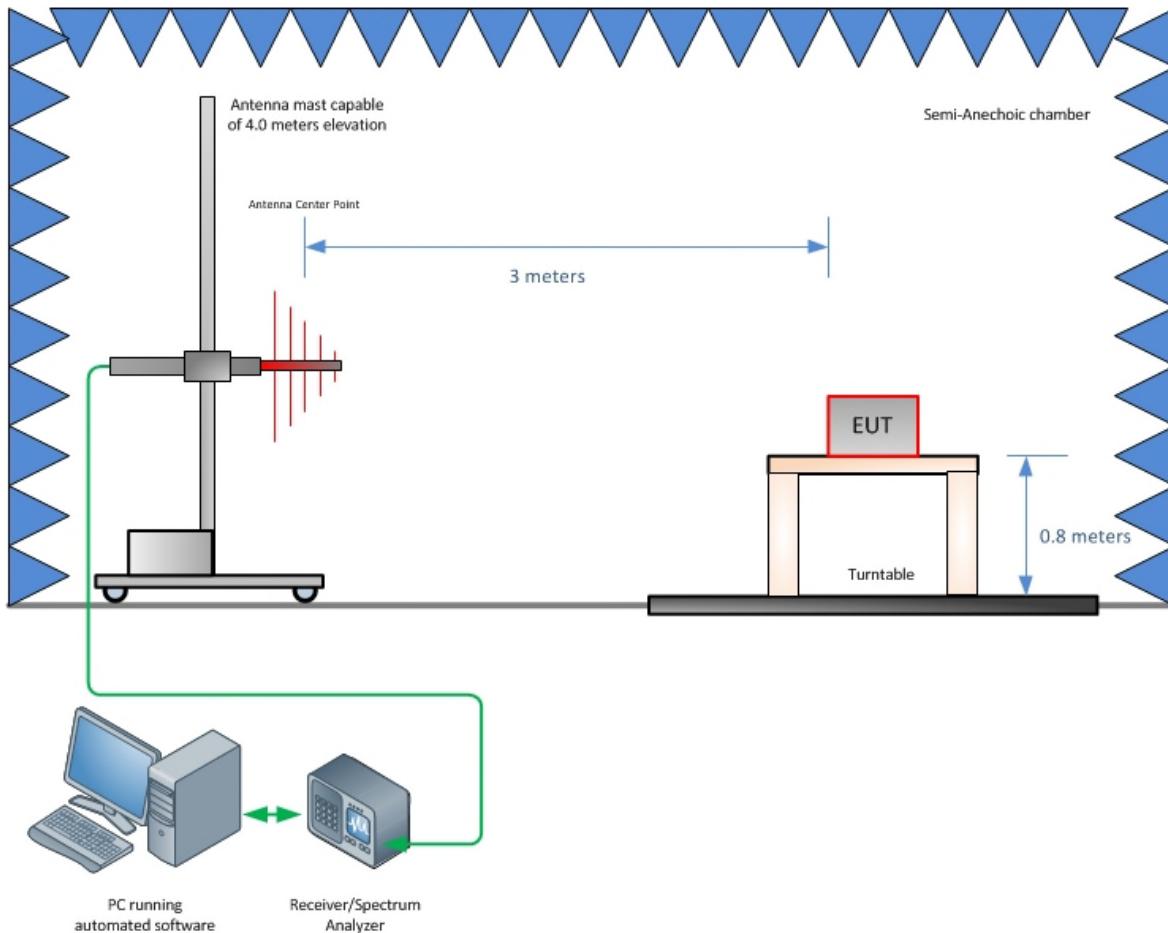

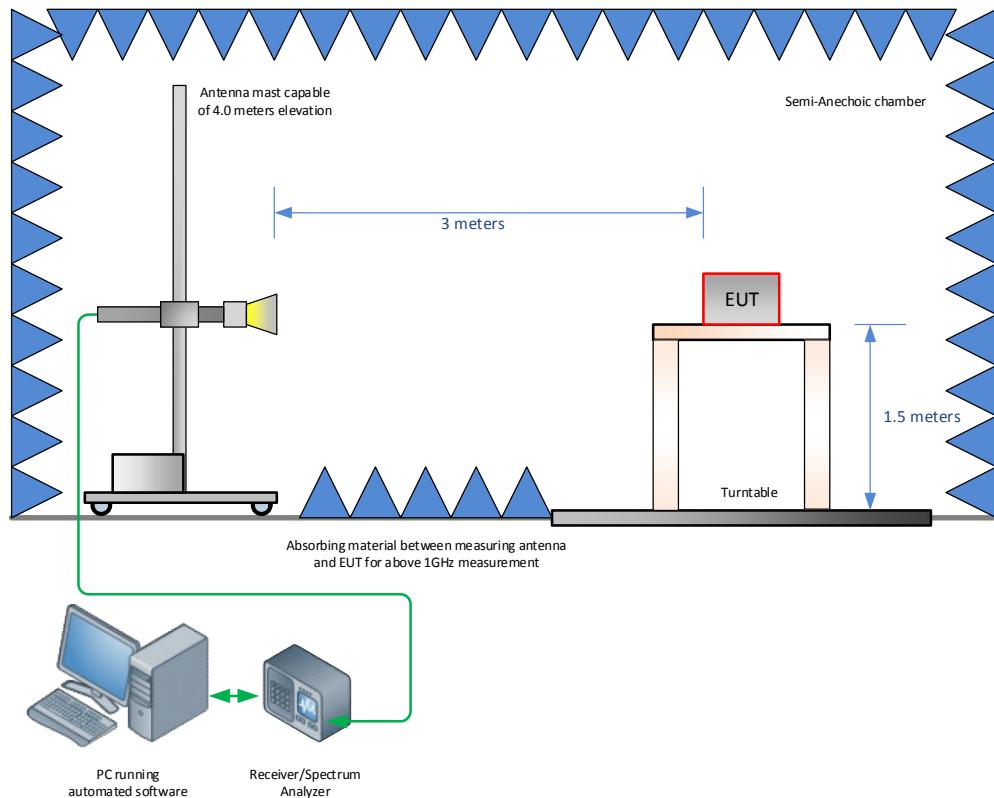**Radiated Emission Test Setup (Above 1GHz)**

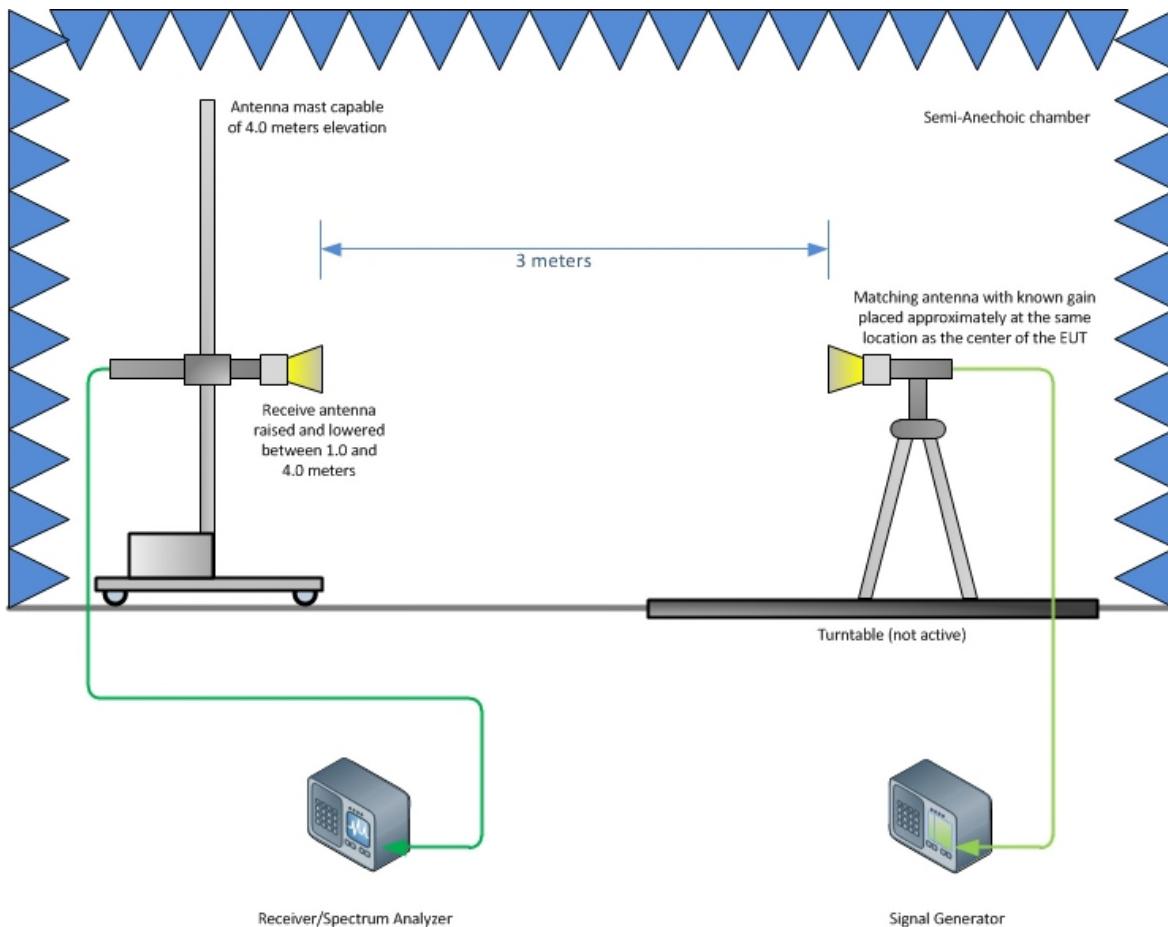**Substitution Test Method (Above 1GHz)**

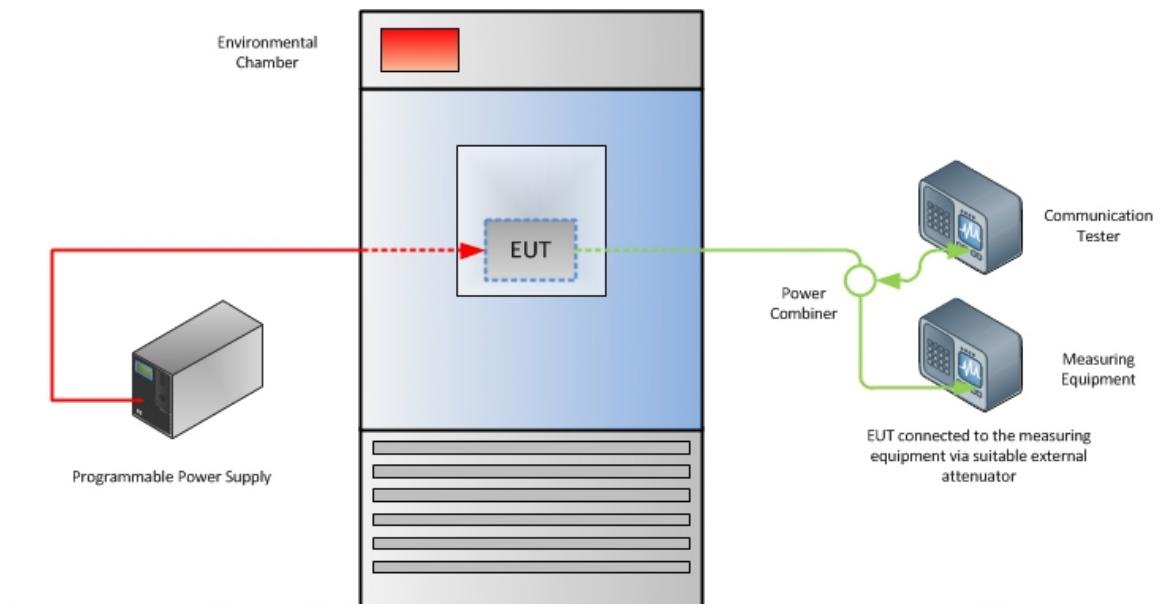**Frequency Stability Test Configuration**

FCC ID PKRNVWMIFI8800
IC: 3229A-MIFI8800
Report No. 72139211C



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.

