



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 27

Applicant Name:

IP Wireless
Unit 7 Greenways Business Park
Bellinger Close, Chippenham
Wiltshire SN15 1BN

Date of Testing:

Sep. 24-Oct.6, 2010

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1008301446.PKT

FCC ID:

PKTUSBSTKAGJ

APPLICANT:

IP WIRELESS

Application Type:

Certification

FCC Classification:

Licensed Non-Broadcast Station Transmitter (TNB)

FCC Rule Part(s):

§2; §27

EUT Type:

700MHz USB Stick Modem

Model(s):

AGJ

Tx Frequency Range:

698-716MHz (Lower Frequency Block)

776-793MHz (Upper Frequency Block)

Max. RF Output Power:

0.086 W ERP (Tx=701MHz, Rx=731MHz) (19.32 dBm)

0.103 W ERP (Tx=707MHz, Rx=737MHz) (20.13 dBm)

0.094 W ERP (Tx=713MHz, Rx=743MHz) (19.74 dBm)

0.14 W ERP (Tx=778.5MHz, Rx=748.5MHz) (21.46 dBm)

0.116 W ERP (Tx=782MHz, Rx=752MHz) (20.65 dBm)

0.119 W ERP (Tx=785.5MHz, Rx=755.5MHz) (20.75 dBm)

0.081 W ERP (Tx=790.5MHz, Rx=760.5MHz) (19.06 dBm)

Emission Designator(s):

4M13G7D(QPSK), 4M12W7D(16QAM), 4M13W7D(64QAM) (Tx=701MHz, Rx=731MHz)

4M13G7D(QPSK), 4M14W7D(16QAM), 4M14W7D(64QAM) (Tx=707MHz, Rx=737MHz)

4M11G7D(QPSK), 4M12W7D(16QAM), 4M12W7D(64QAM) (Tx=713MHz, Rx=743MHz)

4M19G7D(QPSK), 4M16W7D(16QAM), 4M17W7D(64QAM) (Tx=778.5MHz, Rx=748.5MHz)

4M16G7D(QPSK), 4M17W7D(16QAM), 4M15W7D(64QAM) (Tx=782MHz, Rx=748.5MHz)

4M12G7D(QPSK), 4M13W7D(16QAM), 4M12W7D(64QAM) (Tx=785.5MHz, Rx=755.5MHz)

4M16G7D(QPSK), 4M17W7D(16QAM), 4M17W7D(64QAM) (Tx=790.5MHz, Rx=760.5MHz)

Test Device Serial No.:

identical prototype [S/N: AGJAA3200131A]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 27.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President




FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 1 of 69

TABLE OF CONTENTS

FCC PART 27 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.3 LABELING REQUIREMENTS	5
3.0 DESCRIPTION OF TESTS	6
3.1 MEASUREMENT PROCEDURE	6
3.2 OCCUPIED BANDWIDTH EMISSION LIMITS	6
3.3 698-716MHZ (LOWER BLOCK) AND 776-793MHZ (UPPER BLOCK)	6
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	7
3.5 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	8
3.6 FREQUENCY STABILITY / TEMPERATURE VARIATION	8
4.0 TEST EQUIPMENT CALIBRATION DATA	9
5.0 SAMPLE CALCULATIONS	10
6.0 TEST RESULTS	11
6.1 SUMMARY	11
6.2 TRANSMITTER CONDUCTED OUTPUT POWER	12
6.3 EFFECTIVE RADIATED POWER OUTPUT DATA	13
6.4 TD-CDMA RADIATED MEASUREMENTS	15
TD-CDMA RADIATED MEASUREMENTS (CONT'D)	16
6.5 TD-CDMA RADIATED MEASUREMENTS IN 1559 – 1610MHZ BAND	22
6.6 TD-CDMA FREQUENCY STABILITY MEASUREMENTS	24
TD-CDMA FREQUENCY STABILITY MEASUREMENTS	26
TD-CDMA FREQUENCY STABILITY MEASUREMENTS	28
TD-CDMA FREQUENCY STABILITY MEASUREMENTS	30
TD-CDMA FREQUENCY STABILITY MEASUREMENTS	32
TD-CDMA FREQUENCY STABILITY MEASUREMENTS	34
TD-CDMA FREQUENCY STABILITY MEASUREMENTS	36
7.0 PLOT(S) OF EMISSIONS	38
8.0 CONCLUSION	69

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 2 of 69



MEASUREMENT REPORT

FCC Part 27



§2.1033 General Information

APPLICANT: IP Wireless

APPLICANT ADDRESS: Unit 7 Greenways Business Park
Bellingher Close, Chippenham, Wiltshire SN15 1BN

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): §2; §27

BASE MODEL: AGJ

FCC ID: PKTUSBSTKAGJ

FCC CLASSIFICATION: Licensed Non-Broadcast Station Transmitter (TNB)
4M13G7D(QPSK), 4M12W7D(16QAM), 4M13W7D(64QAM) (Tx=701MHz, Rx=731MHz)
4M13G7D(QPSK), 4M14W7D(16QAM), 4M14W7D(64QAM) (Tx=707MHz, Rx=737MHz)
4M11G7D(QPSK), 4M12W7D(16QAM), 4M12W7D(64QAM) (Tx=713MHz, Rx=743MHz)
4M19G7D(QPSK), 4M16W7D(16QAM), 4M17W7D(64QAM) (Tx=778.5MHz, Rx=748.5MHz)
4M16G7D(QPSK), 4M17W7D(16QAM), 4M15W7D(64QAM) (Tx=782MHz, Rx=748.5MHz)
4M12G7D(QPSK), 4M13W7D(16QAM), 4M12W7D(64QAM) (Tx=785.5MHz, Rx=755.5MHz)
4M16G7D(QPSK), 4M17W7D(16QAM), 4M17W7D(64QAM) (Tx=790.5MHz, Rx=760.5MHz)

EMISSION DESIGNATOR(S):

MODULATIONS: TD-CDMA

FREQUENCY TOLERANCE: Frequency must remain in band


Test Device Serial No.: AGJAA3200131A ☐ Production ☒ Pre-Production ☐ Engineering

DATE(S) OF TEST: Sep. 24-Oct.6, 2010

TEST REPORT S/N: 0Y1008301446.PKT

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 3 of 69

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

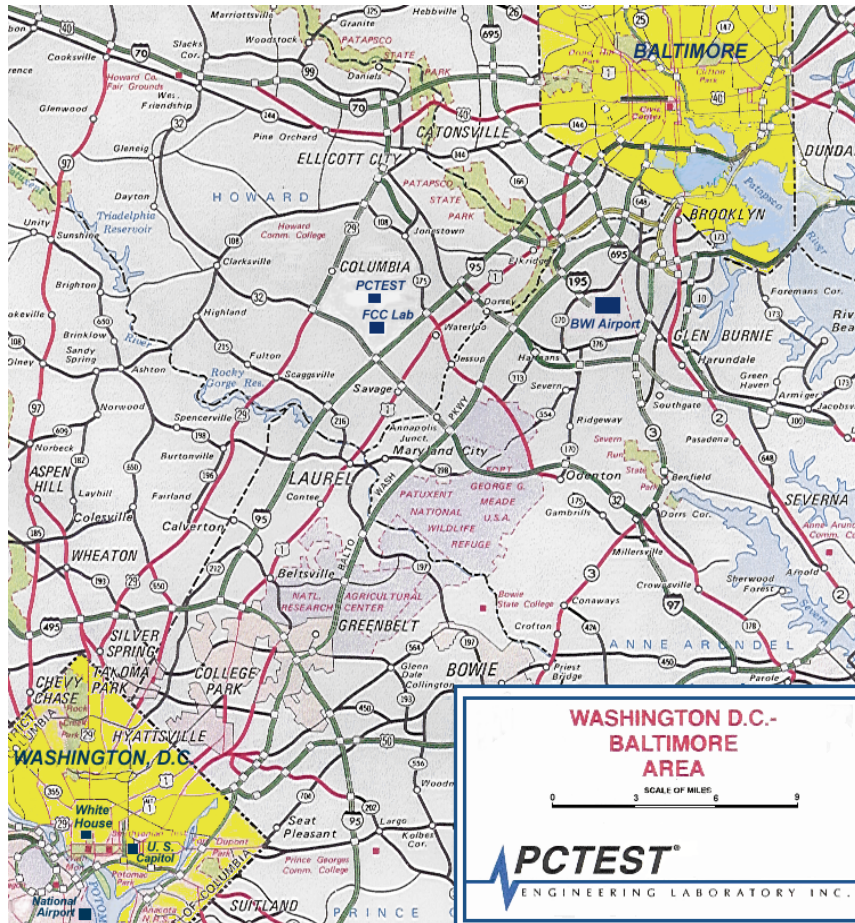


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 4 of 69

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **IP Wireless 700MHz USB Stick Modem FCC ID: PKTUSBSTKAGJ**. The test data contained in this report pertains only to the emissions due to the EUT's 700MHz band function. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
IP Wireless / Model: AGJ	PKTUSBSTKAGJ	700MHz USB Stick Modem

Table 2-1. EUT Equipment Description

The EUT was set to continuous transmission for all timeslots at full power (i.e 24dBm) through test software installed in the laptop computer provided. The chip rate is set to 3.84Mcps for a channel bandwidth of 5MHz. Each available modulation type (i.e. QPSK, 16-QAM, 64-QAM) was tested to determine the configuration producing the worst case emissions.

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.3 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 5 of 69

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (See Figure 3-1). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

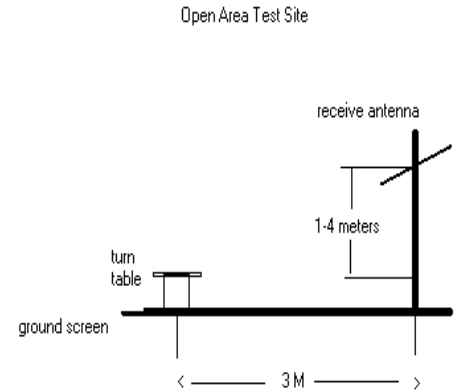


Figure 3-1. Diagram of 3-meter outdoor test range

Deviation from Measurement Procedure.....None


3.2 Occupied Bandwidth Emission Limits

§2.1049, §27.53(g)(1)

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.3 698-716MHz (Lower Block) and 776-793MHz (Upper Block)

§27.5(b)(3)

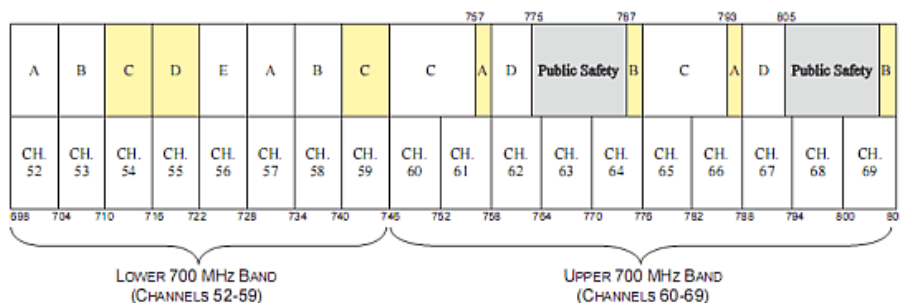

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746–757 MHz and 776–787 MHz bands. In the event that no licenses for two channels in this Block C are assigned

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 6 of 69

based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746–757 MHz and 776–787 MHz bands will instead be made available for assignment at a subsequent auction as follows:

- (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746–752 MHz and 776–782 MHz bands.
- (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752–757 MHz and 782–787 MHz bands.
- (4) Two paired channels of 5 megahertz each are available for assignment in Block D in the 758–763 MHz and 788–793 MHz bands.
- (c) *698–746 MHz band*. The following frequencies are available for licensing pursuant to this part in the 698–746 MHz band:
 - (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:
 - Block A: 698–704 MHz and 728–734 MHz;
 - Block B: 704–710 MHz and 734–740 MHz; and
 - Block C: 710–716 MHz and 740–746 MHz.

Given the band assignment described above, the device operates on the Lower 700MHz Band in Blocks A (698-704MHz), Block B (704-710MHz) and Block C (710-716MHz). In the Upper 700MHz Band, the device operates in the Blocks C, A and D from 776-793MHz.

3.4 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §27.53(c)(d)(g)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30kHz bandwidth may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency.

Additionally, for operations in the 776-788MHz band, the power of any emission outside the licensee's frequency band of operation shall be attenuated below the transmitted power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 776-688MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (2) On all frequencies between 763-775 and 793-805MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25kHz band segment.

For operations in the 788–793 MHz band, the power of any emission outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (2) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 7 of 69

3.5 Radiated Power and Radiated Spurious Emissions

§2.1053, 27.53(c)(2)(4), 27.53(d)(2)(3), 27.53(g), §27.53(f)

Radiated power and radiated spurious emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This level is then measured with a broadband average power meter. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive average power meter reading. This spurious level is recorded with the power meter. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. Additionally, all emissions including harmonics in the band 1559-1610MHz shall be limited to -70dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80dBW EIRP for discrete emissions of less than 700Hz bandwidth.

3.6 Frequency Stability / Temperature Variation

§2.1055, §27.54

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 8 of 69

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	263-10dB	(DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/2/2009	Annual	12/2/2010	3439A02645
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/2/2009	Annual	12/2/2010	3008A00985
Agilent	85650A	Quasi-Peak Adapter	12/2/2009	Annual	12/2/2010	3303A01872
Agilent	85650A	Quasi-Peak Adapter	3/30/2010	Annual	3/30/2011	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/2/2009	Annual	12/2/2010	3638A08713
Agilent	8648D	(9kHz-4GHz) Signal Generator	9/19/2009	Biennial	9/19/2011	3613A00315
Agilent	E4407B	ESA Spectrum Analyzer	3/30/2010	Annual	3/30/2011	US39210313
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	11/1/2009	Annual	11/1/2010	US42510244
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/30/2010	Annual	3/30/2011	MY45470194
Agilent	E8267C	Vector Signal Generator	9/29/2009	Biennial	9/29/2011	US42340152
Agilent	N9020A	MXA Signal Analyzer	10/22/2009	Annual	10/22/2010	US46470561
Anritsu	ML2495A	Power Meter	10/12/2009	Annual	10/12/2010	941001
Compliance Design	Roberts	Dipole Set	4/7/2010	Biennial	4/7/2012	146
Compliance Design	Roberts	Dipole Set	4/7/2010	Biennial	4/7/2012	147
Emco	3115	Horn Antenna (1-18GHz)	10/14/2009	Biennial	10/14/2011	9704-5182
Emco	3115	Horn Antenna (1-18GHz)	4/8/2010	Biennial	4/8/2012	9205-3874
Espec	ESX-2CA	Environmental Chamber	4/1/2010	Annual	4/1/2011	17620
K & L	11SH10	Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10	Band Pass Filter	N/A	Annual	N/A	4000/12000
MiniCircuits	VHF-1300+	High Pass Filter	N/A		N/A	30716
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Pasternack	PE2208-6	Bidirectional Coupler	N/A		N/A	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	11/11/2009	Annual	11/11/2010	836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	6/21/2010	Annual	6/21/2011	833855/0010
Rohde & Schwarz	CMU200	Base Station Simulator	11/4/2009	Annual	11/4/2010	109892
Rohde & Schwarz	CMU200	Base Station Simulator	6/17/2010	Annual	6/17/2011	836536/0005
Rohde & Schwarz	FSQ 26	Spectrum Analyzer	8/28/2010	Annual	8/28/2011	200452
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	8/30/2010	Annual	8/30/2011	100976
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Rx	7/17/2009	Biennial	7/17/2011	9105-2404
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Tx	7/17/2009	Biennial	7/17/2011	9105-2403
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	5/14/2009	Biennial	5/14/2011	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/17/2009	Biennial	7/17/2011	A051107

Table 4-1. Test Equipment

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 9 of 69

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 4M12G7D

TD-CDMA BW = 4.12 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

Spurious Radiated Emission – 700MHz Band

Example: 701 MHz Block Mode 2nd Harmonic (1402.0 MHz)

The average receive power meter reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminal is adjusted to produce a reading of –81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1402.0 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80) = 50.3 dBc.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 10 of 69

6.0 TEST RESULTS

6.1 Summary

Company Name: IP Wireless
 FCC ID: PKTUSBSTKAGJ
 FCC Classification: Licensed Non-Broadcast Station Transmitter (TNB)
 Mode(s): TD-CDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
2.1049, 27.53(g)(1)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 27.53(c)(2)(4), 27.53(d)(2)(3), 27.53(g)	Band Edge / Conducted Spurious Emissions	< 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions <65 + 10 log (P[Watts]) in a 6.25kHz bandwidth for emissions in the 776–788 MHz and 788-793 MHz bands		PASS	Section 7.0
2.1046	Transmitter Conducted Output Power	N/A		PASS	Section 6.2
27.50(b)(10), 27.50(c)(10)	Effective Radiated Power	< 3 Watts max. ERP	RADIATED	PASS	Section 6.3
2.1053, 27.53(c)(2)(4), 27.53(d)(2)(3), 27.53(g)	Undesirable Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.4
2.1053, 27.53(f)	Undesirable Emissions in the 1559-1610MHz band	< -40dBm/MHz EIRP (wideband) < -50dBm EIRP (narrowband)		PASS	Section 6.5
2.1055, 27.54	Frequency Stability	Fundamental emissions must stay within the allotted band		PASS	Section 6.6

Table 6-1. Summary of Test Results

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 11 of 69

6.2 Transmitter Conducted Output Power

§2.1046

The **IP Wireless 700MHz USB Stick Modem FCC ID: PKTUSBSTKAGJ** was powered by the Toshiba Laptop provided and connected to an Agilent spectrum analyzer (Model: N9020A) through the Receive and Transmit antenna ports of the device. Software installed on the laptop was used to transmit power (24dBm) for all timeslots at a given frequency band and the EUT uplink power was measured using the channel power function of the spectrum analyzer. The modulation (QPSK, 16QAM, 64QAM) of the uplink waveform was also programmed by software and the powers corresponding to each modulation are listed below.

FCC Part	Part 27						
700MHz Band Block	Lower 700 MHz Band			Upper 700 MHz Band			
	A	B	C	C & A			D
Frequency Band	698-716			776-788			788-793
Center Tx Frequency (MHz)	701	707	713	778.5	782	785.5	790.5
Rx Frequency (MHz)	731	737	743	748.5	752	755.5	760.5
Conducted Powers (dBm)							
QPSK	24.10	24.30	24.40	23.60	24.40	24.40	24.00
16QAM	24.10	24.20	24.40	23.40	24.10	24.20	23.90
64QAM	24.20	24.20	24.40	23.50	24.20	24.10	23.70

Table 6-2. Maximum Average Conducted Output Power



Figure 6-1. Conducted Output Power Test Setup Diagram

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 12 of 69

6.3 Effective Radiated Power Output Data

§27.50(b)(10), §27.50(c)(10):

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]
701.00	QPSK	-18.600	19.32	0.00	H	19.32	0.086
701.00	16QAM	-20.930	16.99	0.00	H	16.99	0.050
701.00	64QAM	-19.940	17.98	0.00	H	17.98	0.063

Table 6-3. Effective Radiated Power Output Data (698-716MHz Lower Frequency Block)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]
707.00	QPSK	-18.600	19.46	0.00	H	19.46	0.088
707.00	16QAM	-17.960	20.10	0.00	H	20.10	0.102
707.00	64QAM	-17.930	20.13	0.00	H	20.13	0.103

Table 6-4. Effective Radiated Power Output Data (698-716MHz Lower Frequency Block)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]
713.00	QPSK	-18.400	19.52	0.00	H	19.52	0.090
713.00	16QAM	-18.530	19.39	0.00	H	19.39	0.087
713.00	64QAM	-18.180	19.74	0.00	H	19.74	0.094

Table 6-5. Effective Radiated Power Output Data (698-716MHz Lower Frequency Block)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]
778.50	QPSK	-16.500	21.42	0.00	H	21.42	0.139
778.50	16QAM	-16.460	21.46	0.00	H	21.46	0.140
778.50	64QAM	-16.630	21.29	0.00	H	21.29	0.135

Table 6-6. Effective Radiated Power Output Data (776-793MHz Upper Frequency Block)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]
782.00	QPSK	-18.610	19.45	0.00	H	19.45	0.088
782.00	16QAM	-18.500	19.56	0.00	H	19.56	0.090
782.00	64QAM	-17.410	20.65	0.00	H	20.65	0.116

Table 6-7. Effective Radiated Power Output Data (776-793MHz Upper Frequency Block)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]
785.50	QPSK	-17.170	20.75	0.00	H	20.75	0.119
785.50	16QAM	-17.500	20.42	0.00	H	20.42	0.110
785.50	64QAM	-17.650	20.27	0.00	H	20.27	0.106

Table 6-8. Effective Radiated Power Output Data (776-793MHz Upper Frequency Block)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]
790.50	QPSK	-18.860	19.06	0.00	H	19.06	0.081
790.50	16QAM	-19.070	18.85	0.00	H	18.85	0.077
790.50	64QAM	-19.340	18.58	0.00	H	18.58	0.072

Table 6-9. Effective Radiated Power Output Data (776-793MHz Upper Frequency Block)

NOTES:

Effective Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the ERP is recorded.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 14 of 69

6.4 TD-CDMA Radiated Measurements

§2.1053, §27.53(c)(2)(4), §27.53(d)(2)(3), §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 701.00 MHz
 MEASURED OUTPUT POWER: 19.320 dBm = 0.086 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.32 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1402.00	-51.40	6.38	-45.02	H	64.3
2103.00	-44.43	6.70	-37.73	H	57.1
2804.00	-57.78	7.55	-50.23	H	69.6
3505.00	-52.87	7.12	-45.75	H	65.1
4206.00	-95.66	9.05	-86.61	H	105.9

Table 6-10. Radiated Spurious Data (698-716MHz Lower Block)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 15 of 69

TD-CDMA Radiated Measurements (Cont'd)

§2.1053, §27.53(c)(2)(4), §27.53(d)(2)(3), §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 707.00 MHz
 MEASURED OUTPUT POWER: 20.130 dBm = 0.103 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W)$ 33.13 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1414.00	-54.87	6.09	-48.79	H	68.9
2121.00	-54.44	6.60	-47.84	H	68.0
2828.00	-62.86	7.29	-55.57	H	75.7
3535.00	-60.42	7.51	-52.90	H	73.0
4242.00	-94.65	8.05	-86.61	H	106.7

Table 6-11. Radiated Spurious Data (698-716MHz Lower Block)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 16 of 69

TD-CDMA Radiated Measurements (Cont'd)

§2.1053, §27.53(c)(2)(4), §27.53(d)(2)(3), §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 713.00 MHz
 MEASURED OUTPUT POWER: 19.740 dBm = 0.094 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W)$ 32.74 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1426.00	-44.51	6.39	-38.12	V	57.9
2139.00	-35.31	6.70	-28.61	V	48.3
2852.00	-60.65	7.55	-53.10	V	72.8
3565.00	-47.67	7.09	-40.58	V	60.3
4278.00	-95.67	9.05	-86.62	V	106.4

Table 6-12. Radiated Spurious Data (698-716MHz Lower Block)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 17 of 69

TD-CDMA Radiated Measurements (Cont'd)

§2.1053, §27.53(c)(2)(4), §27.53(d)(2)(3), §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 778.50 MHz
 MEASURED OUTPUT POWER: 21.460 dBm = 0.140 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W)$ 34.46 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1557.00	-62.03	6.38	-55.65	V	77.1
2335.50	-54.78	6.69	-48.09	V	69.5
3114.00	-60.69	7.55	-53.14	V	74.6
3892.50	-94.10	7.15	-86.95	V	108.4
4671.00	-95.00	9.05	-85.95	V	107.4

Table 6-13. Radiated Spurious Data (776-793MHz Upper Block)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 18 of 69

TD-CDMA Radiated Measurements (Cont'd)

§2.1053, §27.53(c)(2)(4), §27.53(d)(2)(3), §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 782.00 MHz
 MEASURED OUTPUT POWER: 20.650 dBm = 0.116 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W)$ 33.65 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2346.00	-51.18	6.69	-44.48	H	65.1
3128.00	-57.86	7.55	-50.31	H	71.0
3910.00	-91.38	7.14	-84.24	H	104.9
4692.00	-92.29	9.05	-83.24	H	103.9

Table 6-14. Radiated Spurious Data (776-793MHz Upper Block)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 19 of 69

TD-CDMA Radiated Measurements (Cont'd)

§2.1053, §27.53(c)(2)(4), §27.53(d)(2)(3), §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 785.50 MHz
 MEASURED OUTPUT POWER: 20.750 dBm = 0.119 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W)$ 33.75 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2356.50	-53.92	6.70	-47.22	H	68.0
3142.00	-59.48	7.55	-51.93	H	72.7
3927.50	-91.79	7.12	-84.67	H	105.4
4713.00	-92.68	9.05	-83.63	H	104.4

Table 6-15. Radiated Spurious Data (776-793MHz Upper Block)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 20 of 69

TD-CDMA Radiated Measurements (Cont'd)

§2.1053, §27.53(c)(2)(4), §27.53(d)(2)(3), §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 790.50 MHz
 MEASURED OUTPUT POWER: 19.060 dBm = 0.081 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.06 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2371.50	-57.92	6.70	-51.22	H	70.3
3162.00	-62.06	7.55	-54.51	H	73.6
3952.50	-95.97	7.09	-88.88	H	107.9
4743.00	-96.85	9.05	-87.80	H	106.9

Table 6-16. Radiated Spurious Data (776-793MHz Upper Block)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup for ERP measurements and as stated in the tables for radiated spurious emissions. Modes QPSK, 16QAM, and 64QAM were evaluated and QPSK produced the worst case radiated spurious emissions. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 21 of 69

6.5 TD-CDMA Radiated Measurements in 1559 – 1610MHz Band

§2.1053, §27.53(f)

All of the emissions found in the 1559-1610 MHz band were wideband emissions and the limit -40dBm/MHz was applied.

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 778.50 MHz
 MODULATION SIGNAL: 16QAM
 DISTANCE: 3 meters
 NARROWBAND LIMIT: -50 dBm
 WIDEBAND LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
1567.00	-63.62	6.39	-57.24	H	-17.2

Table 6-17. Radiated Spurious Data (Tx=778.5MHz)

OPERATING FREQUENCY: 782.00 MHz
 MODULATION SIGNAL: 16QAM
 DISTANCE: 3 meters
 NARROWBAND LIMIT: -50 dBm
 WIDEBAND LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
1564.00	-64.76	6.38	-58.38	H	-18.4
1592.40	-59.63	6.39	-53.24	H	-13.2
1598.70	-61.76	6.39	-55.36	H	-15.4

Table 6-18. Radiated Spurious Data (Tx=782MHz)

OPERATING FREQUENCY: 785.50 MHz
 MODULATION SIGNAL: 16QAM
 DISTANCE: 3 meters
 NARROWBAND LIMIT: -50 dBm
 WIDEBAND LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
1568.80	-62.91	6.39	-56.52	V	-16.5
1571.00	-59.62	6.39	-53.24	H	-13.2
1573.00	-62.51	6.39	-56.13	V	-16.1

Table 6-19. Radiated Spurious Data (Tx=785.5MHz)

OPERATING FREQUENCY: 790.50 MHz
 MODULATION SIGNAL: 16QAM
 DISTANCE: 3 meters
 NARROWBAND LIMIT: -50 dBm
 WIDEBAND LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
1578.90	-65.09	6.39	-58.71	V	-18.7
1581.00	-62.86	6.39	-56.47	H	-16.5
1582.97	-62.97	6.39	-56.58	V	-16.6
1596.87	-61.79	6.39	-55.40	V	-15.4

Table 6-20. Radiated Spurious Data (Tx=790.5MHz)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested in all configurations and the highest power is reported as shown in the following test results tables with their respective modulation. This unit was tested while powered by the laptop via USB port. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found with the EUT in the polarity as indicated in the above tables while connected to the USB port of the laptop PC through a short USB extension cable. The data reported in the table above was measured in this test setup.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 23 of 69

6.6 TD-CDMA Frequency Stability Measurements

\$2.1055, \$27.54

Note: The EUT is operable from 4.75VDC to 5.25VDC. The EUT was not tested outside that voltage range.

OPERATING FREQUENCY: 701,000,000 Hz

REFERENCE VOLTAGE: 5 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	5.00	+ 20 (Ref)	701,000,150	150	0.000021
100 %		- 30	701,000,204	204	0.000029
100 %		- 20	700,999,900	-100	-0.000014
100 %		- 10	701,000,132	132	0.000019
100 %		0	700,999,797	-203	-0.000029
100 %		+ 10	700,999,796	-204	-0.000029
100 %		+ 20	701,000,180	180	0.000026
100 %		+ 30	701,000,306	306	0.000044
100 %		+ 40	700,999,771	-229	-0.000033
100 %		+ 50	700,999,893	-107	-0.000015
105 %	5.25	+ 20	701,000,148	148	0.000021
BATT. ENDPOINT	4.75	+ 20	700,999,797	-203	-0.000029

Table 6-21. Frequency Stability Data (TD-CDMA Mode – Tx=701MHz)

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 24 of 69

TD-CDMA Frequency Stability Measurements (Cont'd)

§2.1055, §27.54

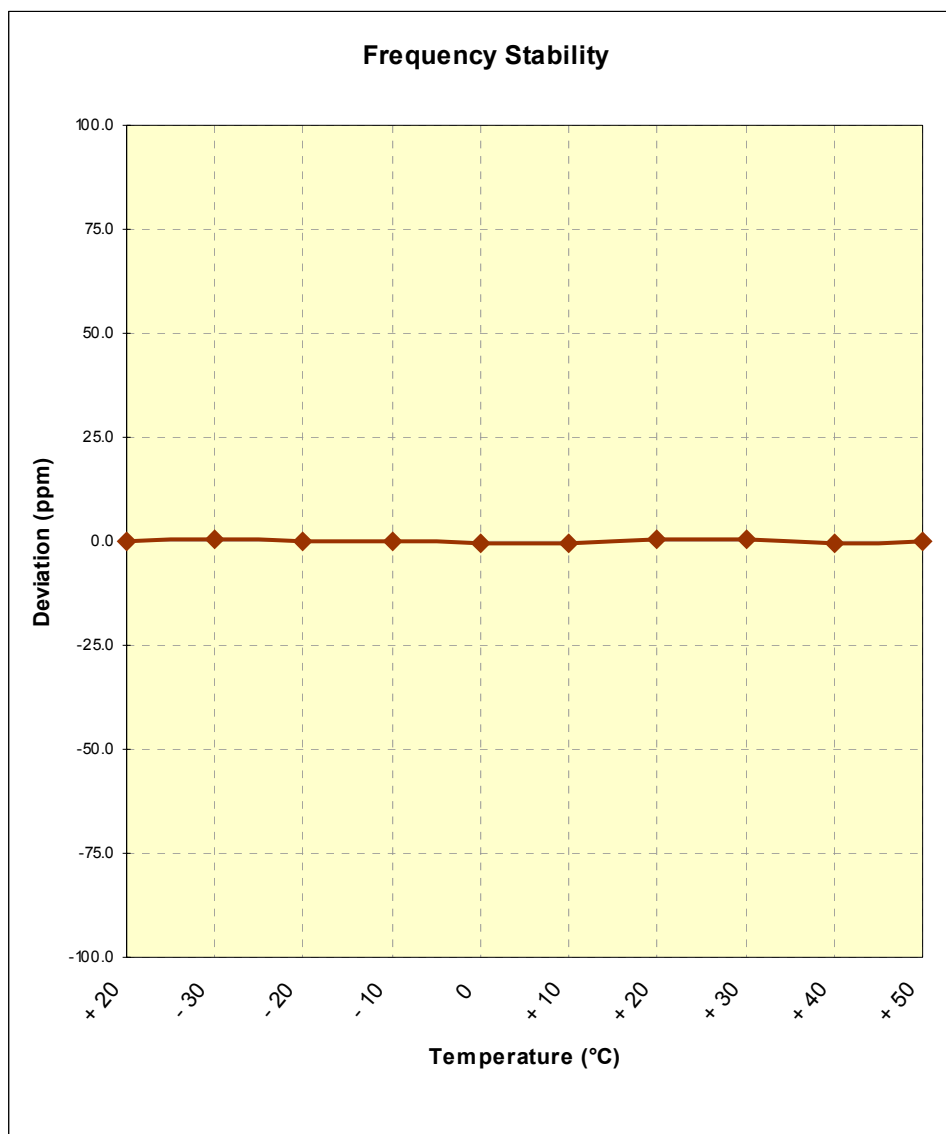


Figure 6-2. Frequency Stability Graph (TD-CDMA Mode Tx=701MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 25 of 69

TD-CDMA Frequency Stability Measurements

\$2.1055, \$27.54

OPERATING FREQUENCY: 707,000,000 Hz

REFERENCE VOLTAGE: 5 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	5.00	+ 20 (Ref)	706,999,865	-135	-0.000019
100 %		- 30	707,000,220	220	0.000031
100 %		- 20	707,000,180	180	0.000025
100 %		- 10	706,999,650	-350	-0.000050
100 %		0	707,000,166	166	0.000023
100 %		+ 10	706,999,800	-200	-0.000028
100 %		+ 20	707,000,166	166	0.000023
100 %		+ 30	706,999,751	-249	-0.000035
100 %		+ 40	707,000,213	213	0.000030
100 %		+ 50	707,000,685	685	0.000097
105 %	5.25	+ 20	706,999,396	-604	-0.000085
BATT. ENDPOINT	4.75	+ 20	706,999,663	-337	-0.000048

Table 6-22. Frequency Stability Data (TD-CDMA Mode – Tx=707MHz)

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 26 of 69

TD-CDMA Frequency Stability Measurements (Cont'd)

§2.1055, §27.54

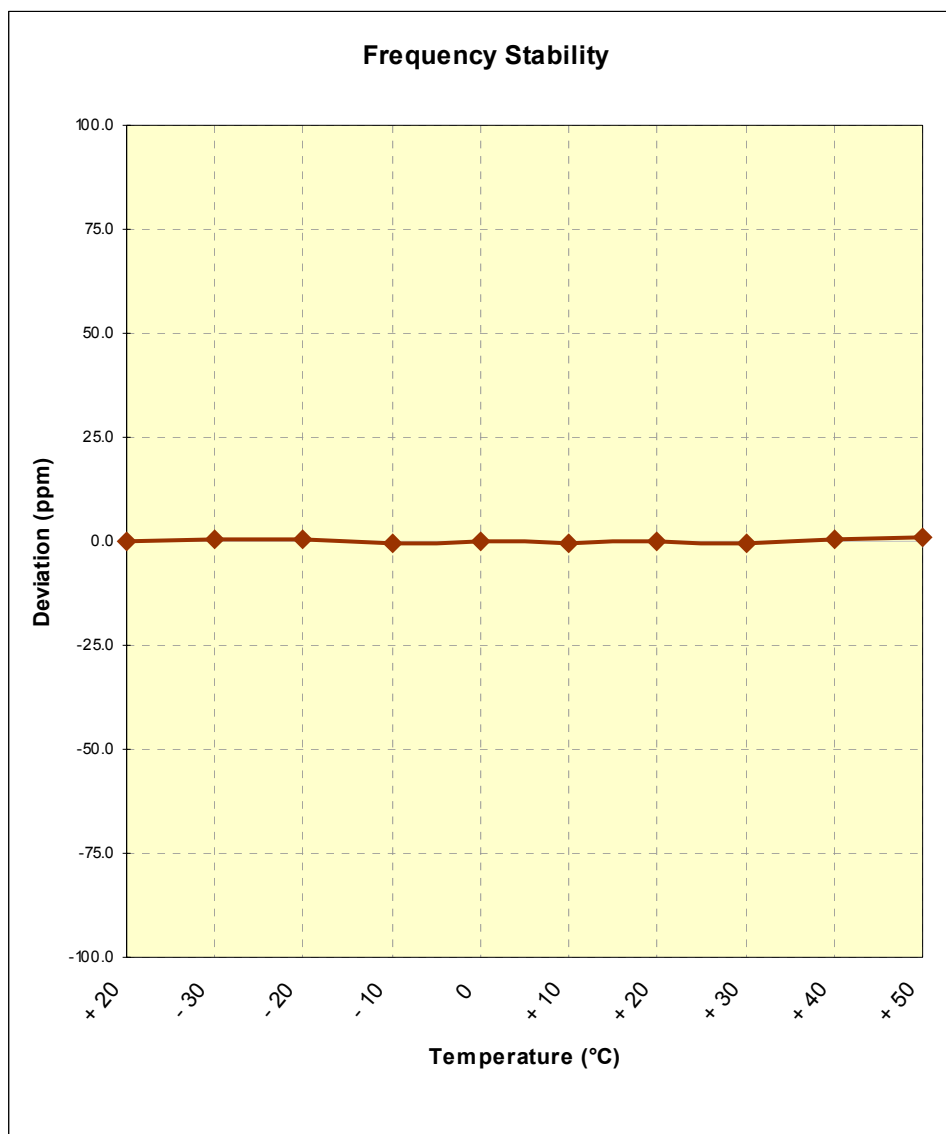


Figure 6-3. Frequency Stability Graph (TD-CDMA Mode Tx=707MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 27 of 69

TD-CDMA Frequency Stability Measurements

§2.1055, §27.54

OPERATING FREQUENCY: 713,000,000 Hz

REFERENCE VOLTAGE: 5 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	5.00	+ 20 (Ref)	712,999,867	-133	-0.000019
100 %		- 30	712,999,795	-205	-0.000029
100 %		- 20	713,000,188	188	0.000026
100 %		- 10	713,000,165	165	0.000023
100 %		0	712,999,796	-204	-0.000029
100 %		+ 10	712,999,805	-195	-0.000027
100 %		+ 20	713,000,180	180	0.000025
100 %		+ 30	713,000,203	203	0.000028
100 %		+ 40	713,000,174	174	0.000024
100 %		+ 50	713,000,200	200	0.000028
105 %	5.25	+ 20	713,000,300	300	0.000042
BATT. ENDPOINT	4.75	+ 20	712,999,744	-256	-0.000036

Table 6-23. Frequency Stability Data (TD-CDMA Mode – Tx=713MHz)

TD-CDMA Frequency Stability Measurements (Cont'd)

§2.1055, §27.54

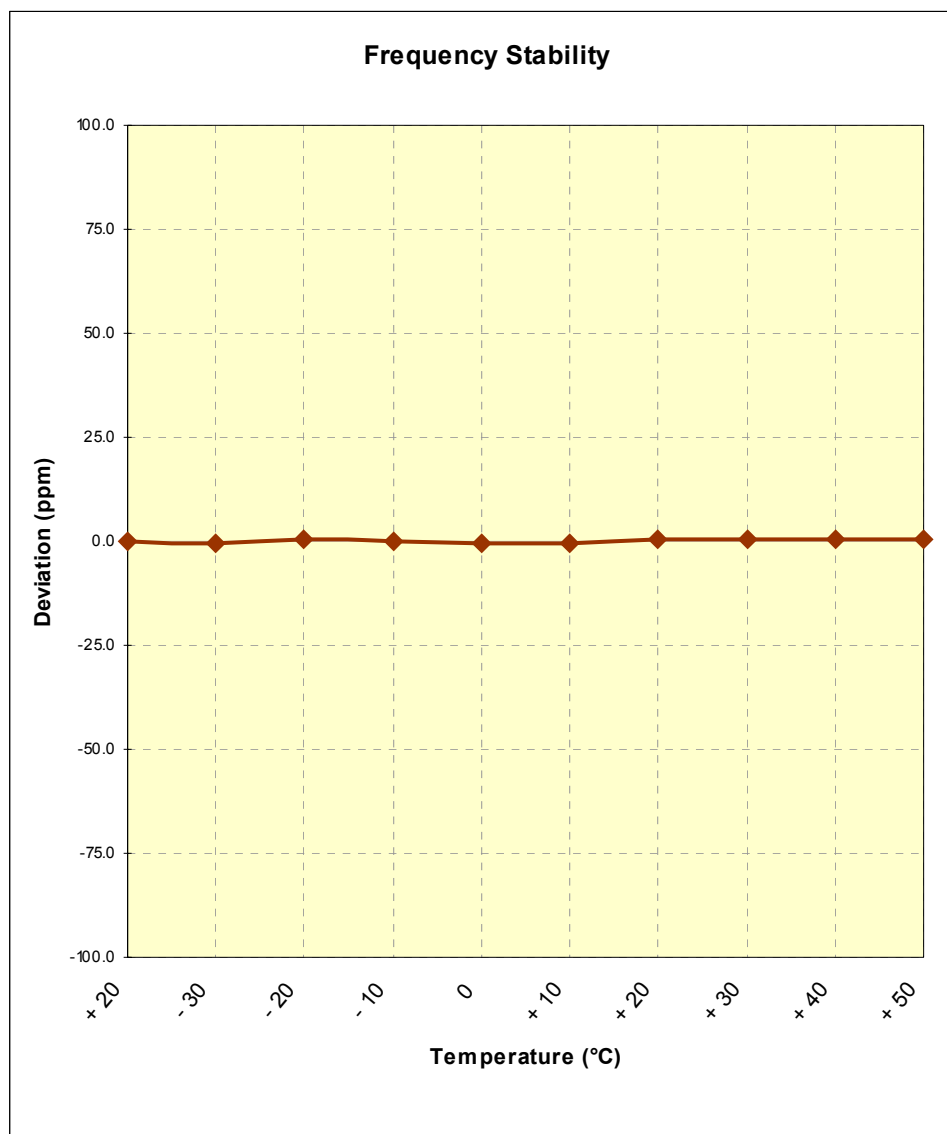


Figure 6-4. Frequency Stability Graph (TD-CDMA Mode - Tx=713MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 29 of 69

TD-CDMA Frequency Stability Measurements

\$2.1055, \$27.54

OPERATING FREQUENCY: 778,500,000 Hz

REFERENCE VOLTAGE: 5 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	5.00	+ 20 (Ref)	778,500,269	269	0.000035
100 %		- 30	778,500,200	200	0.000026
100 %		- 20	778,499,868	-132	-0.000017
100 %		- 10	778,500,177	177	0.000023
100 %		0	778,500,165	165	0.000021
100 %		+ 10	778,500,209	209	0.000027
100 %		+ 20	778,499,334	-666	-0.000086
100 %		+ 30	778,499,782	-218	-0.000028
100 %		+ 40	778,500,336	336	0.000043
100 %		+ 50	778,500,223	223	0.000029
105 %	5.25	+ 20	778,500,602	602	0.000077
BATT. ENDPOINT	4.75	+ 20	778,499,812	-188	-0.000024

Table 6-24. Frequency Stability Data (TD-CDMA Mode –Tx=778.5MHz)

TD-CDMA Frequency Stability Measurements (Cont'd)

§2.1055, §27.54

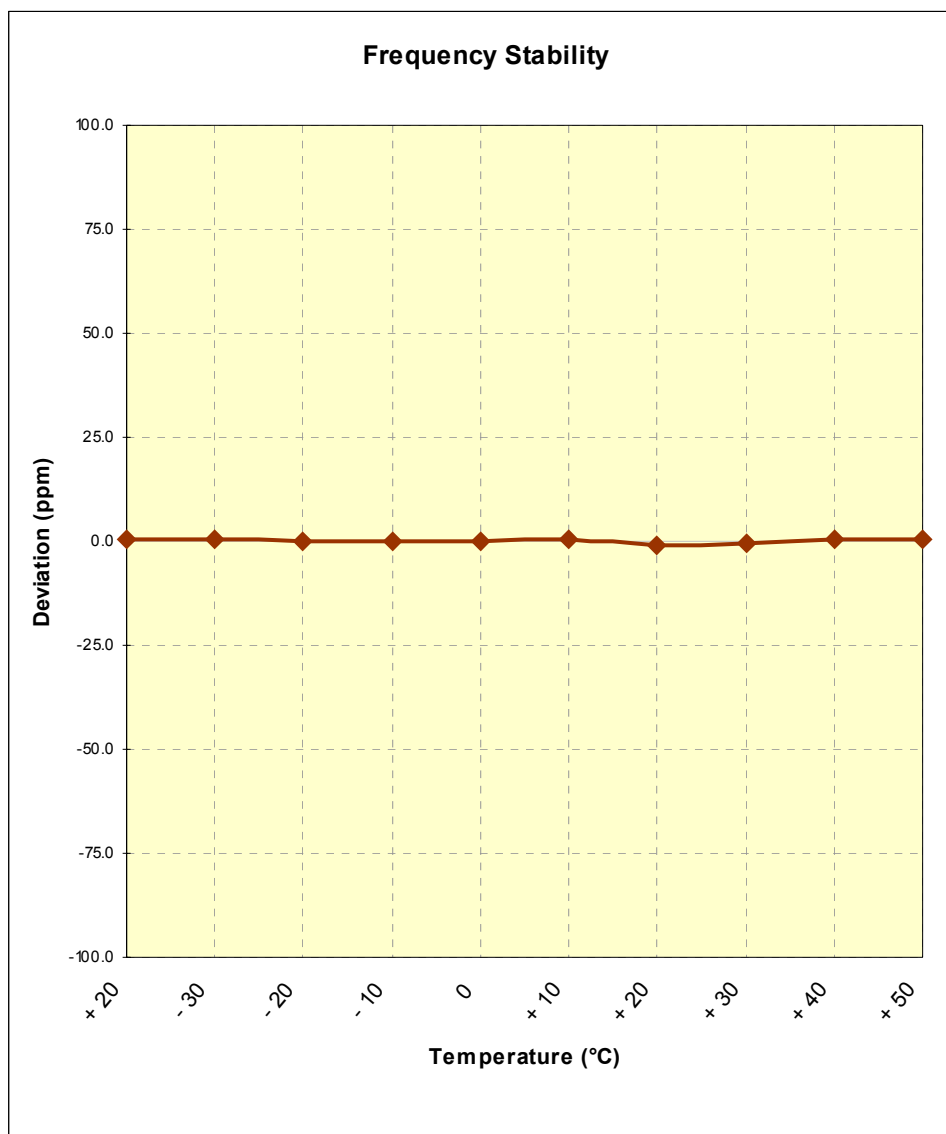


Figure 6-5. Frequency Stability Graph (TD-CDMA Mode Tx=778.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 31 of 69

TD-CDMA Frequency Stability Measurements

§2.1055, §27.54

OPERATING FREQUENCY: 782,000,000 Hz

REFERENCE VOLTAGE: 5 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	5.00	+ 20 (Ref)	782,000,331	331	0.000042
100 %		- 30	782,000,228	228	0.000029
100 %		- 20	781,999,835	-165	-0.000021
100 %		- 10	781,999,896	-104	-0.000013
100 %		0	781,999,777	-223	-0.000029
100 %		+ 10	781,999,395	-605	-0.000077
100 %		+ 20	782,000,378	378	0.000048
100 %		+ 30	782,000,845	845	0.000108
100 %		+ 40	781,999,385	-615	-0.000079
100 %		+ 50	781,999,552	-448	-0.000057
105 %	5.25	+ 20	782,000,093	93	0.000012
BATT. ENDPOINT	4.75	+ 20	781,999,852	-148	-0.000019

Table 6-25. Frequency Stability Data (TD-CDMA Mode – Tx=782MHz)

TD-CDMA Frequency Stability Measurements (Cont'd)

§2.1055, §27.54

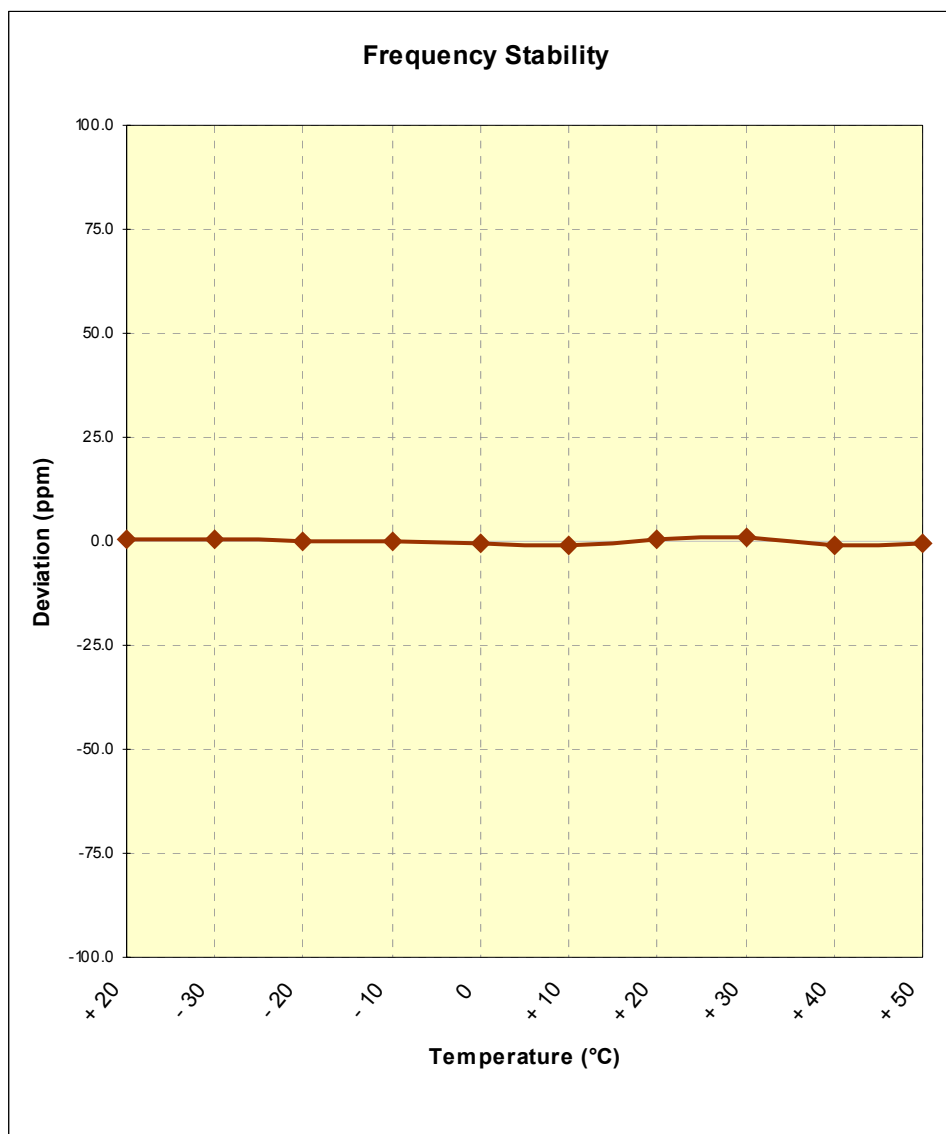


Figure 6-6. Frequency Stability Graph (TD-CDMA Mode Tx=782MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 33 of 69

TD-CDMA Frequency Stability Measurements

\$2.1055, \$27.54

OPERATING FREQUENCY: 785,500,000 Hz

REFERENCE VOLTAGE: 5 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	5.00	+ 20 (Ref)	785,500,125	125	0.000016
100 %		- 30	785,499,774	-226	-0.000029
100 %		- 20	785,500,185	185	0.000024
100 %		- 10	785,500,602	602	0.000077
100 %		0	785,500,345	345	0.000044
100 %		+ 10	785,499,500	-500	-0.000064
100 %		+ 20	785,499,739	-261	-0.000033
100 %		+ 30	785,500,188	188	0.000024
100 %		+ 40	785,499,741	-259	-0.000033
100 %		+ 50	785,499,644	-356	-0.000045
105 %	5.25	+ 20	785,500,600	600	0.000076
BATT. ENDPOINT	4.75	+ 20	785,500,175	175	0.000022

Table 6-26. Frequency Stability Data (TD-CDMA Mode – Tx=785.5MHz)

TD-CDMA Frequency Stability Measurements (Cont'd)

§2.1055, §27.54

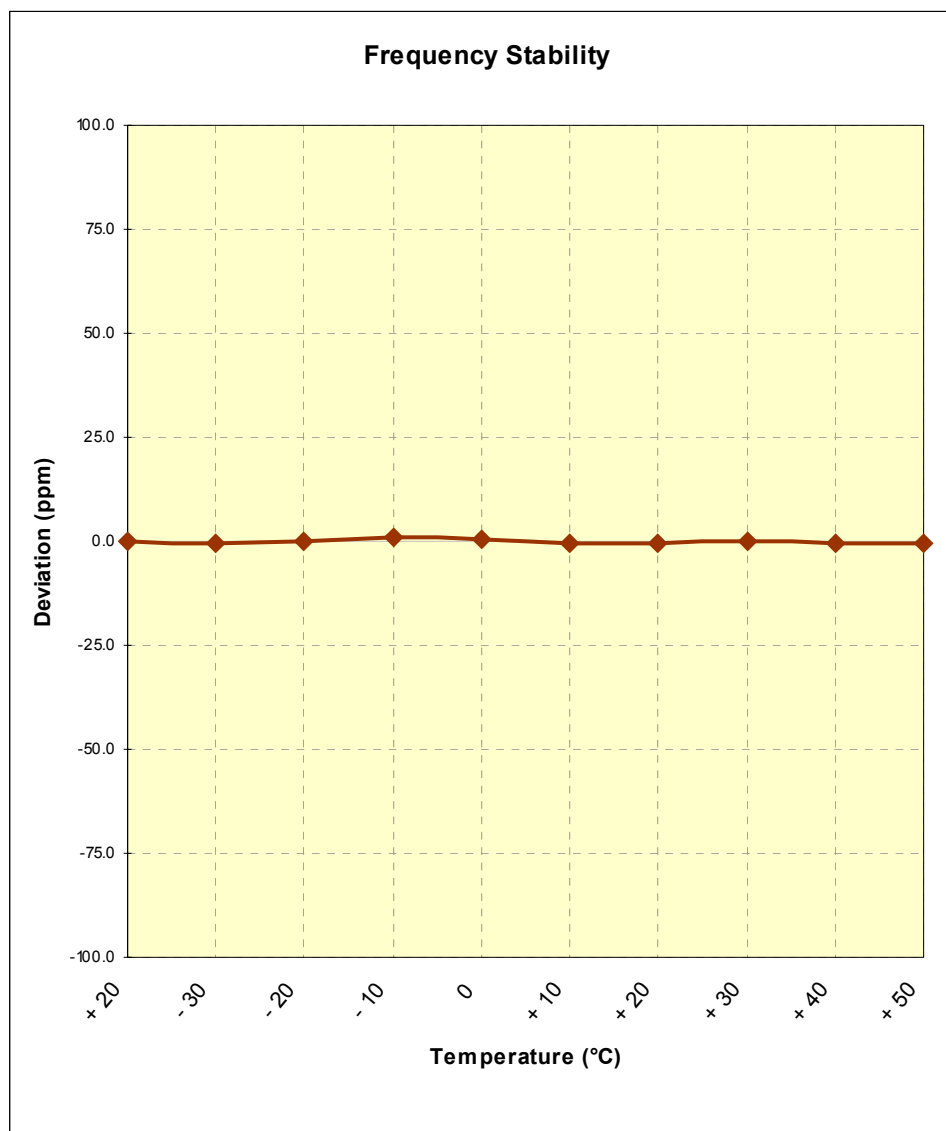


Figure 6-7. Frequency Stability Graph (TD-CDMA Mode Tx=785.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 35 of 69

TD-CDMA Frequency Stability Measurements

§2.1055, §27.54

OPERATING FREQUENCY: 790,500,000 Hz

REFERENCE VOLTAGE: 5 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	5.00	+ 20 (Ref)	790,500,362	362	0.000046
100 %		- 30	790,499,744	-256	-0.000032
100 %		- 20	790,499,585	-415	-0.000052
100 %		- 10	790,499,598	-402	-0.000051
100 %		0	790,499,679	-321	-0.000041
100 %		+ 10	790,499,832	-168	-0.000021
100 %		+ 20	790,499,729	-271	-0.000034
100 %		+ 30	790,499,850	-150	-0.000019
100 %		+ 40	790,500,148	148	0.000019
100 %		+ 50	790,499,200	-800	-0.000101
105 %	5.25	+ 20	790,499,674	-326	-0.000041
BATT. ENDPOINT	4.75	+ 20	790,499,815	-185	-0.000023

Table 6-27. Frequency Stability Data (TD-CDMA Mode – Tx=790.5MHz)

TD-CDMA Frequency Stability Measurements (Cont'd)

§2.1055, §27.54


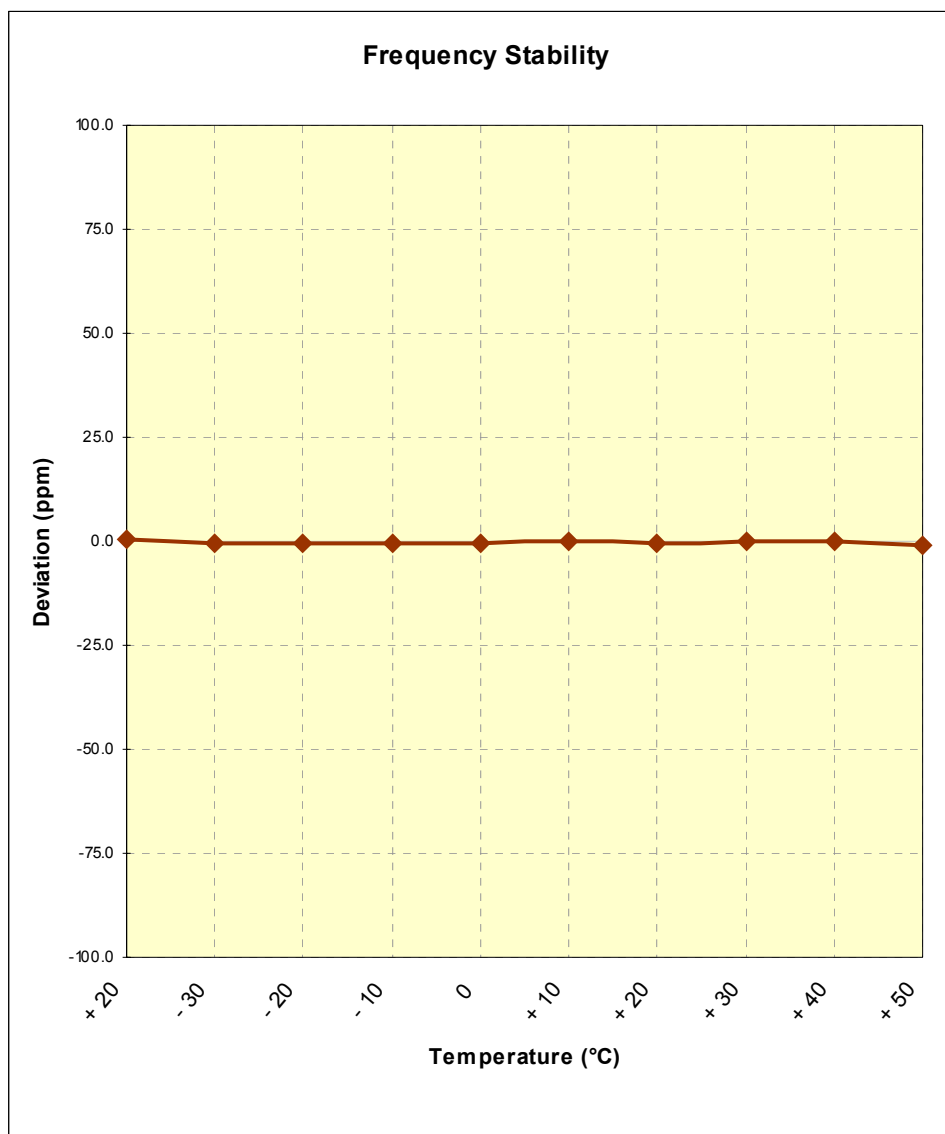


Figure 6-8. Frequency Stability Graph (TD-CDMA Mode Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 37 of 69


7.0 PLOT(S) OF EMISSIONS

Lower Block (698-716MHz)

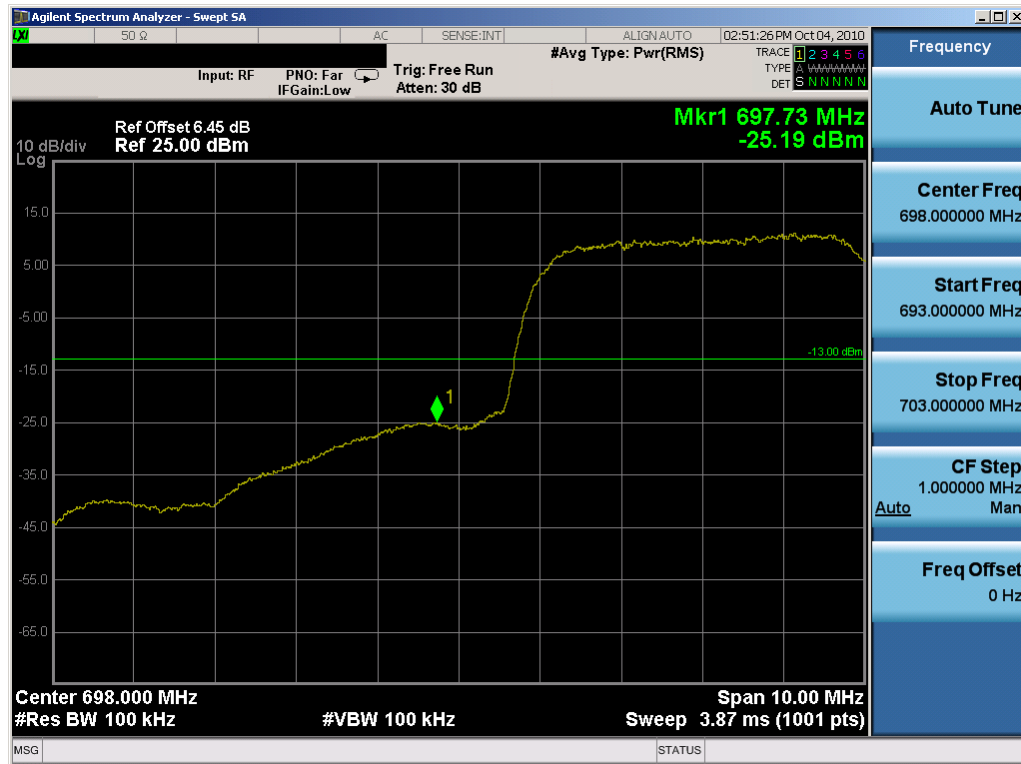


Plot 7-1. Lower Band Edge Plot (QPSK, Tx=701MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 38 of 69

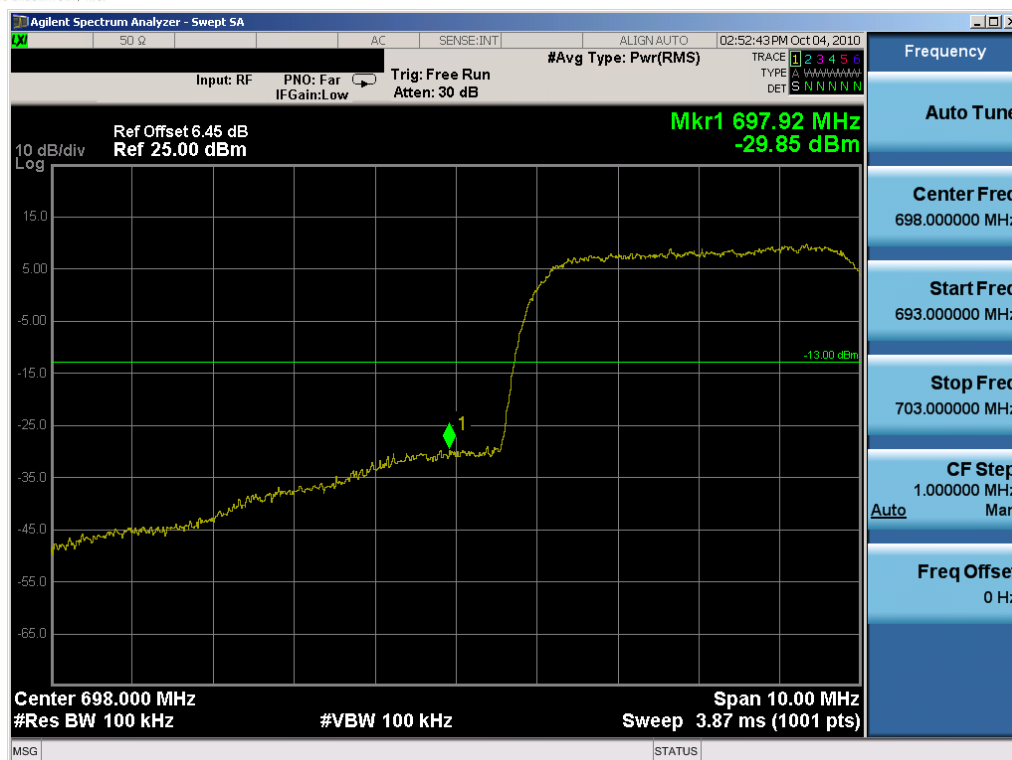


Plot 7-2. Lower Band Edge Plot (16QAM, Tx=701MHz)

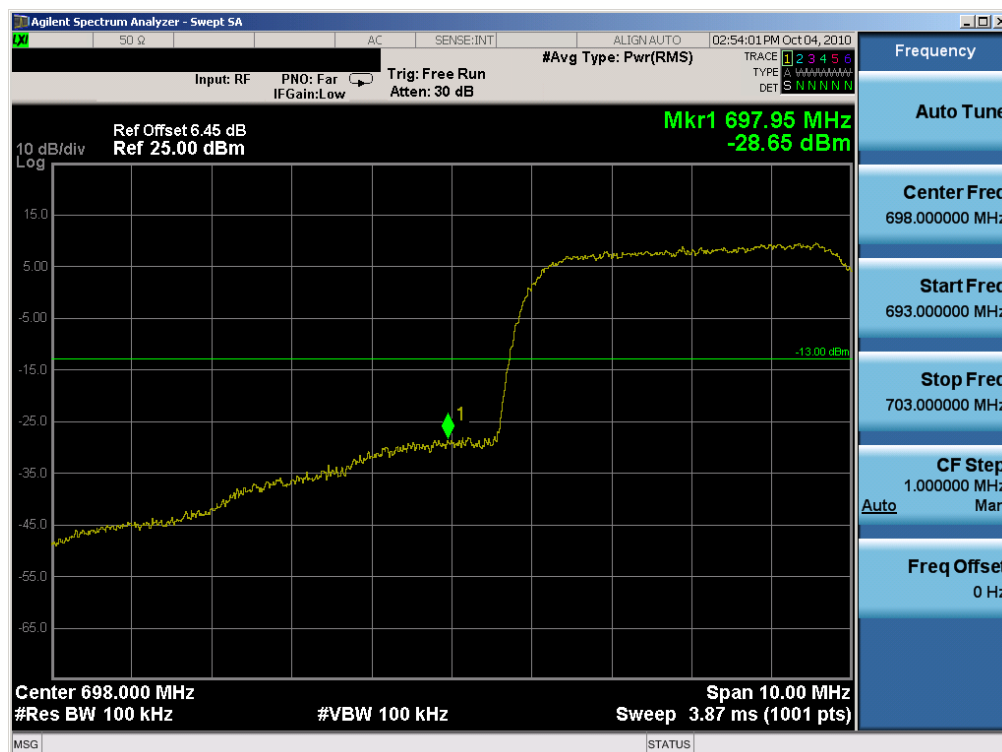


Plot 7-3. Lower Band Edge Plot (64QAM, Tx=701MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 39 of 69

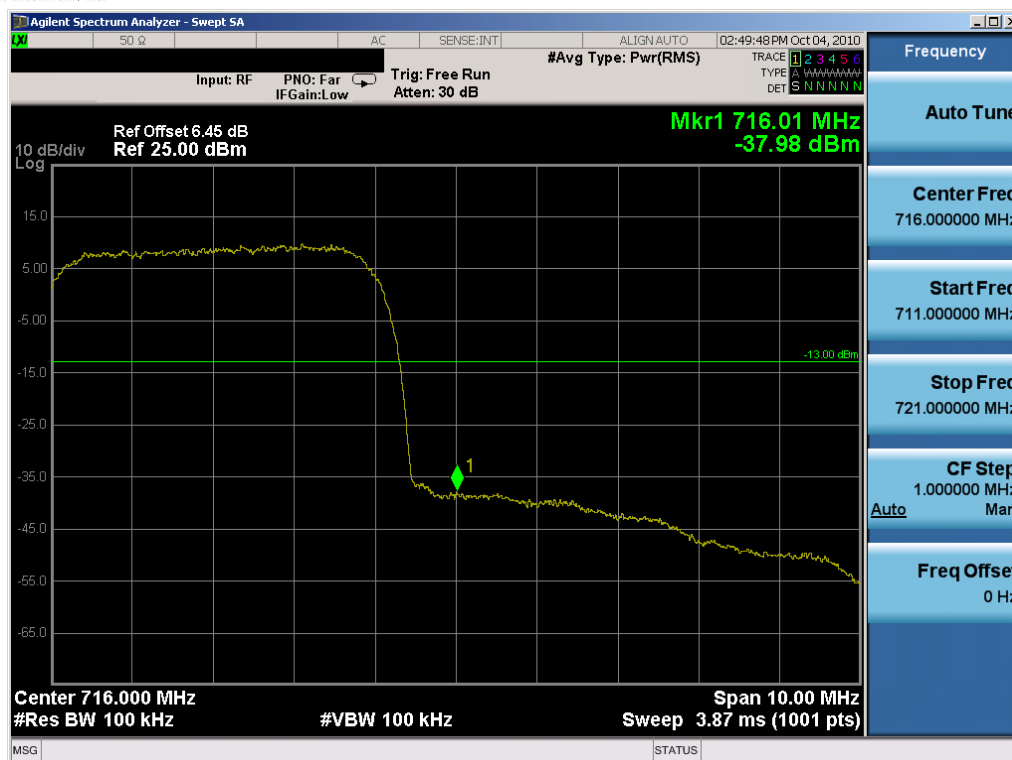


Plot 7-4. Upper Band Edge Plot (QPSK, Tx=713MHz)

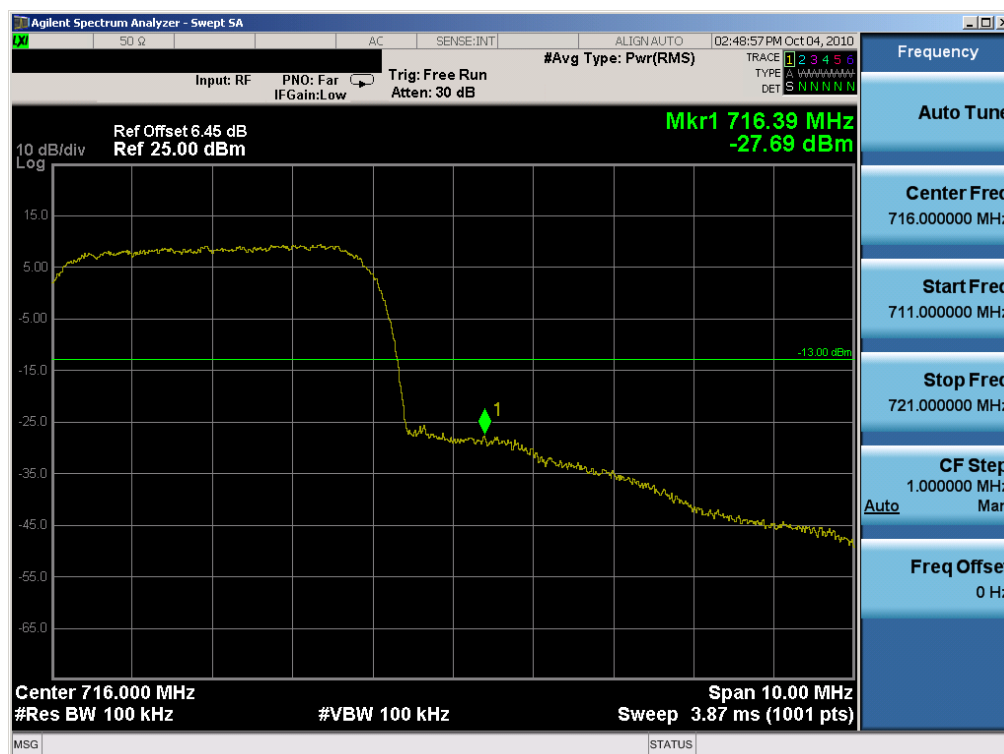


Plot 7-5. Upper Band Edge Plot (16QAM, Tx=713MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 40 of 69

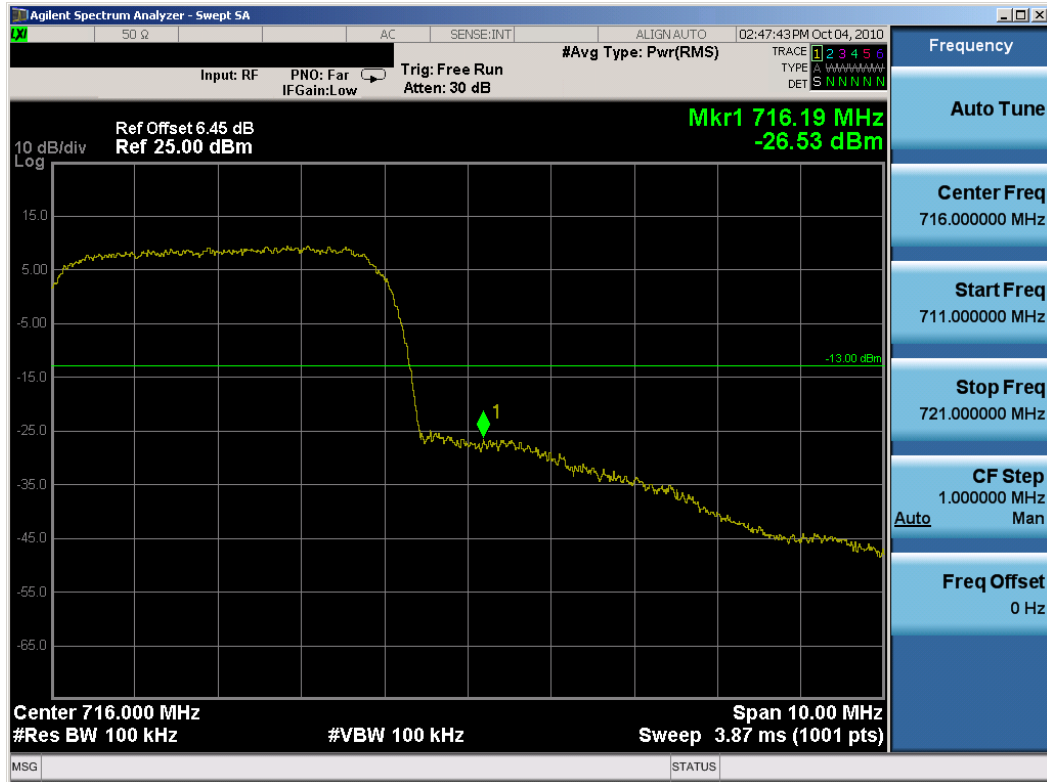

Plot 7-6. Upper Band Edge Plot (64QAM, Tx=713MHz)

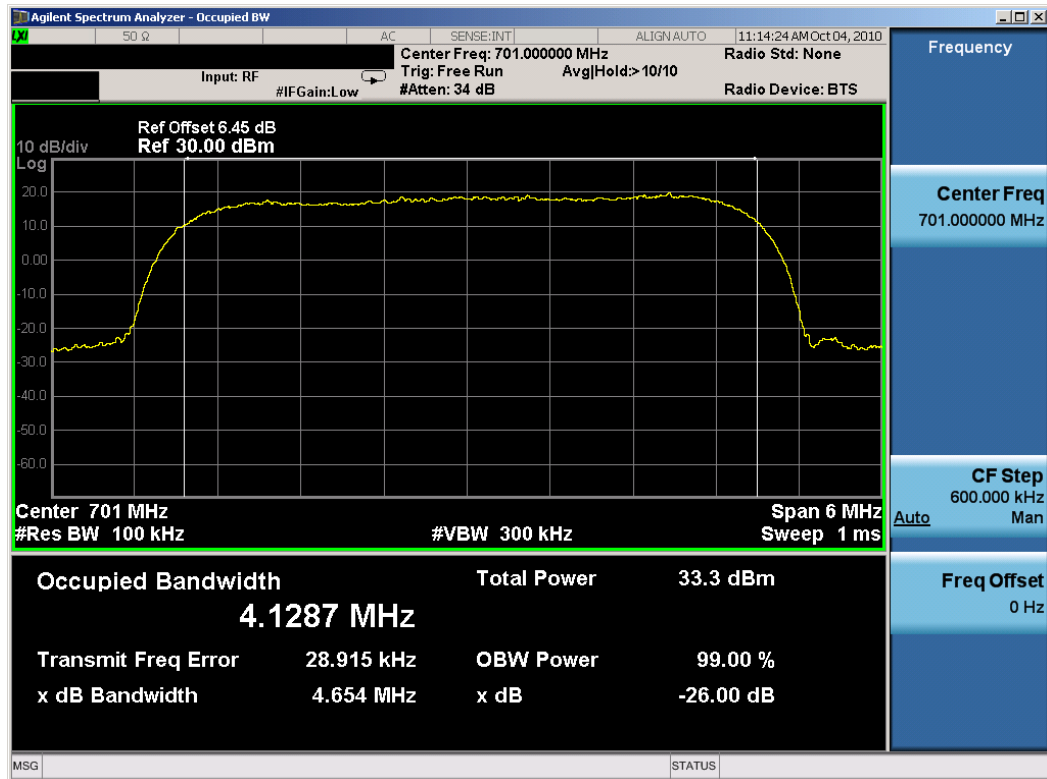


Plot 7-7. Occupied Bandwidth Plot (QPSK, Tx=701MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 41 of 69




Plot 7-8. Occupied Bandwidth Plot (16QAM, Tx=701MHz)

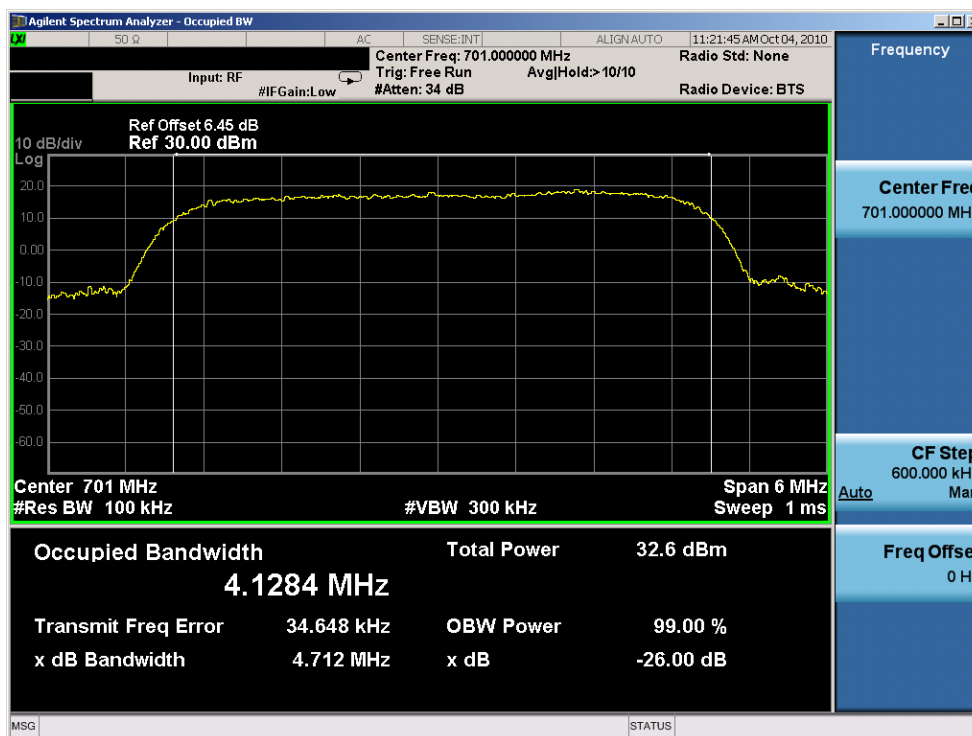


Plot 7-9. Occupied Bandwidth Plot (64QAM, Tx=701MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 42 of 69

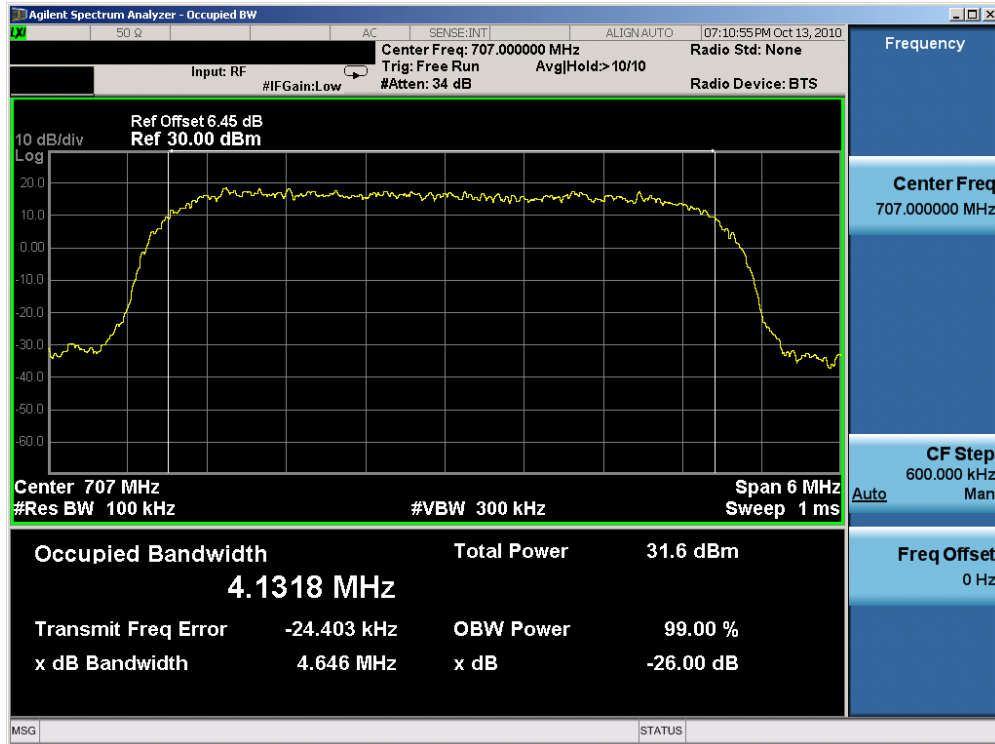


Plot 7-10. Occupied Bandwidth Plot (QPSK Tx=707MHz)

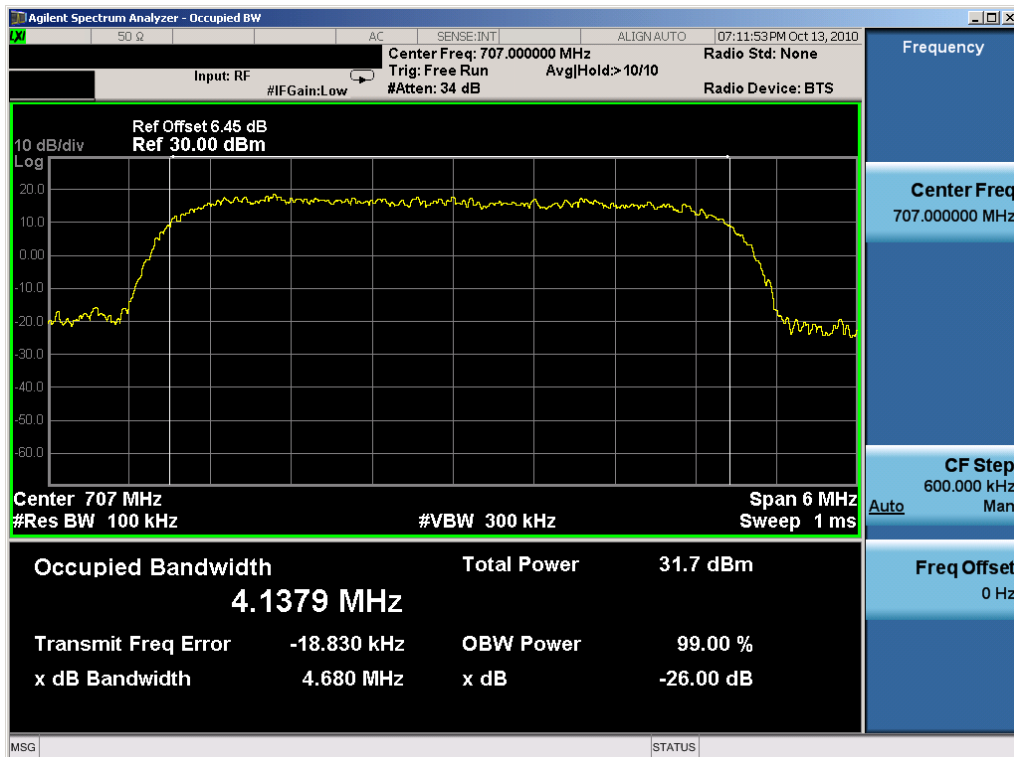


Plot 7-11. Occupied Bandwidth Plot (16QAM, Tx=707MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 43 of 69

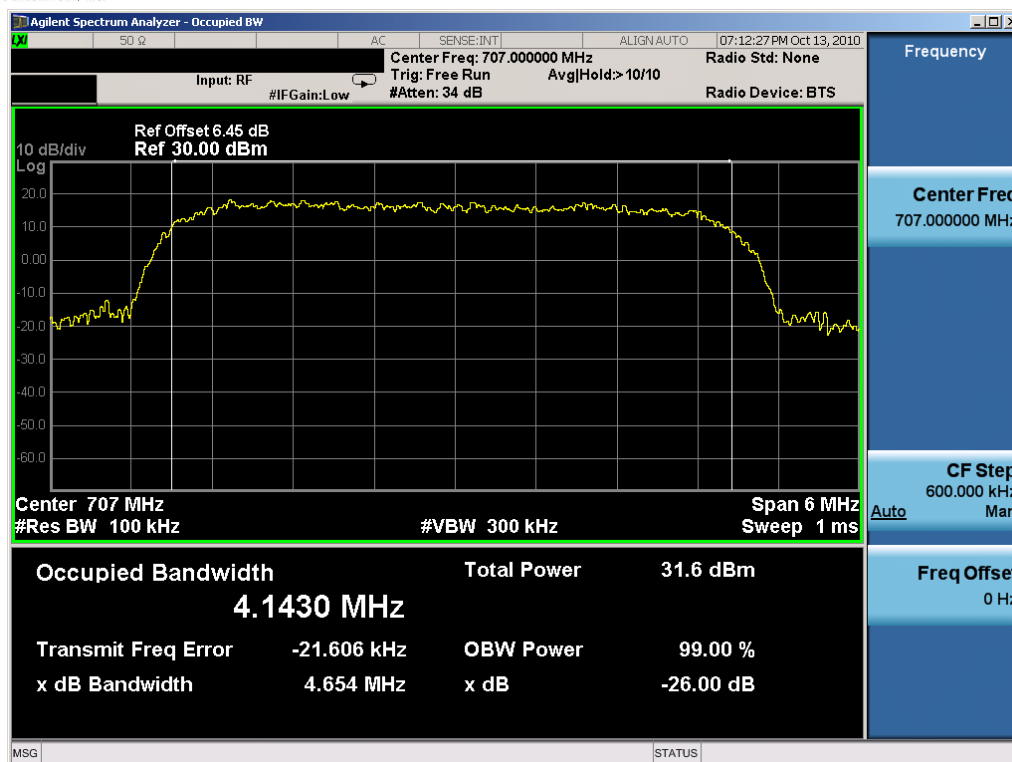


Plot 7-12. Occupied Bandwidth Plot (64QAM, Tx=707MHz)

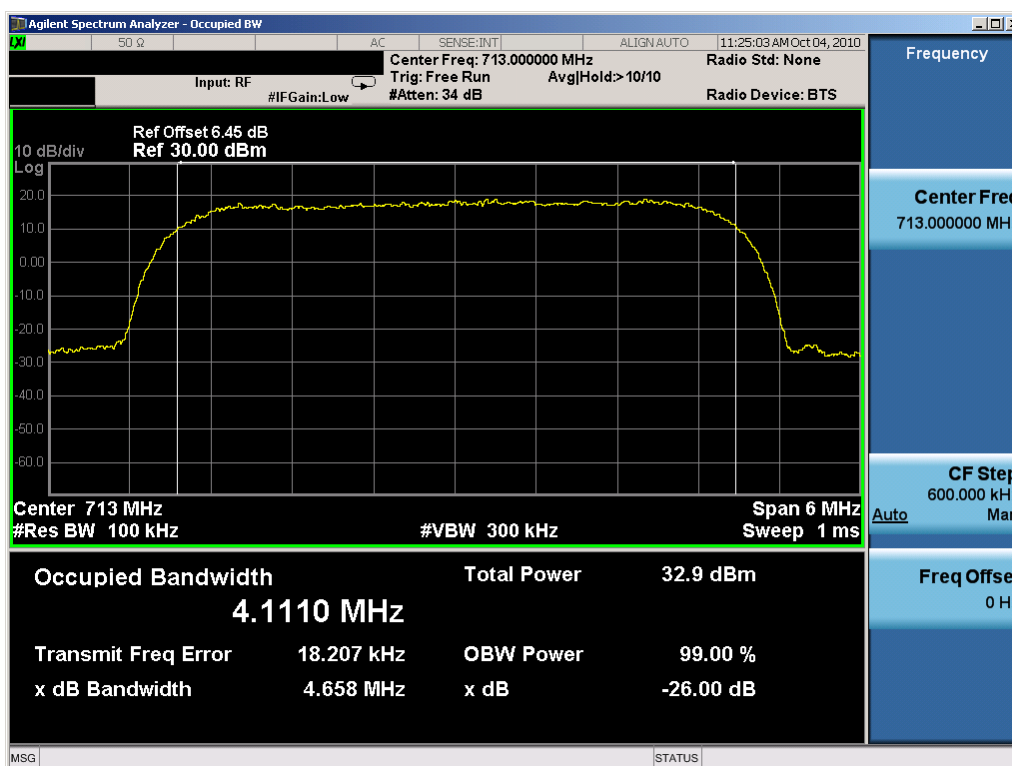


Plot 7-13. Occupied Bandwidth Plot (QPSK, Tx=713MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 44 of 69

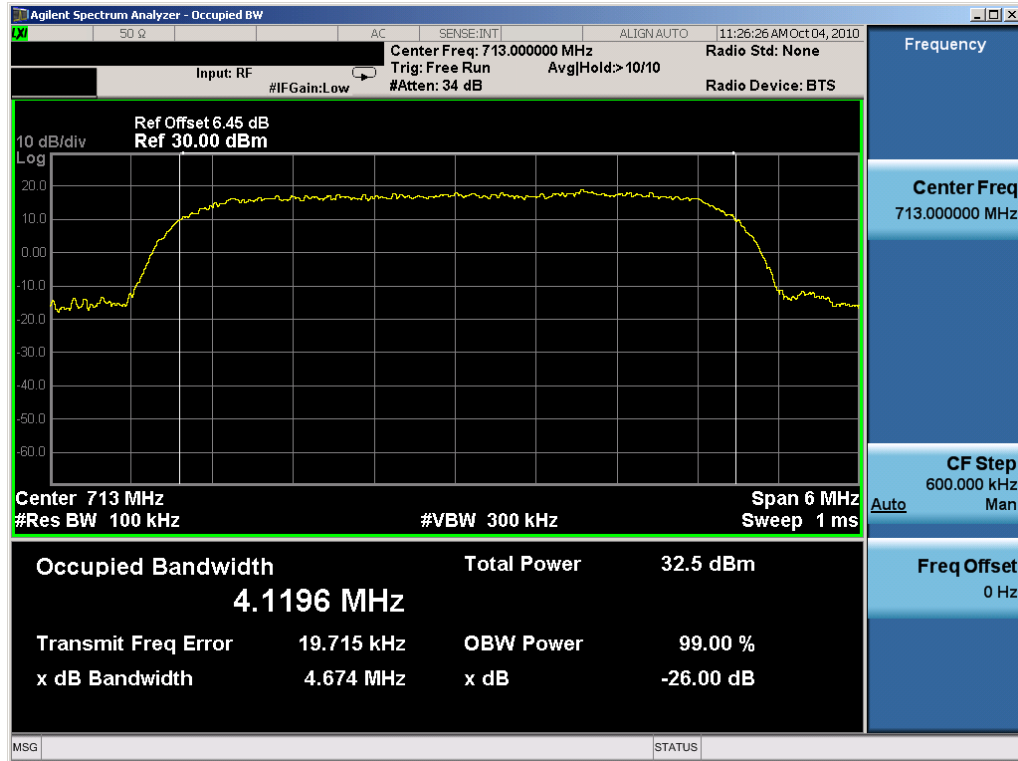

Plot 7-14. Occupied Bandwidth Plot (16QAM, Tx=713MHz)

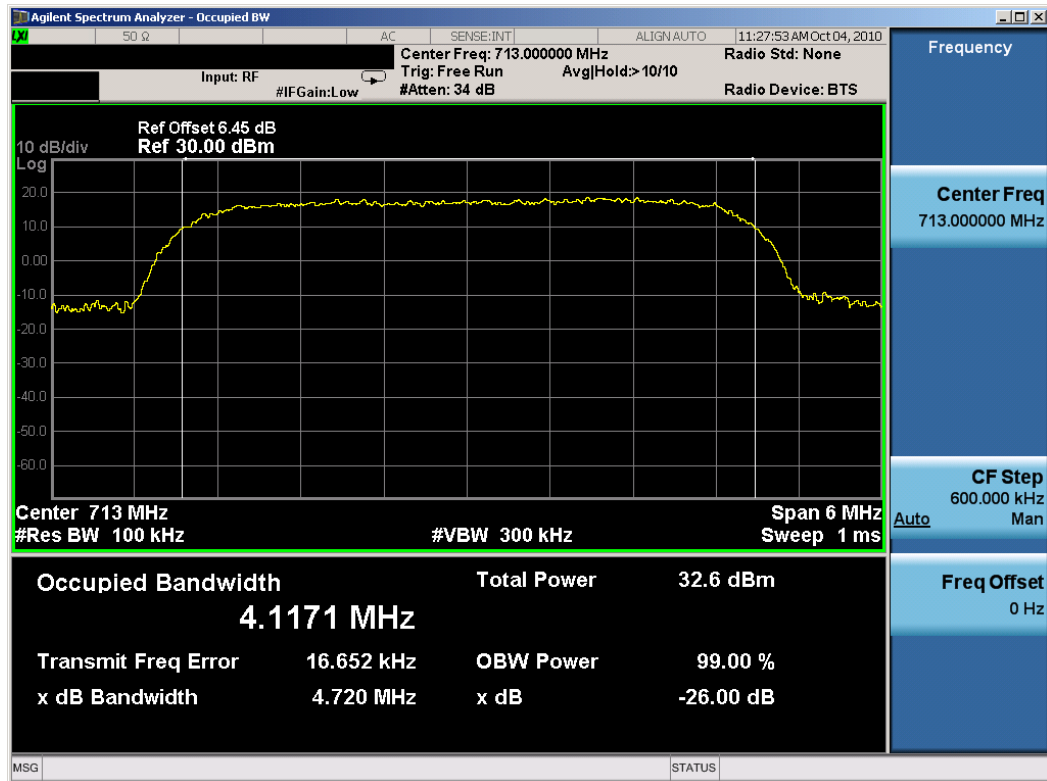


Plot 7-15. Occupied Bandwidth Plot (64QAM, Tx=713MHz)


FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 45 of 69

Out-of-Band Spurious Emissions

For the following conducted spurious emission plots, all modulations were tested and 64QAM mode exhibited the worst case emissions.

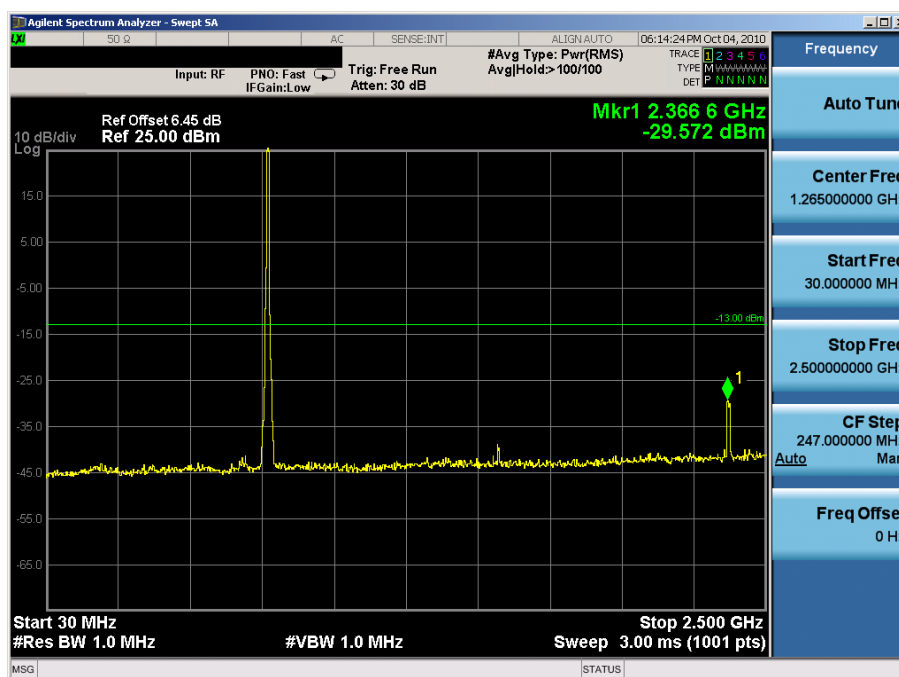


Plot 7-16. Conducted Spurious Plot (64QAM, Tx=701MHz)

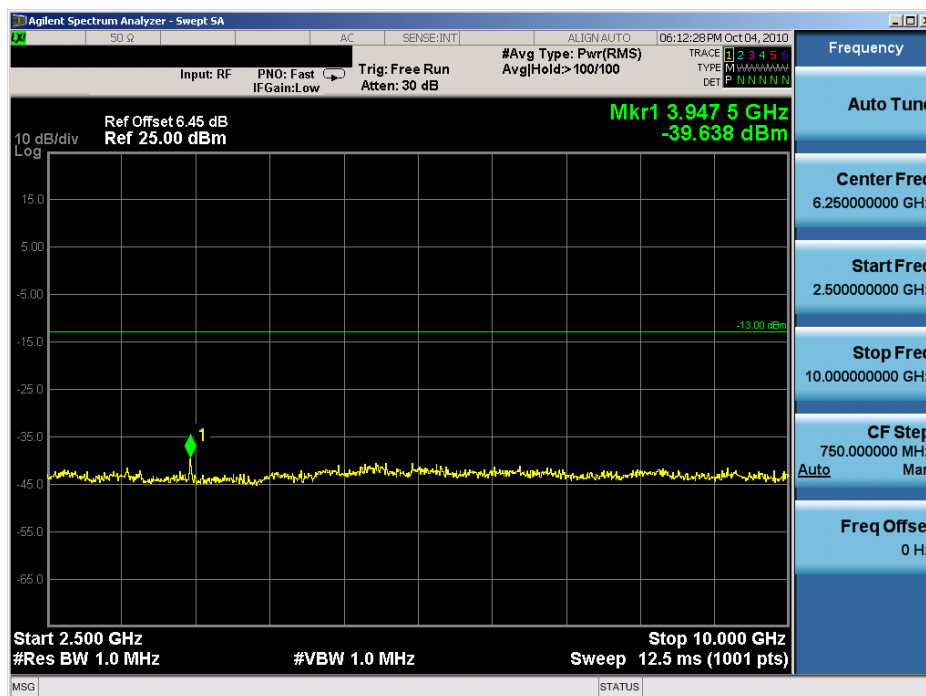


Plot 7-17. Conducted Spurious Plot (64QAM, Tx=701MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 46 of 69

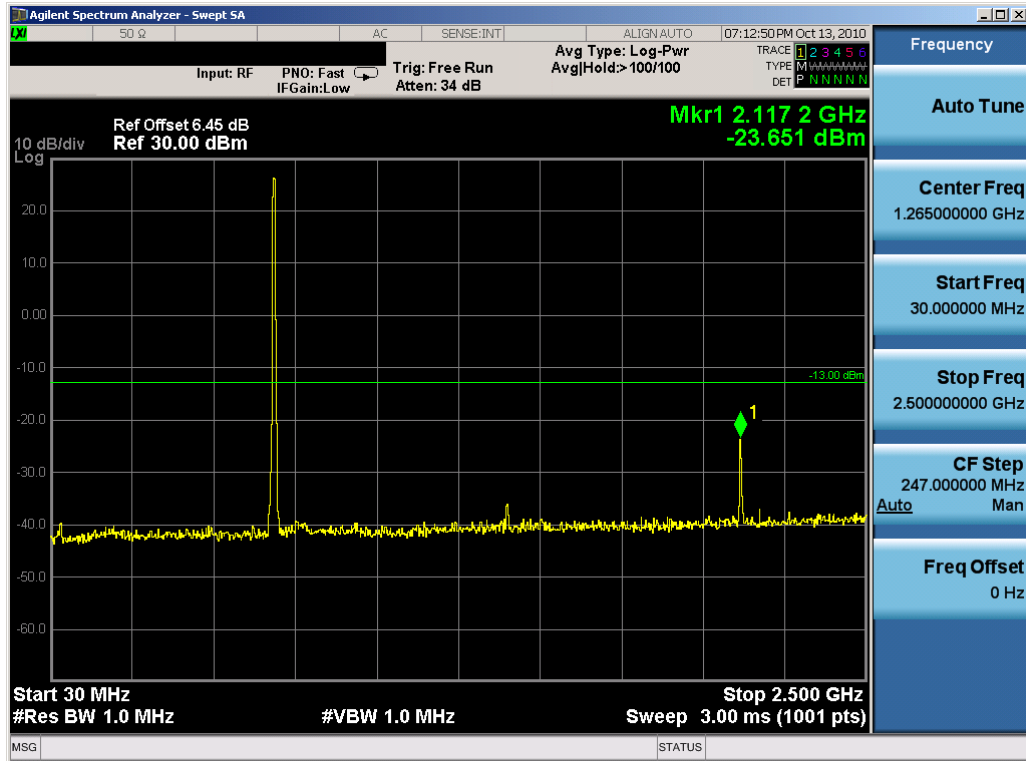


Plot 7-18. Conducted Spurious Plot (64QAM, Tx=707MHz)

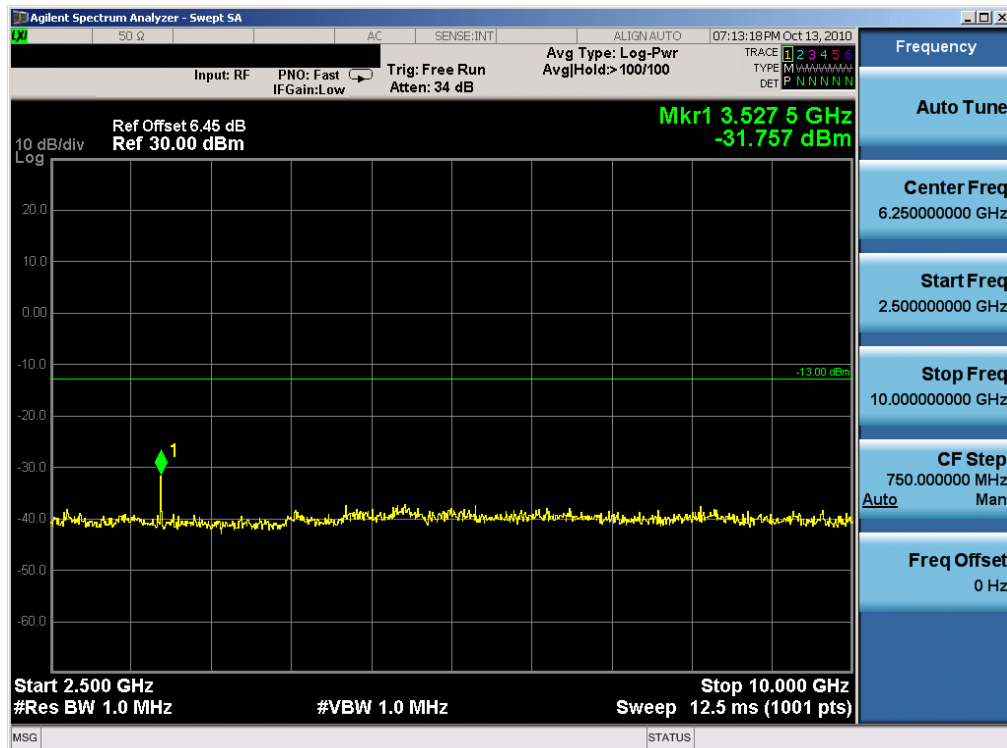


Plot 7-19. Conducted Spurious Plot (64QAM, Tx=707MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 47 of 69

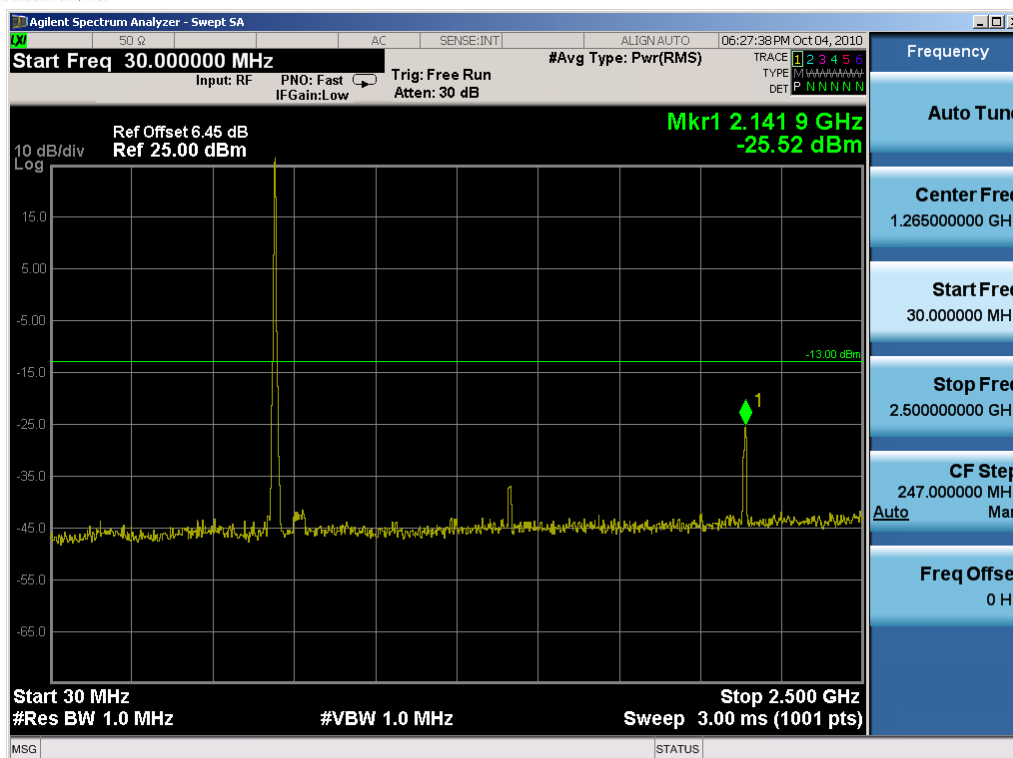

Plot 7-20. Conducted Spurious Plot (64QAM, Tx=713MHz)

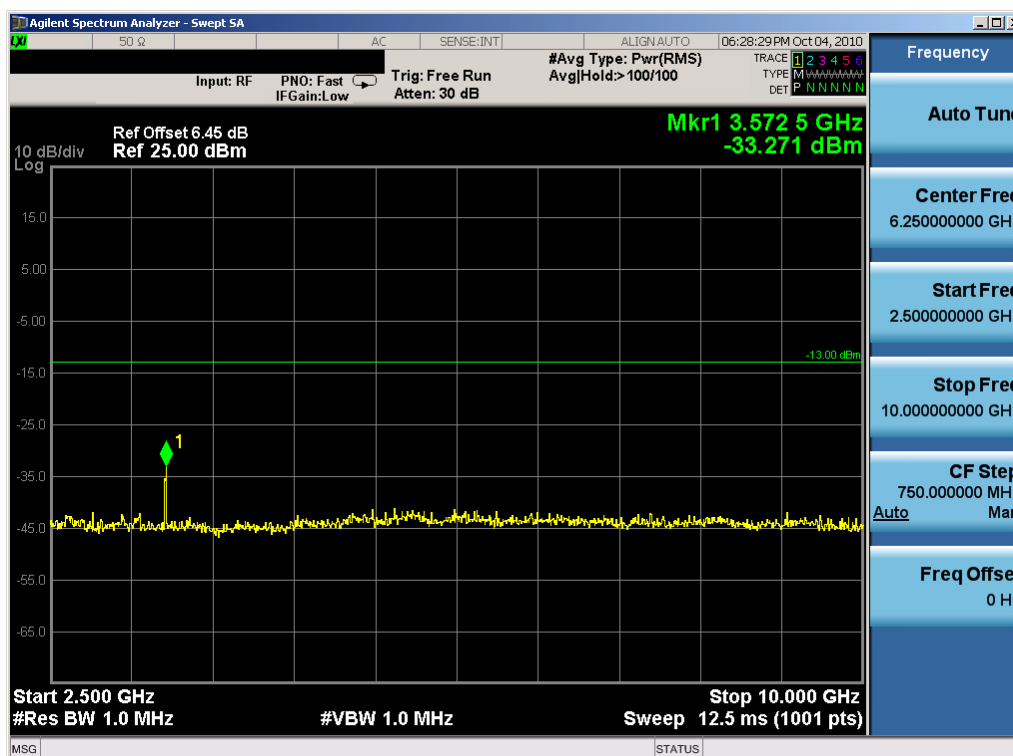


Plot 7-21. Conducted Spurious Plot (64QAM, Tx=713MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 48 of 69


Upper Block (776-788MHz)

For the plots showing emissions in the 769 – 775MHz and 799 – 805MHz band, the FCC limit is $65 + 10\log_{10}(P_{\text{Watts}}) = -35\text{dBm}$ in a 6.25kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25kHz with the available equipment, a bandwidth of 10kHz was used instead to show compliance. By using a 10kHz bandwidth, the limit was adjusted by $10\log_{10}(10\text{kHz}/6.25\text{kHz}) = 2.04\text{dB}$. Thus, the limit shown in all plots in the 769 – 775MHz and 799 – 805MHz bands for all available modulation types was $-35\text{dBm} + 2.04\text{dB} = -32.96\text{dBm}$.

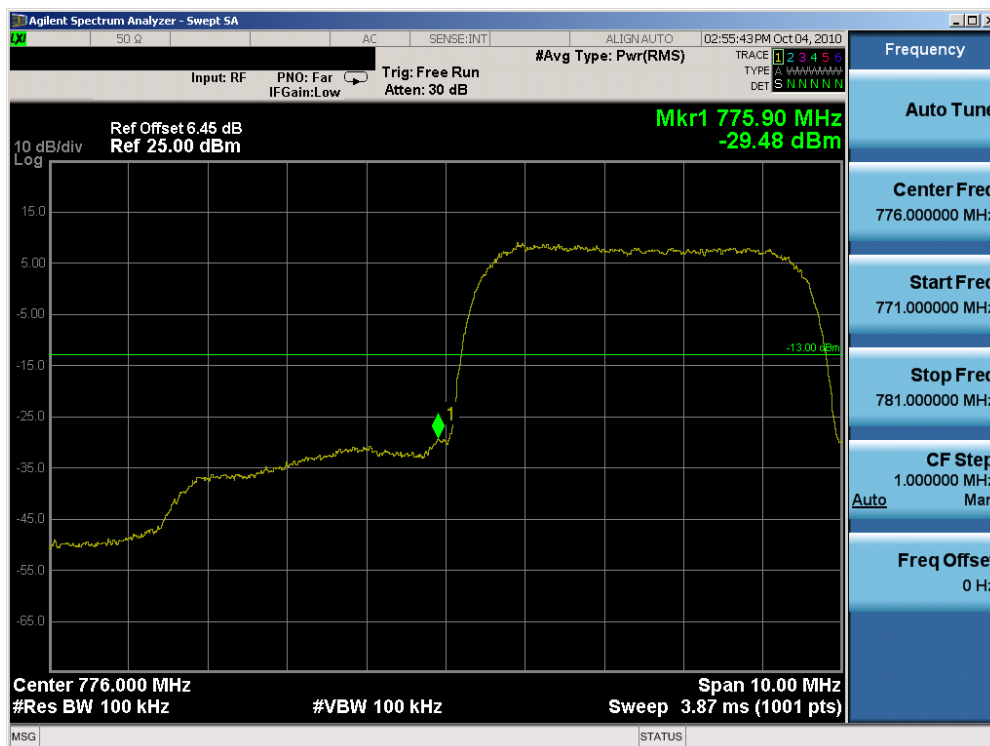


Plot 7-22. Lower Band Edge Plot (QPSK, Tx=778.5MHz)

FCC ID: PKTUSBSTKAGJ	 FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem	Page 49 of 69

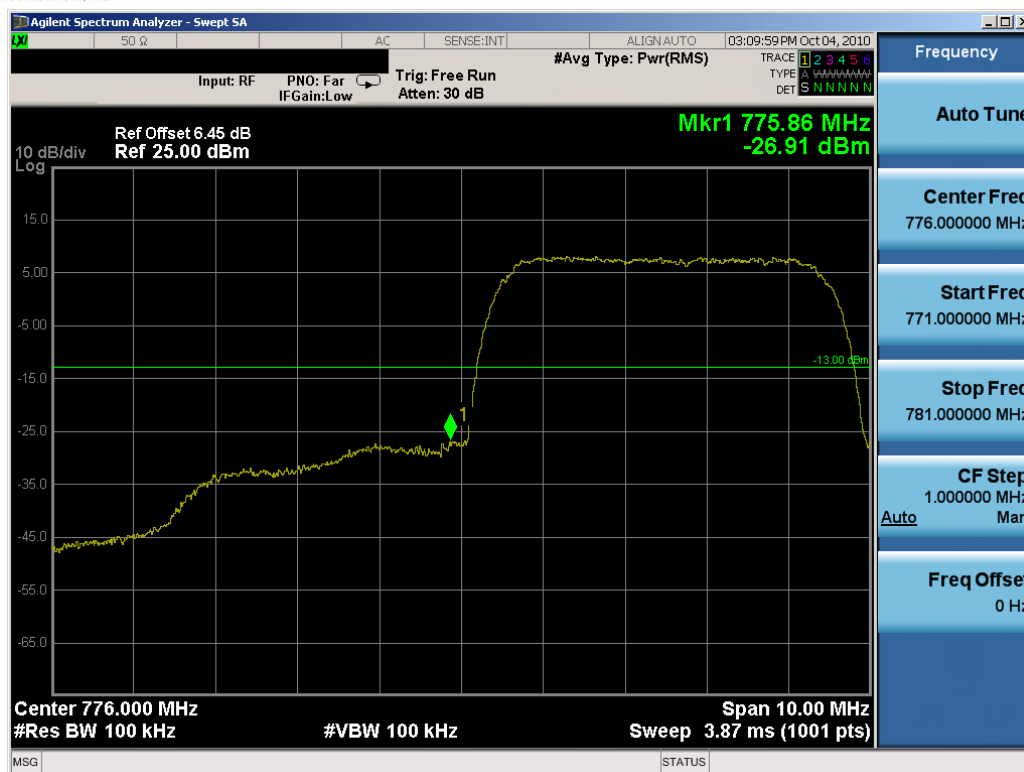


Plot 7-23. Lower Band Edge Plot (16QAM, Tx=778.5MHz)

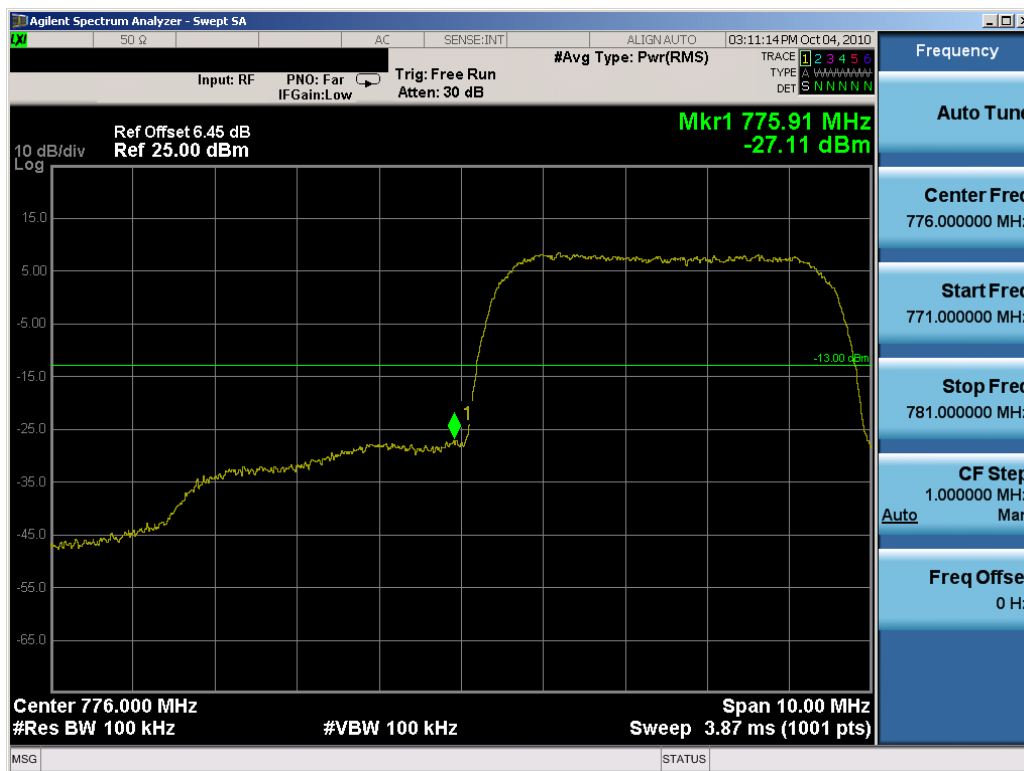

Plot 7-24. Lower Band Edge Plot (64QAM, Tx=778.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 50 of 69

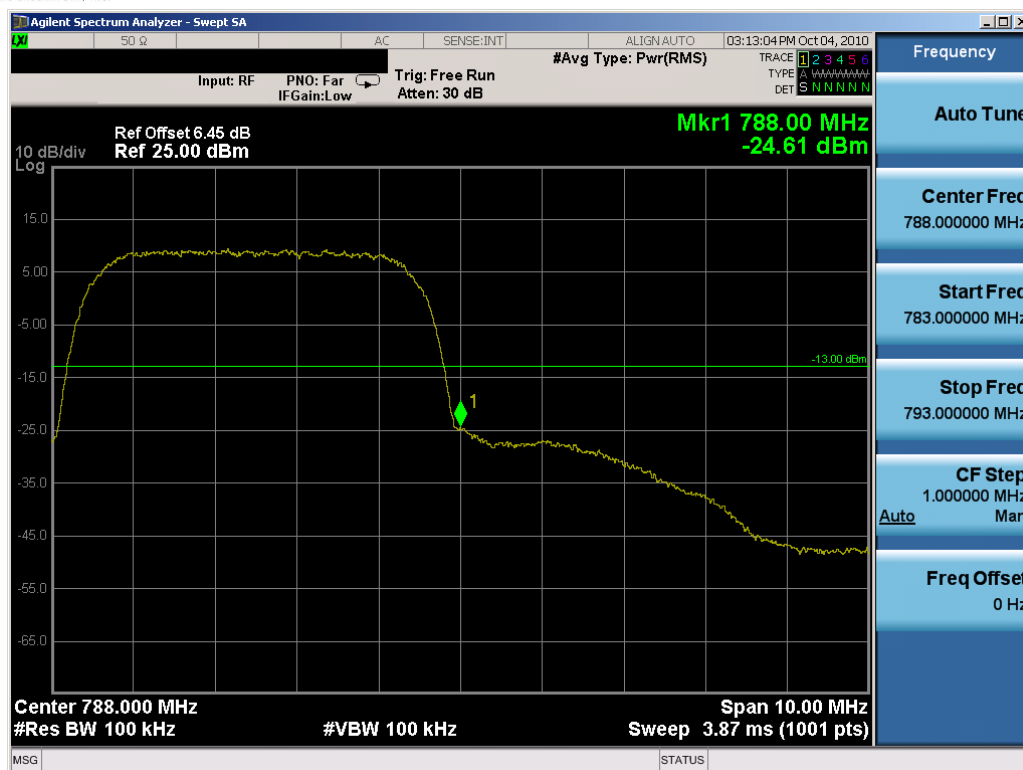


Plot 7-25. Upper Band Edge Plot (QPSK, Tx=785.5MHz)




Plot 7-26. Upper Band Edge Plot (16QAM, Tx=785.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 51 of 69

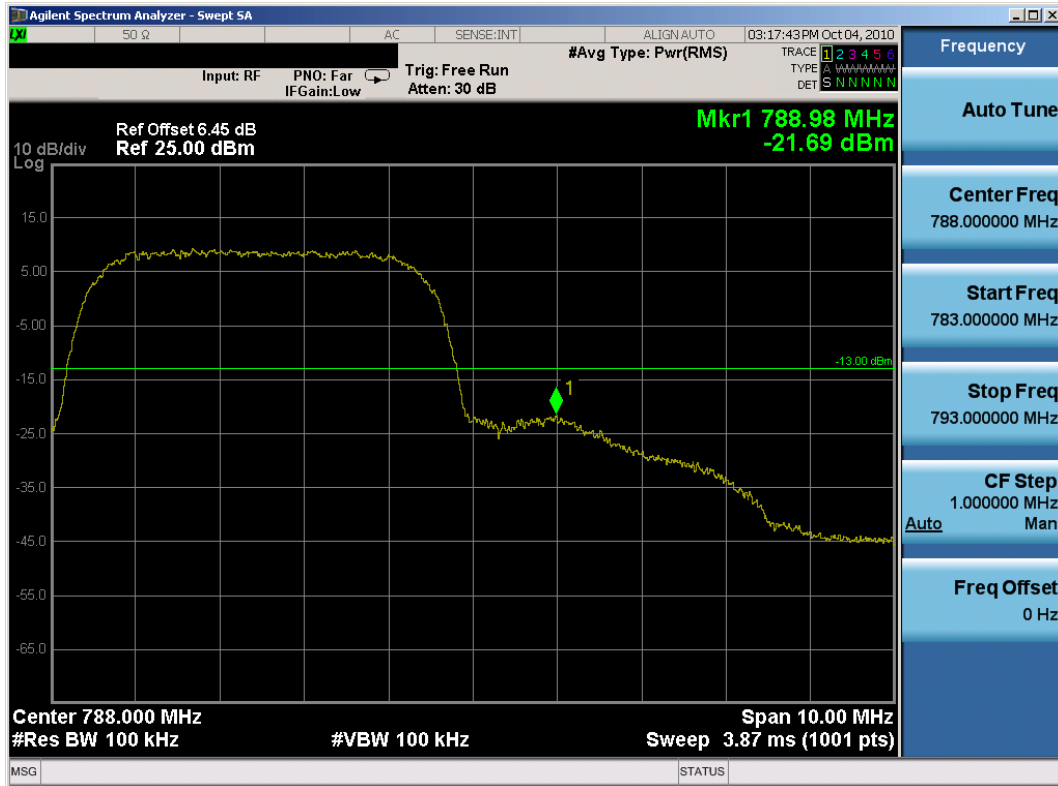


Plot 7-27. Upper Band Edge Plot (64QAM, Tx=785.5MHz)

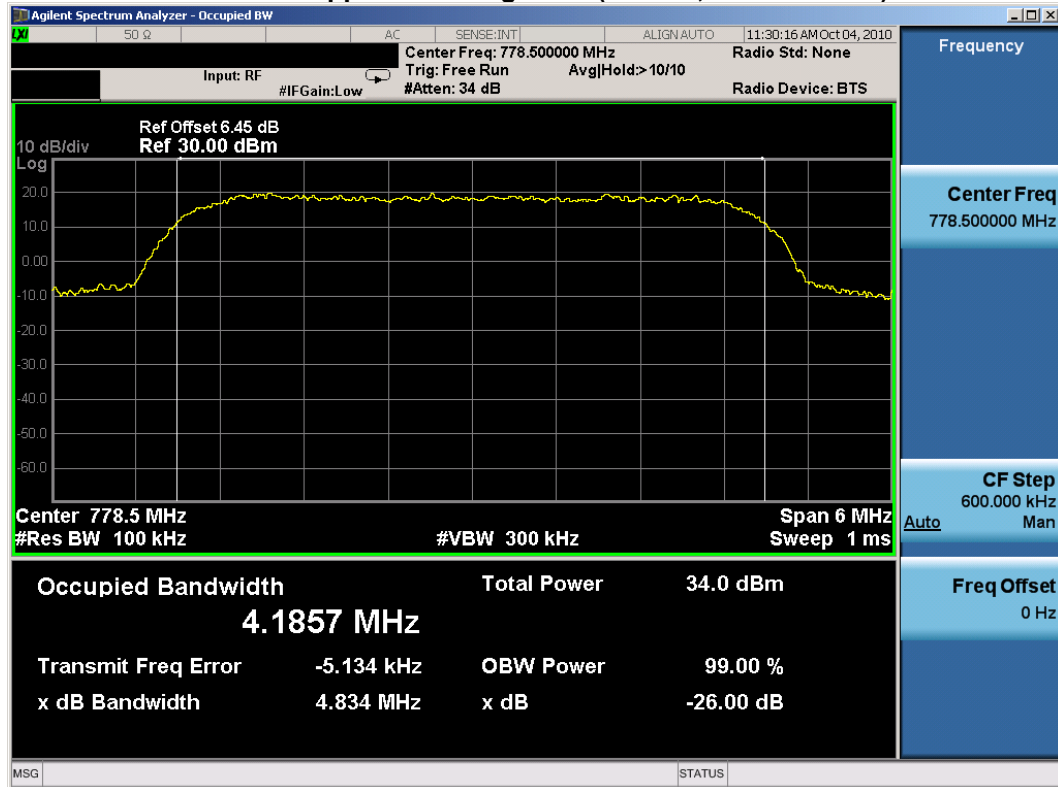


Plot 7-28. Occupied Bandwidth Plot (QPSK, Tx=778.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 52 of 69

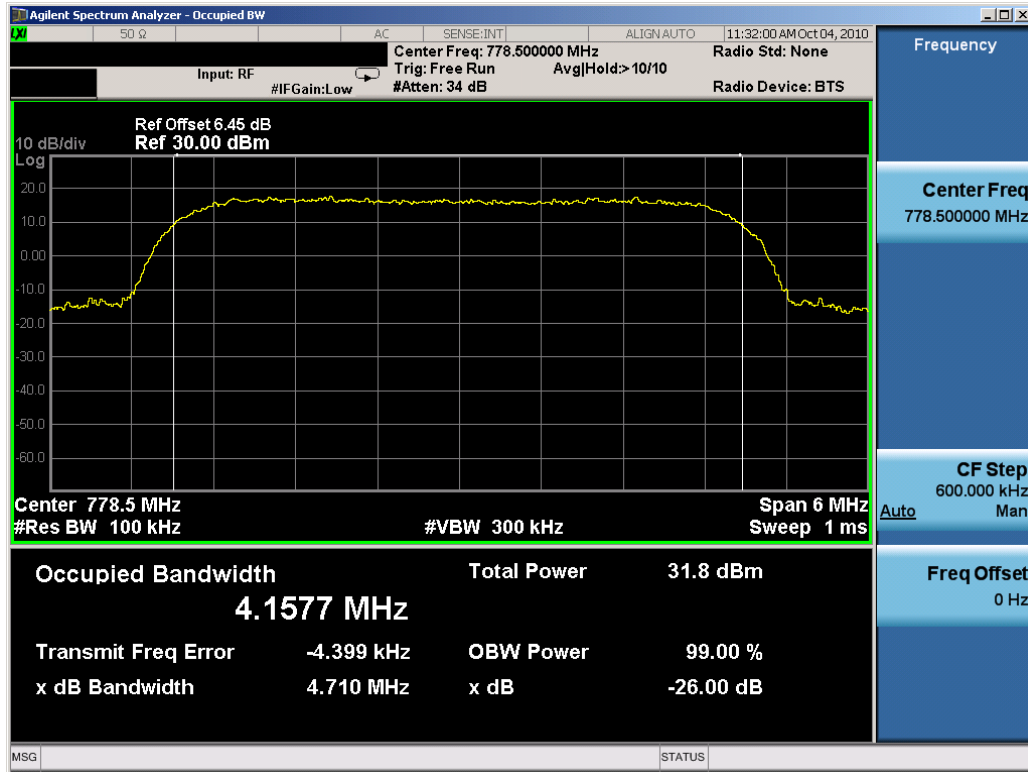


Plot 7-29. Occupied Bandwidth Plot (16QAM, Tx=778.5MHz)

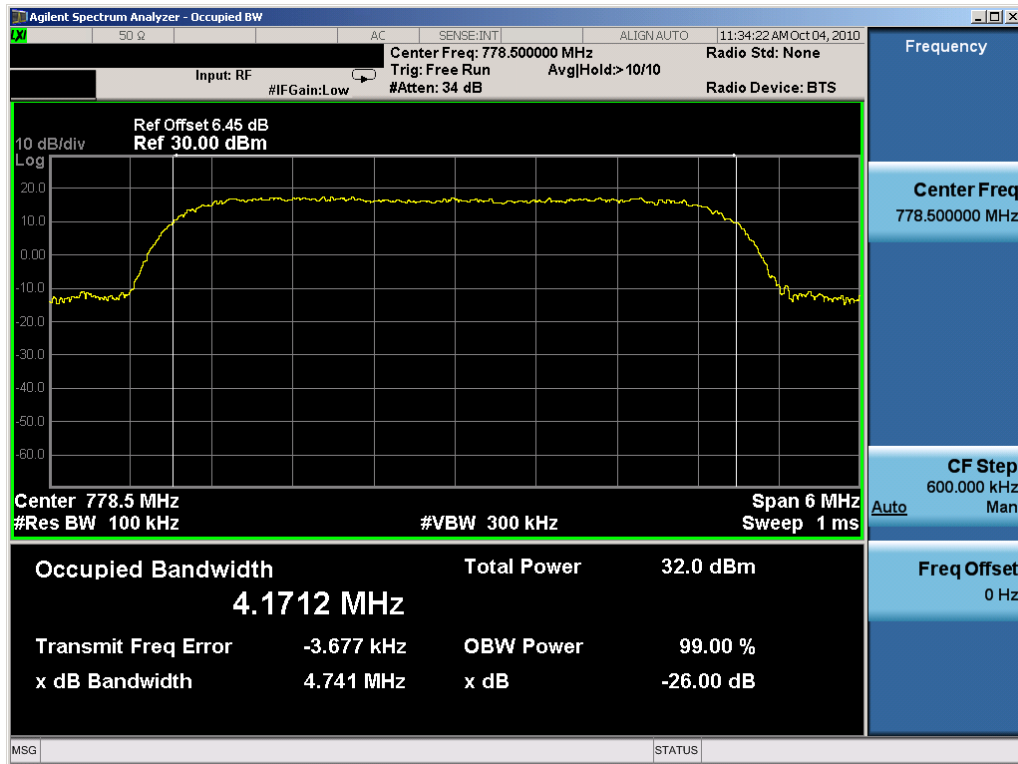


Plot 7-30. Occupied Bandwidth Plot (64QAM, Tx=778.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 53 of 69

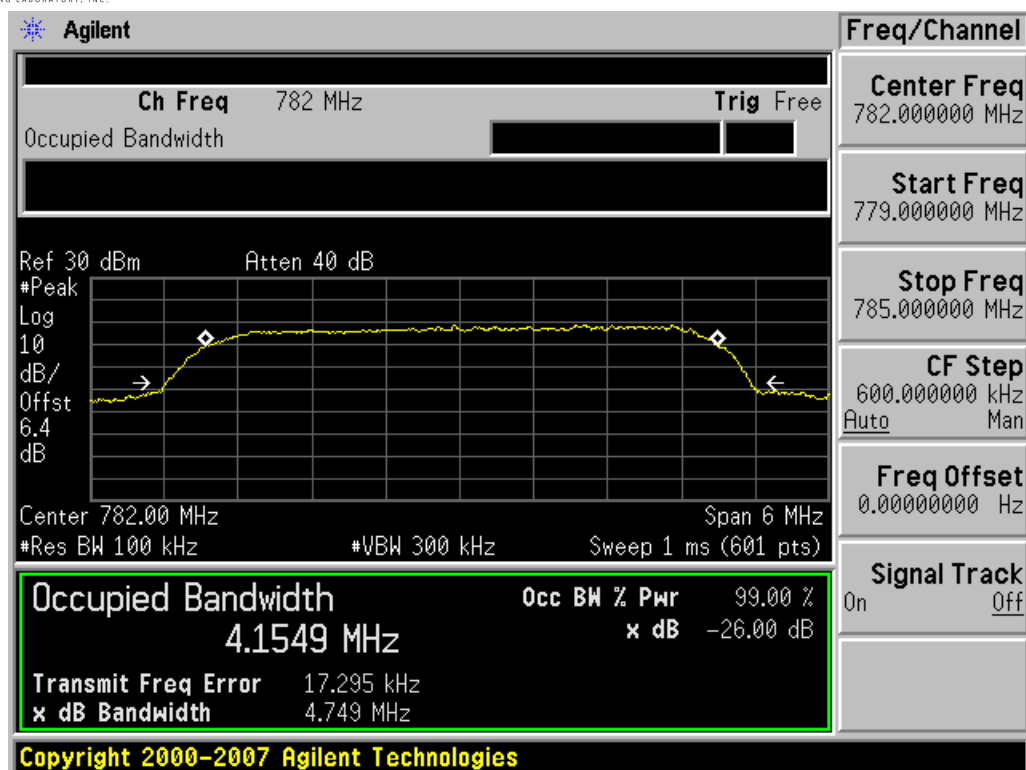


Plot 7-31. Occupied Bandwidth Plot (QPSK, Tx=782 MHz)

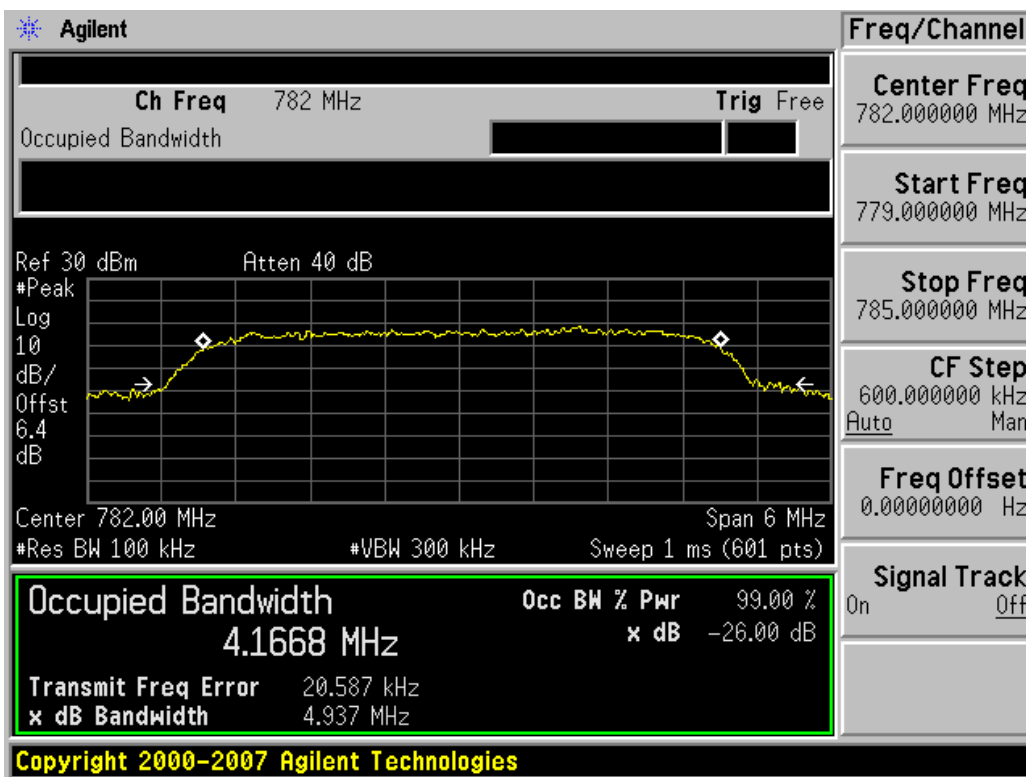


Plot 7-32. Occupied Bandwidth Plot (16QAM, Tx=782 MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 54 of 69

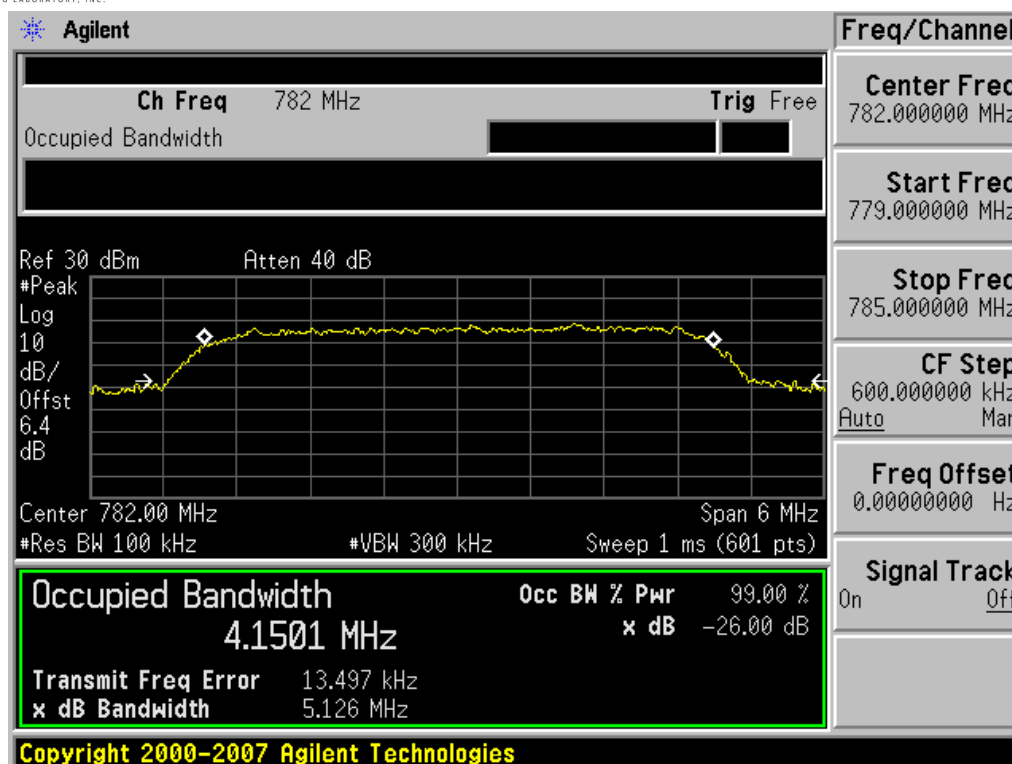


Plot 7-33. Occupied Bandwidth Plot (64QAM, Tx=782 MHz)

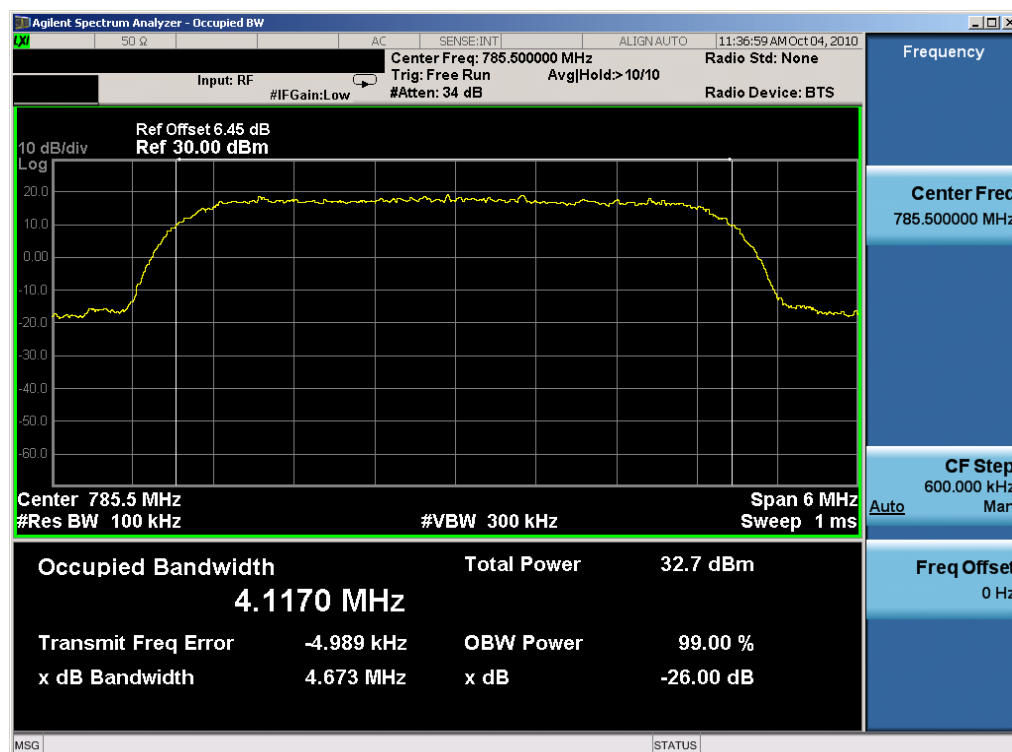


Plot 7-34. Occupied Bandwidth Plot (QPSK, Tx=785.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 55 of 69

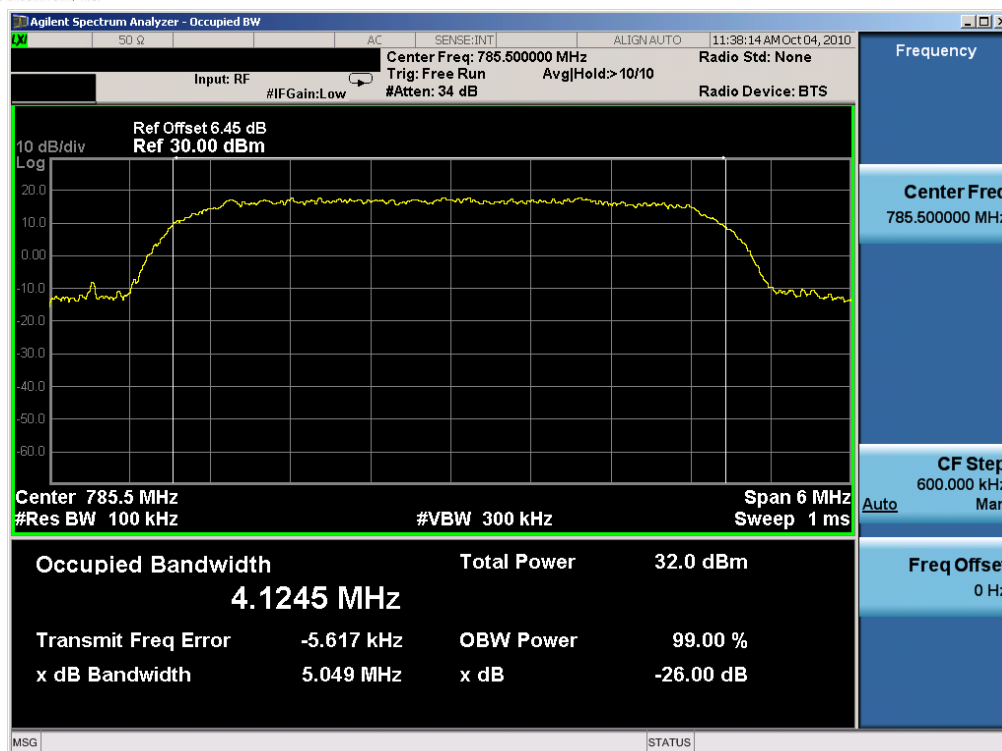

Plot 7-35. Occupied Bandwidth Plot (16QAM, Tx=785.5MHz)

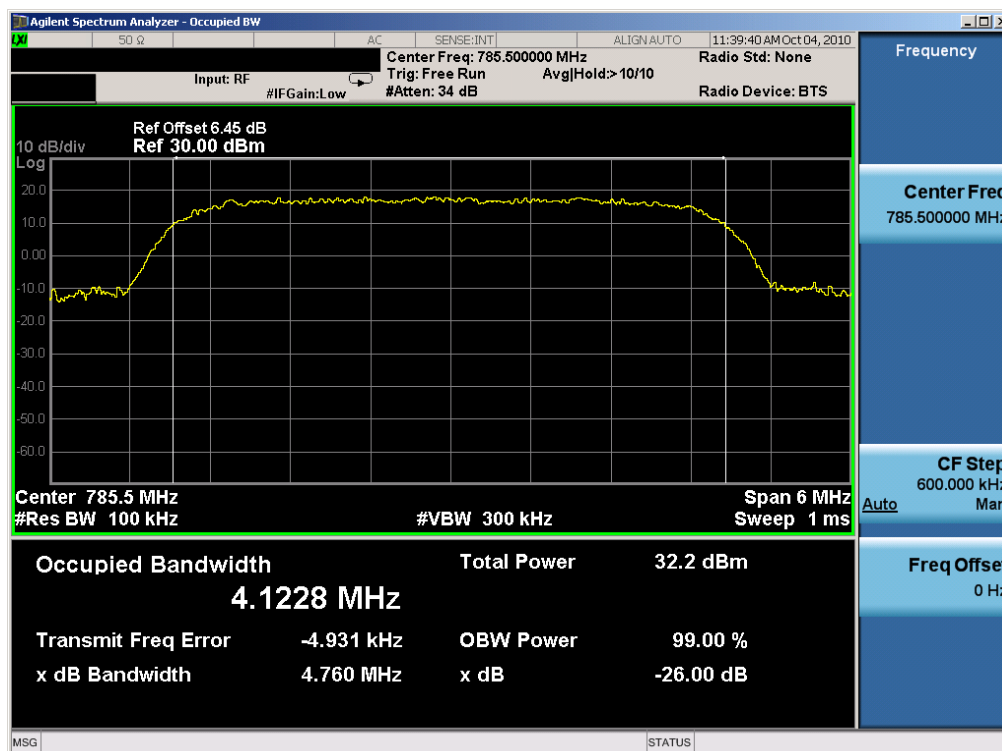


Plot 7-36. Occupied Bandwidth Plot (64QAM, Tx=785.5MHz)


FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 56 of 69

Out-of-Band Spurious Emissions

For the following conducted spurious emission plots, all modulations were tested and 64QAM mode exhibited the worst case emissions.

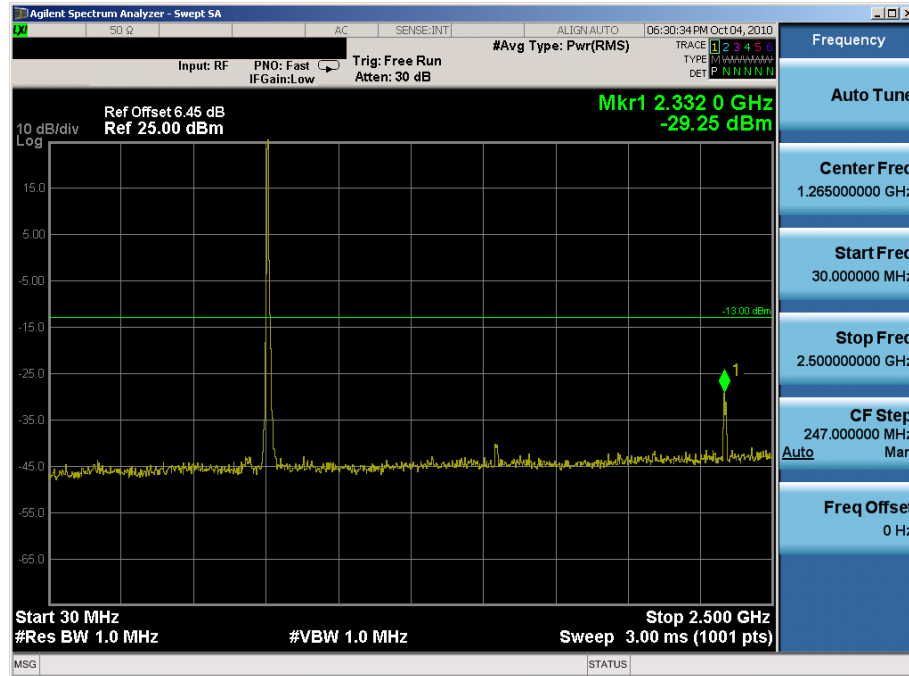


Plot 7-37. Conducted Spurious Plot (64QAM, Tx=778.5MHz)

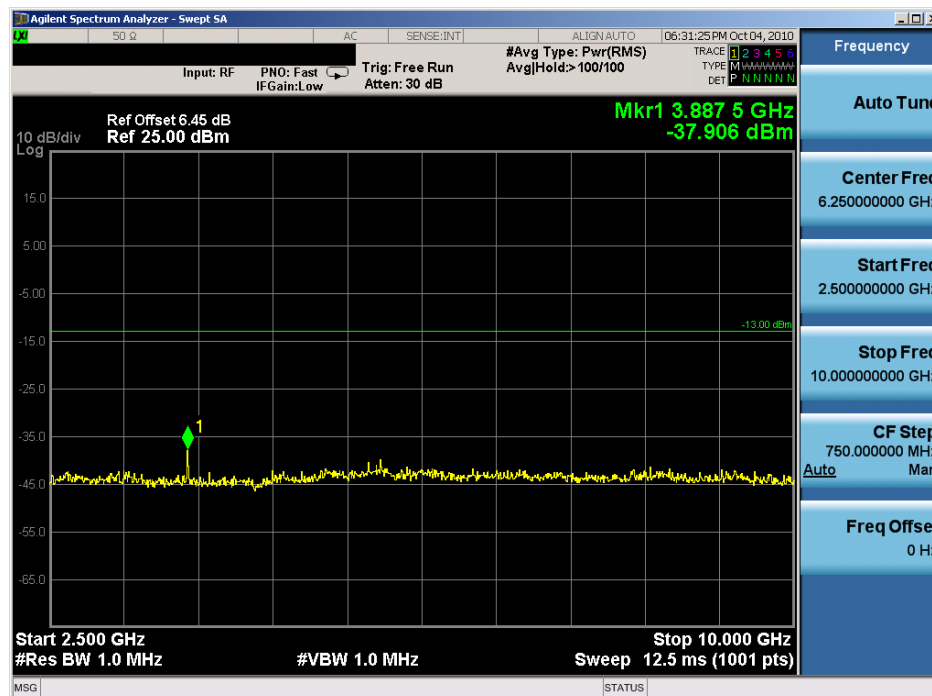


Plot 7-38. Conducted Spurious Plot (64QAM, Tx=778.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 57 of 69

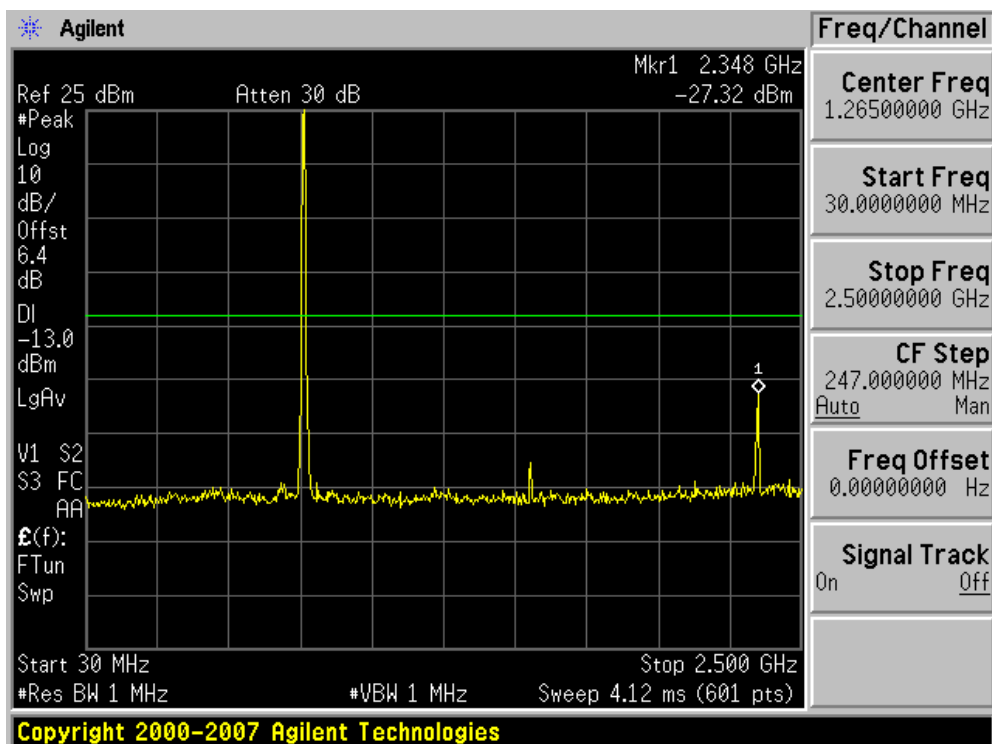


Plot 7-39. Conducted Spurious Plot (64QAM, Tx=782MHz)

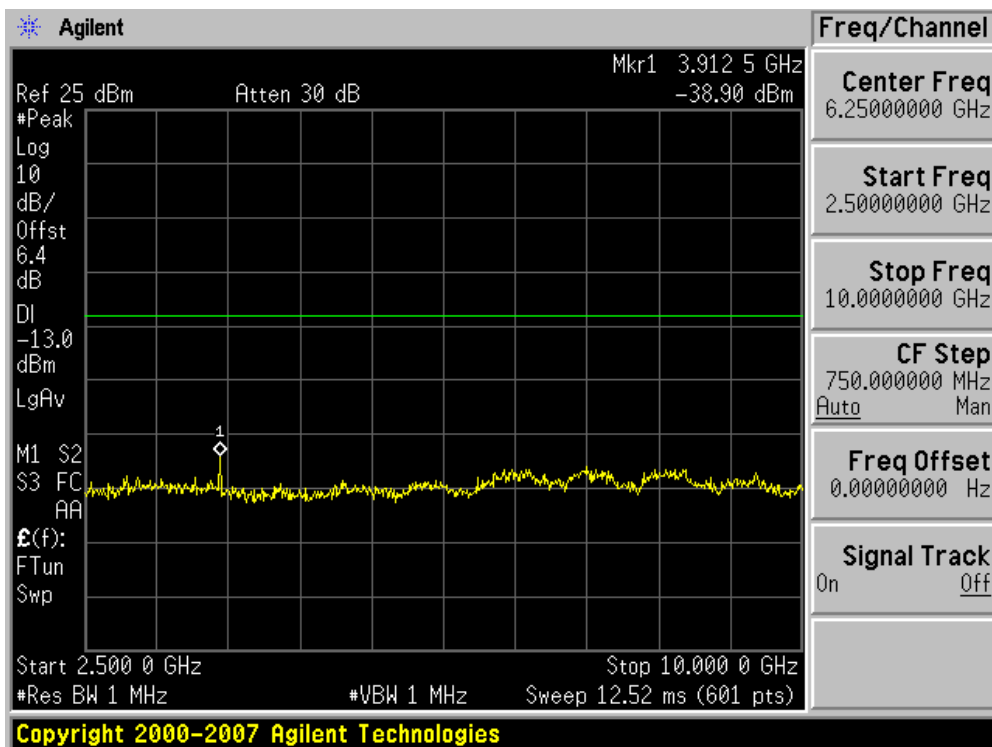


Plot 7-40. Conducted Spurious Plot (64QAM, Tx=782MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 58 of 69

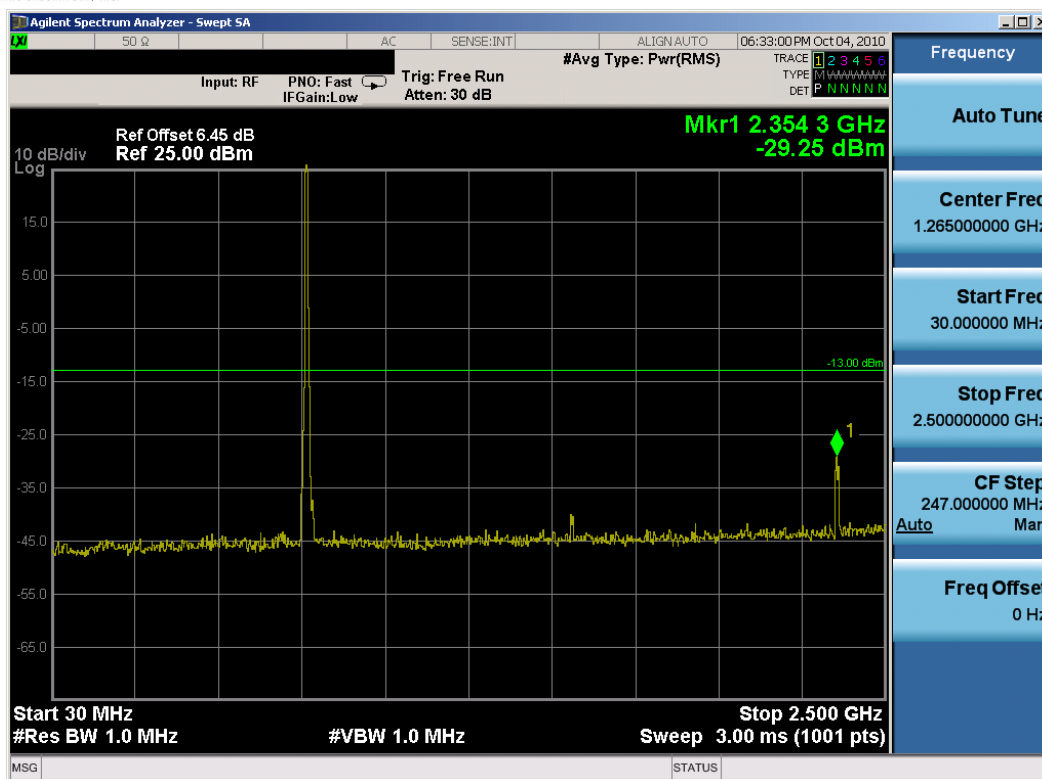


Plot 7-41. Conducted Spurious Plot (64QAM, Tx=785.5MHz)

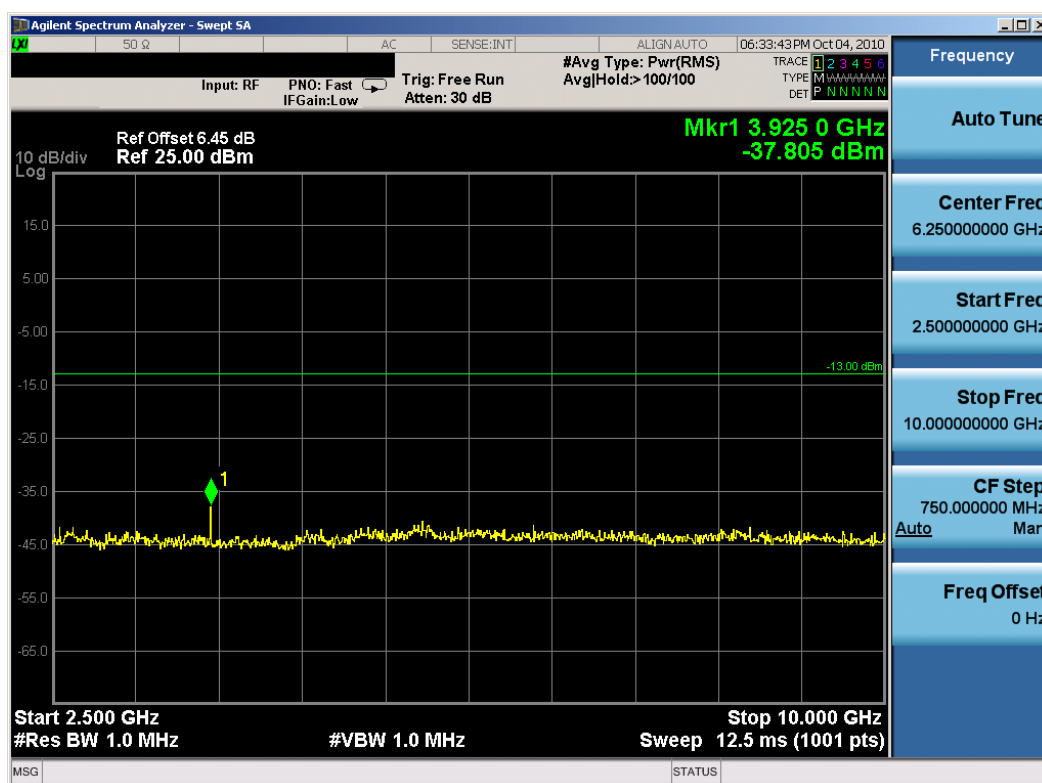


Plot 7-42. Conducted Spurious Plot (64QAM, Tx=785.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 59 of 69

Upper Block (788-793MHz)

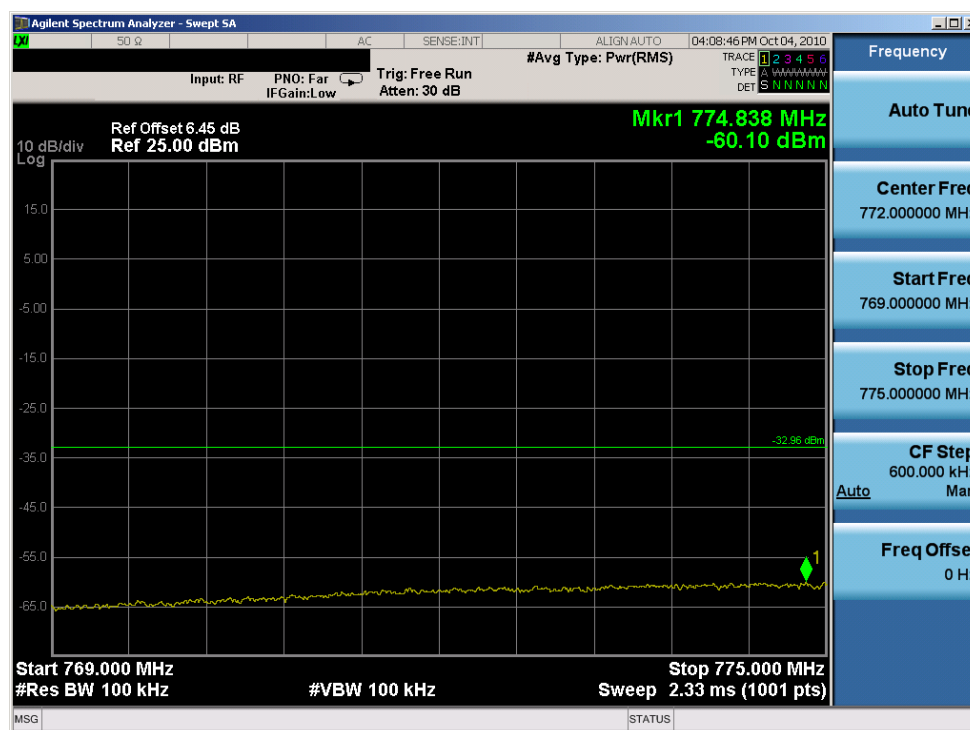


Plot 7-43. Lower Emission Mask 769-775MHz Plot (QPSK, Tx=790.5MHz)

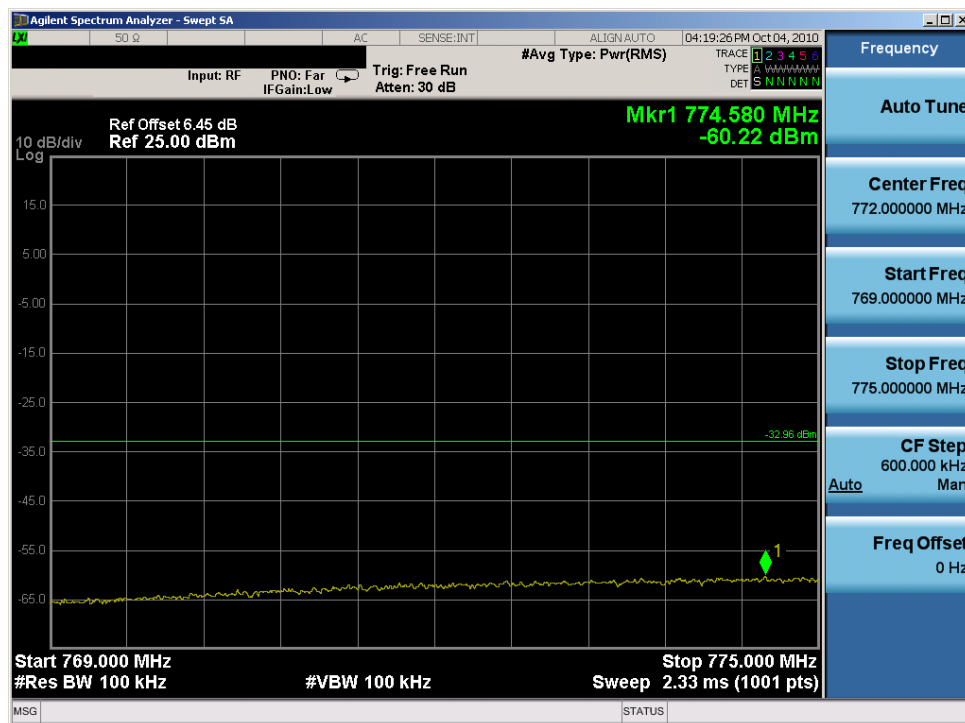


Plot 7-44. Lower Emission Mask 769-775MHz Plot (16QAM, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 60 of 69

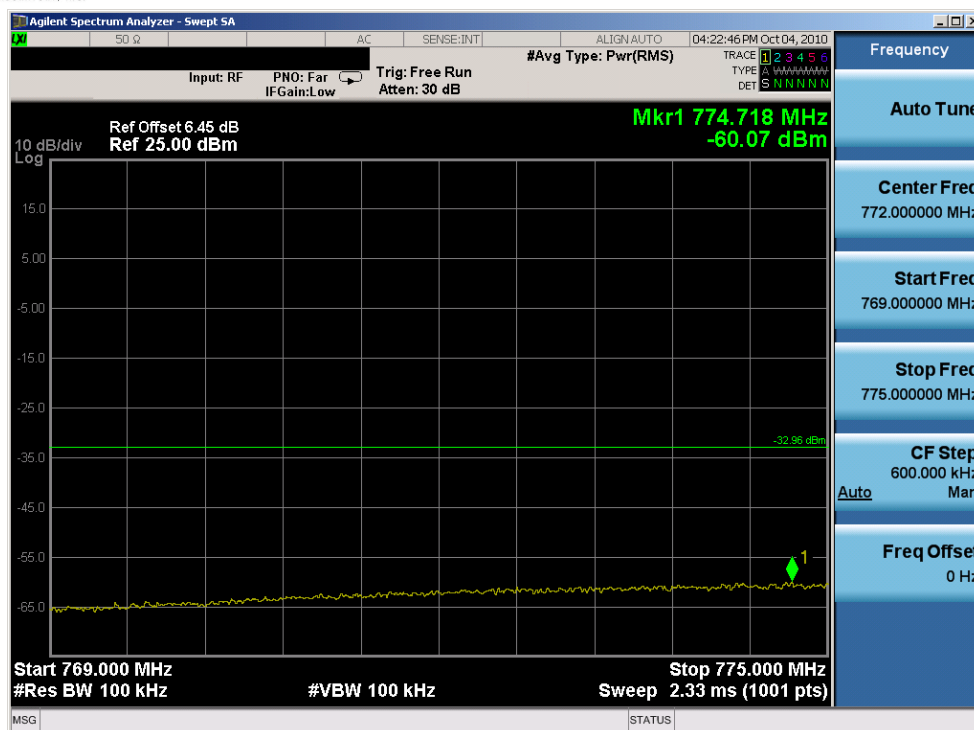


Plot 7-45. Lower Emission Mask 769-775MHz Plot (64QAM, Tx=790.5MHz)

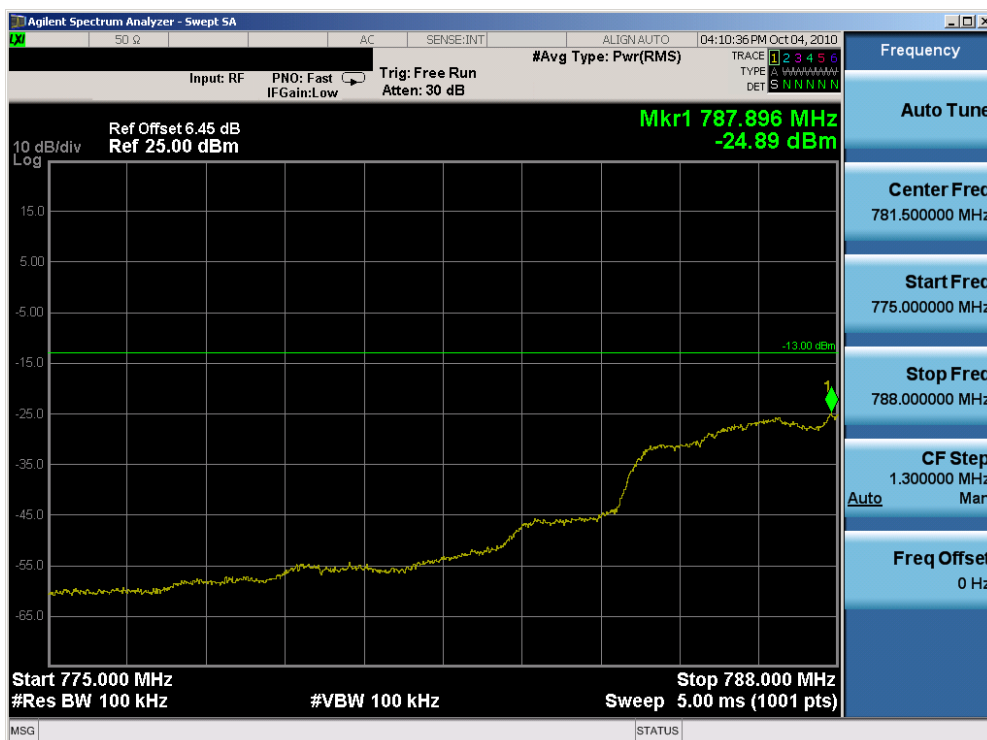


Plot 7-46. Lower Emission Mask 775-788MHz Plot (QPSK, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 61 of 69

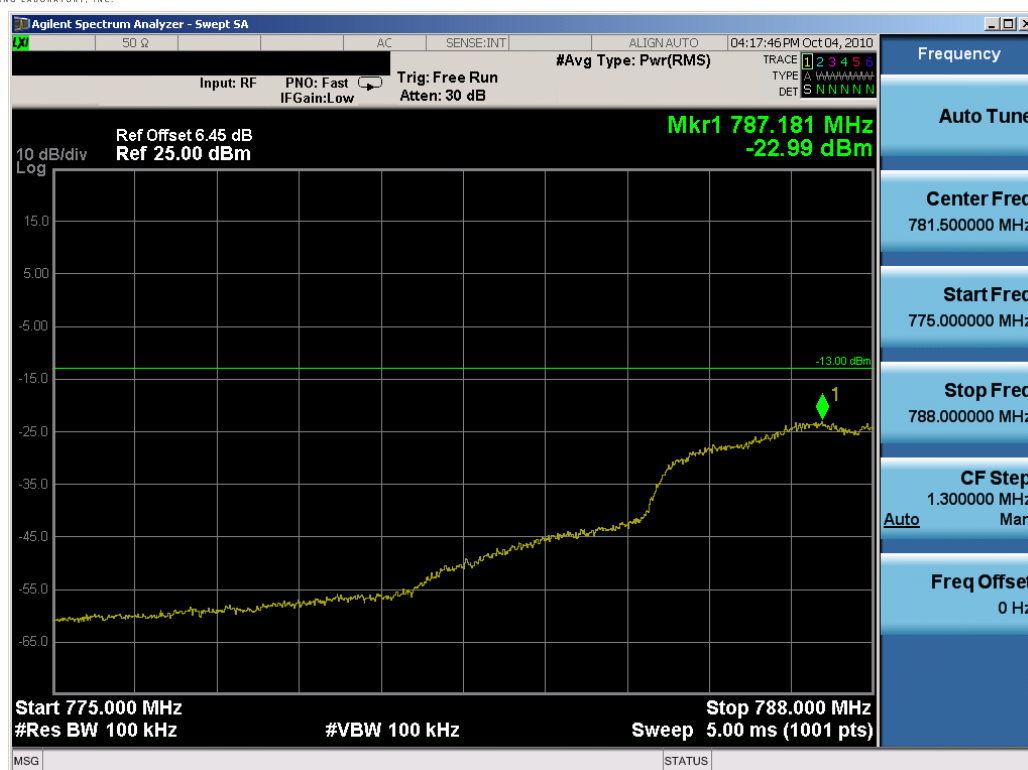


Plot 7-47. Lower Emission Mask 775-788MHz Plot (16QAM, Tx=790.5MHz)

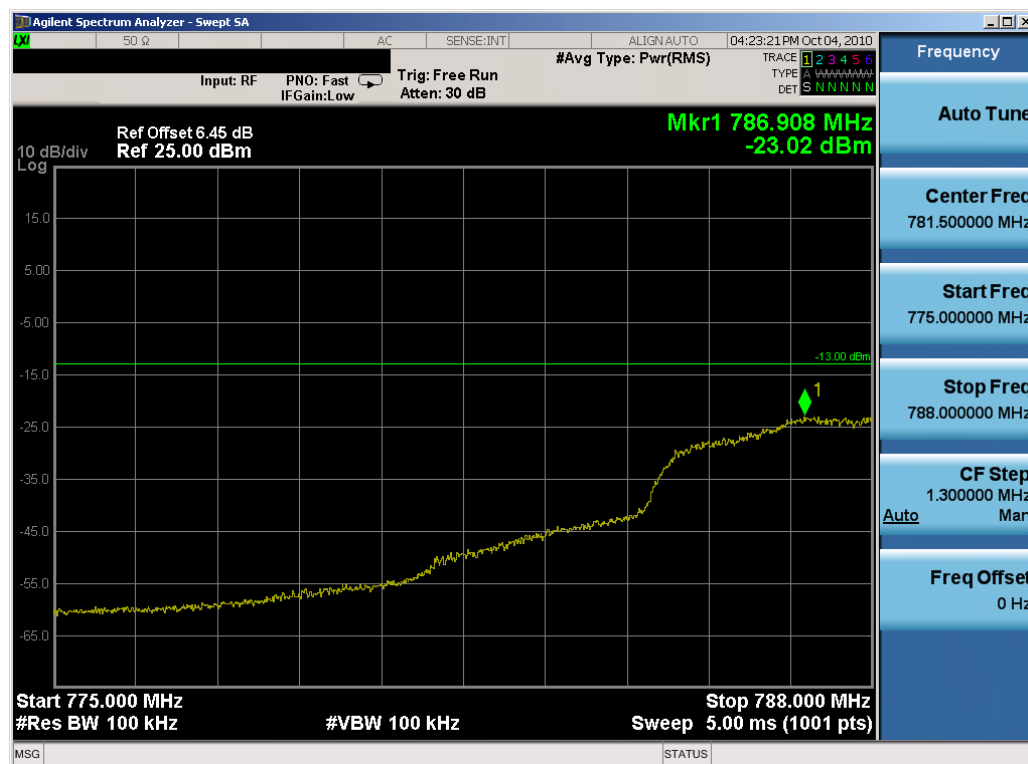


Plot 7-48. Lower Emission Mask 775-788MHz Plot (64QAM, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 62 of 69

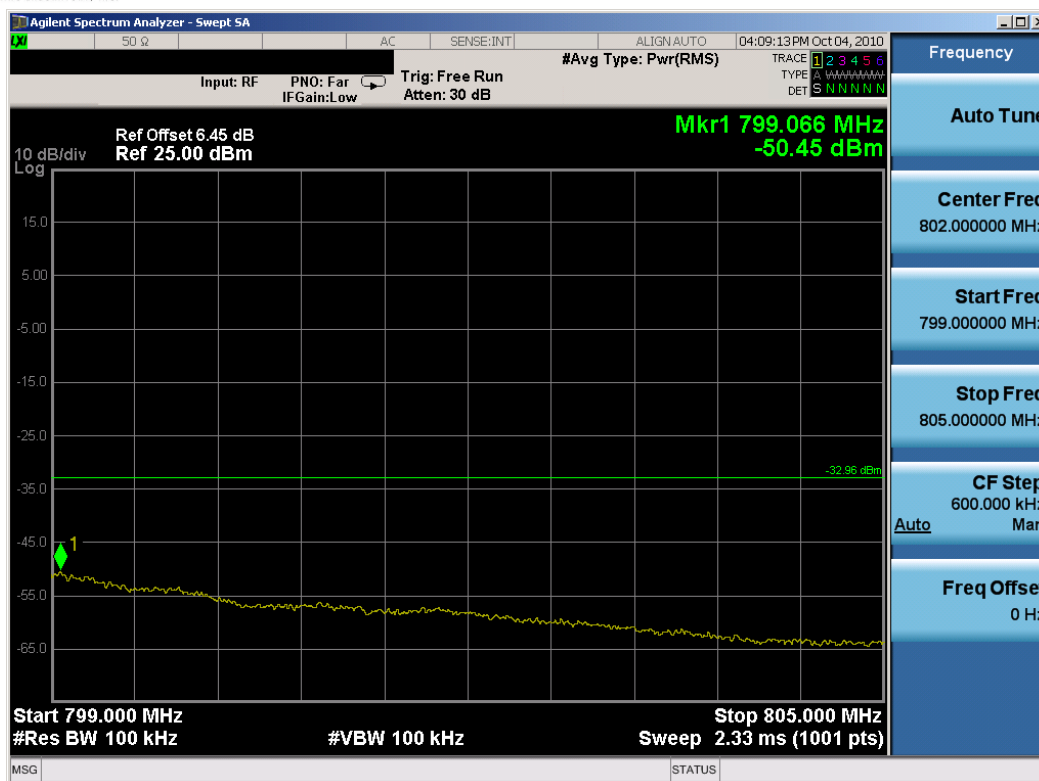


Plot 7-49. Upper Emission Mask 799-805MHz Plot (QPSK, Tx=790.5MHz)

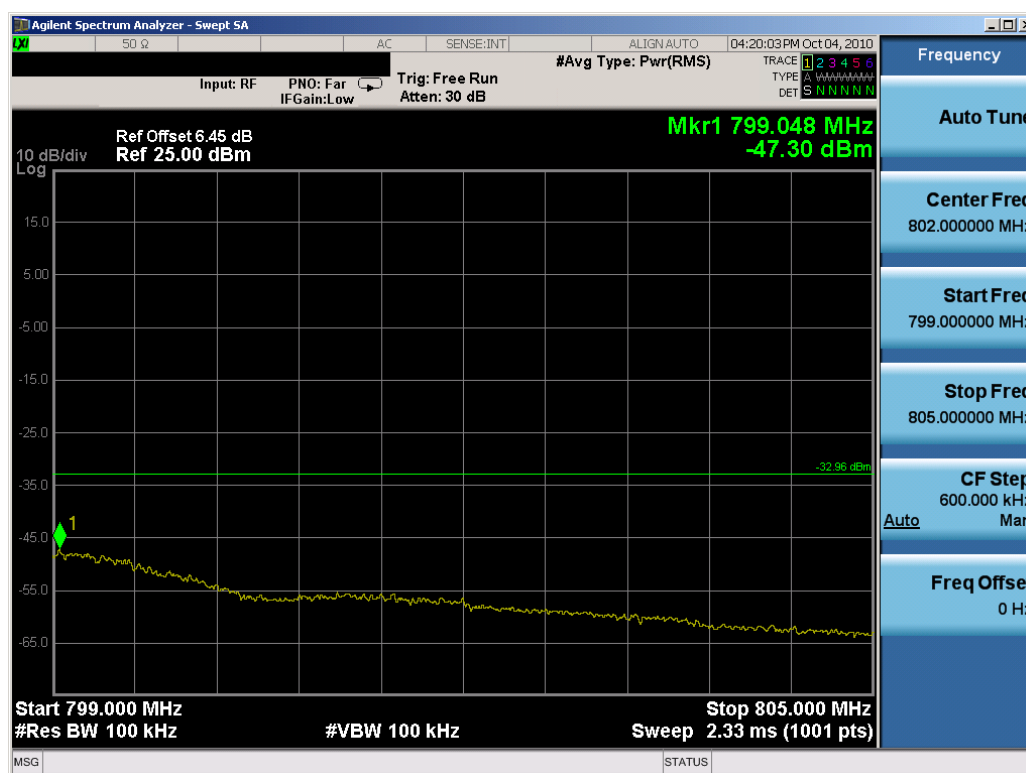


Plot 7-50. Upper Emission Mask 799-805MHz Plot (16QAM, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 63 of 69

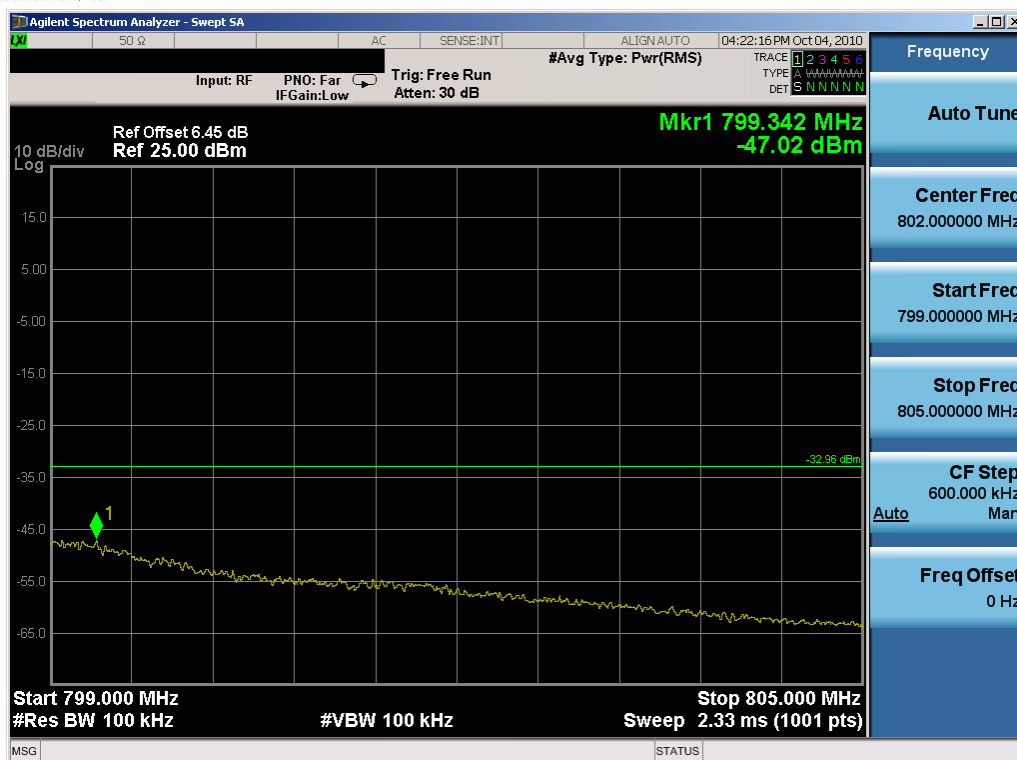


Plot 7-51. Upper Emission Mask 799-805MHz Plot (64QAM, Tx=790.5MHz)

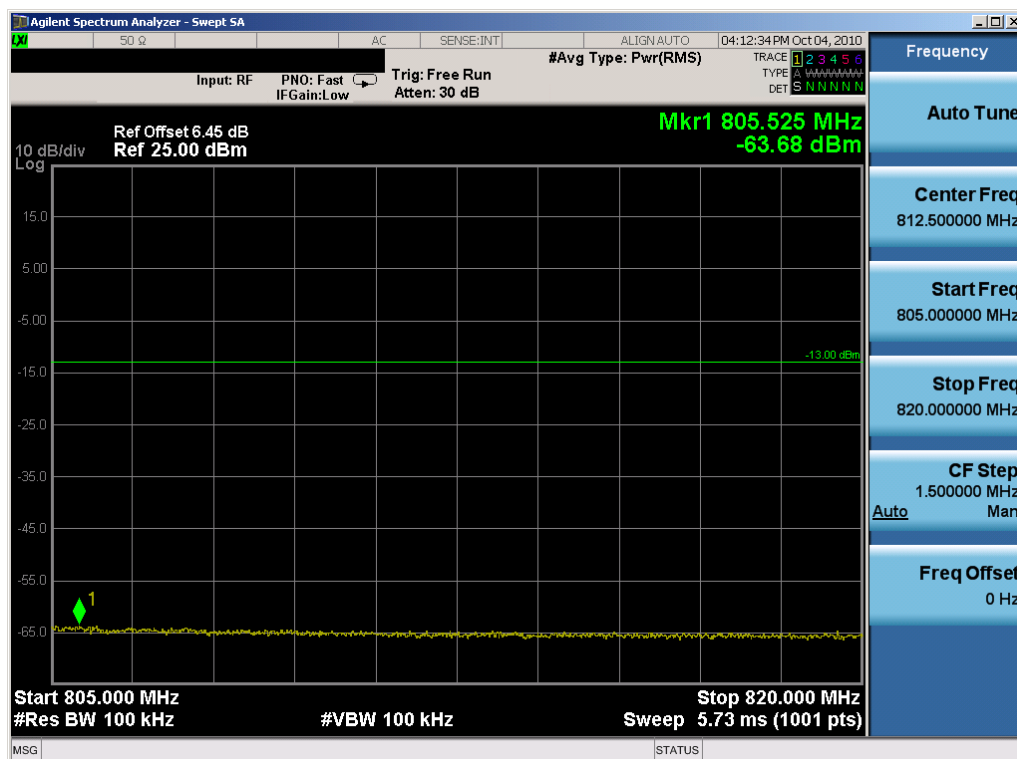


Plot 7-52. Upper Emission Mask Above 805MHz Plot (QPSK, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 64 of 69

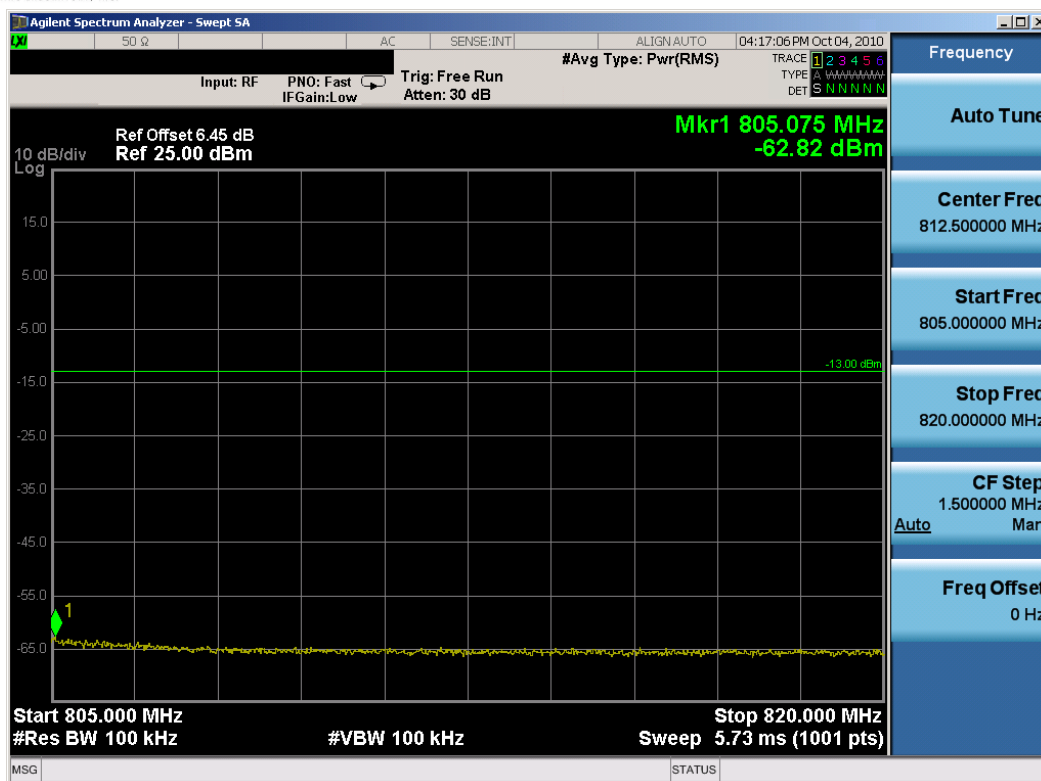


Plot 7-53. Upper Emission Mask Above 805MHz Plot (16QAM, Tx=790.5MHz)

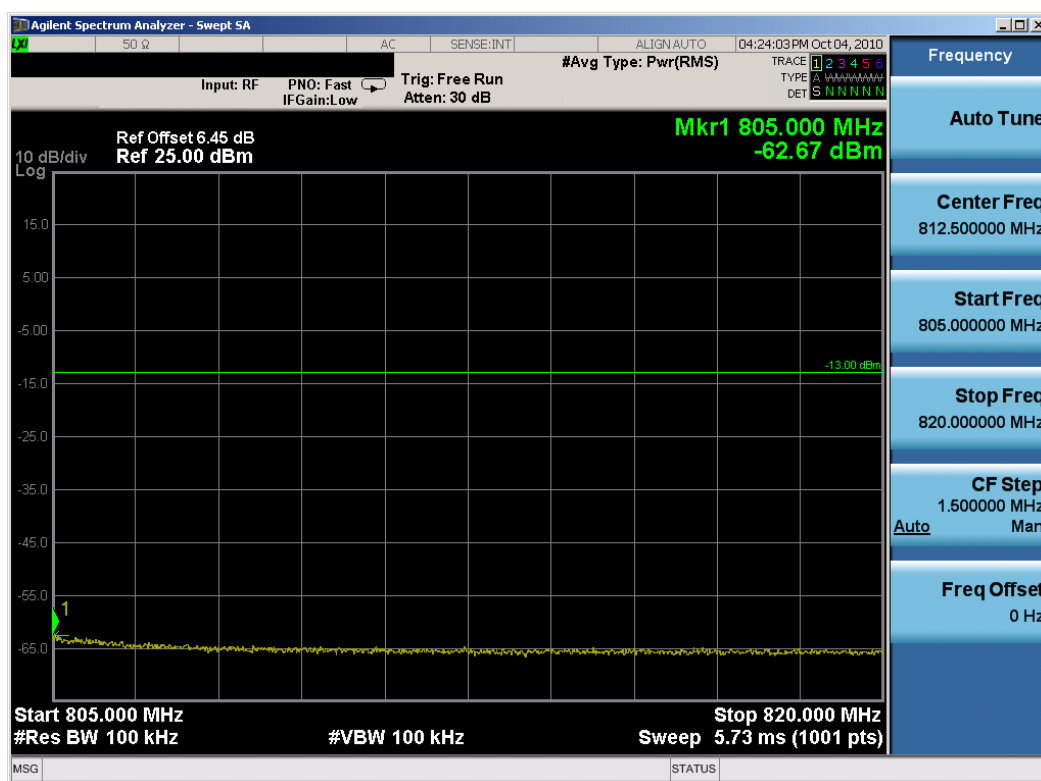


Plot 7-54. Upper Emission Mask Above 805MHz Plot (64QAM, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 65 of 69

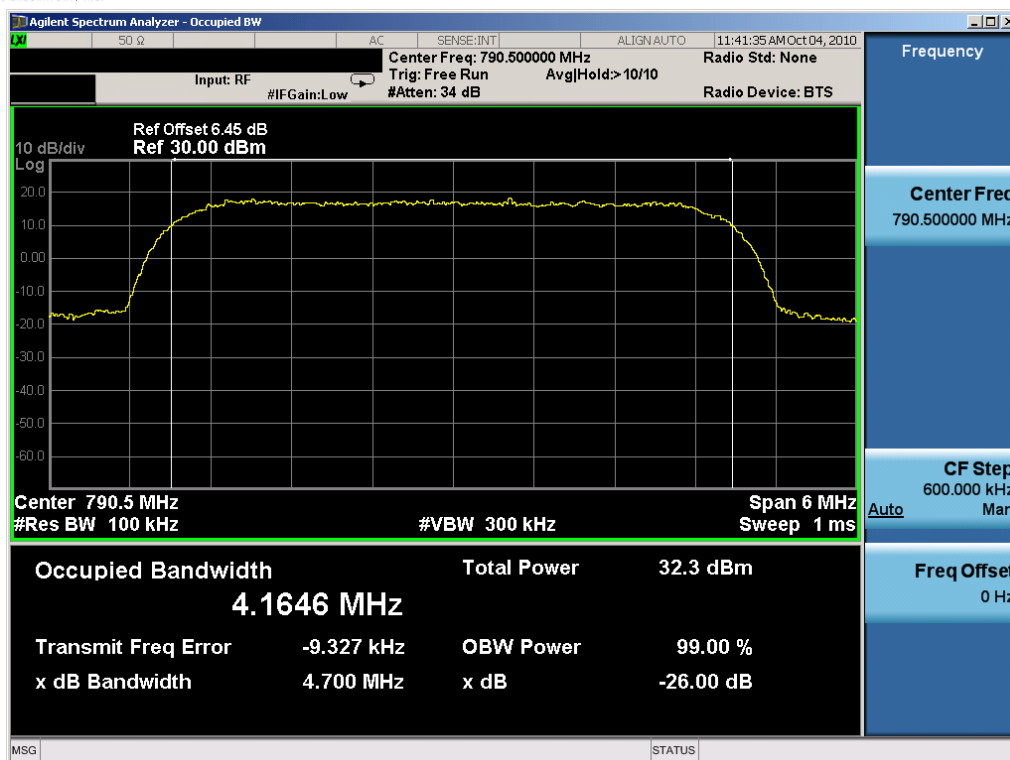


Plot 7-55. Occupied Bandwidth Plot (QPSK, Tx=790.5MHz)

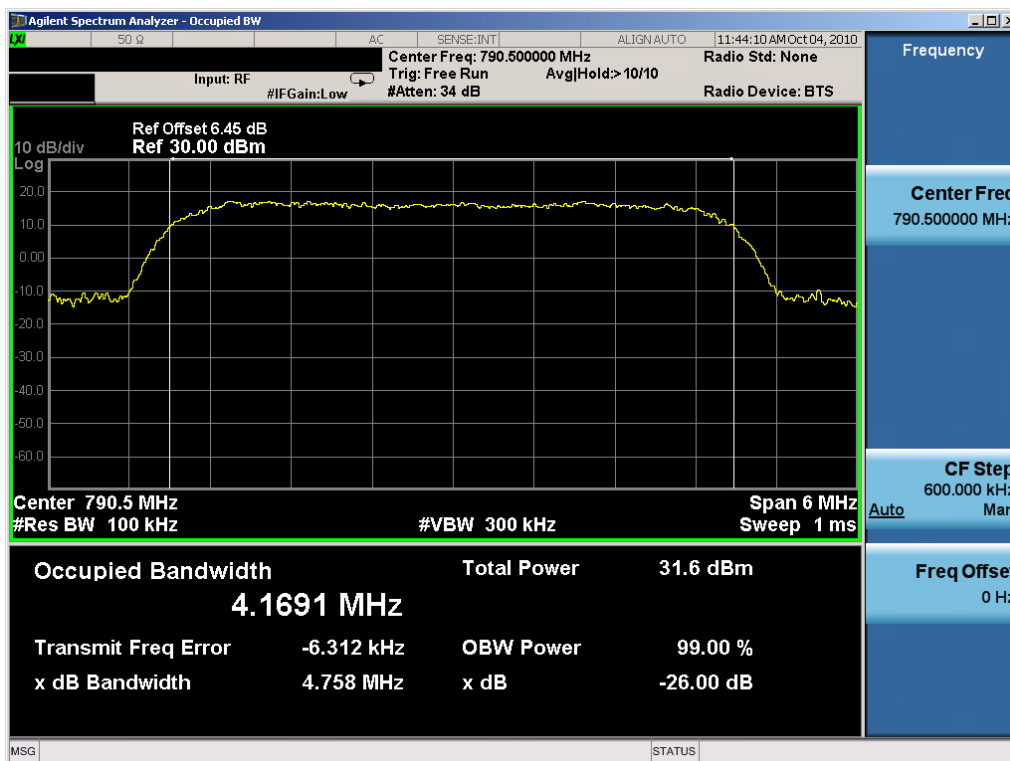


Plot 7-56. Occupied Bandwidth Plot (16QAM, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 66 of 69

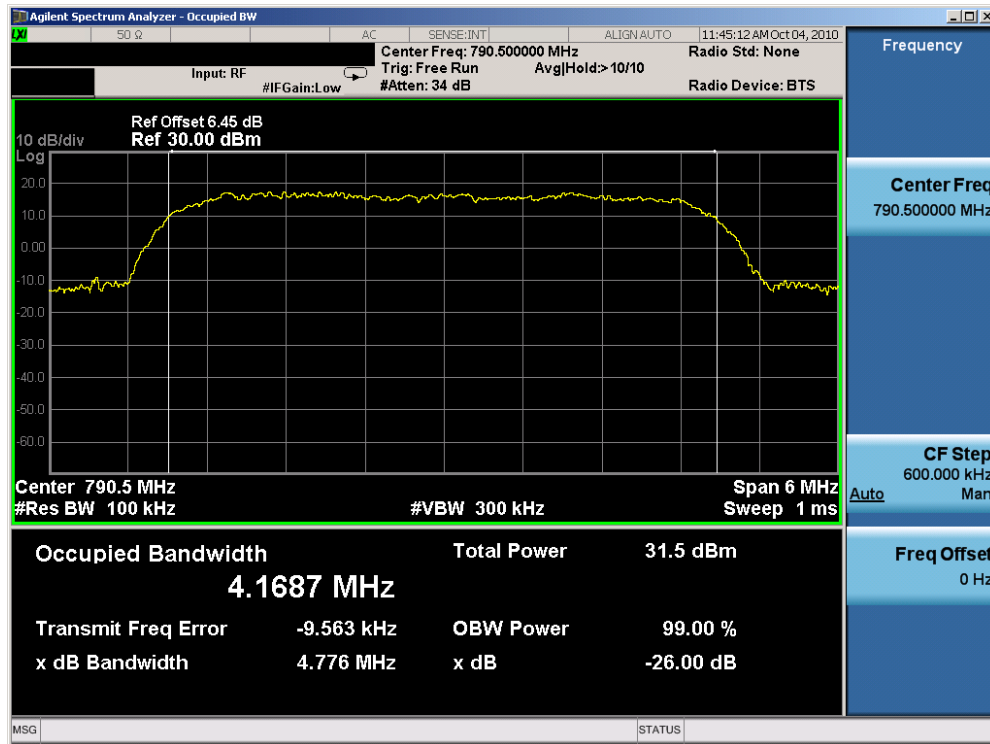


Plot 7-57. Occupied Bandwidth Plot (64QAM, Tx=790.5MHz)

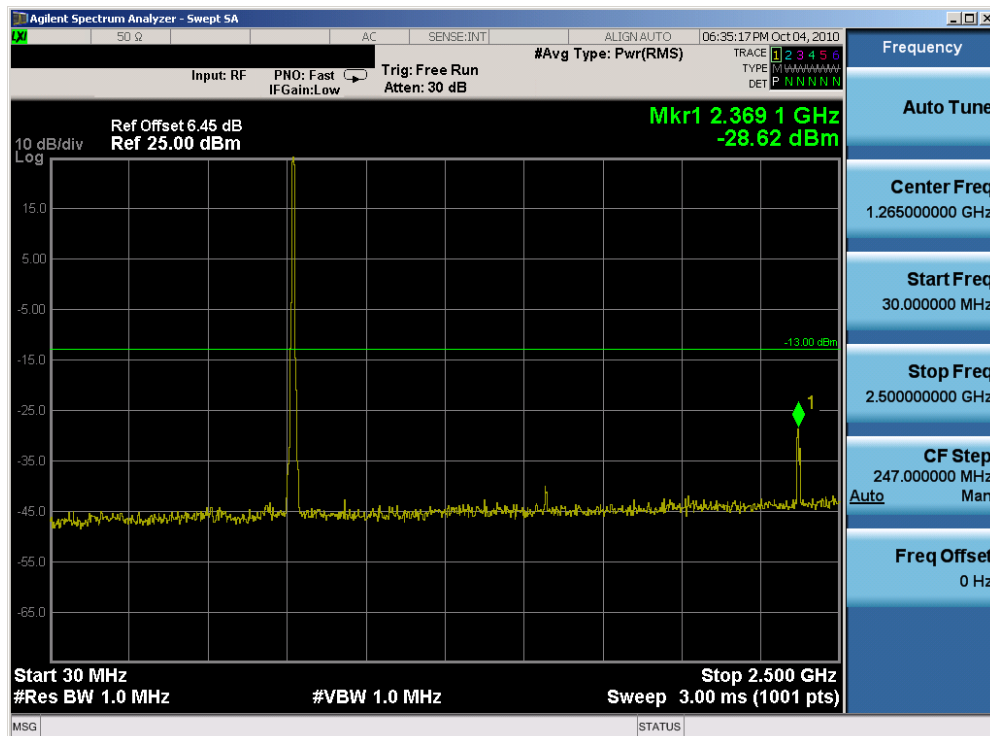

Plot 7-58. Conducted Spurious Plot (64QAM, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	IPWireless	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 67 of 69

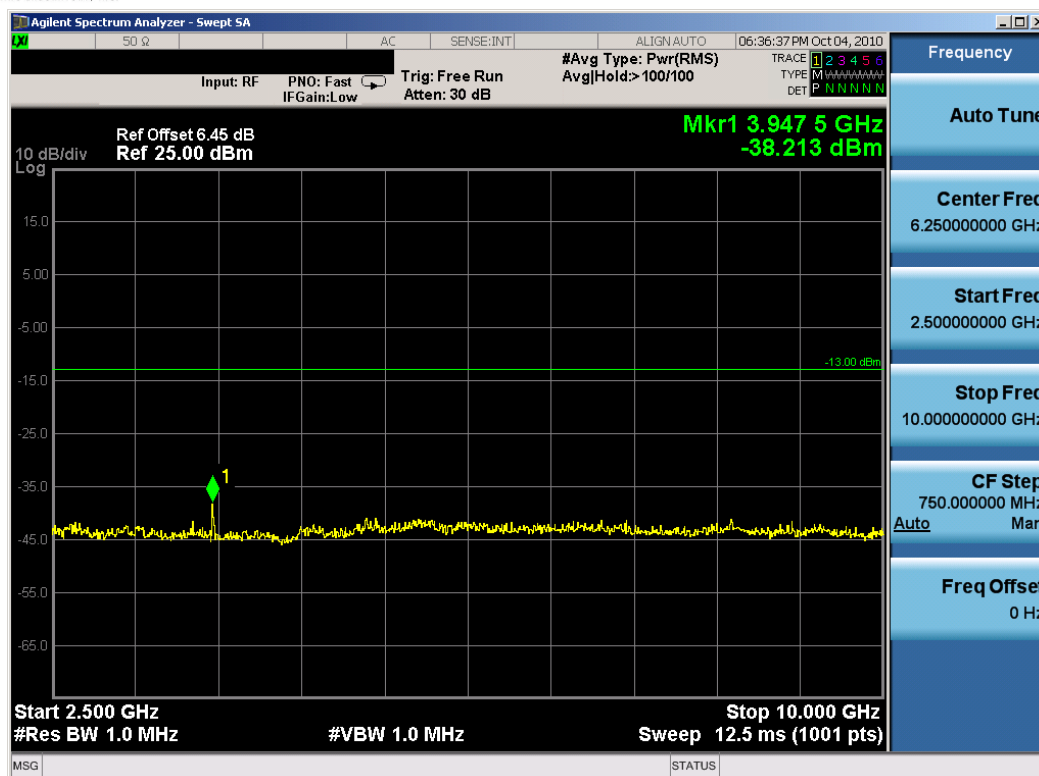

Plot 7-59. Conducted Spurious Plot (64QAM, Tx=790.5MHz)

FCC ID: PKTUSBSTKAGJ	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)	Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem	Page 68 of 69

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **IP Wireless 700MHz USB Stick Modem FCC ID: PKTUSBSTKAGJ** complies with all the requirements of Parts 2 and 27 of the FCC rules.

FCC ID: PKTUSBSTKAGJ		FCC Pt. 27 TD-CDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1008301446.PKT	Test Dates: Sep. 24-Oct.6, 2010	EUT Type: 700MHz USB Stick Modem		Page 69 of 69