

Radio Satellite Communication
Untertürkheimer Straße 6–10, D-66117 Saarbrücken,
Telephone +49 (0) 681 598- 0, Fax +49 (0) 598 9075

Test report No.: 2-3373-01-01/03

This test report consists of 27 pages

Page 1 (25)

Recognized by the
Federal Communications Commission
FCC–Identification Number: 90462
TCB ID: DE 001



Accredited by the
German Accreditation Council
DAR–Registration Number
TTI–P–G 166/98



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report No. : 2-3373-01-01/03

Applicant : Mandolyn Int. Ltd.

Type : IKT201

FCC–ID No : PLJIKT201

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

Table of contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test specifications

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5.
The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2003-10-13 RSC - 8411 Berg M.

Date

Section

Name



Signature


Technical responsibility for area of testing:

2003-10-13 RSC - 8412 Hausknecht D.

Date

Section

Name



Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 0

Telefax : + 49 681 598 - 9075

E-mail : info@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

Accredited by : Regulierungsbehörde für Telekommunikation und Post (RegTP)

Listed by : Federal Communications Commission (FCC)

Authority	Identification/Registration No.
RegTP	TTI-P-G 166/98-30
FCC	90462

1.3 Details of applicant

Name : W.H. Mandolyn International Ltd.

Street : Unit 1003-8 Landmark North

39 Lung Sum Avenue;

Sheung Shui

City : N.T. Hong Kong

Country : N.T. Hong Kong

Telephone: +(852) 2670 9733

Telex : +(852) 2673 0337

E-mail : Shirleyc@upm-products.com.hk

Contact person:

Name : Shirley Chan

Telephone : +(852) 2670 9733

Telex : +(852) 2673 0337

E-mail : Shirleyc@upm-products.com.hk

1.4 Application details

Date of receipt of test item : 2003-10-01

Date of test : 2003-10-13

Person(s) who have been : -.-

present during the test

1.5 Test item

Type of equipment : Remote Control Transmitter
Type designation : IKT201
Manufacturer : Same as applicant
Street :
City :
Country :
Serial number : - / -

Additional information :

Frequency : 433.9 MHz
Type of modulation : 12K4A1D
Channel spacing : >25 kHz
Number of channels : 1
Antenna : Integral antenna
Power supply : 3 x 1,5V DC Batteries
Temperature range : -20°C - +55°C
FCC ID : PLJIKT201

Max. ERP : Peak: 91.3 dB μ V/m ; Average: 70.3 dB μ V/m at 3m distance

1.6 Test specifications: **FCC Part 15 §15.209**
FCC Part 15 §15.231
CANADA RSS-210

2 Technical test

2.1 Summary of test results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.35, 15.209.

The product fulfills also the requirements for CANADA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

2.2 Test report

TEST REPORT

Test report no. : 2-3085-01-01/02


TEST REPORT REFERENCE

LIST OF MEASUREMENTS

Paragraph	PARAMETER TO BE MEASURED	PAGE
TRANSMITTER PARAMETERS		
§ 15.231 (e)	Timing of the transmitter	9
§ 15.231 (e)	Emission limitations	12
§ 15.231 (c)	Occupied bandwidth	15
Test equipment listing		16
Photographs of the equipment		18

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

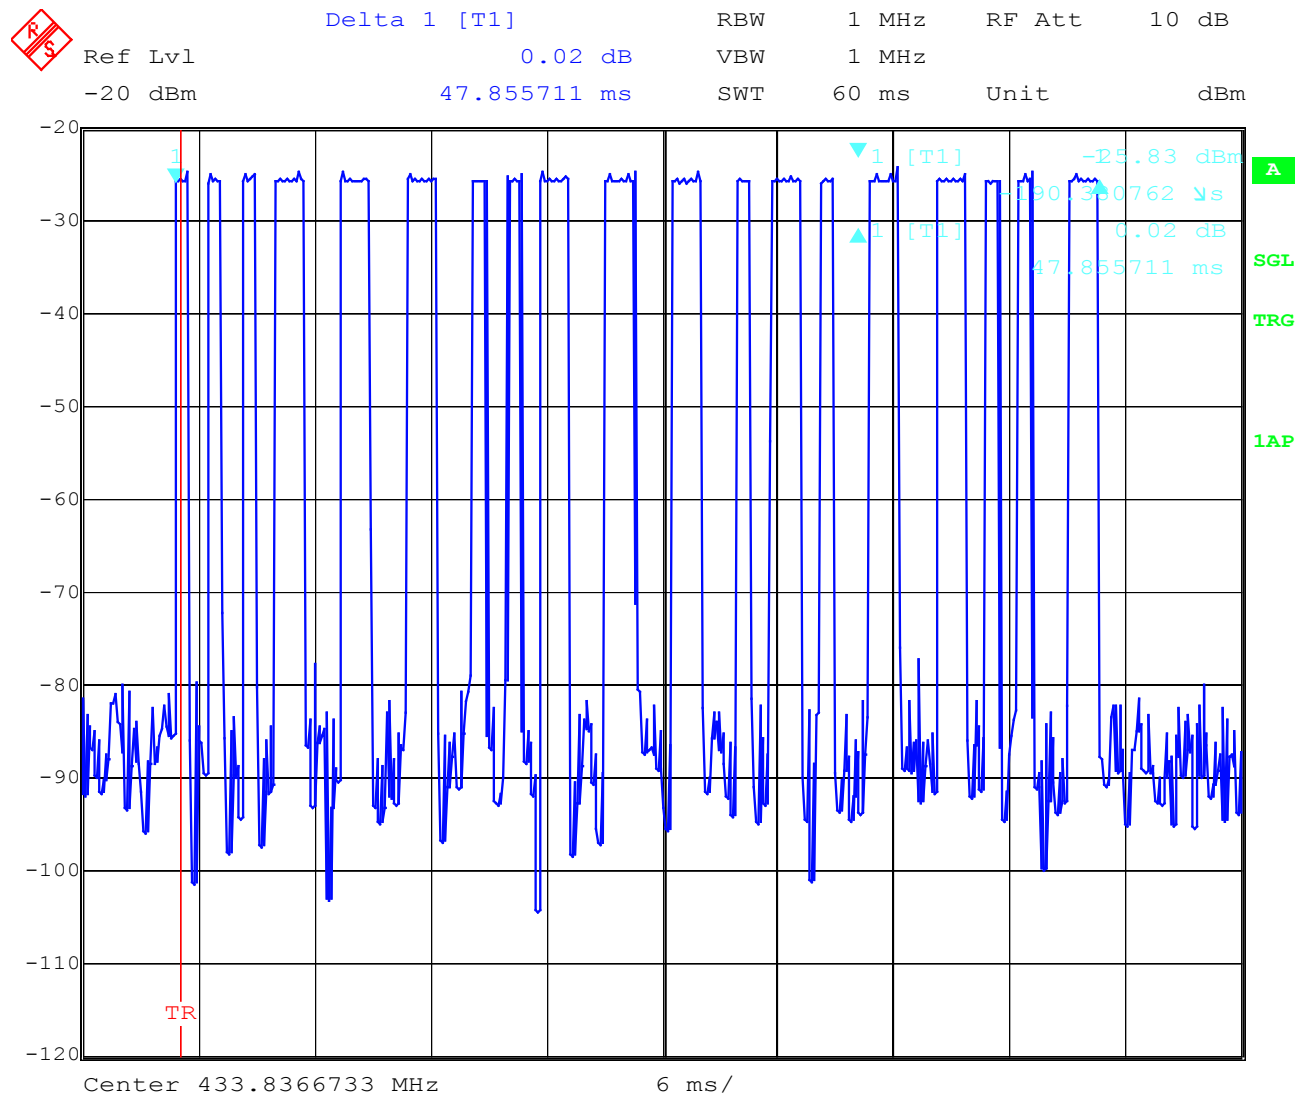

Date: 13.OCT.2003 10:04:06

Start : 0 s

Marker 1↓ : Start transmission at -190 μs


Marker 1↑ : End pulse train at +47.85 ms

Pulse train length = 48 ms

Duty Cycle in pulse train = 50% → TX time in one pulse train = 24 ms

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

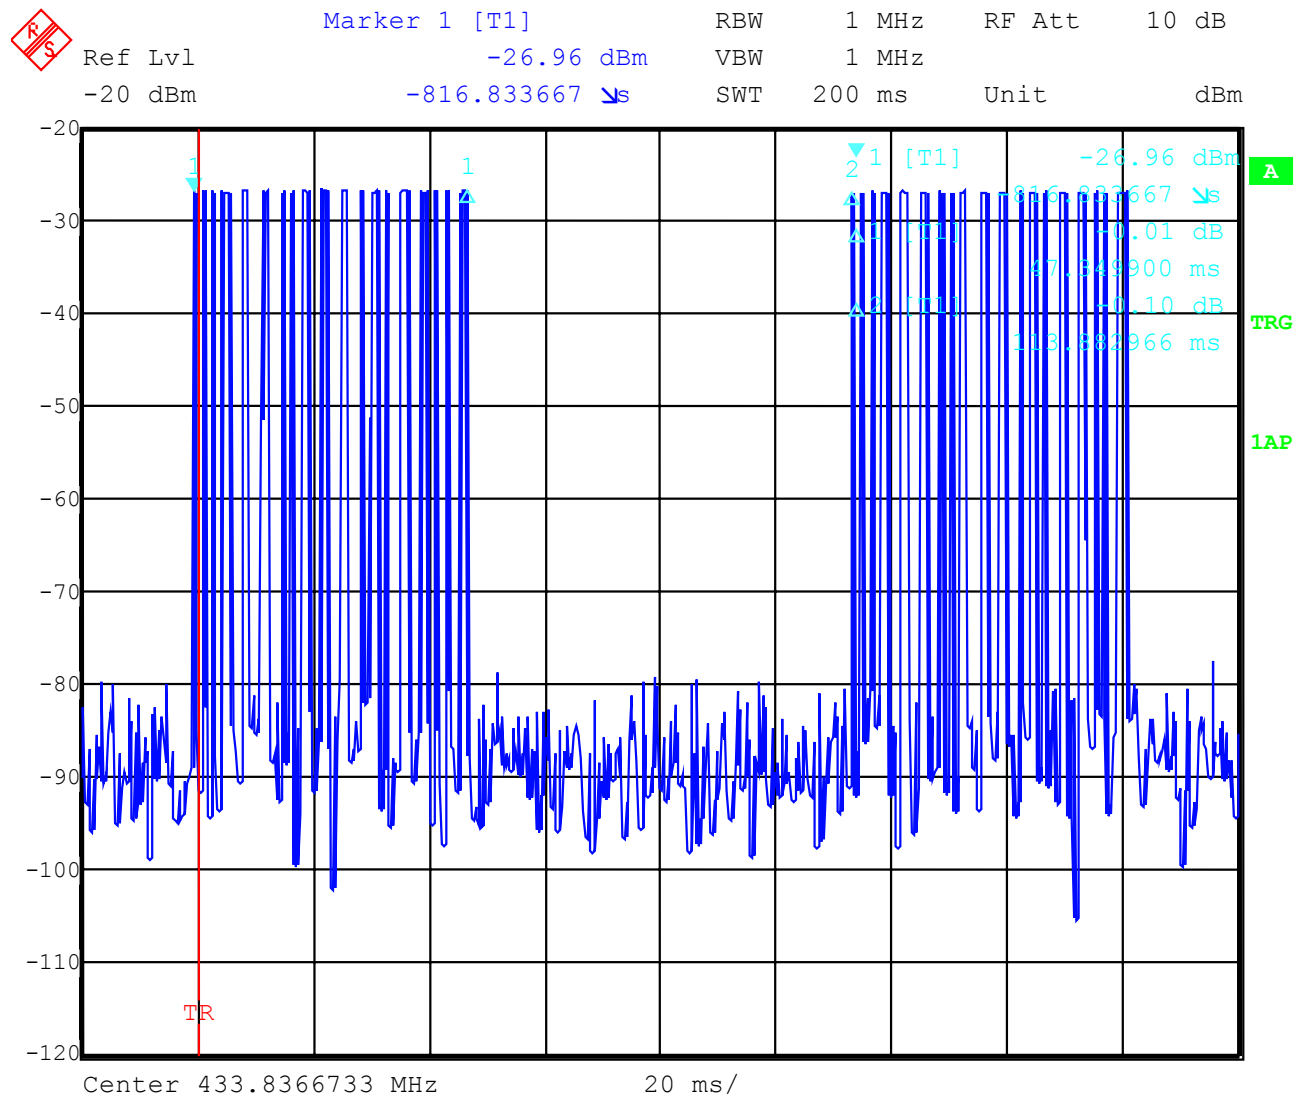

Date: 13.OCT.2003 09:59:44


Remark: The pulse train length is ~ 113.88 ms.
 The ON – time of transmitter is ~ 24ms.
 The OFF- time is 110ms – 39ms = ~ 89.88 ms

Correction factor for average measurement:
 $20 * \log (T_{on} / 100 \text{ ms}) = 20 * \log (0.24) = -12.4 \text{ dB}$

Timing of the transmitter

SUBCLAUSE § 15.231 (a) (1)

Timing behavior after releasing button

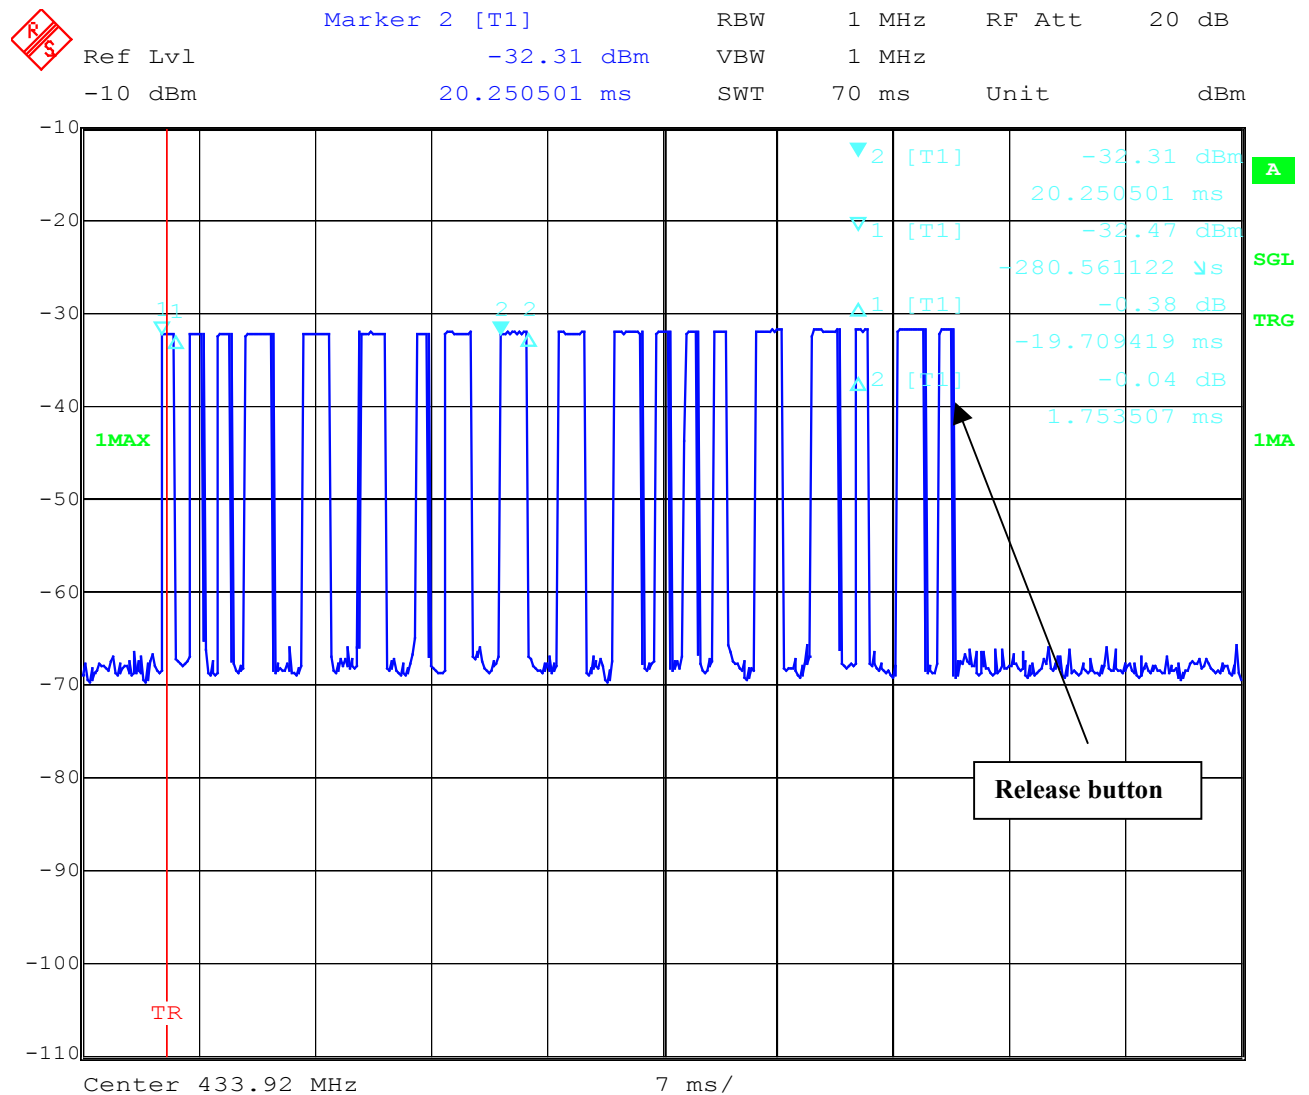

Date: 13.OCT.2003 09:43:19

red vertical line = press button

the transmitter stops directly after release button

So the product complies with the FCC requirements.

SPURIOUS EMISSION (radiated)

§ 15.231 (e)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBµV/m) Average/QP	limit max. allowed emmission power	actual attenuation below frequency of operation (dB)	results
433,9		70.3 AV	72.9 dBµV/m Average		Operating frequency
870.5		25.8 AV	20 dBc	44.5	complies
Measurement uncertainty			± 3dB		

So the product complies with the FCC requirements.

LIMITS

SUBCLAUSE § 15.231 (e)

Fundamental Frequency (MHz)	Field Strength of the Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 – 40.70	1,000 / 60dBµV/m	100 / 40 dBµV/m
70 – 130	500 / 54 dBµV/m	50 / 34 dBµV/m
130 – 174	500, to 1,500 **	50 to 150 ** 34 – 43.5 dBµV/m
174 – 260	1,500 / 63.5 dBµV/m	150 / 43.5 dBµV/m
260 – 470	1,500 to 5,000**	150 to 500 ** 43.5 – 54.0 dBµV/m
Above 470	5,000 / 74 dBµV/m	500 / 54 dBµV/m
** linear interpolations		

EMISSION LIMITATIONS- Radiated < 30 MHz

§ 15.209


FCC Rule 47

Part 15.209 Magnetics

EUT: IKT201
 Manufacturer: Mandolyn Electronic Technology Inc.
 Operating Condition: Transmitter
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109/15.209
 Comment:
 Start of Test: 13.10.03 / 12:51:10



SCANTABELLE: "VDE0875/211 Triple"

Kurzbeschreibung:	Voltage Mains	1.60
Start- Stop-	Schritt-	Detektor
Frequenz	Frequenz	weite
9.0 kHz	150.0 kHz	100.0 Hz
150.0 kHz	30.0 MHz	10.0 kHz
MaxPeak	100.0 ms	0.2 kHz
MaxPeak	100.0 ms	10 kHz
HFH2-Z2	HFH2-Z2	(dBµV/m)
HFH2-Z2	HFH2-Z2	(dBµV/m)

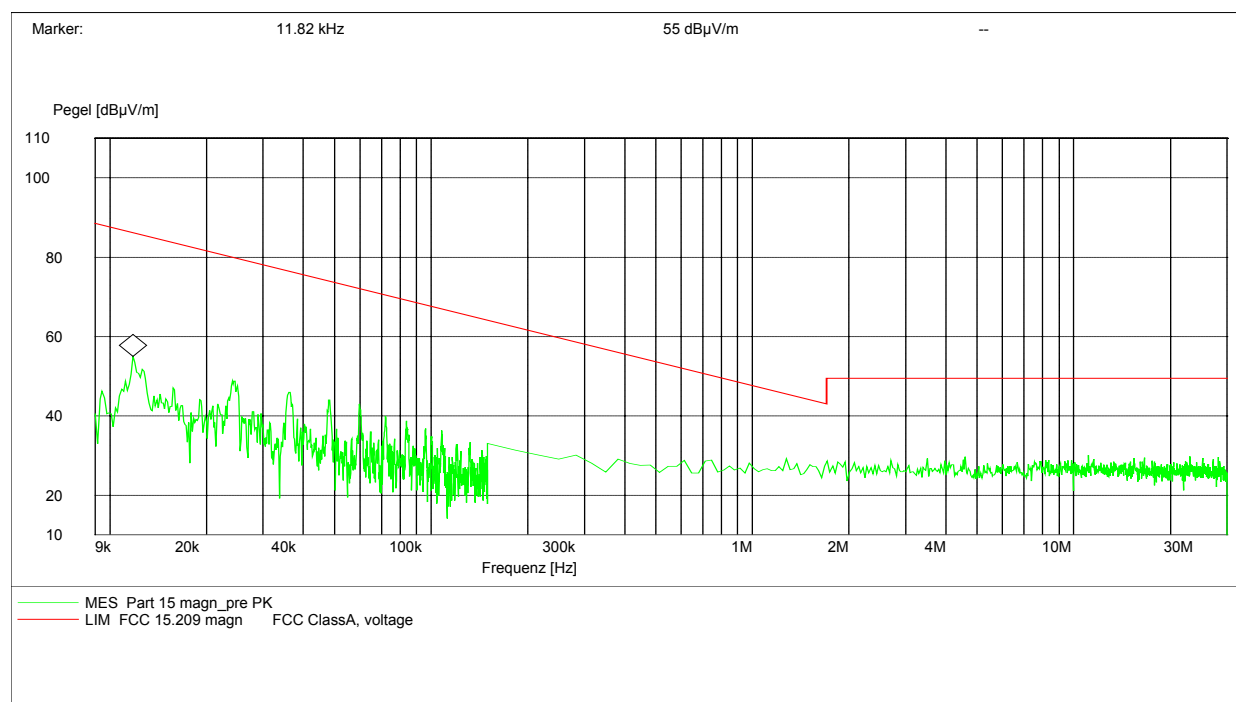


SPURIOUS EMISSION (radiated) > 30 MHz

§ 15.231 (e)

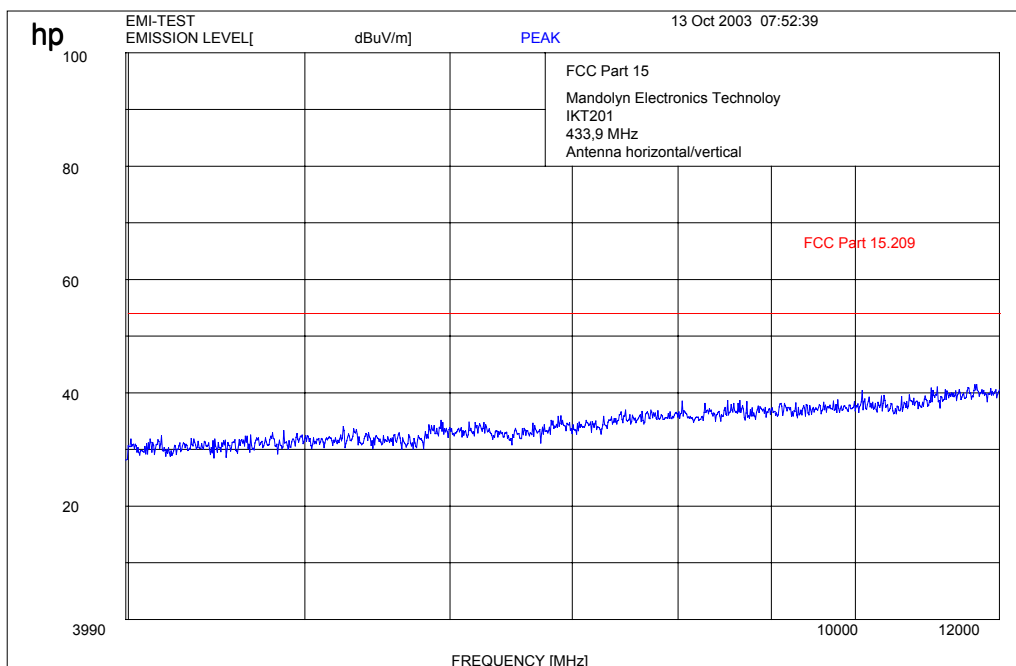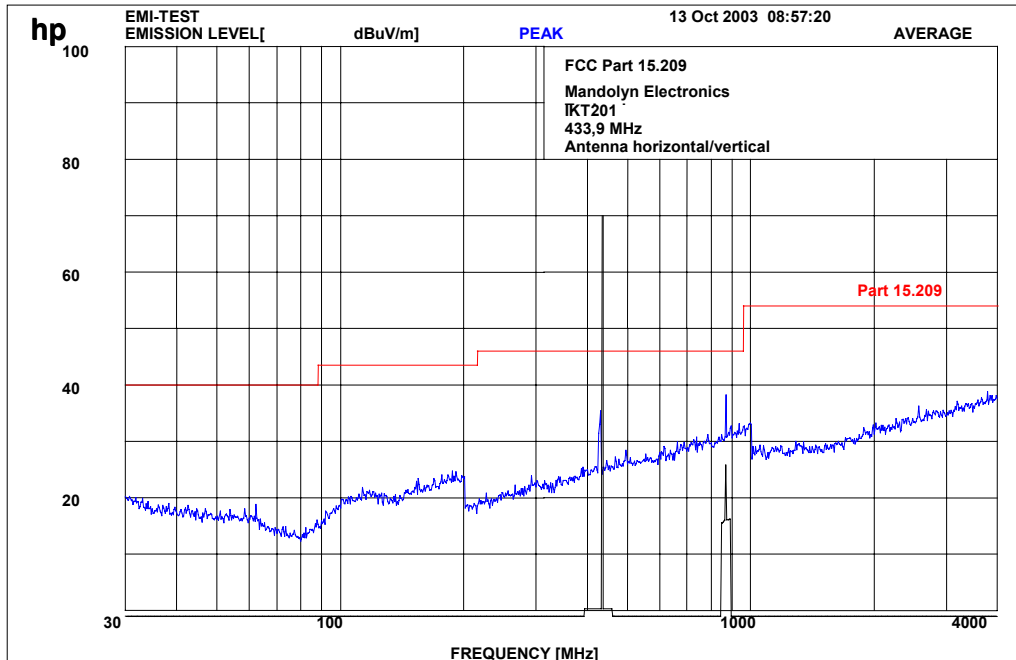

Occupied bandwidth

FCC 15.231 (c)

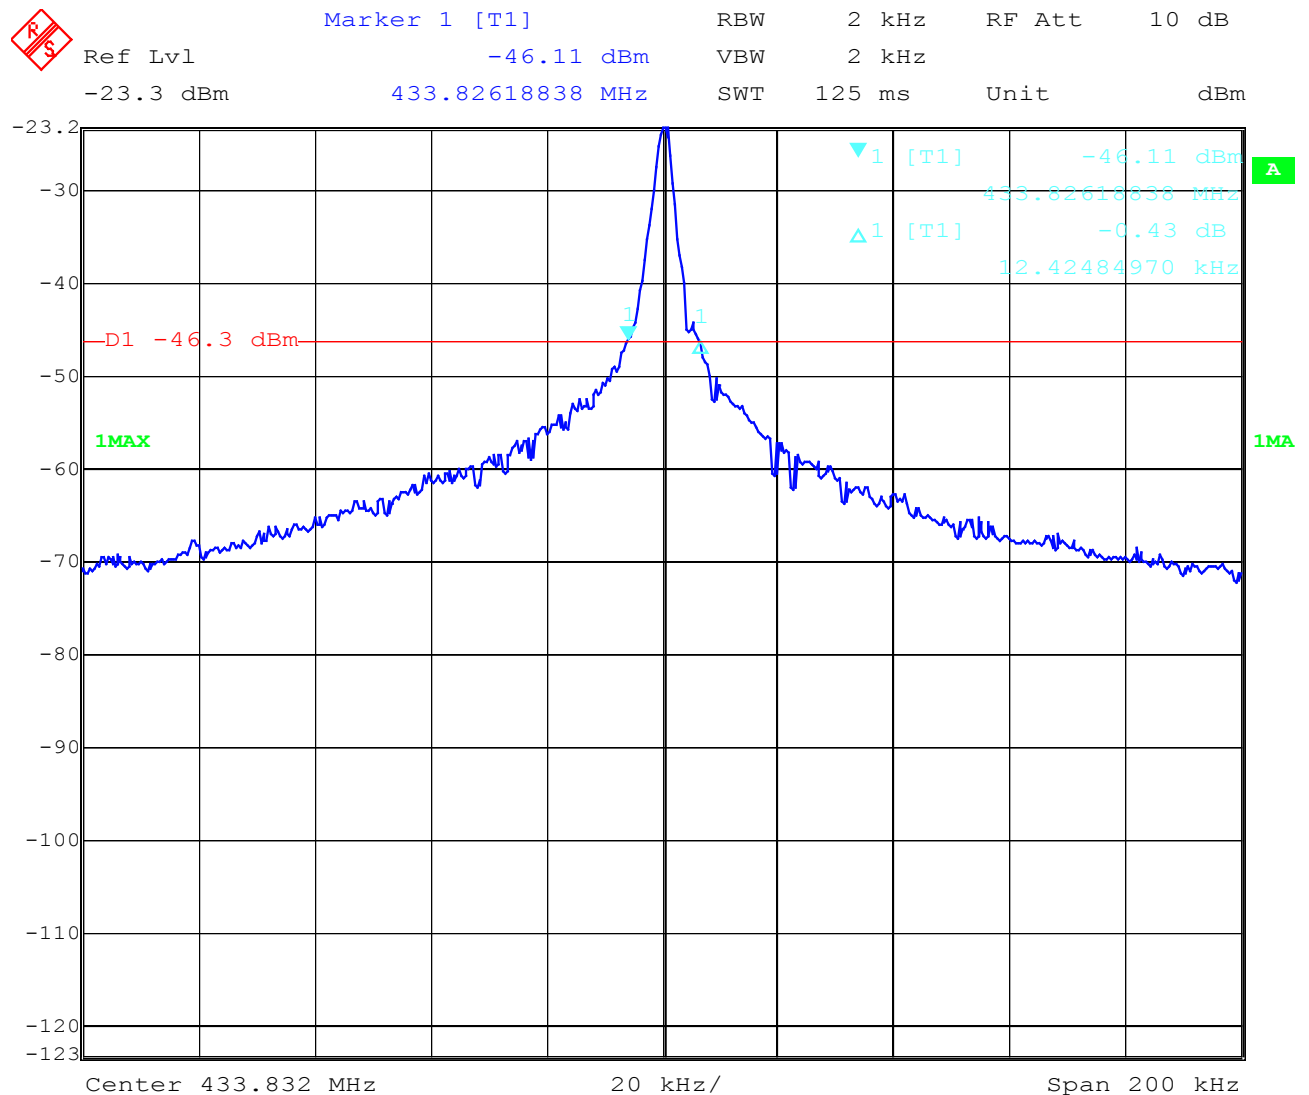

Date: 13.OCT.2003 11:05:24

Marker 1↓ : 433.826 188 MHz

Marker 1↑ : 433.838 613 MHz

The occupied bandwidth is 12.42 kHz at -20 dB points.

So the product complies with the FCC requirements.

Limit

SUBCLAUSE § 15.231(c)

< 0.25% of the centre frequency, here 1.08 MHz

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.


No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				

Test site

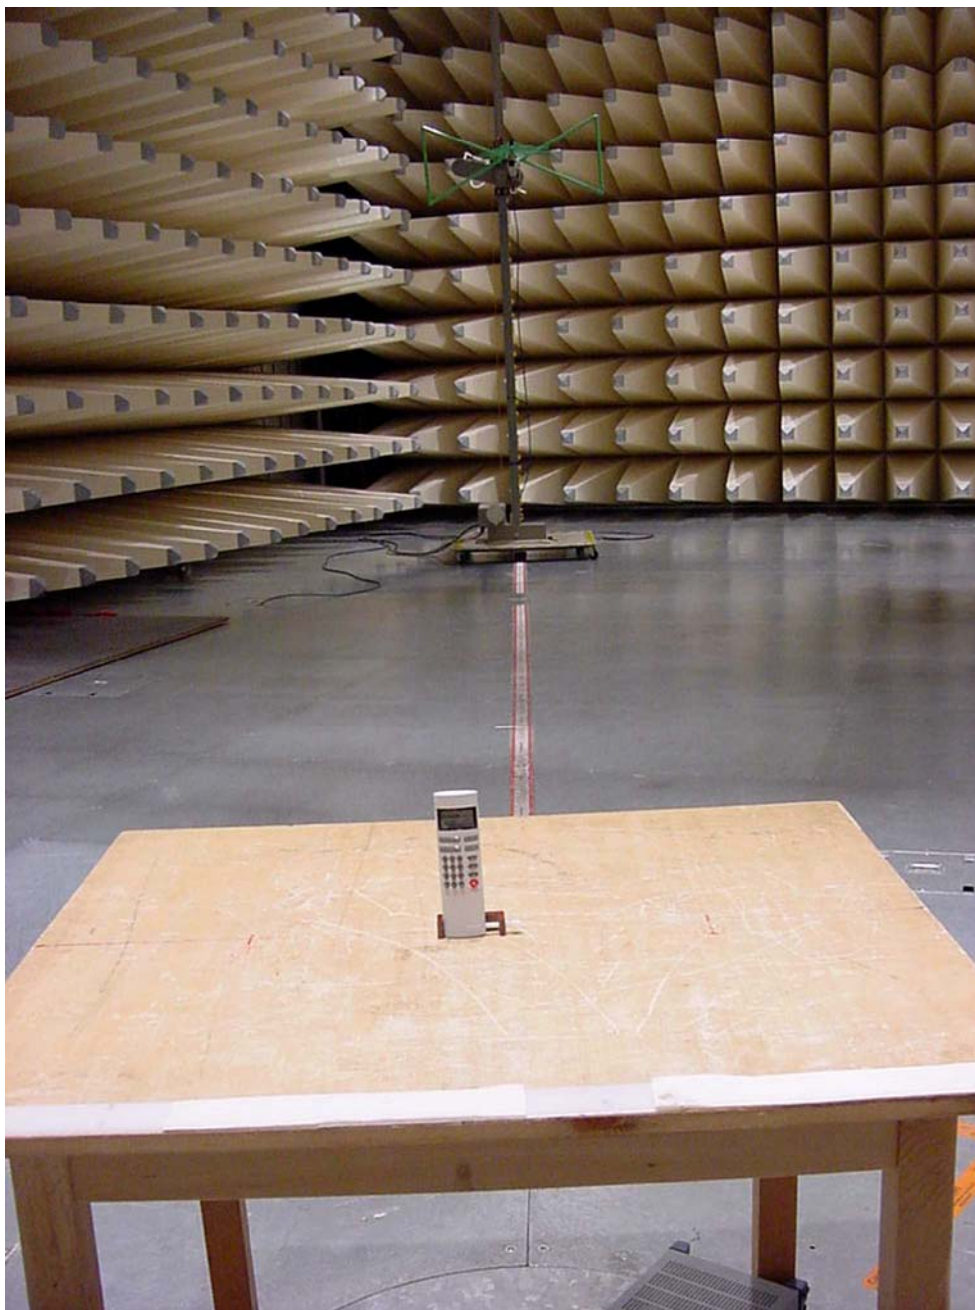

Photographs of the equipment

Photograph no.: 1




Photographs of the equipment

Photograph no.: 2



Photographs of the equipment

Photograph no.: 3

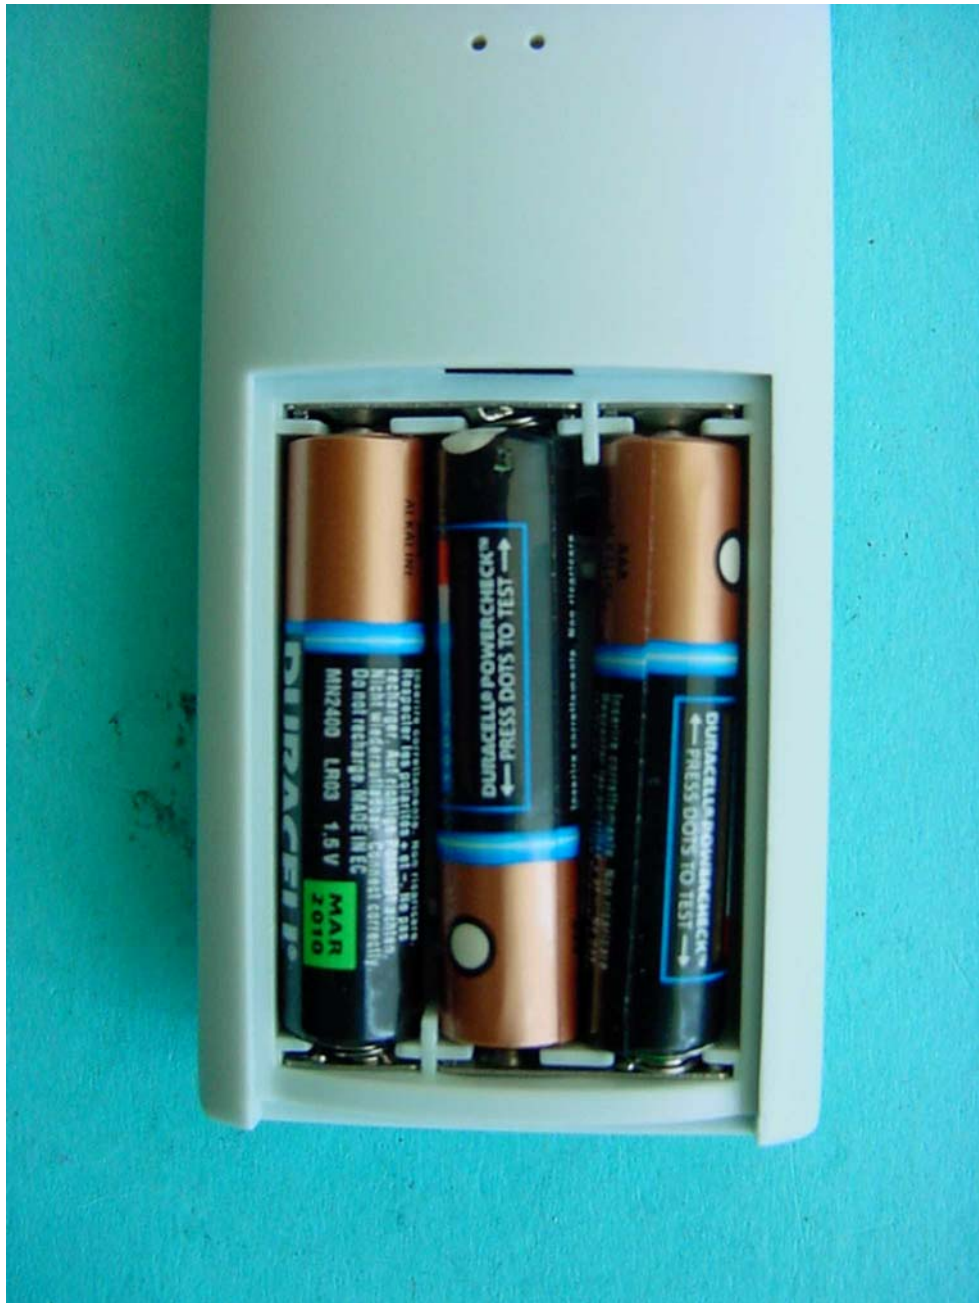


Photographs of the equipment

Photograph no.: 3



Photographs of the equipment

Photograph no.: 3

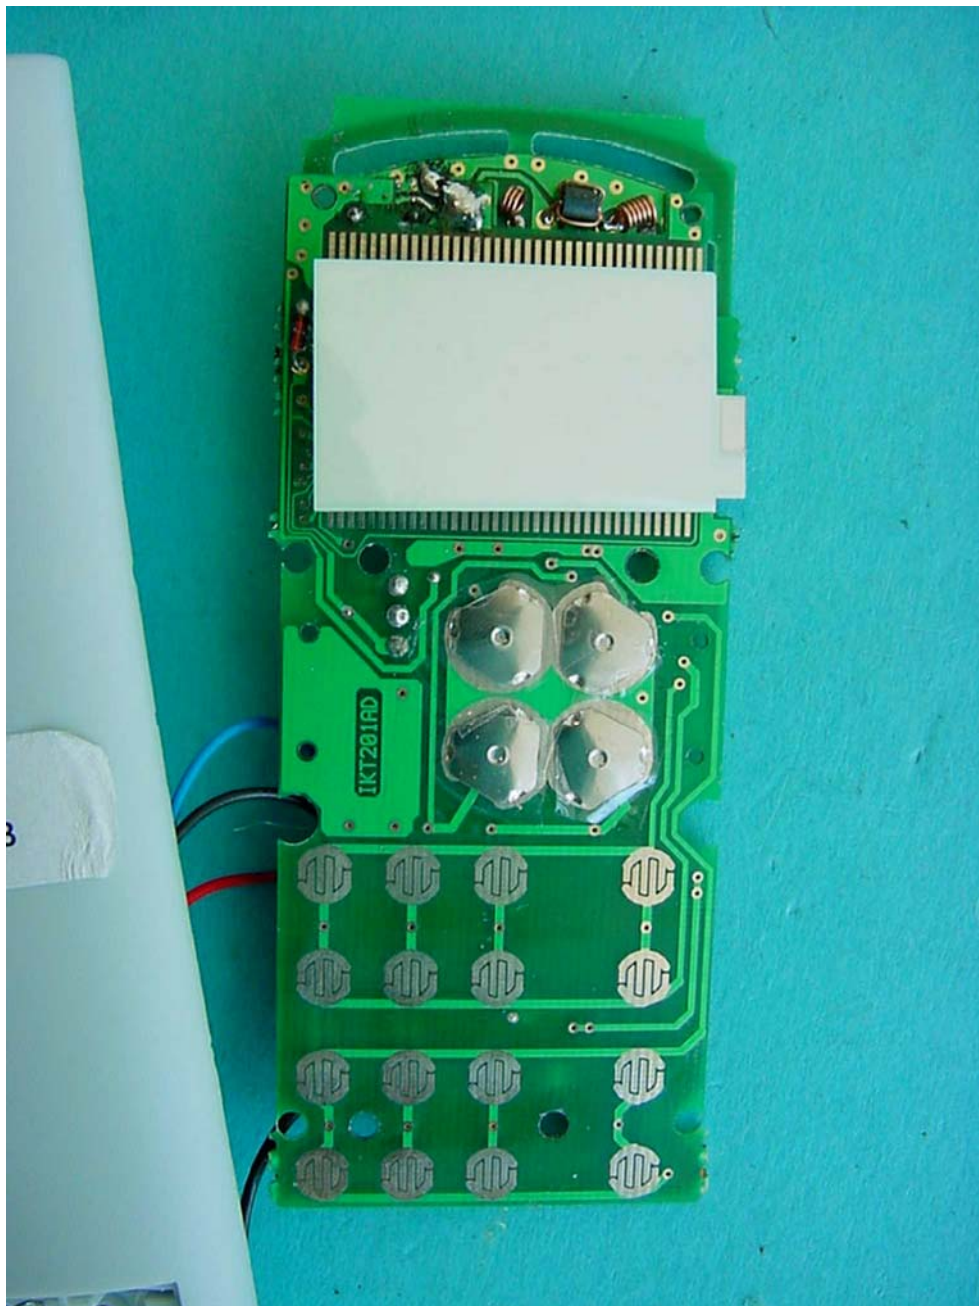

Photographs of the equipment

Photograph no.: 3

