



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION  
TEST REPORT**

**FOR**

**ArcXtend TM**

**MODEL NUMBER: AX1455**

**FCC ID: PLRAX145500**

**REPORT NUMBER: 05U3489-1B**

**ISSUE DATE: JUNE 23, 2005**

*Prepared for*

**ARCWAVE INCORPORATED  
910 CAMPISI WAY, #1C  
CAMPBELL, CA 95008, USA**

*Prepared by*

**COMPLIANCE ENGINEERING SERVICES, INC.  
d.b.a.**

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP<sup>®</sup>**  
**LAB CODE:200065-0**

Revision History

| Rev. | Issue<br>Date | Revisions                     | Revised By |
|------|---------------|-------------------------------|------------|
| A    | 6/23/05       | Initial Issue                 | YZ         |
| B    | 8/22/05       | Corrected typo in section 5.2 | MH         |

## TABLE OF CONTENTS

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS.....</b>                             | <b>4</b>  |
| <b>2. TEST METHODOLOGY .....</b>                                       | <b>5</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>                           | <b>5</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY.....</b>                             | <b>5</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION.....                             | 5         |
| 4.2. MEASUREMENT UNCERTAINTY.....                                      | 5         |
| <b>5. EQUIPMENT UNDER TEST.....</b>                                    | <b>6</b>  |
| 5.1. DESCRIPTION OF EUT .....                                          | 6         |
| 5.2. MAXIMUM OUTPUT POWER .....                                        | 6         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....                            | 7         |
| 5.4. SOFTWARE AND FIRMWARE .....                                       | 7         |
| 5.5. WORST-CASE CONFIGURATION AND MODE.....                            | 7         |
| 5.6. DESCRIPTION OF TEST SETUP .....                                   | 8         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>                         | <b>10</b> |
| <b>7. CHANNEL TESTS .....</b>                                          | <b>11</b> |
| 7.1.1. 6 dB BANDWIDTH .....                                            | 11        |
| 7.1.2. 99% BANDWIDTH.....                                              | 15        |
| 7.1.3. PEAK OUTPUT POWER .....                                         | 19        |
| 7.1.4. MAXIMUM PERMISSIBLE EXPOSURE .....                              | 27        |
| 7.1.5. AVERAGE POWER.....                                              | 30        |
| 7.1.6. PEAK POWER SPECTRAL DENSITY .....                               | 31        |
| 7.1.7. CONDUCTED SPURIOUS EMISSIONS.....                               | 38        |
| 7.2. RADIATED EMISSIONS.....                                           | 51        |
| 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....                   | 51        |
| 7.2.2. TRANSMITTER ABOVE 1 GHz WITH 19dBi ANTENNA .....                | 54        |
| 7.2.3. TRANSMITTER ABOVE 1 GHz WITH 15dBi ANTENNA .....                | 55        |
| 7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 19dBi ANTENNA... | 56        |
| 7.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 15dBi ANTENNA... | 60        |
| <b>8. SETUP PHOTOS .....</b>                                           | <b>64</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** ARCWAVE, INC.  
910 CAMPISI WAY, #1C  
CAMPBELL, CA 95008  
U.S.A

**EUT DESCRIPTION:** ArcXtend TM

**MODEL:** AX1455 (TESTED AX1455-SM-25 AND AX1455-SM-60)

**SERIAL NUMBER:** 00001

**DATE TESTED:** JUNE 13 –JUNE 14, 2005

| APPLICABLE STANDARDS  |                         |
|-----------------------|-------------------------|
| STANDARD              | TEST RESULTS            |
| FCC PART 15 SUBPART C | NO NON-COMPLIANCE NOTED |

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE  
ENGINEERING MANAGER  
COMPLIANCE CERTIFICATION SERVICES

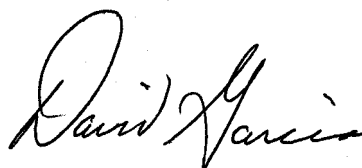

DAVID GARCIA  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                           | UNCERTAINTY    |
|-------------------------------------|----------------|
| Radiated Emission, 30 to 200 MHz    | +/- 3.3 dB     |
| Radiated Emission, 200 to 1000 MHz  | +4.5 / -2.9 dB |
| Radiated Emission, 1000 to 2000 MHz | +4.5 / -2.9 dB |
| Power Line Conducted Emission       | +/- 2.9 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a 5.8GHz point to multipoint hub.

The radio module is manufactured by Arcwave Inc.

The EUT was tested in two configurations. The only difference between the two configurations was the antenna. One antenna is a 20 degree beam-width, patch array antenna with a gain of 19 dBi and the other is a 60 degree beam-width, patch array antenna with a gain of 15 dBi.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range<br>(MHz) | Antenna<br>Applied | Output Power<br>(dBm) | Output Power<br>(mW) |
|--------------------------|--------------------|-----------------------|----------------------|
| 5813 - 5843              | 19 dBi Antenna     | 15.50                 | 35.48                |
| 5813 - 5843              | 15 dBi Antenna     | 20.80                 | 120.23               |

### **5.3. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes a patch array antenna. There are two options available. One antenna is a 20 degree beam-width, patch array antenna with a maximum gain of 19 dBi and the other is a 60 degree beam-width, patch array antenna with a maximum gain of 15 dBi.

### **5.4. SOFTWARE AND FIRMWARE**

1. Firmware Installed on EUT  
Total of 4  
AX500 (Cable Tuner)= 2.7 Rev. 1  
AX150 (transmitter) = 2.6 Rev. 0  
AX106 (Receiver) = 2.6 Rev. 0  
BRM3202 (embedded Cable modem) = 2.00.04A1 Rev 1
2. Host support Equipment  
Laptop = Windows 2000 Server SP2  
Arris CMTS = 4.2.414
3. Test Utility Software  
MS Internet Explorer = 5.00.3315.1000

### **5.5. WORST-CASE CONFIGURATION AND MODE**

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 5825 MHz.

The worst-case data rate for this channel is determined to be 40 Mb/s, based on previous experience with the similar product design architectures.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST |                    |                 |               |        |
|-----------------------------------|--------------------|-----------------|---------------|--------|
| Description                       | Manufacturer       | Model           | Serial Number | FCC ID |
| CMTS                              | Nortel Networks    | ARCD0145        | 11500491201   | N/A    |
| Laptop                            | Sony               | Vaio PCG-Z505HE | 28305630      | DoC    |
| Diplexer                          | Blonder Tonque     | ZUVSJ           | N/A           | N/A    |
| Power Injector                    | ChannelVision      | CVT-P1          | N/A           | N/A    |
| AC Power Supply                   | Alpha Technologies | APC 6014PM      | NC0100463-ATN | N/A    |
| AC Adapter                        | Sony               | PCGA-ACX1       | 418880        | N/A    |


### I/O CABLES

| I/O CABLE LIST |            |                      |                |            |              |         |
|----------------|------------|----------------------|----------------|------------|--------------|---------|
| Cable No.      | Port       | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1              | AC         | 1                    | IEC            | Unshielded | 1.8m         |         |
| 2              | Power      | 1                    | F              | Shielded   | 0.5m         |         |
| 3              | Data/Power | 1                    | F              | Shielded   | 20m          |         |
| 4              | Data       | 1                    | F              | Shielded   | 0.5m         |         |
| 5              | Data       | 1                    | F              | Shielded   | 0.5m         |         |
| 6              | Data       | 1                    | F              | Shielded   | 0.5m         |         |
| 7              | Data       | 1                    | RJ-45          | Unshielded | 1.5m         |         |
| 8              | DC         | 1                    | DC             | Unshielded | 1.5m         |         |
| 9              | AC         | 1                    | AC             | Unshielded | 1.8m         |         |
| 10             | AC         | 1                    | IEC            | Unshielded | 1.8m         |         |

### TEST SETUP

The EUT is a stand alone unit and was tested while connected to remote support equipment. Test software exercised the EUT.

**SETUP DIAGRAM FOR TESTS**

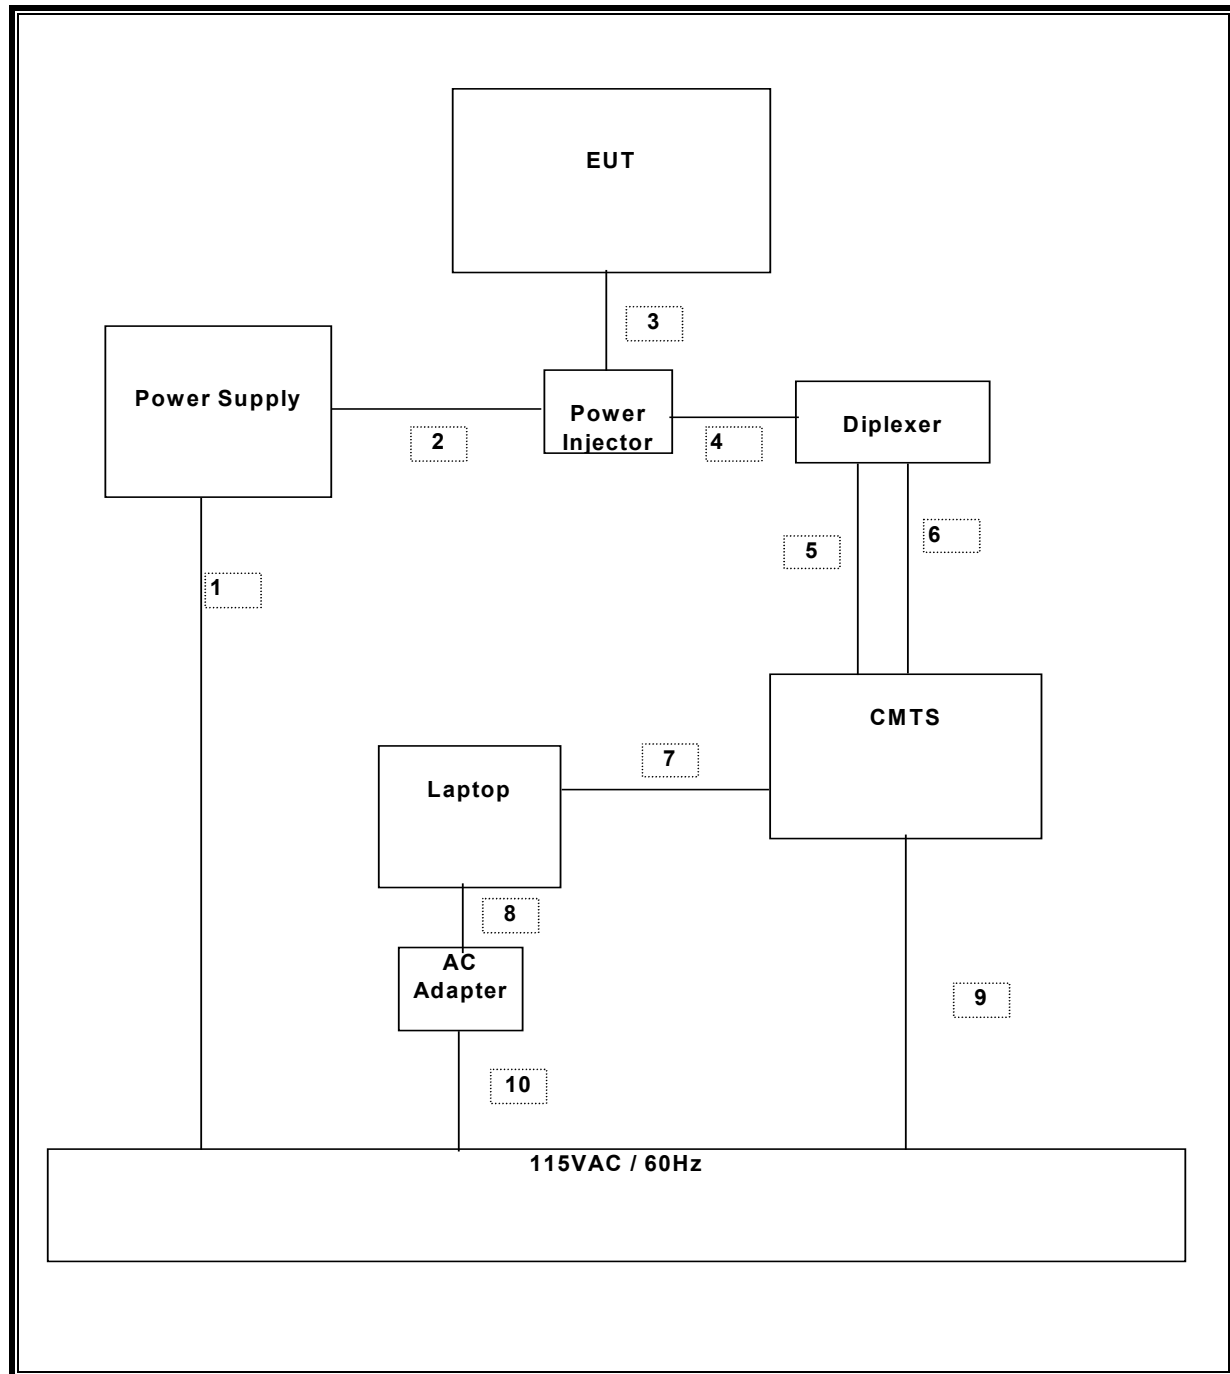

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST                |                |            |               |           |
|------------------------------------|----------------|------------|---------------|-----------|
| Description                        | Manufacturer   | Model      | Serial Number | Cal Due   |
| EMI Test Receiver                  | R & S          | ESIB40     | 100192        | 5/9/2006  |
| Spectrum Analyzer 3 Hz ~ 44 GHz    | Agilent        | E4446A     | US42510266    | 8/25/2005 |
| EMI Receiver, 9 kHz ~ 2.9 GHz      | HP             | 8542E      | 3942A00286    | 3/29/2006 |
| RF Filter Section                  | HP             | 85420E     | 3705A00256    | 3/29/2006 |
| Antenna, Bilog 30MHz ~ 2Ghz        | Sunol Sciences | JB1        | A121003       | 3/3/2006  |
| Antenna, Horn 1 ~ 18 GHz           | EMCO           | 3115       | 6717          | 9/12/2005 |
| Preamplifier, 1 ~ 26 GHz           | Miteq          | NSP2600-44 | 646456        | 8/17/2005 |
| Peak Power Meter                   | Agilent        | E4416A     | GB41291160    | 2/9/2006  |
| Peak / Average Power Sensor        | Agilent        | E9327A     | US40440755    | 2/10/2006 |
| 5.725 - 5.825 GHz Rejection Filter | MicroTronics   | BRC13192   | 2             | CNR       |
| 4.0 GHz High Pass Filter           | MicroTronics   | HPM13351   | 4             | CNR       |

## 7. CHANNEL TESTS

### 7.1.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


#### RESULTS

No non-compliance noted:

| Channel | Frequency<br>(MHz) | 6 dB Bandwidth<br>(kHz) | Minimum Limit<br>(kHz) | Margin<br>(kHz) |
|---------|--------------------|-------------------------|------------------------|-----------------|
| Low     | 5813               | 5166.667                | 500                    | 4667            |
| Middle  | 5825               | 5083.333                | 500                    | 4583            |
| High    | 5843               | 5083.333                | 500                    | 4583            |



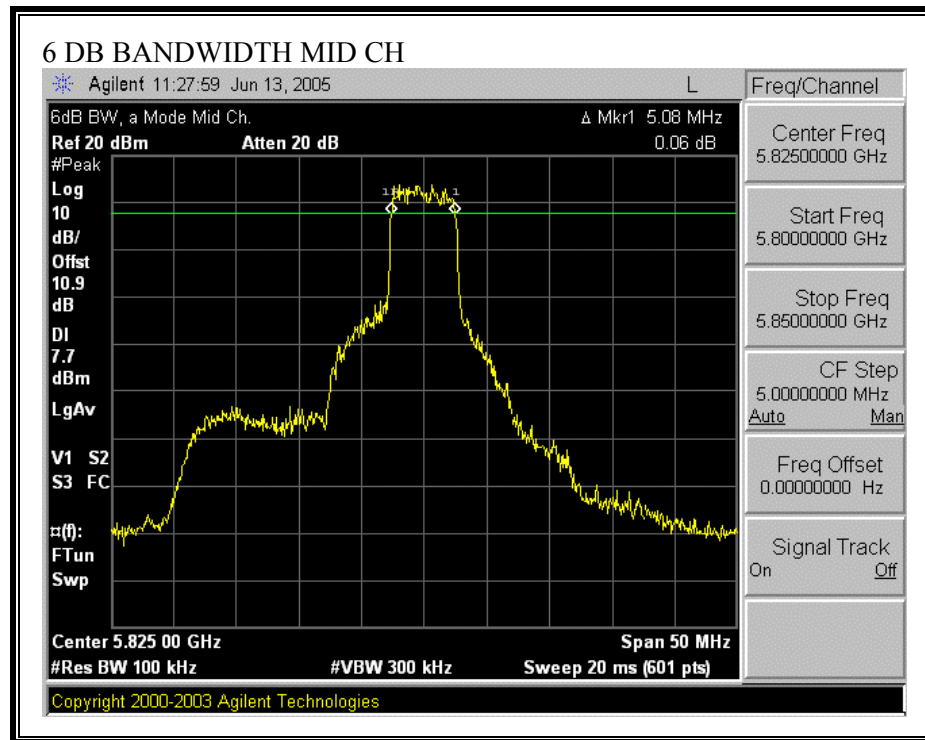

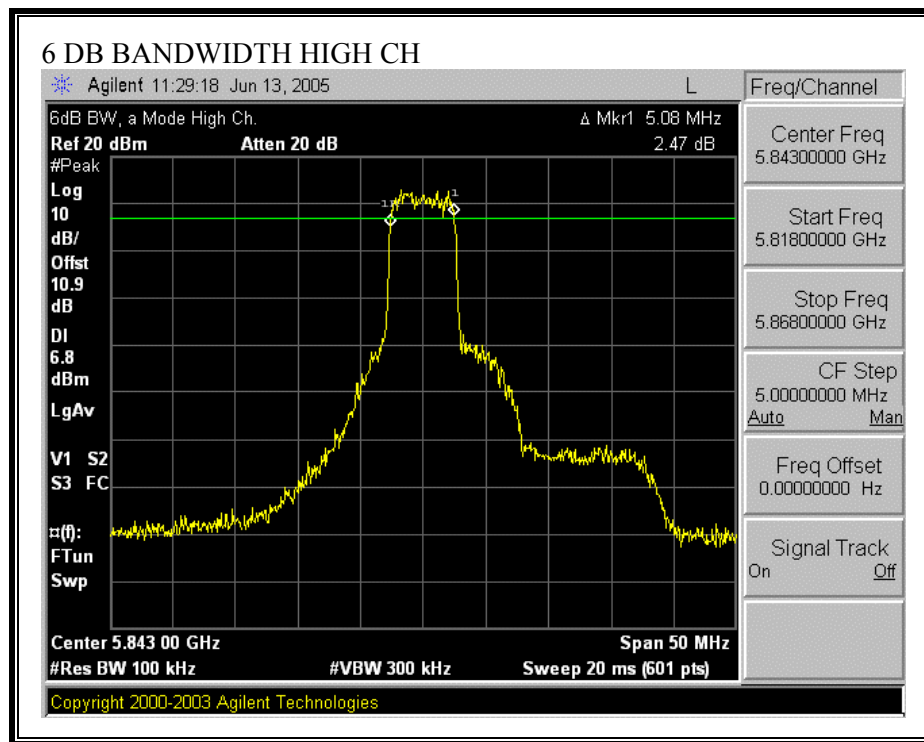

### 7.1.2. 99% BANDWIDTH

#### LIMIT

None: for reporting purposes only.

#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


#### RESULTS


No non-compliance noted:

| Channel | Frequency<br>(MHz) | 99% Bandwidth<br>(MHz) |
|---------|--------------------|------------------------|
| Low     | 5813               | 5.1781                 |
| Middle  | 5825               | 5.2001                 |
| High    | 5843               | 5.163                  |

**99% BANDWIDTH**

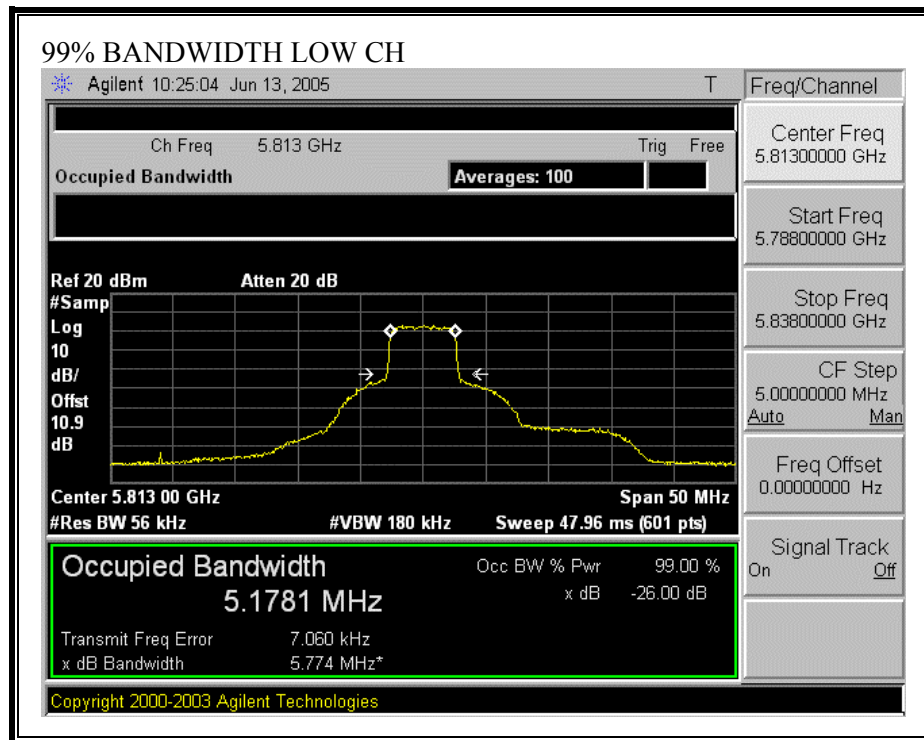

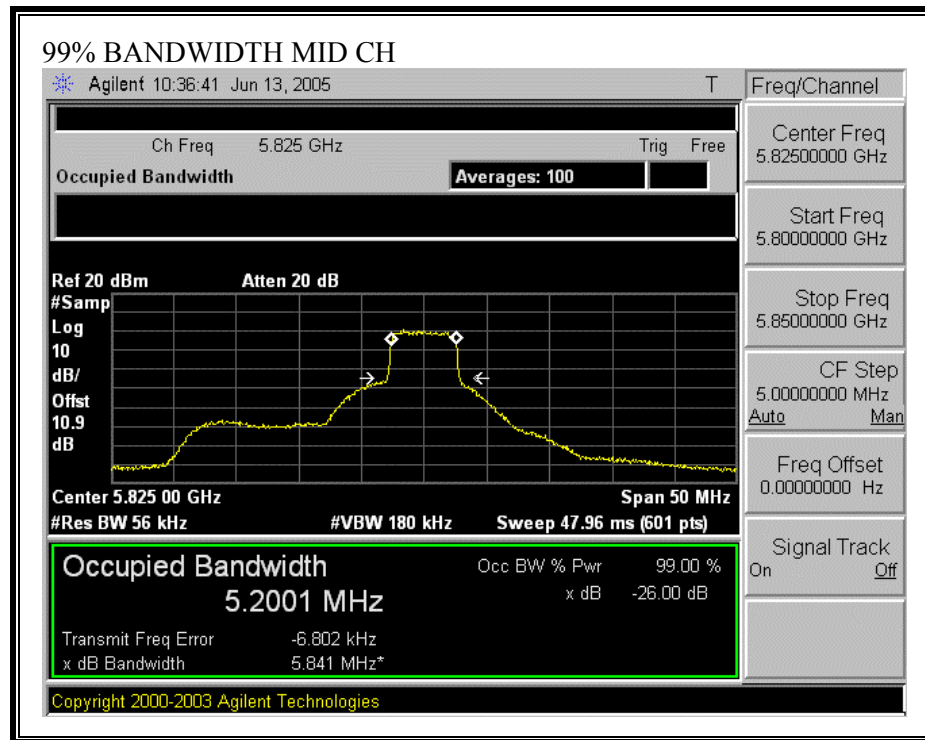

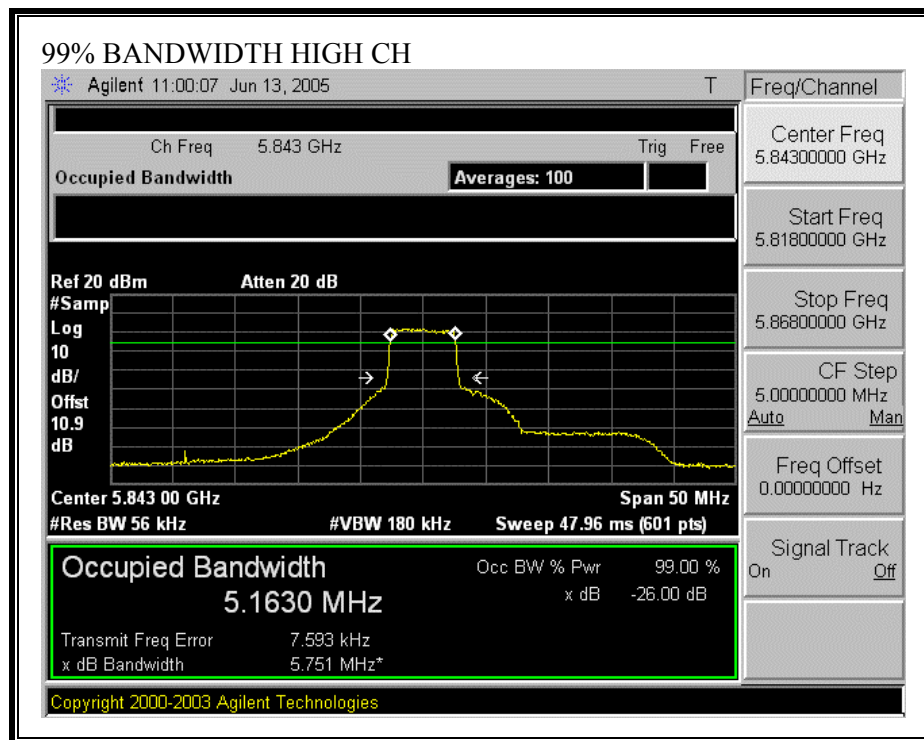

### **7.1.3. PEAK OUTPUT POWER**

#### **PEAK POWER LIMIT**

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one-Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

The test is performed in accordance with FCC document “Measurement of Digital Transmission Systems Operating under Section 15.247”, March 23, 2005. The transmitter operates continuously therefore Power Output Option 2, Method # 1 is used.

## **RESULTS**

This is not a fixed, point-to-point operation system. Therefore, for the maximum antenna gain of 19 dBi, the limit is 17 dBm; and for the maximum antenna gain of 15 dBi, the limit is 21dBm.

No non-compliance noted:


For 19 dBi Antenna


| <b>Channel</b> | <b>Frequency<br/>(MHz)</b> | <b>Peak Power<br/>(dBm)</b> | <b>Limit<br/>(dBm)</b> | <b>Margin<br/>(dB)</b> |
|----------------|----------------------------|-----------------------------|------------------------|------------------------|
| Low            | 5813                       | 14.93                       | 17                     | -2.07                  |
| Middle         | 5825                       | 15.50                       | 17                     | -1.50                  |
| High           | 5843                       | 13.97                       | 17                     | -3.03                  |


For 15 dBi Antenna

| <b>Channel</b> | <b>Frequency<br/>(MHz)</b> | <b>Peak Power<br/>(dBm)</b> | <b>Limit<br/>(dBm)</b> | <b>Margin<br/>(dB)</b> |
|----------------|----------------------------|-----------------------------|------------------------|------------------------|
| Low            | 5813                       | 20.24                       | 21                     | -0.76                  |
| Middle         | 5825                       | 20.80                       | 21                     | -0.20                  |
| High           | 5843                       | 19.87                       | 21                     | -1.13                  |


**OUTPUT POWER FOR 19 dBi ANTENNA**

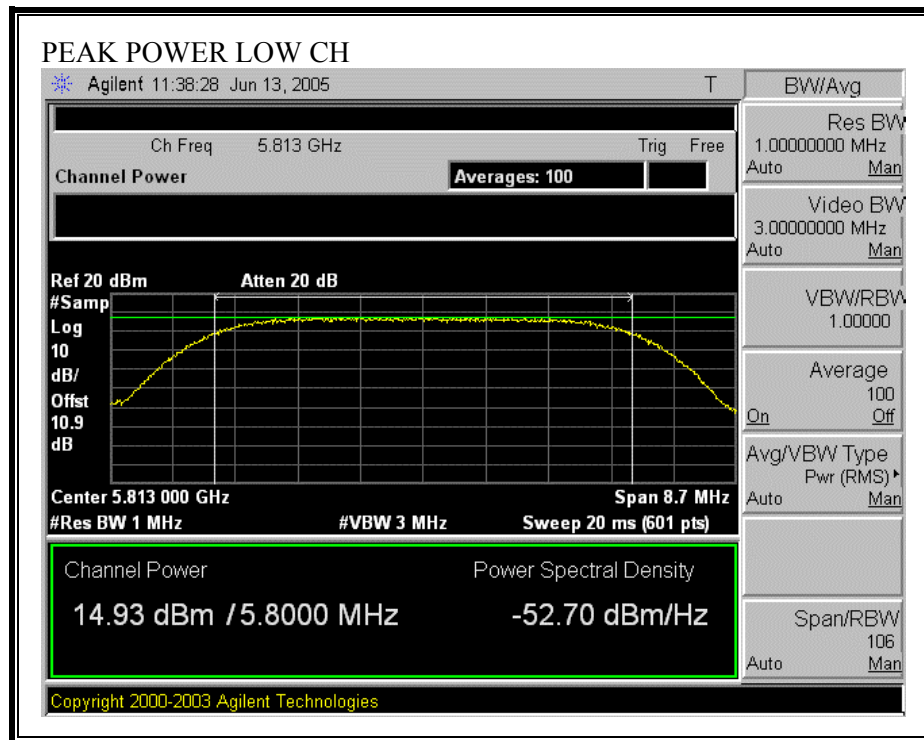


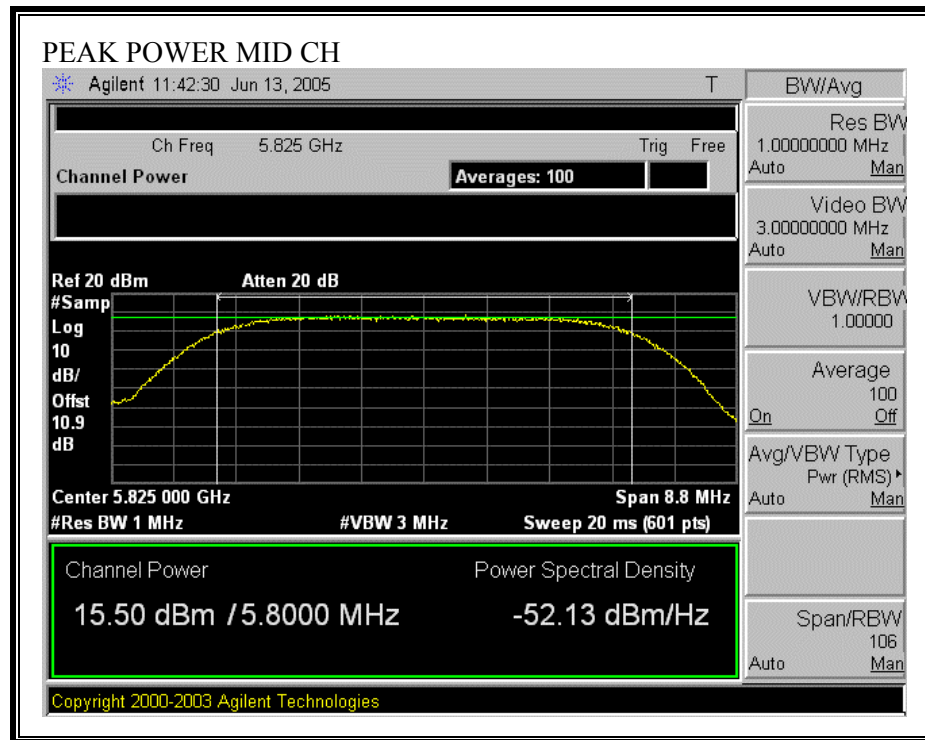


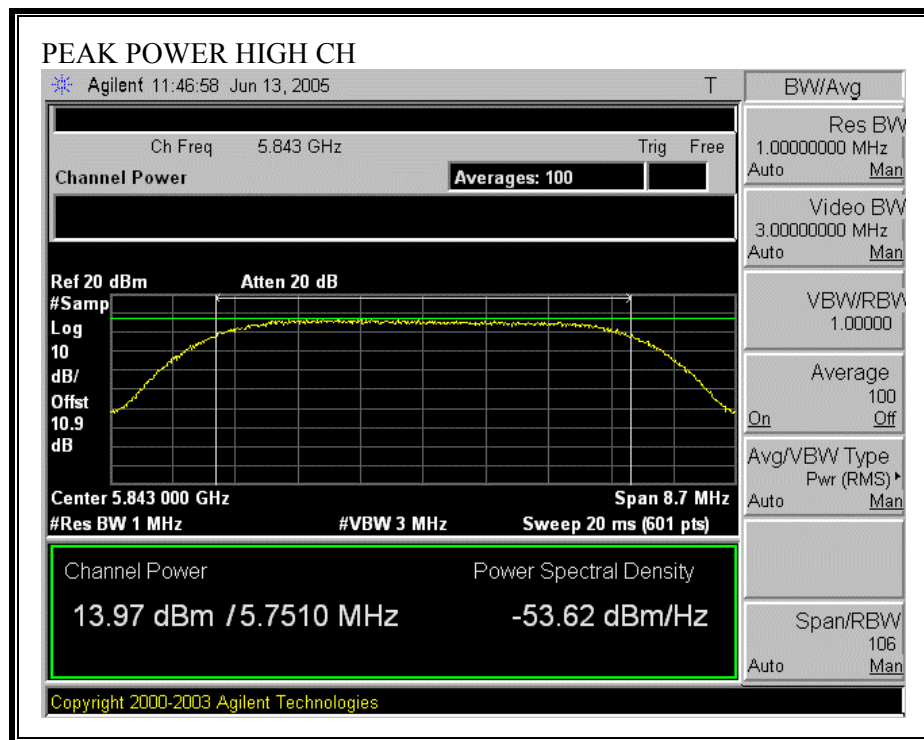

**OUTPUT POWER FOR 15 dBi ANTENNA**

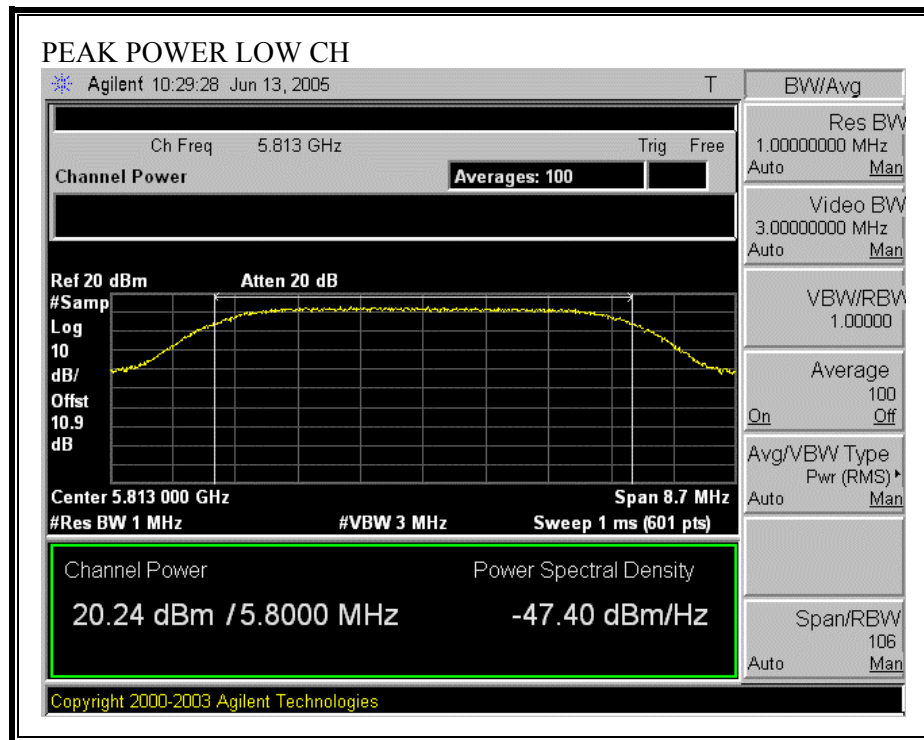

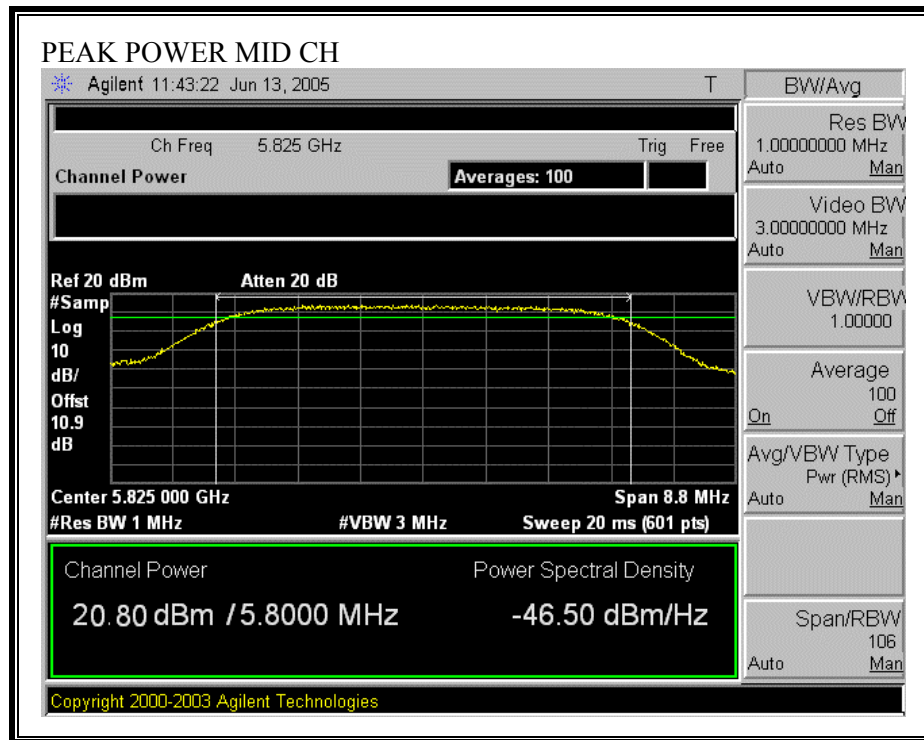

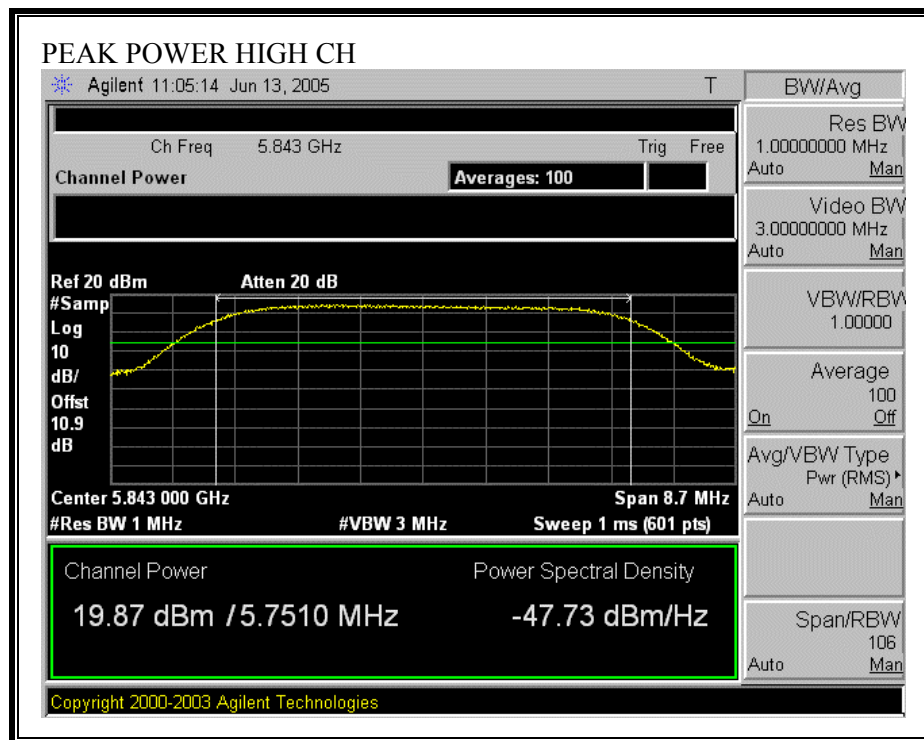

## 7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz)                                   | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures        |                               |                               |                                     |                          |
| 0.3–3.0 .....                                           | 614                           | 1.63                          | *(100)                              | 6                        |
| 3.0–30 .....                                            | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                        |
| 30–300 .....                                            | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300–1500 .....                                          | .....                         | .....                         | f/300                               | 6                        |
| 1500–100,000 .....                                      | .....                         | .....                         | 5                                   | 6                        |
| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
| 0.3–1.34 .....                                          | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34–30 .....                                           | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| 30–300 .....          | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300–1500 .....        | .....                         | .....                         | f/1500                              | 30                       |
| 1500–100,000 .....    | .....                         | .....                         | 1.0                                 | 30                       |

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

## **LIMITS**

From §1.1310 Table 1 (B),  $S = 1.0 \text{ mW/cm}^2$

## **RESULTS**

No non-compliance noted:

| <b>Antenna<br/>Applied</b> | <b>Power Density<br/>Limit<br/>(mW/cm<sup>2</sup>)</b> | <b>Output<br/>Power<br/>(dBm)</b> | <b>Antenna<br/>Gain<br/>(dBi)</b> | <b>MPE<br/>Distance<br/>(cm)</b> |
|----------------------------|--------------------------------------------------------|-----------------------------------|-----------------------------------|----------------------------------|
| For 19dBi Antenna          | 1.0                                                    | 15.50                             | 19.00                             | 14.97                            |
| For 15dBi Antenna          | 1.0                                                    | 20.80                             | 15.00                             | 17.39                            |

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

### 7.1.5. AVERAGE POWER

#### AVERAGE POWER LIMIT

None: for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.9 dB (including 10 dB pad and 0.9 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

For 19 dBi Antenna

| Channel | Frequency<br>(MHz) | Average Power<br>(dBm) |
|---------|--------------------|------------------------|
| Low     | 5813               | 14.50                  |
| Middle  | 5825               | 14.90                  |
| High    | 5843               | 13.40                  |

For 15 dBi Antenna

| Channel | Frequency<br>(MHz) | Average Power<br>(dBm) |
|---------|--------------------|------------------------|
| Low     | 5813               | 20.20                  |
| Middle  | 5825               | 20.60                  |
| High    | 5843               | 19.40                  |

### 7.1.6. PEAK POWER SPECTRAL DENSITY

#### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

#### RESULTS

No non-compliance noted:


For 19 dBi Antenna


| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low     | 5813            | -5.16      | 8           | -13.16      |
| Middle  | 5825            | -3.63      | 8           | -11.63      |
| High    | 5843            | -7.29      | 8           | -15.29      |


For 15 dBi Antenna

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low     | 5813            | 0.24       | 8           | -7.76       |
| Middle  | 5825            | 1.49       | 8           | -6.51       |
| High    | 5843            | -1.55      | 8           | -9.55       |


**PEAK POWER SPECTRAL DENSITY FOR 19 dBi ANTENNA**

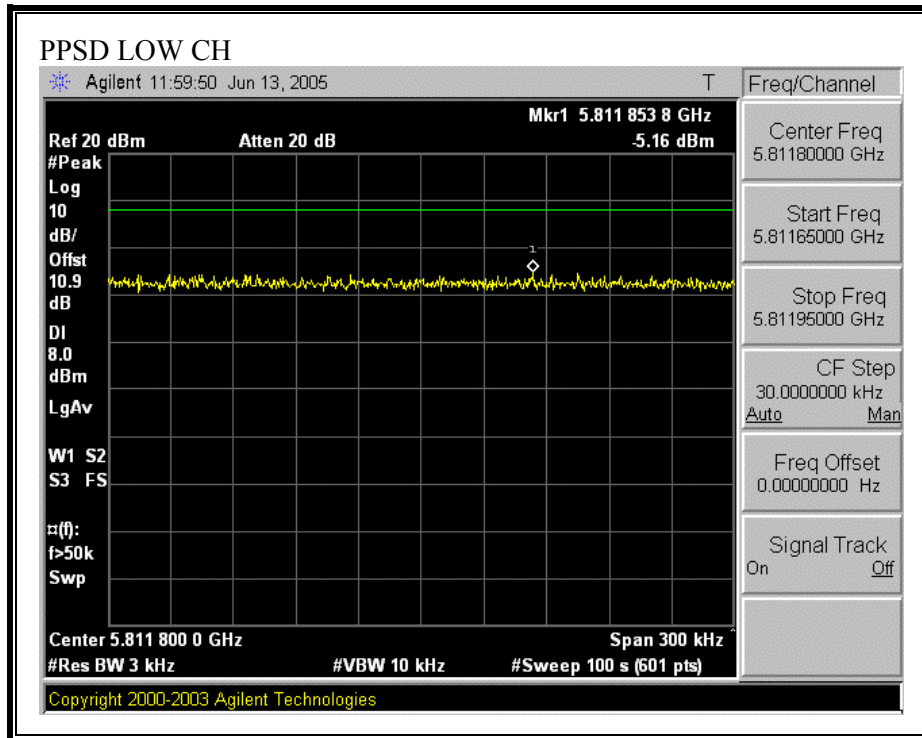


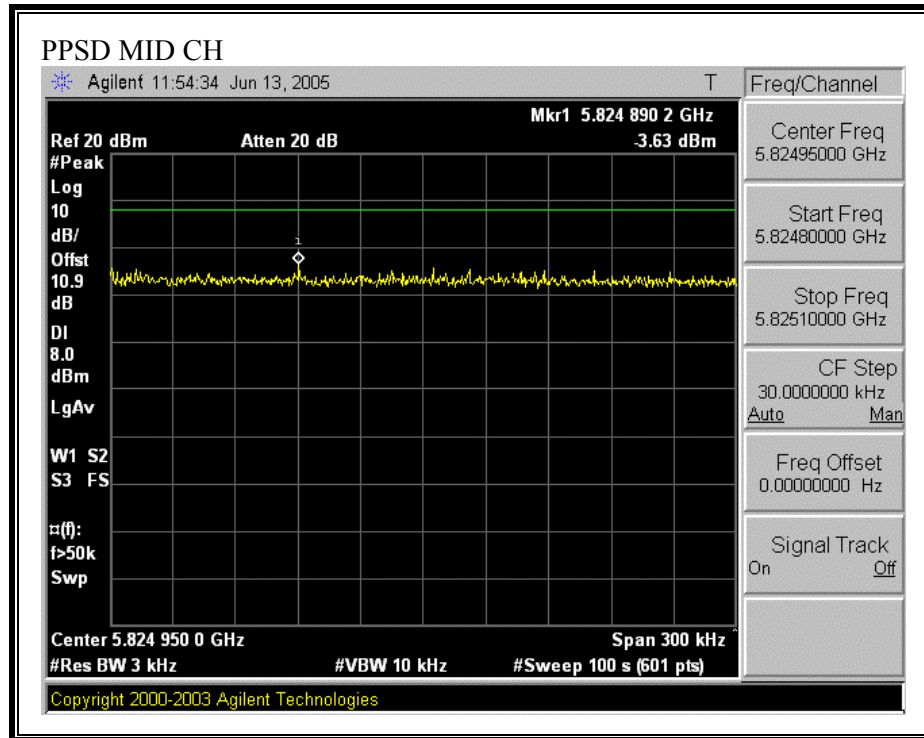


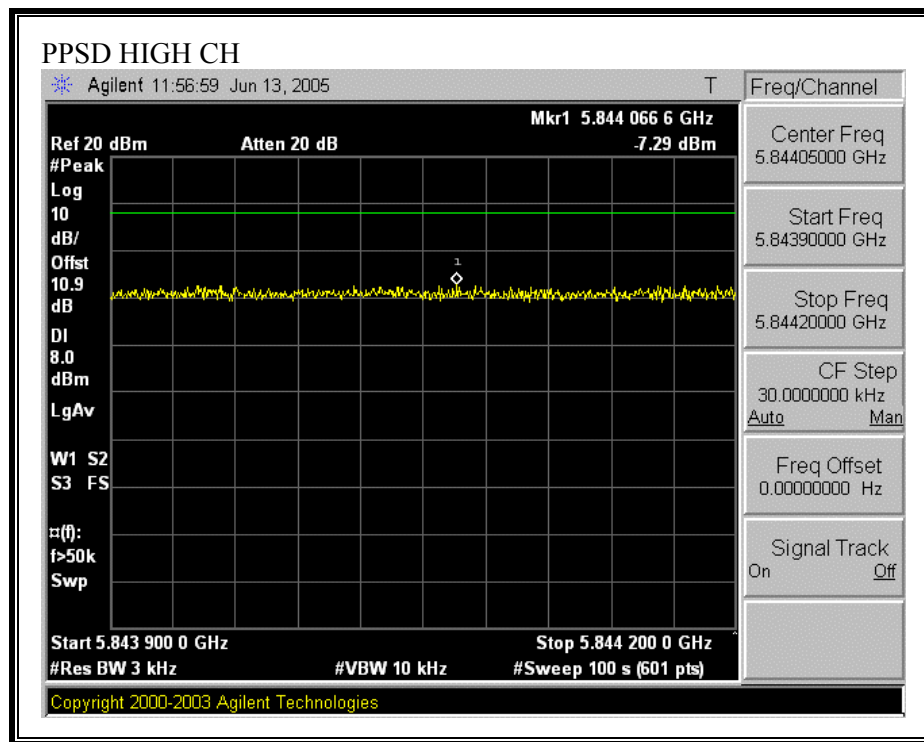

**PEAK POWER SPECTRAL DENSITY FOR 15 dBi ANTENNA**

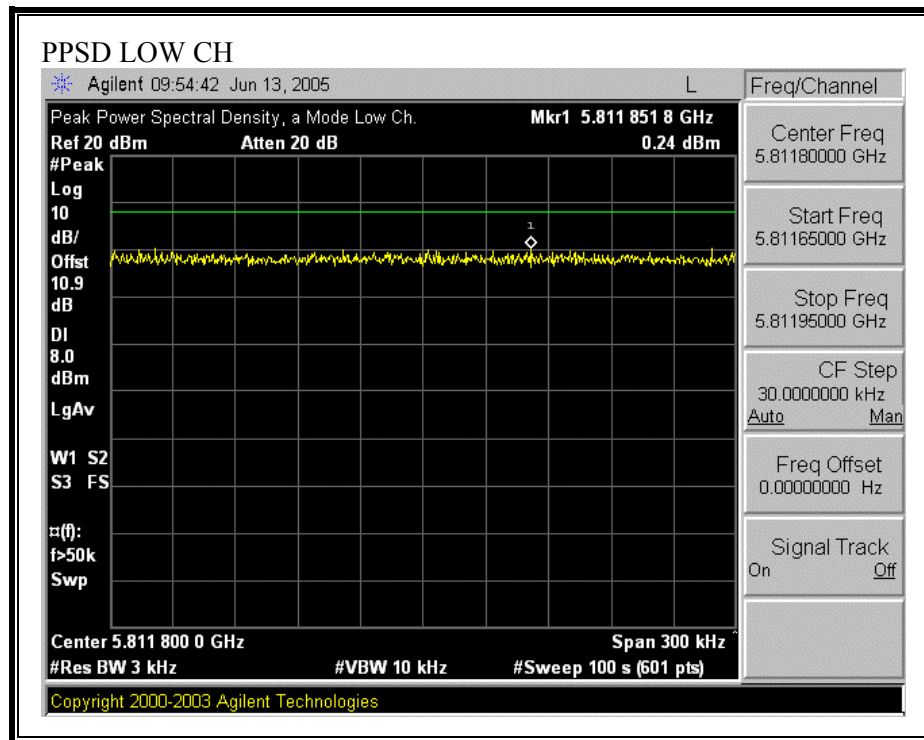

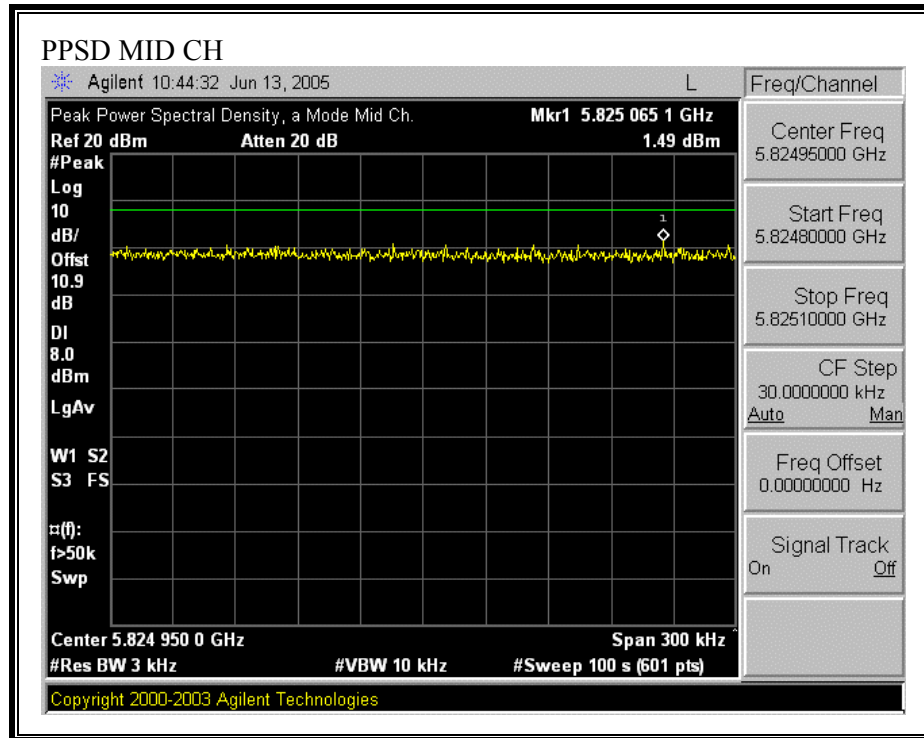

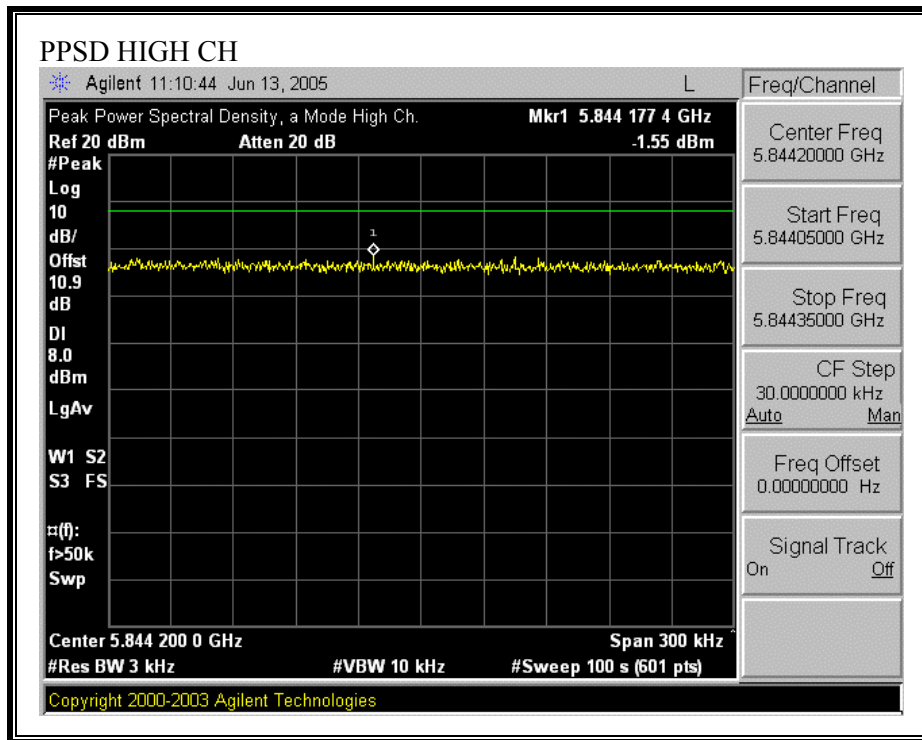

## **7.1.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of RMS averaging over a time interval, therefore the required attenuation is 30 dB.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### **RESULTS**


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL FOR 19 dBi ANTENNA**

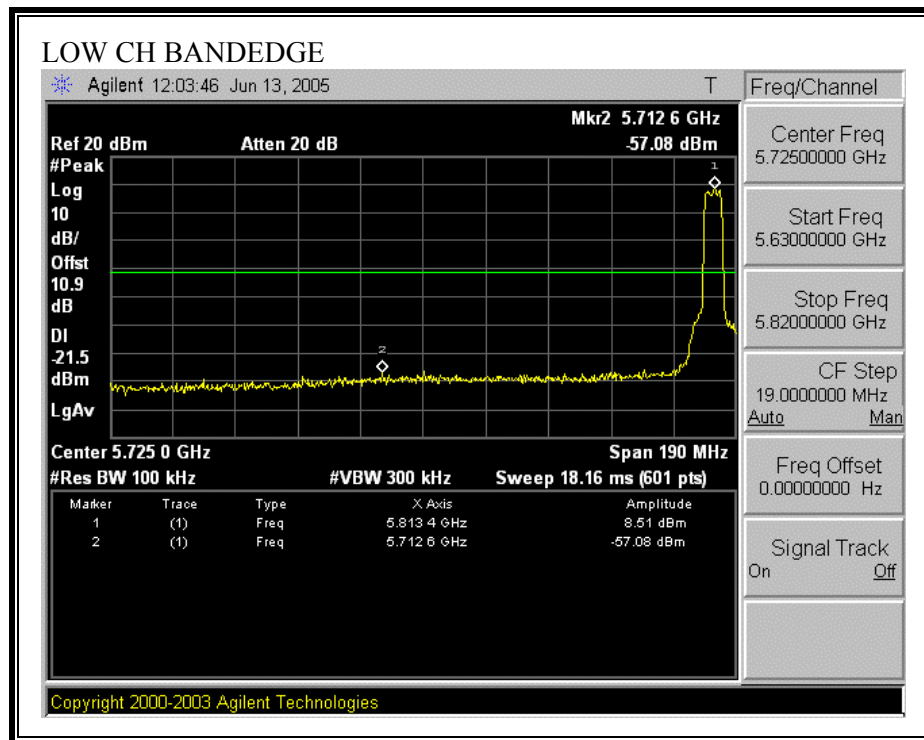

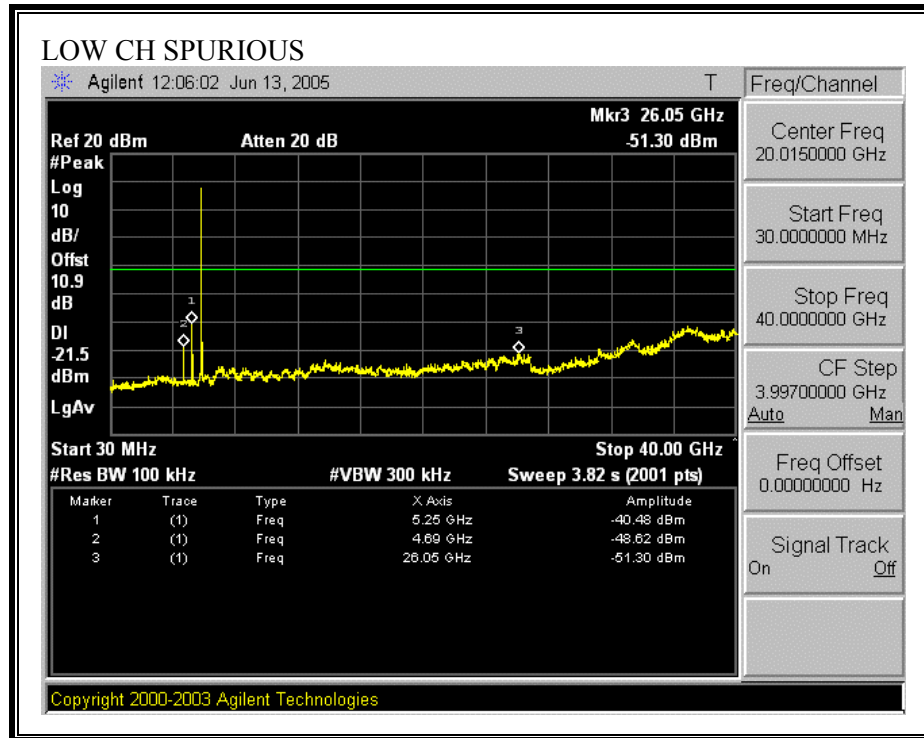



**SPURIOUS EMISSIONS, MID CHANNEL FOR 19 dBi ANTENNA**

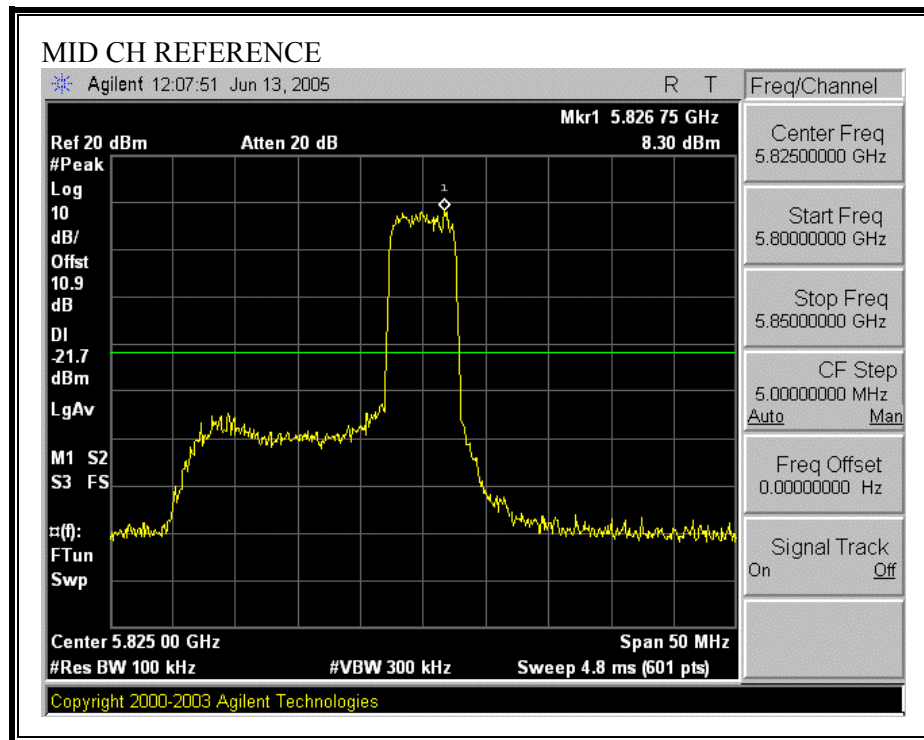

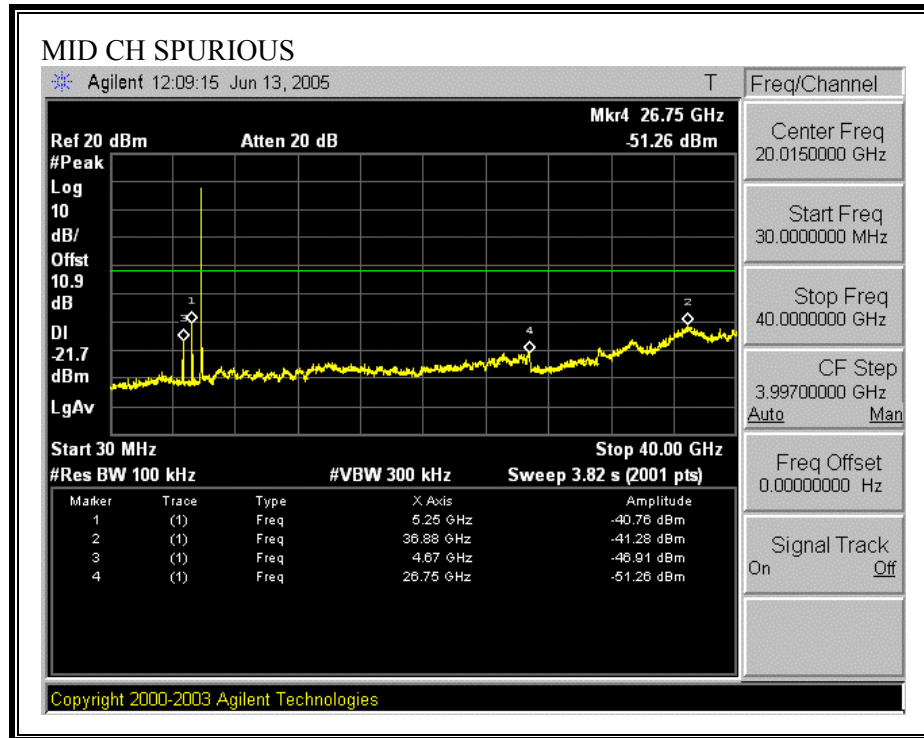



**SPURIOUS EMISSIONS, HIGH CHANNEL FOR 19 dBi ANTENNA**

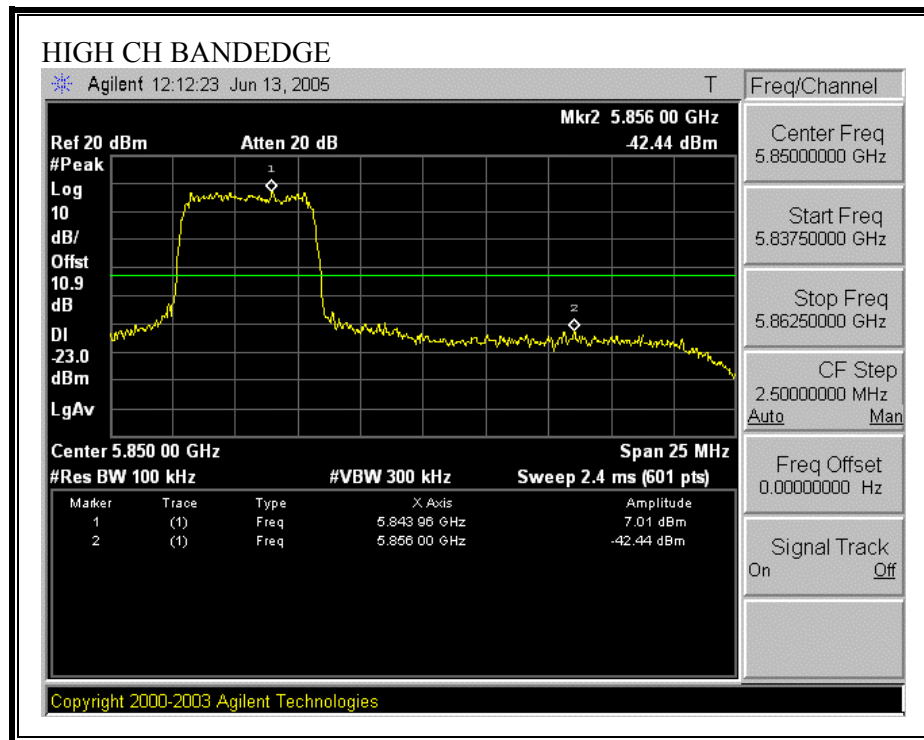

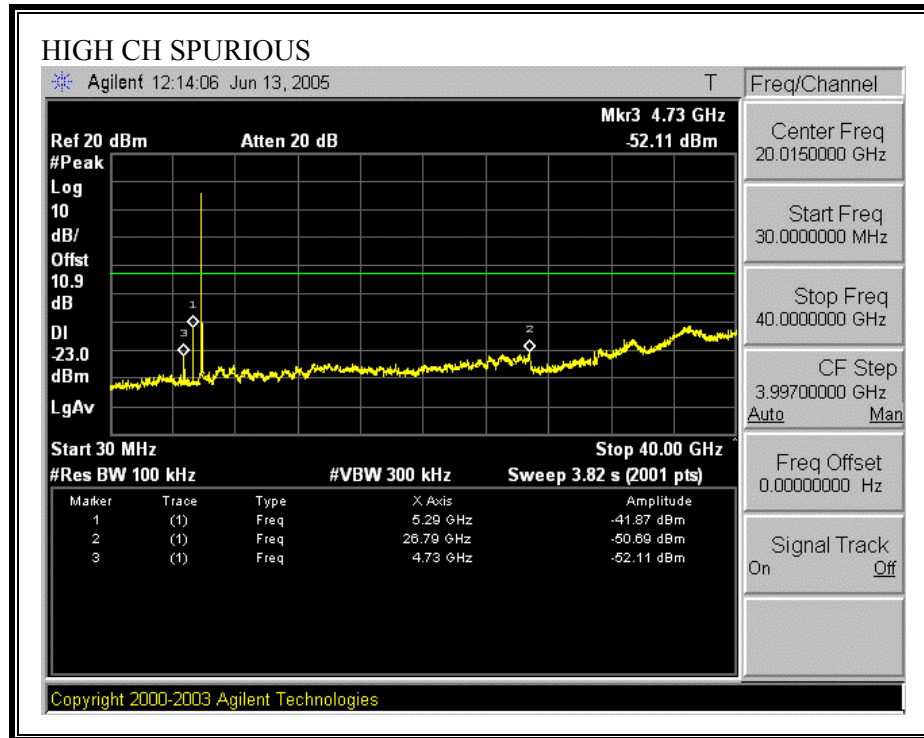



**SPURIOUS EMISSIONS, LOW CHANNEL FOR 15 dBi ANTENNA**

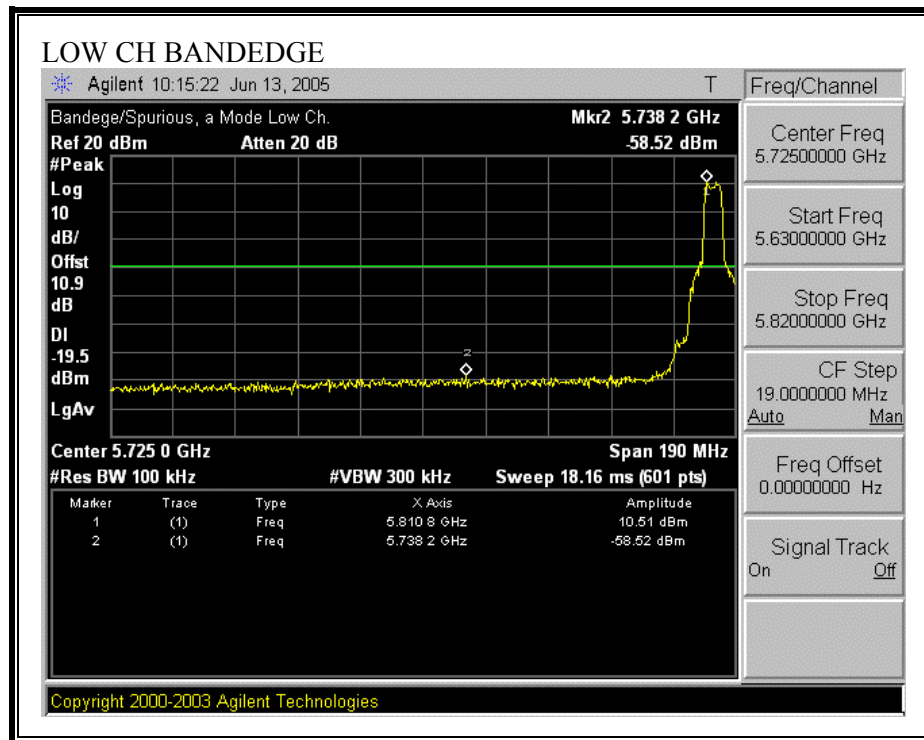

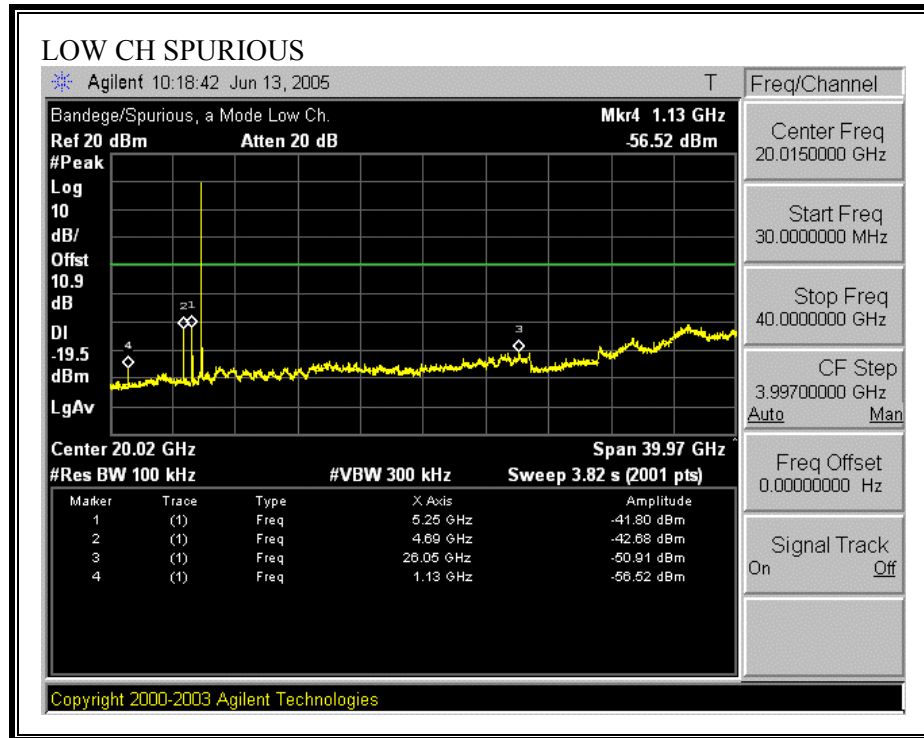



**SPURIOUS EMISSIONS, MID CHANNEL FOR 15 dBi ANTENNA**

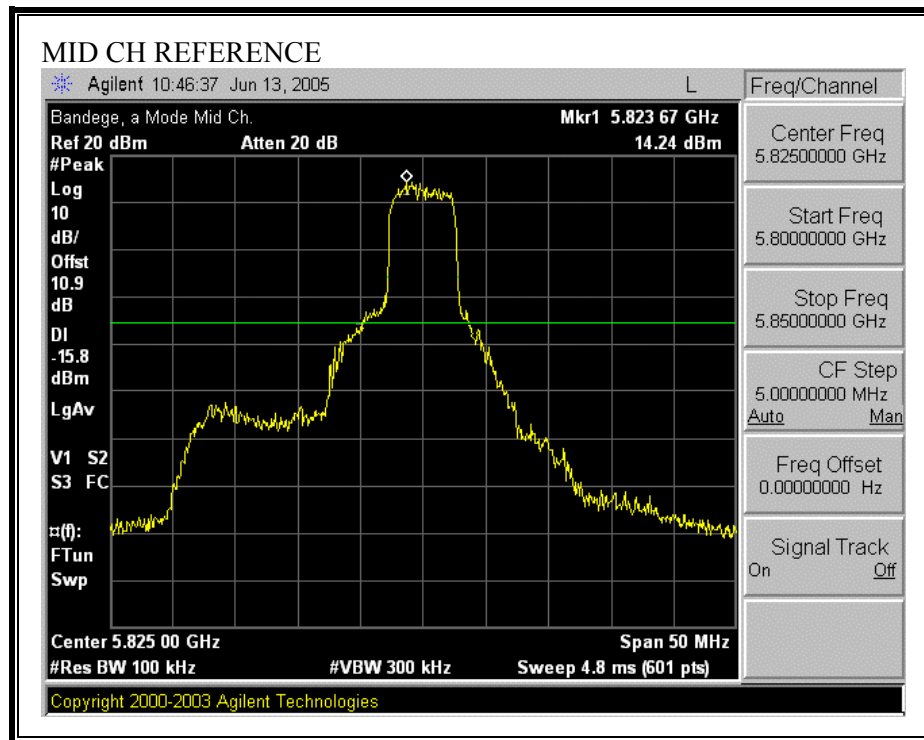

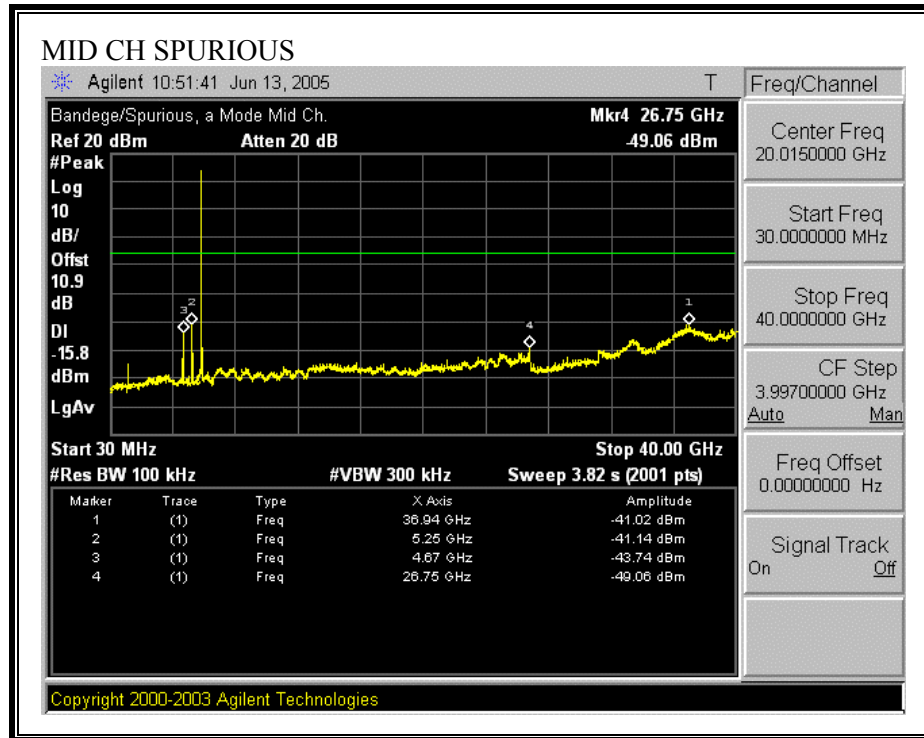

**SPURIOUS EMISSIONS, HIGH CHANNEL FOR 15 dBi ANTENNA**

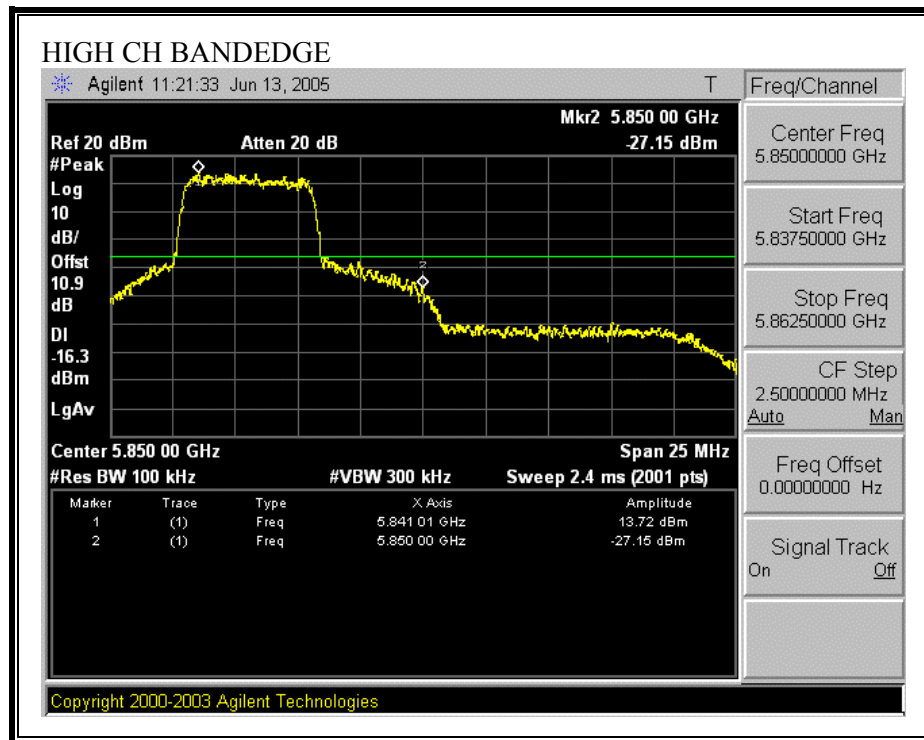

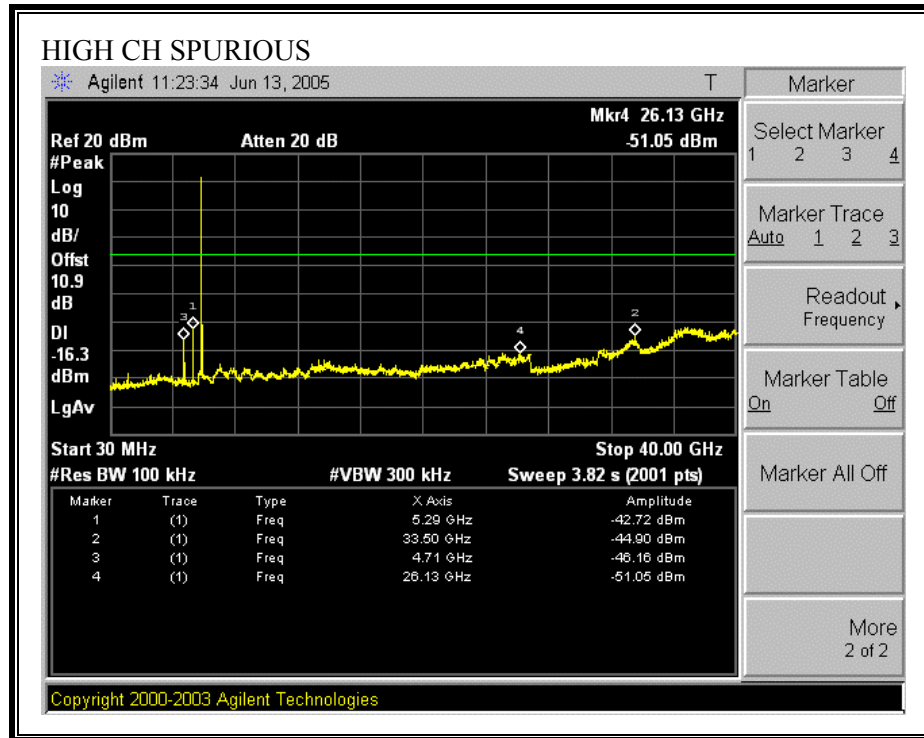

## 7.2. RADIATED EMISSIONS

### 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 - 88            | 100 **                               | 3                                |
| 88 - 216           | 150 **                               | 3                                |
| 216 - 960          | 200 **                               | 3                                |
| Above 960          | 500                                  | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 7.2.2. TRANSMITTER ABOVE 1 GHz WITH 19dBi ANTENNA

### HARMONICS AND SPURIOUS EMISSIONS WITH 19 dBi ANTENNA

|                                                                                |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
|--------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------|-----------|------------------------|------|-----------------------------|--------------------------------|---------------|--------|------------|--------|---------------|------------------------------|----------------------|-------|--|
| 06/14/05 High Frequency Measurement                                            |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Compliance Certification Services, Morgan Hill Open Field Site                 |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Test Engr:                                                                     |                       | David Garcia                                              |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Project #:                                                                     |                       | 05U3489-2                                                 |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Company:                                                                       |                       | Arcwave                                                   |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| EUT Descrip.:                                                                  |                       | Point to multipoint WLAN hub                              |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| EUT M/N:                                                                       |                       | AXI455-SM-25                                              |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Test Target:                                                                   |                       | FCC 15.205                                                |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Mode Oper:                                                                     |                       | Tx, Mid Power Setting                                     |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Average Power Meter:                                                           |                       | Low = 14.5 dBm, Mid = 14.9 dBm, High = 13.4 dBm           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
|                                                                                |                       | Added Gore shielding material to Transmitter box section. |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| Test Equipment:                                                                |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| EMCO Horn 1-18GHz                                                              |                       | Pre-amplifier 1-26GHz                                     |           | Pre-amplifier 26-40GHz |      | Horn > 18GHz                |                                | Limit         |        |            |        |               |                              |                      |       |  |
| T73; S/N: 6717 @1m                                                             |                       | T63 Miteq 646456                                          |           |                        |      | T39; ARA 18-26GHz; S/N:1013 |                                | FCC 15.205    |        |            |        |               |                              |                      |       |  |
| Hi Frequency Cables                                                            |                       | 2 foot cable                                              |           | 3 foot cable           |      | 4 foot cable                |                                | 12 foot cable |        | HPF        |        | Reject Filter |                              | Peak Measurements    |       |  |
| 2_David                                                                        |                       |                                                           |           |                        |      | 4_David                     |                                | 12_Yan        |        | HPF_4.0GHz |        | R_002         |                              | RBW=VBW=1MHz         |       |  |
|                                                                                |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              | Average Measurements |       |  |
|                                                                                |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              | RBW=1MHz ; VBW=10Hz  |       |  |
| f                                                                              | Dist                  | Read Pk                                                   | Read Avg. | AF                     | CL   | Amp                         | D Corr                         | Fldr          | Peak   | Avg        | Pk Lim | Avg Lim       | Pk Mar                       | Avg Mar              | Notes |  |
| GHz                                                                            | (m)                   | dBuV                                                      | dBuV      | dB/m                   | dB   | dB                          | dB                             | dB            | dBuV/m | dBuV/m     | dBuV/m | dBuV/m        | dB                           | dB                   | (V/H) |  |
| 5813 Channel                                                                   |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| 11.626                                                                         | 3.0                   | 46.0                                                      | 34.0      | 38.3                   | 9.2  | -37.3                       | 0.0                            | 0.9           | 57.2   | 45.2       | 74     | 54            | -16.8                        | -8.8                 | V     |  |
| 15.744                                                                         | 3.0                   | 47.2                                                      | 36.4      | 39.2                   | 10.1 | -38.4                       | 0.0                            | 1.1           | 59.3   | 48.5       | 74     | 54            | -14.7                        | -5.5                 | V     |  |
| 20.992                                                                         | 3.0                   | 42.0                                                      | 33.2      | 33.1                   | 12.9 | -33.9                       | 0.0                            | 0.0           | 54.1   | 45.3       | 74     | 54            | -19.9                        | -8.7                 | V     |  |
| 11.660                                                                         | 3.0                   | 48.3                                                      | 33.4      | 38.4                   | 9.3  | -37.3                       | 0.0                            | 0.9           | 59.5   | 44.6       | 74     | 54            | -14.5                        | -9.4                 | H     |  |
| 15.744                                                                         | 3.0                   | 49.3                                                      | 40.6      | 39.2                   | 10.1 | -38.4                       | 0.0                            | 1.1           | 61.4   | 52.7       | 74     | 54            | -12.6                        | -1.3                 | H     |  |
| 20.992                                                                         | 3.0                   | 41.7                                                      | 31.2      | 33.1                   | 12.9 | -33.9                       | 0.0                            | 0.0           | 53.8   | 43.3       | 74     | 54            | -20.2                        | -10.7                | H     |  |
| 5825 Channel                                                                   |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| 11.650                                                                         | 3.0                   | 44.6                                                      | 32.0      | 38.4                   | 9.2  | -37.3                       | 0.0                            | 0.9           | 55.8   | 43.2       | 74     | 54            | -18.2                        | -10.8                | V     |  |
| 15.744                                                                         | 3.0                   | 47.9                                                      | 38.4      | 39.2                   | 10.1 | -38.4                       | 0.0                            | 1.1           | 60.0   | 50.5       | 74     | 54            | -14.0                        | -3.5                 | V     |  |
| 20.992                                                                         | 3.0                   | 42.6                                                      | 32.7      | 33.1                   | 12.9 | -33.9                       | 0.0                            | 0.0           | 54.7   | 44.8       | 74     | 54            | -19.3                        | -9.2                 | V     |  |
| 11.650                                                                         | 3.0                   | 46.0                                                      | 33.4      | 38.4                   | 9.2  | -37.3                       | 0.0                            | 0.9           | 57.2   | 44.6       | 74     | 54            | -16.8                        | -9.4                 | H     |  |
| 15.744                                                                         | 3.0                   | 49.3                                                      | 40.6      | 39.2                   | 10.1 | -38.4                       | 0.0                            | 1.1           | 61.4   | 52.7       | 74     | 54            | -12.6                        | -1.3                 | H     |  |
| 20.992                                                                         | 3.0                   | 41.4                                                      | 31.3      | 33.1                   | 12.9 | -33.9                       | 0.0                            | 0.0           | 53.5   | 43.4       | 74     | 54            | -20.5                        | -10.6                | H     |  |
| 5843 Channel                                                                   |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| 11.686                                                                         | 3.0                   | 45.5                                                      | 31.6      | 38.4                   | 9.3  | -37.3                       | 0.0                            | 0.9           | 56.7   | 42.8       | 74     | 54            | -17.3                        | -11.2                | V     |  |
| 11.686                                                                         | 3.0                   | 46.7                                                      | 33.0      | 38.4                   | 9.3  | -37.3                       | 0.0                            | 0.9           | 57.9   | 44.2       | 74     | 54            | -16.1                        | -9.8                 | H     |  |
| No further emissions were detected above the noise floor of the test receiver. |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
|                                                                                |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
|                                                                                |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
|                                                                                |                       |                                                           |           |                        |      |                             |                                |               |        |            |        |               |                              |                      |       |  |
| f                                                                              | Measurement Frequency |                                                           |           |                        |      | Amp                         | Preamp Gain                    |               |        |            |        | Avg Lim       | Average Field Strength Limit |                      |       |  |
| Dist                                                                           | Distance to Antenna   |                                                           |           |                        |      | D Corr                      | Distance Correct to 3 meters   |               |        |            |        | Pk Lim        | Peak Field Strength Limit    |                      |       |  |
| Read                                                                           | Analyzer Reading      |                                                           |           |                        |      | Avg                         | Average Field Strength @ 3 m   |               |        |            |        | Avg Mar       | Margin vs. Average Limit     |                      |       |  |
| AF                                                                             | Antenna Factor        |                                                           |           |                        |      | Peak                        | Calculated Peak Field Strength |               |        |            |        | Pk Mar        | Margin vs. Peak Limit        |                      |       |  |
| CL                                                                             | Cable Loss            |                                                           |           |                        |      | HPF                         | High Pass Filter               |               |        |            |        |               |                              |                      |       |  |

## 7.2.3. TRANSMITTER ABOVE 1 GHz WITH 15dBi ANTENNA

### HARMONICS AND SPURIOUS EMISSIONS WIHT 15 dBi ANTENNA

|                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------|----------------|-------------------------------------------|-------|--------|-----------|-------------------------|-------------|------------|---------------|---------------------------------------------|-----------|------------|-------------|-------------------|--|------------------------|--|-----------------------------------|--|---------------------------------------------|--|
| 06/14/05 <b>High Frequency Measurement</b><br>Compliance Certification Services, Morgan Hill Open Field Site                                                                                                                                                                                                                                                                                                                    |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| Test Engr: David Garcia<br>Project #: 05U3489-2<br>Company: Arcwave<br>EUT Descrip.: Point to multipoint WLAN hub<br>EUT M/N: AX1455-SM-60<br>Test Target: FCC 15.205<br>Mode Oper: Tx, High Power Setting<br>Average Power Meter: Low = 20.2 dBm, Mid = 20.6 dBm, High = 19.4 dBm<br>Added Gore shielding material to Transmitter box section.                                                                                 |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| Test Equipment:                                                                                                                                                                                                                                                                                                                                                                                                                 |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| EMCO Horn 1-18GHz<br>T73; S/N: 6717 @1m                                                                                                                                                                                                                                                                                                                                                                                         |          |              |                | Pre-amplifier 1-26GHz<br>T63 Miteq 646456 |       |        |           | Pre-amplifier 26-40GHz  |             |            |               | Horn > 18GHz<br>T39; ARA 18-26GHz; S/N:1013 |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| Hi Frequency Cables<br>2 foot cable<br>2_David                                                                                                                                                                                                                                                                                                                                                                                  |          |              |                | 3 foot cable                              |       |        |           | 4 foot cable<br>4_David |             |            |               | 12 foot cable<br>12_Yan                     |           |            |             | HPF<br>HPF_4.0GHz |  | Reject Filter<br>R_002 |  | Peak Measurements<br>RBW=VBW=1MHz |  | Average Measurements<br>RBW=1MHz ; VBW=10Hz |  |
| f GHz                                                                                                                                                                                                                                                                                                                                                                                                                           | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m                                   | CL dB | Amp dB | D Corr dB | Fltr dB                 | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m                              | Pk Mar dB | Avg Mar dB | Notes (V/H) |                   |  |                        |  |                                   |  |                                             |  |
| 5813 Channel                                                                                                                                                                                                                                                                                                                                                                                                                    |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| 11.626                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 46.0         | 34.0           | 38.3                                      | 9.2   | -37.3  | 0.0       | 0.9                     | 57.2        | 45.2       | 74            | 54                                          | -16.8     | -8.8       | V           |                   |  |                        |  |                                   |  |                                             |  |
| 15.744                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 50.4         | 40.3           | 39.2                                      | 10.1  | -38.4  | 0.0       | 1.1                     | 62.5        | 52.4       | 74            | 54                                          | -11.5     | -1.6       | V           |                   |  |                        |  |                                   |  |                                             |  |
| 20.992                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 44.0         | 33.7           | 33.1                                      | 12.9  | -33.9  | 0.0       | 0.0                     | 56.1        | 45.8       | 74            | 54                                          | -17.9     | -8.2       | V           |                   |  |                        |  |                                   |  |                                             |  |
| 11.660                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 48.5         | 35.8           | 38.4                                      | 9.3   | -37.3  | 0.0       | 0.9                     | 59.7        | 47.0       | 74            | 54                                          | -14.3     | -7.0       | H           |                   |  |                        |  |                                   |  |                                             |  |
| 15.744                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 49.3         | 41.5           | 39.2                                      | 10.1  | -38.4  | 0.0       | 1.1                     | 61.4        | 53.6       | 74            | 54                                          | -12.6     | -0.4       | H           |                   |  |                        |  |                                   |  |                                             |  |
| 20.992                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 41.9         | 31.5           | 33.1                                      | 12.9  | -33.9  | 0.0       | 0.0                     | 54.0        | 43.6       | 74            | 54                                          | -20.0     | -10.4      | H           |                   |  |                        |  |                                   |  |                                             |  |
| 5825 Channel                                                                                                                                                                                                                                                                                                                                                                                                                    |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| 11.650                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 46.6         | 32.6           | 38.4                                      | 9.2   | -37.3  | 0.0       | 0.9                     | 57.8        | 43.8       | 74            | 54                                          | -16.2     | -10.2      | V           |                   |  |                        |  |                                   |  |                                             |  |
| 15.744                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 47.6         | 37.9           | 39.2                                      | 10.1  | -38.4  | 0.0       | 1.1                     | 59.7        | 50.0       | 74            | 54                                          | -14.3     | -4.0       | V           |                   |  |                        |  |                                   |  |                                             |  |
| 20.992                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 44.0         | 33.7           | 33.1                                      | 12.9  | -33.9  | 0.0       | 0.0                     | 56.1        | 45.8       | 74            | 54                                          | -17.9     | -8.2       | V           |                   |  |                        |  |                                   |  |                                             |  |
| 11.650                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 49.8         | 35.9           | 38.4                                      | 9.2   | -37.3  | 0.0       | 0.9                     | 61.0        | 47.1       | 74            | 54                                          | -13.0     | -6.9       | H           |                   |  |                        |  |                                   |  |                                             |  |
| 15.744                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 48.9         | 41.3           | 39.2                                      | 10.1  | -38.4  | 0.0       | 1.1                     | 61.0        | 53.4       | 74            | 54                                          | -13.0     | -0.6       | H           |                   |  |                        |  |                                   |  |                                             |  |
| 20.992                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 41.9         | 31.5           | 33.1                                      | 12.9  | -33.9  | 0.0       | 0.0                     | 54.0        | 43.6       | 74            | 54                                          | -20.0     | -10.4      | H           |                   |  |                        |  |                                   |  |                                             |  |
| 5843 Channel                                                                                                                                                                                                                                                                                                                                                                                                                    |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| 11.686                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 46.0         | 32.6           | 38.4                                      | 9.3   | -37.3  | 0.0       | 0.9                     | 57.2        | 43.8       | 74            | 54                                          | -16.8     | -10.2      | V           |                   |  |                        |  |                                   |  |                                             |  |
| 11.686                                                                                                                                                                                                                                                                                                                                                                                                                          | 3.0      | 46.7         | 33.0           | 38.4                                      | 9.3   | -37.3  | 0.0       | 0.9                     | 57.9        | 44.2       | 74            | 54                                          | -16.1     | -9.8       | H           |                   |  |                        |  |                                   |  |                                             |  |
| No further emissions were detected above the noise floor of the test receiver.                                                                                                                                                                                                                                                                                                                                                  |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |
| f Measurement Frequency<br>Dist Distance to Antenna<br>Read Analyzer Reading<br>AF Antenna Factor<br>CL Cable Loss<br>Amp Preamp Gain<br>D Corr Distance Correct to 3 meters<br>Avg Average Field Strength @ 3 m<br>Peak Calculated Peak Field Strength<br>HPF High Pass Filter<br>Avg Lim Average Field Strength Limit<br>Pk Lim Peak Field Strength Limit<br>Avg Mar Margin vs. Average Limit<br>Pk Mar Margin vs. Peak Limit |          |              |                |                                           |       |        |           |                         |             |            |               |                                             |           |            |             |                   |  |                        |  |                                   |  |                                             |  |

## 7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 19dBi ANTENNA


### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL, 19 dBi ANTENNA)

#### HORIZONTAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 4 File#: 05U3489.EMI Date: 06-13-2005 Time: 14:10:25

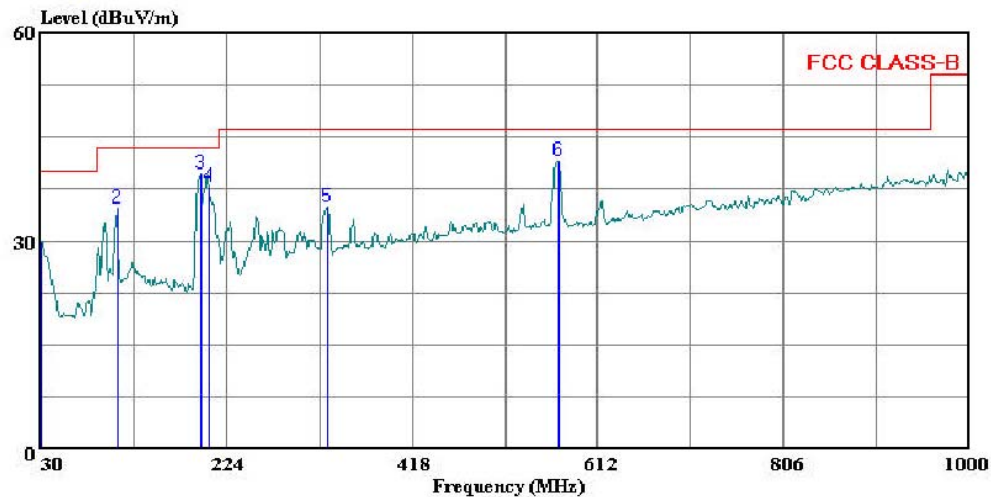

(Audix ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL  
Test Operator: : David Garcia  
Project #: : 05U3489-2  
Company: : Arcwave  
EUT: : Point to Multipoint WLAN Hub  
Model No.: : AX1455-SM-25  
Configuration : EUT Stand alone w/20 degree antenna  
Target of Test : FCC Class B  
Mode of Operation: High Channel on Downstream  
: Upstream at 10 MHz, Medium Power Setting

#### HORIZONTAL DATA

|   | Freq    | Read<br>Level | Factor | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
|   | MHz     | dBuV          | dB     | dBuV/m | dBuV/m        | dB            |        |
| 1 | 30.000  | 9.44          | 20.45  | 29.89  | 40.00         | -10.11        | Peak   |
| 2 | 109.540 | 21.21         | 13.44  | 34.65  | 43.50         | -8.86         | Peak   |
| 3 | 196.840 | 25.59         | 14.00  | 39.59  | 43.50         | -3.91         | Peak   |
| 4 | 205.570 | 24.03         | 13.71  | 37.73  | 43.50         | -5.77         | Peak   |
| 5 | 329.730 | 18.46         | 16.44  | 34.90  | 46.00         | -11.10        | Peak   |
| 6 | 570.290 | 20.46         | 21.14  | 41.60  | 46.00         | -4.40         | Peak   |


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL, 19 dBi ANTENNA)**

VERTICAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 2 File#: 05U3489.EMI Date: 06-13-2005 Time: 14:03:45

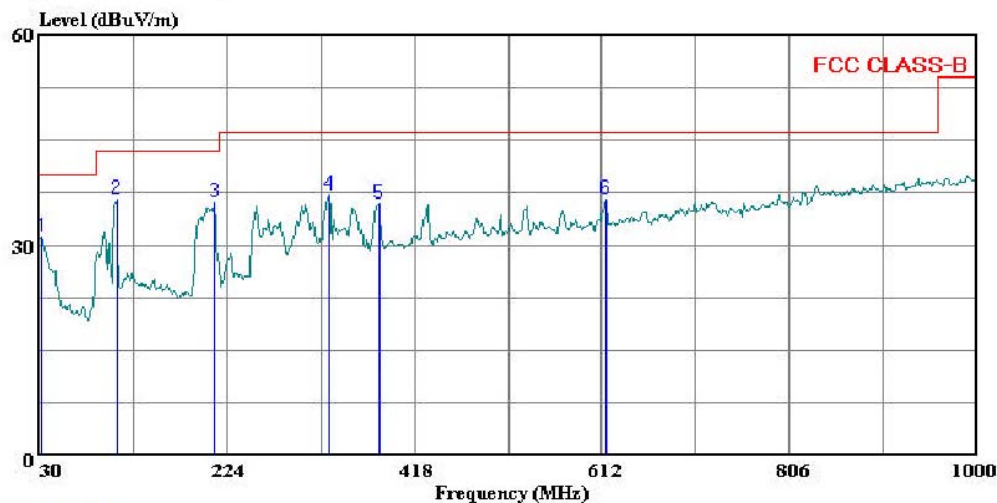

(Audix ATC)

Trace: 1

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: : David Garcia  
Project #: : 05U3489-2  
Company: : Arcwave  
EUT: : Point to Multipoint WLAN Hub  
Model No. : AX1455-SM-25  
Configuration : EUT Stand alone w/20 degree antenna  
Target of Test : FCC Class B  
Mode of Operation: High Channel on Downstream  
Upstream at 10 MHz, Medium Power Setting

VERTICAL DATA

|   | Freq    | Read<br>Level | Factor | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
|   | MHz     | dBuV          | dB     | dBuV/m | dBuV/m        | dB            |        |
| 1 | 31.940  | 11.11         | 19.94  | 31.05  | 40.00         | -8.95         | Peak   |
| 2 | 109.540 | 23.04         | 13.44  | 36.48  | 43.50         | -7.02         | Peak   |
| 3 | 211.390 | 23.13         | 12.92  | 36.05  | 43.50         | -7.45         | Peak   |
| 4 | 329.730 | 20.71         | 16.44  | 37.15  | 46.00         | -8.85         | Peak   |
| 5 | 381.140 | 18.23         | 17.62  | 35.85  | 46.00         | -10.15        | Peak   |
| 6 | 615.880 | 14.64         | 21.81  | 36.45  | 46.00         | -9.55         | Peak   |

## 7.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 15dBi ANTENNA


### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL, 15 dBi ANTENNA)

#### HORIZONTAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 6 File#: 05U3489.EMI Date: 06-13-2005 Time: 14:21:53

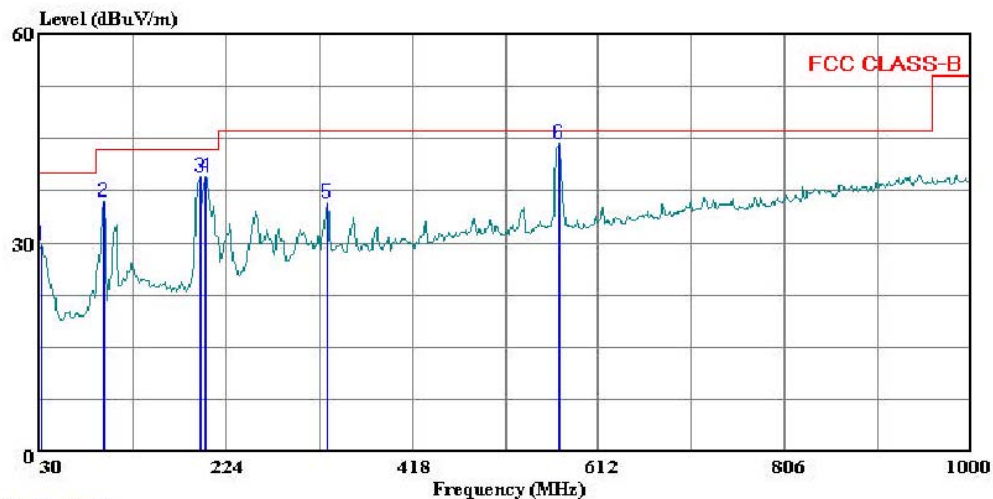

(Auxiliary ATC)

Trace: 5

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL  
Test Operator: : David Garcia  
Project #: : 05U3489-2  
Company: : Arcwave  
EUT: : Point to Multipoint WLAN Hub  
Model No.: : AX1455-SM-25  
Configuration : EUT Stand alone w/60 degree antenna  
: High Power Setting  
Target of Test : FCC Class B  
Mode of Operation: High Channel on Downstream  
: Upstream at 41 MHz

# HORIZONTAL DATA

|   | Freq    | Read<br>Level | Factor | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
|   | MHz     | dBuV          | dB     | dBuV/m | dBuV/m        | dB            |        |
| 1 | 30.970  | 9.30          | 20.45  | 29.75  | 40.00         | -10.25        | Peak   |
| 2 | 96.930  | 25.37         | 10.58  | 35.95  | 43.50         | -7.55         | Peak   |
| 3 | 196.840 | 25.50         | 14.00  | 39.50  | 43.50         | -4.00         | Peak   |
| 4 | 201.690 | 25.17         | 14.32  | 39.49  | 43.50         | -4.01         | Peak   |
| 5 | 329.730 | 19.33         | 16.44  | 35.77  | 46.00         | -10.23        | Peak   |
| 6 | 570.290 | 23.02         | 21.14  | 44.16  | 46.00         | -1.84         | Peak   |


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL, 15 dBi ANTENNA)**

VERTICAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 8 File#: 05U3489.EMI Date: 06-13-2005 Time: 14:28:15

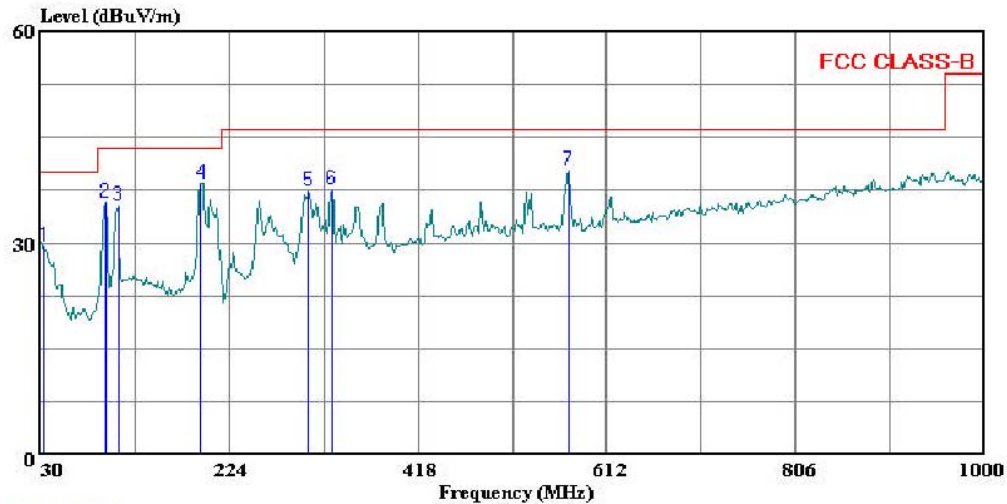

(Audix ATC)

Trace: 7

Ref Trace:


Condition: FCC CLASS-B VERTICAL  
Test Operator: : David Garcia  
Project #: : 05U3489-2  
Company: : Arcwave  
EUT: : Point to Multipoint WLAN Hub  
Model No. : AX1455-SM-25  
Configuration : EUT Stand alone w/60 degree antenna  
: High Power Setting  
Target of Test : FCC Class B  
Mode of Operation: High Channel on Downstream  
: Upstream at 41 MHz

VERTICAL DATA

|   | Freq    | Read<br>Level | Factor | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|---------------|--------|--------|---------------|---------------|--------|
|   | MHz     | dBuV          | dB     | dBuV/m | dBuV/m        | dB            |        |
| 1 | 33.880  | 10.53         | 19.05  | 29.58  | 40.00         | -10.42        | Peak   |
| 2 | 96.930  | 25.12         | 10.58  | 35.70  | 43.50         | -7.80         | Peak   |
| 3 | 109.540 | 21.95         | 13.44  | 35.39  | 43.50         | -8.11         | Peak   |
| 4 | 194.900 | 24.74         | 13.76  | 38.50  | 43.50         | -5.00         | Peak   |
| 5 | 305.480 | 21.59         | 15.80  | 37.39  | 46.00         | -8.61         | Peak   |
| 6 | 329.730 | 21.12         | 16.44  | 37.56  | 46.00         | -8.44         | Peak   |
| 7 | 572.230 | 19.12         | 21.14  | 40.26  | 46.00         | -5.74         | Peak   |

## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

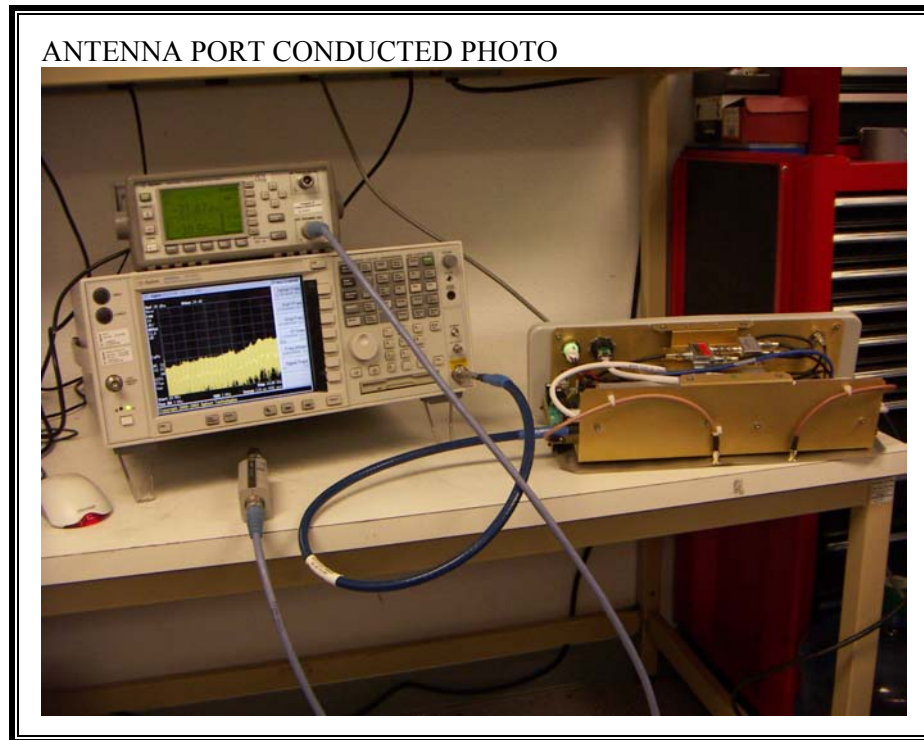


**RADIATED EMISSION SETUP WITH 19 dBi ANTENNA**

RADIATED FRONT PHOTO




RADIATED BACK PHOTO

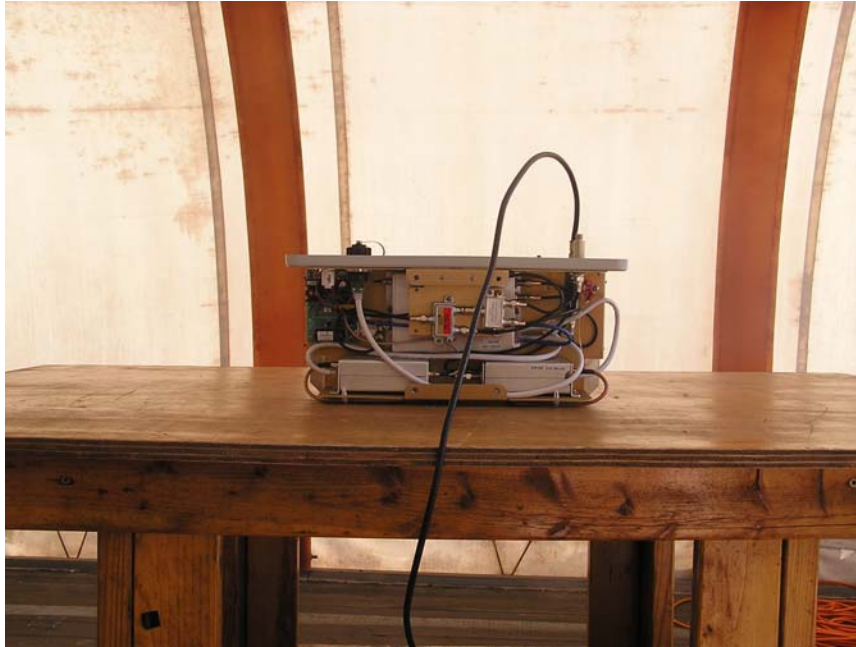

**RADIATED EMISSION SETUP WITH 15 dBi ANTENNA**

RADIATED FRONT PHOTO



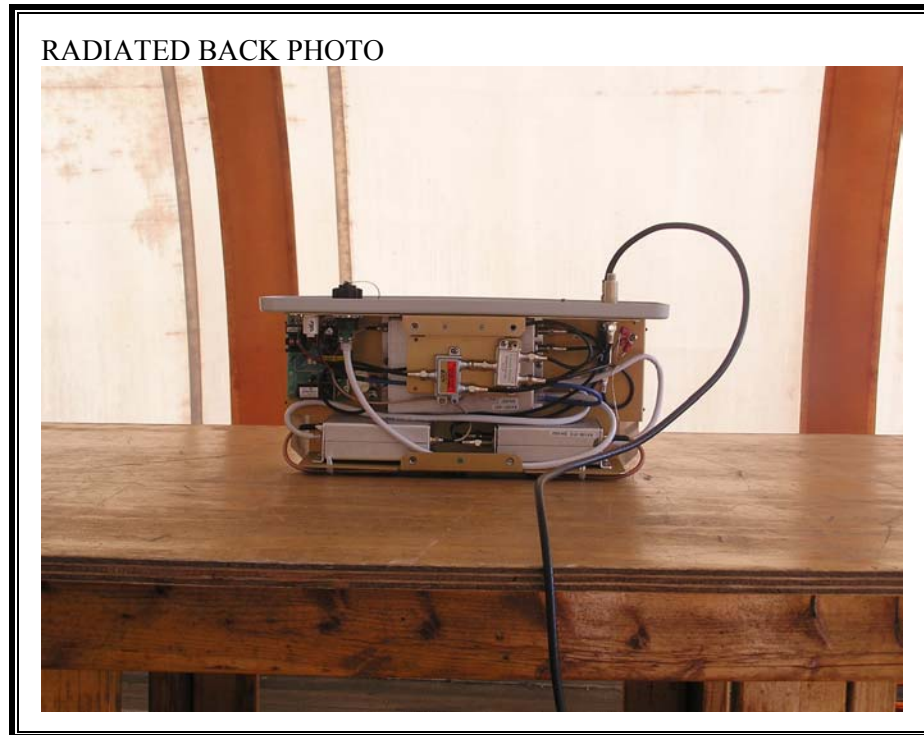

**END OF REPORT**