


EMI CONDUCTED TEST

Diagram.: 1.01

EUT: Phone + Charger (AMS00b01)
Manufacturer: Mirae
Operating Condition: TX, max power control level
Test Site: 7 layers Ratingen
Operator: GAL
Test Specification: ANSIC63.4; FCC15.107/15.207
Comment:
Start of Test: 07.04.04 / 15:41:32

SCAN TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage				
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

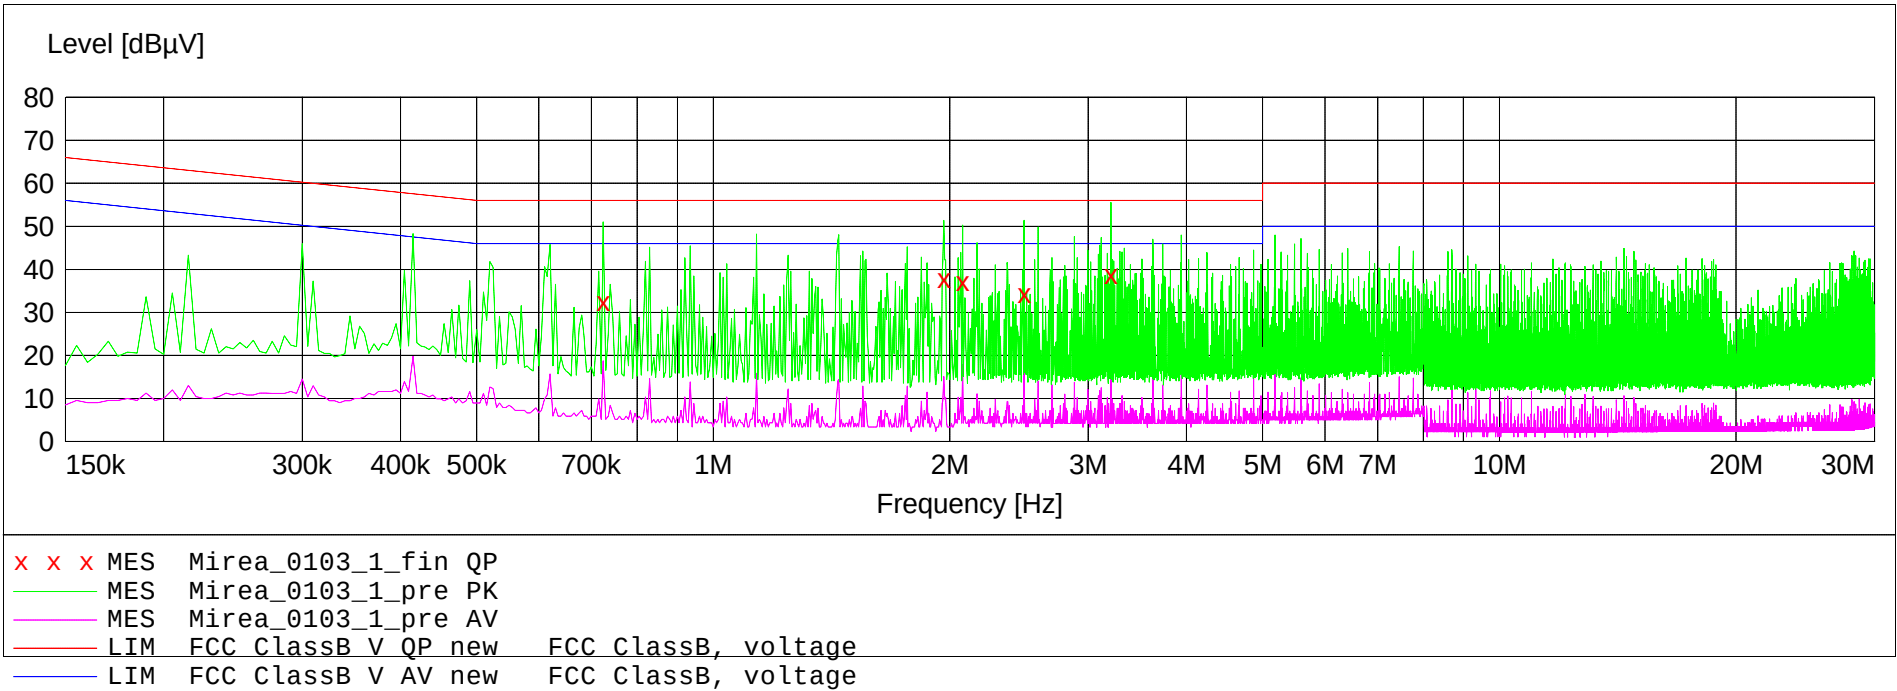

MEASUREMENT RESULT: "Mirea_0103_1_fin QP"

07.04.04 15:56

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.725000	32.50	9.9	56	23.5	N	GND
1.965000	37.90	9.8	56	18.1	L1	GND
2.075000	37.20	9.8	56	18.8	L1	FLO
2.485000	34.50	9.8	56	21.5	N	GND
3.205000	38.90	9.8	56	17.1	L1	FLO