

**Nemko Korea CO., Ltd.**

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333 FAX:+82 31 322 2332

**FCC EVALUATION REPORT FOR CERTIFICATION****Manufacturer :****AMAC TEK Co., Ltd.****3<sup>rd</sup> floor Seyo Bldg, 161-8, Samsung1-dong,  
Kangnam-Ku, Seoul, 135-881 Korea****Attn : Mr. K. H. Na****Dates of Issue : September 3, 2002****Test Report No. : NK2CE603****Test Site : Nemko Korea Co., Ltd.****EMC site, Korea****FCC ID****PLXHAN-230UVS****Brand Name****AMAC****Applicant****Amac Tek Co., Ltd.****3<sup>rd</sup> floor Seyo Bldg, 161-8, Samsung1-dong, Kangnam-Ku  
Seoul, 135-881, Korea****Mr. K. H. Na****Telephone No. : +82 2 539 6958**

FCC Rule Part(s):

Part 15 &amp; 2

Classification:

FCC Class B Device

EUT Type:

MP3 Player

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*Baek Sung-hun*


---

**Tested By : S. H. Baek**  
**Engineer**
*H.H. Kim*


---

**Reviewed By : H.H. Kim**  
**Manager & Chief Engineer**

## TABLE OF CONTENTS

---

<b>SCOPE</b>	<b>3</b>
<b>INTRODUCTION (Site Description)</b>	<b>4</b>
<b>TEST CONDITION &amp; EUT INFORMATION</b>	<b>5</b>
<b>DESCRIPTION OF TEST (Conducted Emissions)</b>	<b>6</b>
<b>DESCRIPTION OF TEST (Radiated Emissions)</b>	<b>7</b>
<b>TEST DATA (Conducted Emissions)</b>	<b>8</b>
<b>TEST DATA (Radiated Emissions)</b>	<b>9</b>
<b>PLOTS OF EMISSION</b>	<b>12</b>
Conducted Emissions Diagram	
<b>SAMPLE CALCULATIONS</b>	<b>14</b>
<b>ACCURACY of MEASUREMENT</b>	<b>15</b>
<b>LIST of TEST EQUIPMENT</b>	<b>16</b>
<b>RECOMMENDATION/CONCLUSION</b>	<b>17</b>
<b>APPENDIX A - LABELLING REQUIREMENTS</b>	<b>18</b>
<b>APPENDIX B - CIRCUIT DIAGRAM</b>	<b>19</b>
<b>APPENDIX C - PHOTOGRAPHS of TEST SET-UP</b>	<b>20</b>
<b>APPENDIX D - EUT PHOTOGRAPHS</b>	<b>22</b>
<b>APPENDIX E - USER'S MANUAL</b>	<b>29</b>
<b>APPENDIX F – Schematic Diagram</b>	<b>30</b>

## SCOPE

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.*

<b>Responsible Party* :</b>	AMAC TEK Co., Ltd.
<b>Contact Person :</b>	Mr. K. H. Na
	Tel No.: +82 2 539 6958
 <b>Manufacturer :</b>	 AMAC TEK Co., Ltd.
	3 <sup>rd</sup> floor Seyo Bldg, 161-8, Samsung1-dong, Kangnam-Ku Seoul, 135-881, Korea
	Tel No.: +82 2 539 6958

- FCC ID: PLXHAN-230UVS
- Model: HAN-230UVS
- Brand Name: Amac
- EUT Type: MP3 Player
- Voltage: DC 1.5V (size AA battery)
- Port/Connector: USB, Headphone
  
- Classification: FCC Class B
- Rule Part(s): FCC Part 15 & Part 2
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: August 23, 2002 to August 27, 2002
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2CE603

\* NOTE: Please refer to the duties and responsibilities of the Responsible Party attached.

## INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **AMAC TEK Co., Ltd.**

FCC ID: **PLXHAN-230UVS, MP3 Player**


These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 50 kilometers (30 miles) southeast and Seoul International Airport (Kimpo Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

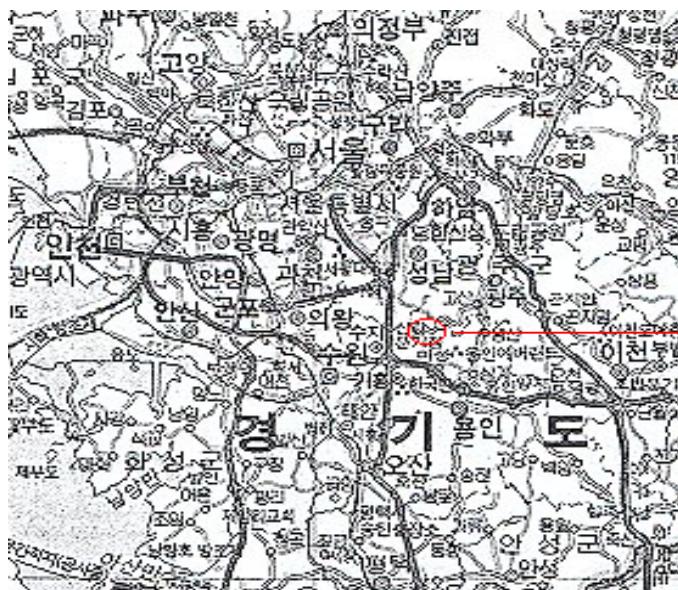

Nemko Korea Co., Ltd.  
OPEN AREA TEST SITE  
300-2, Osan-Ri, Mohyun-Myun, Yongin-City Kyungki-Do, KOREA 449-852  
Tel)+82-31-322-2333  
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Kimpo Airport.

## ***TEST CONDITIONS & EUT INFORMATION***

---

### **Operating During Test**

The MP3 player connected with PC was operated at download mode and playback mode for the testing.

### **Support Equipment**

Note Book	LG, Model:CM2080 1.8m unshield AC power cord 2.0m Shielded DC Cable	S/N: 5Y12FP74KC49
Printer	HP, Model No: C5870K 1.5m unshielded AC power cable 1.8m Shield D-sub cable	S/N: SG88R131GW
PS/2 Mouse	Immanuel, Model: OMS3CE 1.5m shield Din cable	S/N: N/A
Earphone:	1.55m unshielded, phone Jack	
USB Cable	1.2m shielded	

### **EUT Information**

Clock:	Y2(12MHz), Y2(16MHz), Y3(12.288MHz)
Chipset(s):	U5(UNI8021), U6(PIC17C756/A_TQFP)
	U8(ADE30A)
Port(s):	Earphone, USB

## DESCRIPTION OF TESTS

---

### Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN and PMM LISN L3-32 50ohm/50uH line impedance stabilization network are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the PMM LISN. Power to the LISNs are filtered by high-current high insertion loss

Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function was set to CISPR quasi-peak mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

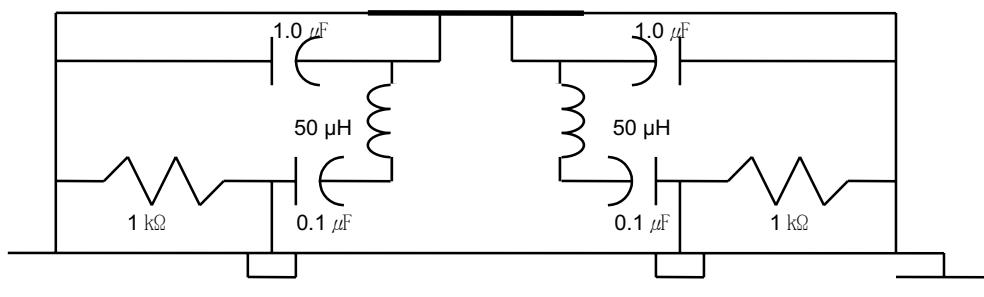


Fig. 2. LISN Schematic Diagram

## DESCRIPTION OF TESTS

---

### Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.( Rohde Schwarz HL025) The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

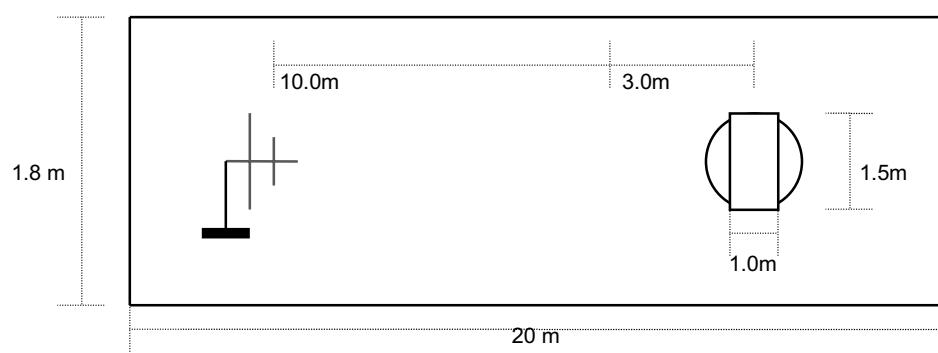


Fig. 3. Dimensions of Outdoor Test Site

**TEST DATA****Conducted Emissions****FCC ID : PLXHAN-230UVS****Test Mode : Playing and download mode**

FREQ (MHz)	LEVEL(dB $\mu$ V)	LINE	LIMIT( $\mu$ V)	( $\mu$ V)	MARGIN*(dB)
1.19	28.2	L	250	25.70	19.8
3.66	29.2	L	250	28.84	18.8
6.12	30.7	L	250	34.28	17.3
10.11	31.1	L	250	35.89	16.9
12.57	39.1	N	250	90.16	8.9
24.00	34.9	N	250	55.59	13.1

**Table 1. Line Conducted Emissions Tabulated Data****NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is 250  $\mu$ V from 450 kHz to 30MHz.
4. LINE : L =Line , N = Neutral

*Baek Sung-hun*  
\_\_\_\_\_  
Tested by S. H. Baek

**TEST DATA****Radiated Emissions**

FCC ID : PLXHAN-230UVS

Test Mode : Playing and download mode

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
144.02	43.4	V	-13.5	29.9	43.5	13.6
149.29	51.1	V	-12.7	38.4	43.5	5.1
248.90	52.3	H	-12.5	39.8	46.0	6.2
432.03	46.1	H	-7.9	38.2	46.0	7.8
528.05	38.4	H	-5.5	32.9	46.0	13.1
648.07	37.2	V	-2.3	34.9	46.0	11.1

Table 2. Radiated Measurements at 3meters

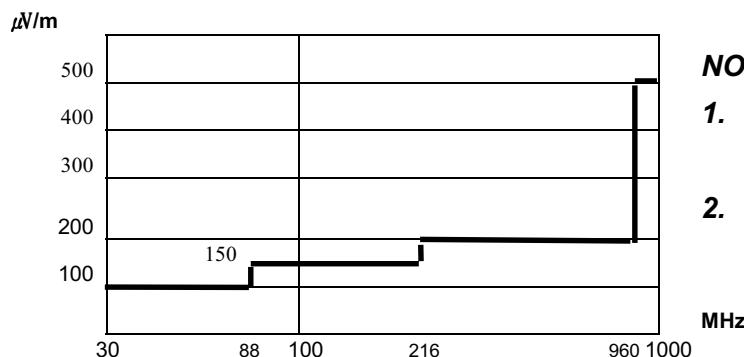


Fig. 4. Limits at 3 meters

**NOTES:**

1. \*Pol. H =Horizontal      V=Vertical
2. \*\*AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

*Baek Sung-hun*

Tested by S. H. Baek

## TEST DATA

---

### Radiated Emissions

FCC ID : PLXHAN-230UVS

Test Mode : Tune to the broadcasting channels

T. Freq.* (MHz)	Frequency (MHz)	Pol.** (H/V)	Reading (dB)	A.F + C.L+Amp*** (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
87.5	982.00	V	26.9	5.4	32.3	54.0	21.7
98.0	326.10	H	53.3	-10.6	42.7	46.0	3.3
	760.90	V	27.3	0.6	27.9	46.0	18.1
	869.60	V	37.7	3.2	40.9	46.0	5.1
	978.30	V	26.8	5.3	32.1	54.0	21.9
	108.0	V	27.2	2.3	29.5	46.0	16.5
	830.90	V	27.0	4.8	31.8	46.0	14.2

Table 3. Radiated Measurements at 3meters

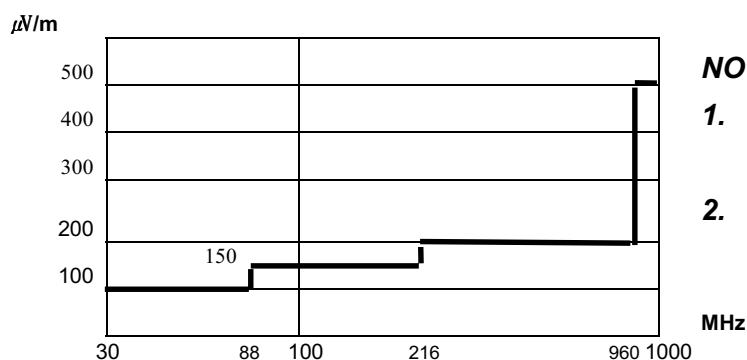


Fig. 4. Limits at 3 meters

#### NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4. Above 1GHz the limit is 500  $\mu$ V/m.

**NOTES:**

1. \*Pol. H =Horizontal V=Vertical
2. \*\*AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

*Baek Sung-hun*


---

Tested by S. H. Baek

## PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Line)

Scan Settings (1 Range)  
 ----- Frequencies ----- Receiver Settings -----  
 Start Stop Step IF BW Detector M-Time Atten Preampl  
 450k 30M 5k 9k PK 20ms 10dBLN OFF  
 Transducer No. Start Stop Name  
 17 150k 30M CE\_CNE  
 Final Measurement: x QP  
 Meas Time: 1 s  
 Subranges: 8  
 Acc Margin: 40dB

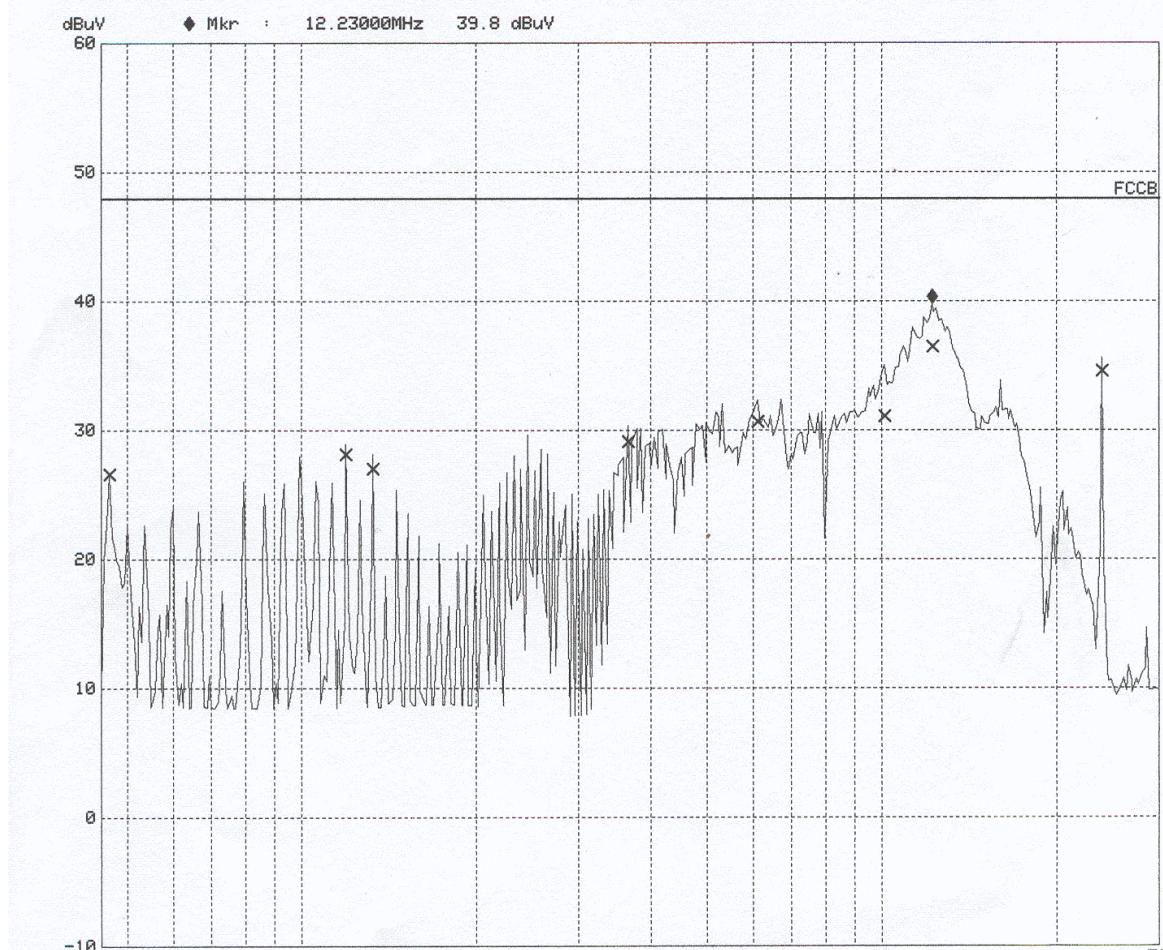

PAGE 1

## PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Neutral)


```

Scan Settings (1 Range)
----- Frequencies -----|----- Receiver Settings -----
Start      Stop       Step     IF BW   Detector  M-Time  Atten Preamp
450k       30M        5k      9k      PK        20ms    10dBLN OFF

Transducer No. Start      Stop       Name
17          150k       30M      CE_CNE

Final Measurement: x QP
Meas Time:      1 s
Subranges:      8
Acc Margin:    40dB

```

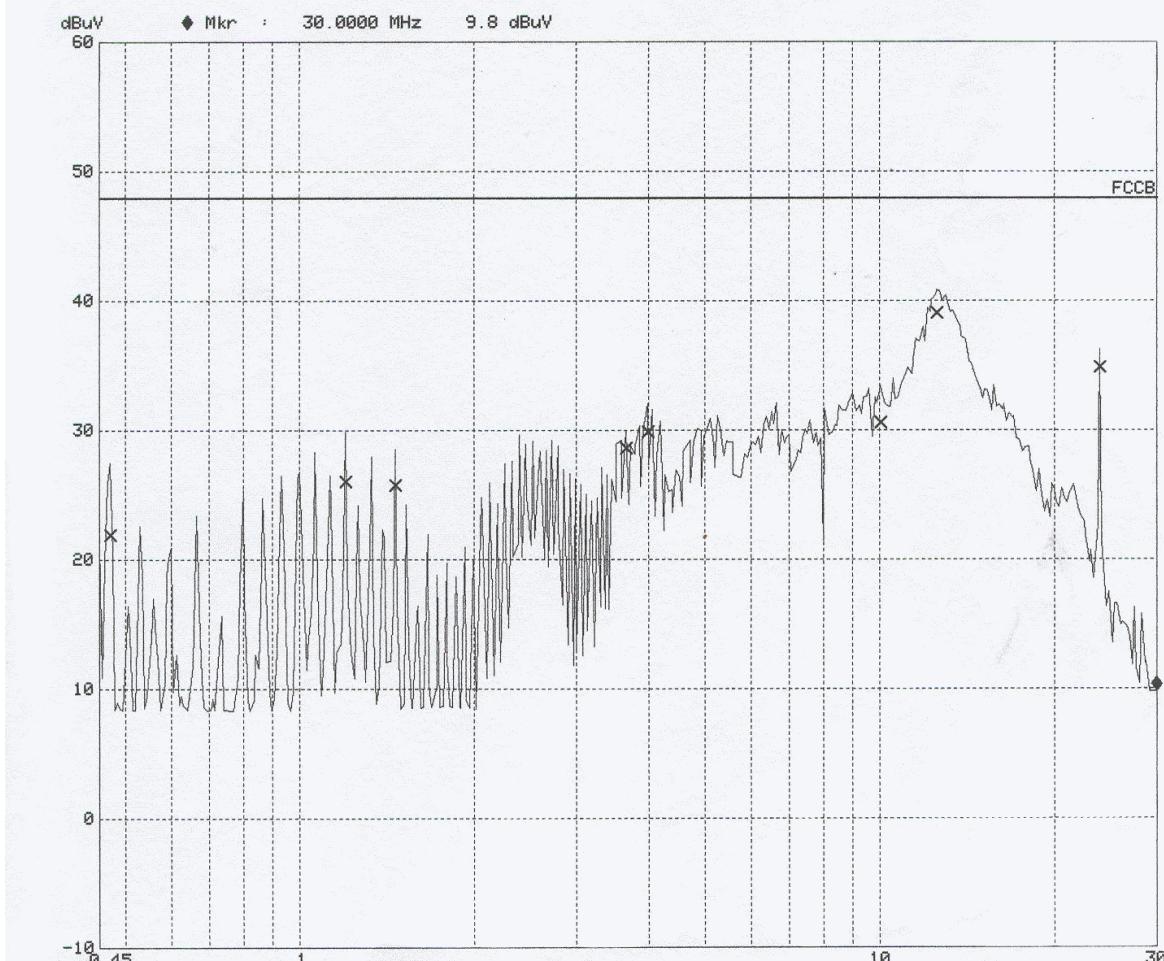

PAGE 1

**SAMPLE CALCULATIONS**

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB } \mu\text{V}/20)}$$

**EX. 1.**

@20.3 MHz

Class B limit = 250  $\mu\text{V}$  = 48.0 dB  $\mu\text{V}$ Reading = 40.8 dB  $\mu\text{V}$  (calibrated level)

$$10^{(40.8/20)} = 109.64 \mu\text{V}$$

$$\text{Margin} = 48.0 - 40.8 = 7.2$$

**7.2 dB below limit****EX. 2.**

@57.7 MHz

Class B limit = 100  $\mu\text{V}/\text{m}$  = 40.0 dB  $\mu\text{V}/\text{m}$ Reading = 19.1 dB  $\mu\text{V}$  (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

Total = 29.22 dB  $\mu\text{V}/\text{m}$ 

$$\text{Margin} = 40.0 - 29.22 = 10.78$$

**10.78 dB below the limit**

## ***ACCURACY OF MEASUREMENT***

---

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

### ***1. Radiation Uncertainty Calculation***

<b><i>Contribution</i></b>	<b><i>Probability Distribution</i></b>	<b><i>Uncertainty(+/-dB)</i></b>
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity	Rectangular	± 1.0
Antenna Factor variation with Height		
Antenna Phase Center Variation		
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch:Receiver VRC ri=0.3	U-Shaped	+ 0.25 / - 0.26
Antenna VRC rR=0.1(Bi)0.4(Lp)		
Uncertainty Limits 20Log(1+/-ri rR)		
System Repeatability	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expended Uncertainty U	Normal (k=2)	± 3.5

### ***2. Conducted Uncertainty Calculation***

<b><i>Contribution</i></b>	<b><i>Probability Distribution</i></b>	<b><i>Uncertainty(+/-dB)</i></b>
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch:Receiver VRC ri=0.3	U-Shaped	± 0.26
LISN vrc rg=0.1		
Uncertainty Limits 20Log(1+/-ri rR)		
System Repeatability	Std.deviation	± 0.68
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.18
Expended Uncertainty U	Normal (k=2)	± 2.4

***TEST EQUIPMENT***

No.	Instrument	Manufacturer	Model	Calibration Date
1	*Test Receiver	R & S	ESCS 30	2002.02
2	Test Receiver	PMM	PMM9000	2002.06
3	*Amplifier	HP	8447F	2001.11
4	*Amplifier	HP	8447F	2001.11
5	*Spectrum Analyzer	Advantest	R3265A	2002.03
6	*Logbicon Super Antenna	Schwarzbeck	VULB9166	2002.02
7	Log-Periodic Antenna	R & S	HL025	2002.01
8	Dipole Antenna	R & S	VHA9103	2002.05
9	Dipole Antenna	R & S	UHA9105	2002.05
11	Biconical Log Antenna	ARA	LPB-2520/A	2002.01
12	Asorbing Clamp	R & S	MDS21	2002.03
13	High Voltage Probe	R & S	ESH2-Z3	2001.09
14	Signal Generater	R & S	SMP02	2001.12
15	Matching Pad	R & S	RAM358.5414.02	2002.05
16	LISN	R & S	ESH3-Z5	2001.10
17	*LISN	Kyoritsu	KNW-407	2002.04
18	*LISN	Kyoritsu	KNW-408	2002.04
19	*Position Controller	EM Eng.	N/A	N/A
20	*Turn Table	EM Eng.	N/A	N/A
21	*Antenna Mast	EM Eng.	N/A	N/A
22	*Anechoic Chamber	EM Eng.	N/A	N/A

\*) Test equipment used during the test

## ***RECOMMENDATION/CONCLUSION***

---

The data collected shows that the **AMAC TEK Co., Ltd.**


FCC ID : **PLXHAN-230UVS, MP3 Player.** complies with § 15.107 and 15.109 of the FCC Rules.

The highest emission observed was at **12.57 MHz** for conducted emissions with a margin of **8.9 dB**, at **326 MHz** for radiated emissions with a margin of **3.3 dB**.


## APPENDIX A – SAMPLE LABEL

### Labelling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

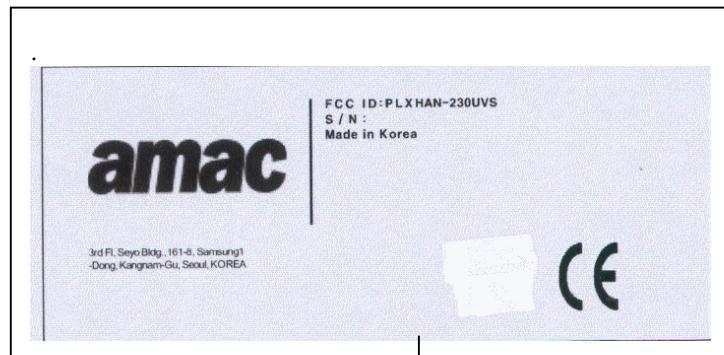

- FCC ID Location of EUT

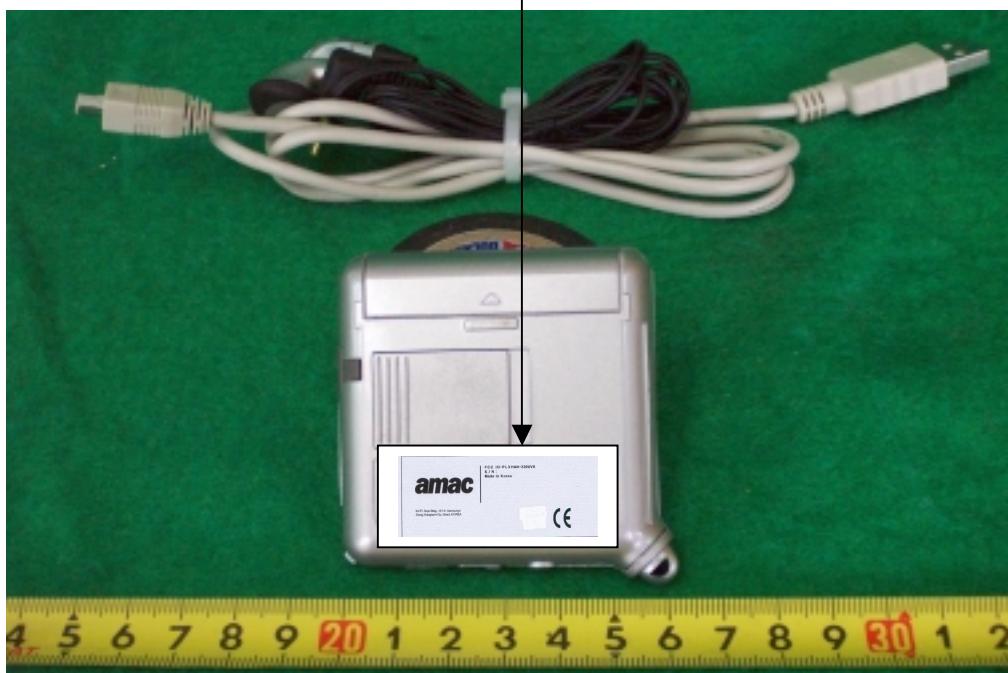

## ***APPENDIX B – CIRCUIT DIAGRAM***

---

## ***APPENDIX E – USER'S MANUAL***

---

## ***APPENDIX F – Schematic Diagrams***

---