

EUT labeling


FCC ID: PM7-DCMI2001

The PIM-OTD labeling has not changed for this permissive change.

The following the labels are for the WUSI and the WRI configurations. The Dimensions are in inches.



WUSI label

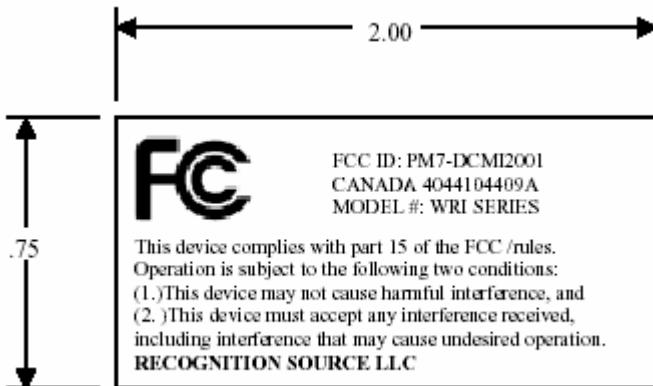

WRI label

Description of Label: (This applies to all labels)

1. Minimum Letter Height .047 Inch
2. Facestock: FASSON.U.L. Gloss is a destructible cast-coated high gloss stock.
Basis Weight: 60# per ream +/-10%; (500 sheets 25" X 38")
Caliper: 0.00340 inches +/- 10%
Tensile: MD 26# per inch width; CD 16# per inch width
Tear: MD 55 grams per sheet CD 60 grams per sheet
Stiffness: MD 125 mg CD 65 mg
3. Adhesive: FASSON A351 adhesive is a clear adhesive featuring good initial tack, high shear and minimum cold flow. Suitable for use on a wide variety of substrates,
Type: Solvent Acrylic
Minimum Application Temperature: +45°f
Service Temperature Range: -65°F to +200°F
4. Liner: 40# SCK is a bleached super-calendered kraft stock featuring high internal strength, toughness and tear resistance. Used primarily for roll-to-roll label applications
Basis Weight: 41# per ream +/-10% (500 sheets 25" x 36")
Caliper: 0.0025 inches +/-10%
Tensile: MD 35# per inch width
CD 16# per inch width
Tear: MD 35 grams; CD 45 grams

5. Total Construction Caliper: 0.0071 inches +/- 10%
6. Shelf Life: One year when stored at 72°F at 50% RH

WUSI Label location



WRI label location

