


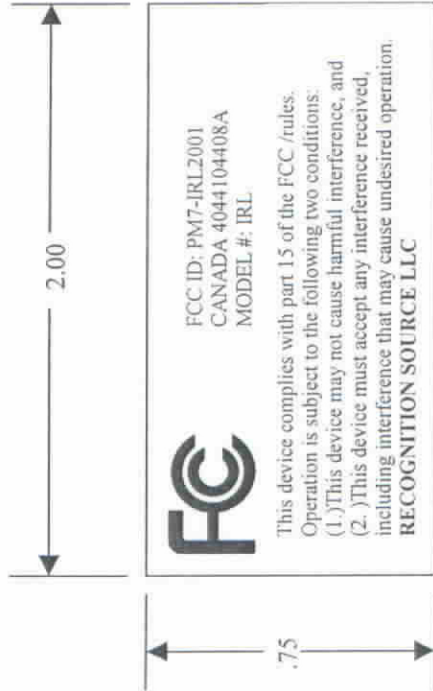

NOTES:

1. MINIMUM LETTER HEIGHT .047 INCH, UNLESS OTHERWISE SPECIFIED.
2. UNLESS OTHERWISE SPECIFIED, TOLERANCES TO BE:
0.005 FOR LINEAR DIMENSIONS,
0.5° FOR ANGULAR DIMENSIONS,
Ø0.003 FOR HOLE DIAMETER DIMENSIONS

3. FACESTOCK: FASSON® U.L. Gloss is a destructible cast-coated high gloss stock.

Basis Weight: 60# per ream ±10%
(500 sheets 25" X 38")

Caliper: 0.00340 inches ± 10%

Tensile: MD 26# per inch width

CD 16# per inch width

Tear: MD 55 grams per sheet

CD 60 grams per sheet

Stiffness: MD 125 mg

CD 65 mg

4. ADHESIVE: FASSON®A351 adhesive is a clear adhesive featuring good initial tack, high shear and minimum cold flow. Suitable for use on a wide variety of substrates,

Type: Solvent Acrylic

Minimum Application

Temperature: +45°F

Service Temperature

Range: -65°F to +200°F

5. Liner: 40# SCK is a bleached super-calendered kraft stock featuring high internal strength, toughness and tear resistance. Used primarily for roll-to-roll label applications

Basis Weight: 41# per ream ±10%

(500 sheets 25" x 36")

Caliper: 0.0025 inches ±10%

Tensile: MD 35# per inch width

CD 16# per inch width

Tear: MD 35 grams

CD 45 grams

6. Total Construction Caliper: 0.0071 inches ± 10%

7. Shelf Life: One year when stored at 72°F at 50% RH

		20	7/3/01	Removed CANADA REC#, TX#, Added 4044104408A, Recognition Source LLC	MW	A
			6/21/01	REVISED TEXT SEE ECO# 14; 2.00 WAS 1.50, .75 WAS .50	DKS	E2
			5/15/01	RELEASE FOR QUOTATION	DKS	E1
Common Tooling	Offshore Tooling	Engineering Approval	ECO. NO.	DATE	CHG. BY	ISSUE
FASSON® U.L. GLOSS/S730/40#SCK SEE NOTES			CHECKED BY NAME: M. WOZNICKI	DATE: 5/01/01	RECOGNITION SOURCE 3820 STERN RD. ST. CHARLES, IL 60174	
DO NOT SCALE			UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES	DRAWN BY K. STROBEL	DATE 5/01/01	SHEET A
SCALE: NOT TO SCALE			TITLE: LABEL, FCC, IRL			
			DRAWING NO. L001-001-001			
			SHEET 1 OF 1			