

FCC EVALUATION REPORT FOR CERTIFICATION

KOREA Standard Technology

Test report No.: KST-FCC0503

Applicant's Name : AL Tech, Inc.
Applicant's Address : 1F, Haesung Bldg., 747-2, Yoksam-Dong,
Kangnam-Gu, Seoul, Korea, 153-080
Manufacturer's Name : AL Tech, Inc.
Manufacturer's Address : 1F, Haesung Bldg., 747-2, Yoksam-Dong,
Kangnam-Gu, Seoul, Korea, 153-080

EUT's:

FCC ID : PM8-MG35HDD0127
Product Name : MPEG4 Player
Model Number(s) : MG-35
Product Options : N/A
Category : FCC Part 15 subpart B
Class B Computing Digital Device

Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2001.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test Date : January 27, 2005

Issued Date : January 29 , 2005

Tested by:



Chung, Suck-Jin

Approved by:



Lee, Weon-Woo

Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics

Specifications.

1. Description of Device

- | | |
|-------------------------------|---|
| 1) Kind of equipment: | Portable MPEG4 Player |
| 2) FCC ID: | PM8-MG35HDD0127 |
| 3) Model Name: | MG-35 |
| 4) Serial No.: | None |
| 5) Type of Sample Tested: | Pre-production |
| 6) High Frequency Used: | 27.000 MHz / 25.000 MHz
12.000 MHz |
| 7) Adapter | Model name: UEA325D-0512
Manufacturer: XIMETA TECHNOLOGY
Serial no: 411-0435995 |
| 8) Power Rating: | 1phase AC100-240 V, 50/60 Hz 0.7 A
Output: DC 12 V, 1.5 A, |
| 9) Tested Power supply: | 1phase AC120 V, 60 Hz |
| 10) Date of Manufacture: | December , 2005 |
| 11) Manufacture: | AL Tech Inc. |
| 12) Description of Operating: | Scroll All "H" Character
Resolution 1024*768
Vertical Frequency: 75Hz |
| 13) Dates of Test: | January 27, 2005 |
| 14) Place of Tests: | Korea Standard Technology EMC site |
| 15) Test Report No: | KST-FCC0503 |

2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology (KOSTEC Co., Ltd)

:

Head office & Test Lab

:180-254, Annyung-Ri, Taeaeon-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

MIC(Ministry of Information and Communication) Number: **KR0042**


FCC Filing Number. : **525762**

VCCI Membership Number : **2005**


VCCI Registration Number : **R-1657 / C-1763**

3. Route Map of Measurement Facility

Korea

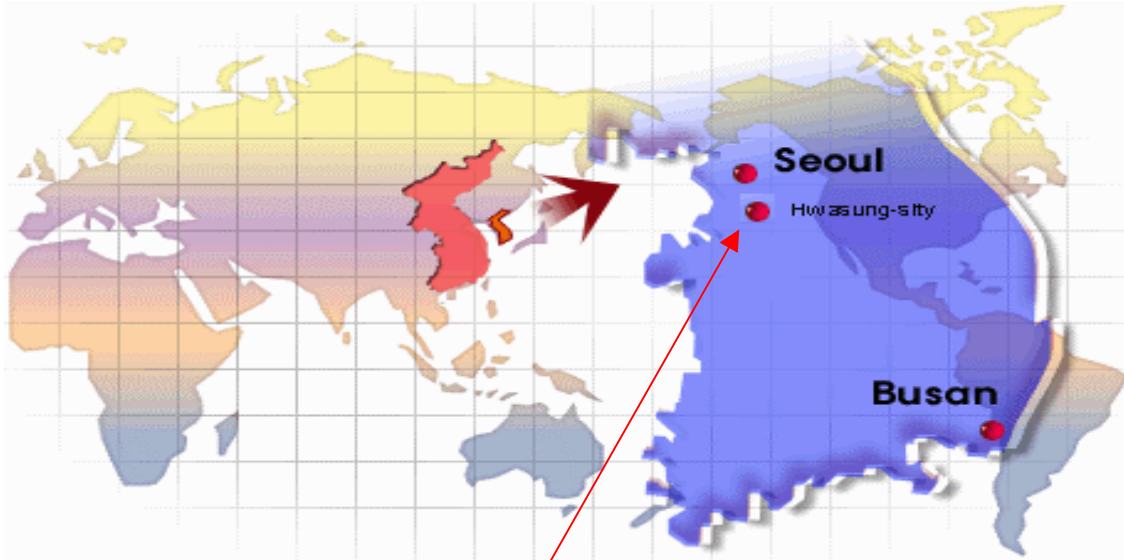

Hwasung-shi (open area test site)

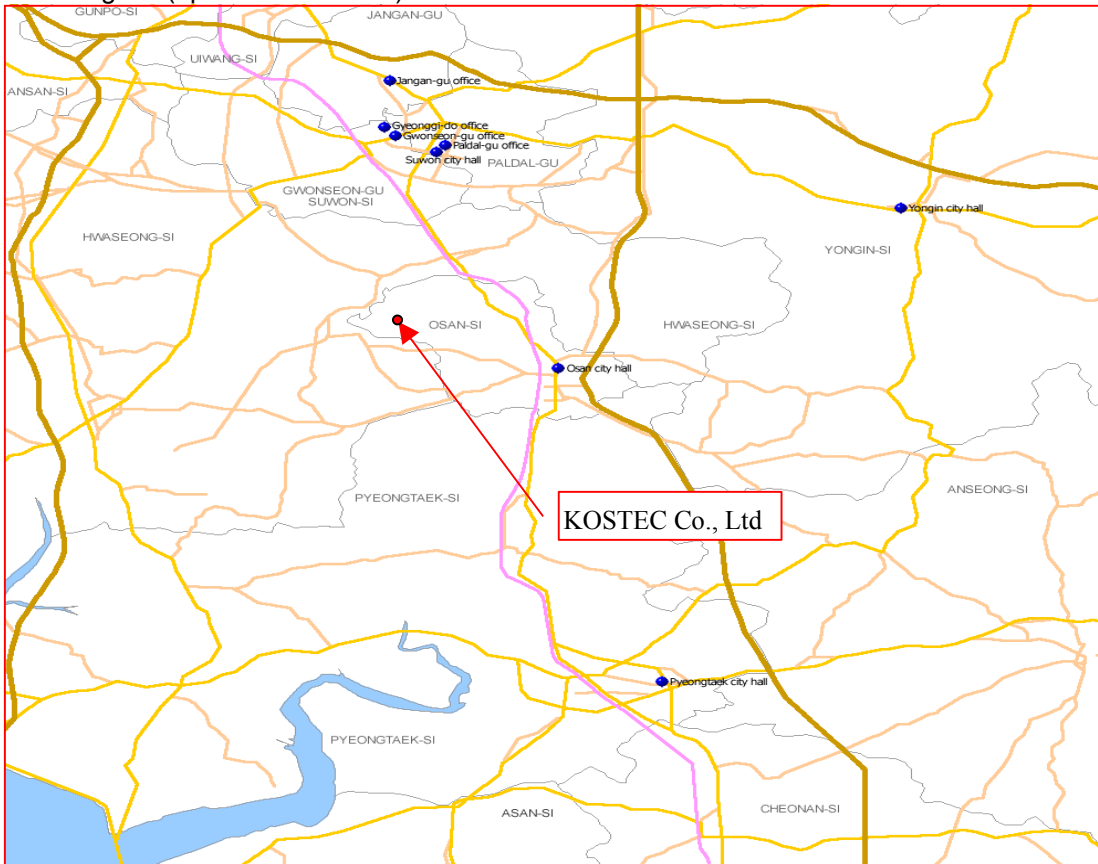

4. Test System Configuration

Operation Environment

Ambient	<u>Temperature</u> (° C)	<u>Humidity</u> (%)	<u>Pressure</u> (hPa)
10 m Open Area site	3.5	30	1022
Shielded room:	18.5	37	1022

Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

5. Description of E.U.T.

Product Description

Manufactured By:	AL Tech Inc.
Address:	1F, Haesung Bldg., 747-2, Yoksam-Dong, Kangnam-Gu, Seoul, Korea, 153-080
Model:	MG-35
Serial Number:	None

Configuration of EUT

Description	Manufacturer	Model / Part #	Serial Number
HDD	Western Digital	WD800	WCAJ92208908
Main Board	AL Tech Inc.	None	None
LED Controller	AL Tech Inc.	None	None
Keypad	AL Tech Inc.	MG-35	None
Remote control	AL Tech Inc.	None	None

EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	1.5	Y	DC INLET	Ac/dc adapter	EUT
USB	Yes	1.5	Y	USB	EUT	PC
RCA	Yes	1.5	Y	RCA	EUT	-
S-Video	Yes	1.5	-	S-Video	EUT	-

Operating conditions

The operating mode/system were as follows in details:

Operating: After connected from USB port of EUT to PC by USB cable.
And open it each cable (RCA and S-Video) . And then use to media player program for continuously data transmission by displayed on the Monitor.

7. TEST RESULTS

7.1 Conducted emission

Measurement procedure

Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2005.3.15	●
L.I.S.N.	ESH2-Z5	100044	R&S	2005.4.23	●
	ESH2-Z5	100147	R&S	2005.4.23	●

Measurement uncertainty

Conducted Emission measurement : ± 2.4 (K=2)

Test data

FREQ. (MHz)	LEVEL (dB μ V)		LINE PoI	Loss (dB)	LIMIT (dB μ V)		MARGIN (dB)	
	QP	AV			QP	AV	QP	AV
0.154	39.26	23.23	N	0.29	65.80	55.80	26.83	32.86
0.226	49.08	43.18	N	0.29	61.63	51.63	12.84	8.74
0.338	40.61	37.43	N	0.29	61.24	51.24	20.92	14.10
0.946	38.13	25.85	L	0.43	56.00	46.00	18.30	20.58
3.358	40.12	29.11	N	0.62	56.00	46.00	16.50	17.51
3.738	39.06	25.26	N	0.62	56.00	46.00	17.56	21.36
16.342	31.42	23.64	L	1.77	60.00	50.00	30.35	28.13
24.338	30.09	24.26	N	2.20	60.00	50.00	32.11	27.94

* Level = test receiver reading value

* Loss = LISN insertion Loss + Cable Loss


EMI TEST REPORT



Report reference No: KST-FCC0503


Conducted emission test graph

Line. Live

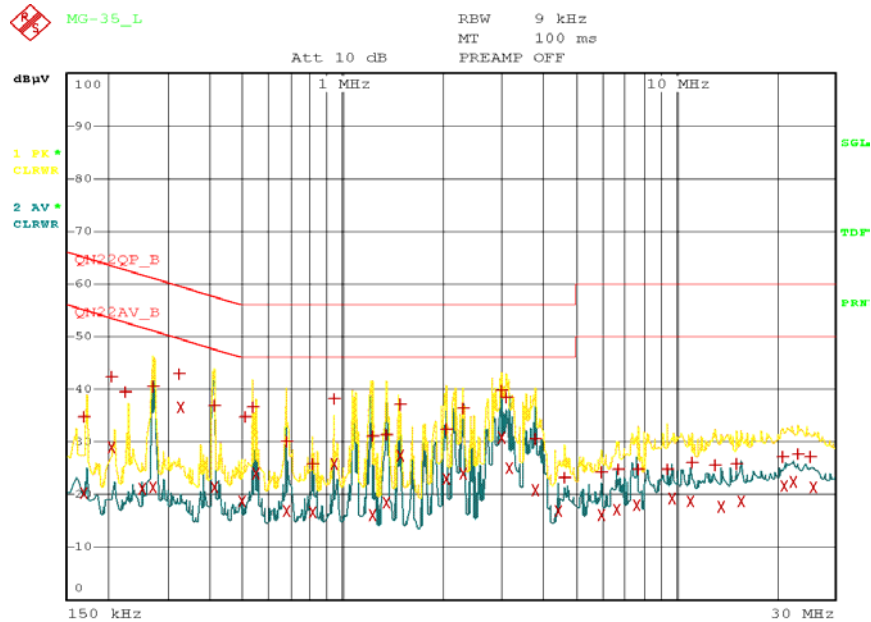

Date: 28.JAN.2005 14:27:08

Line. Neutral

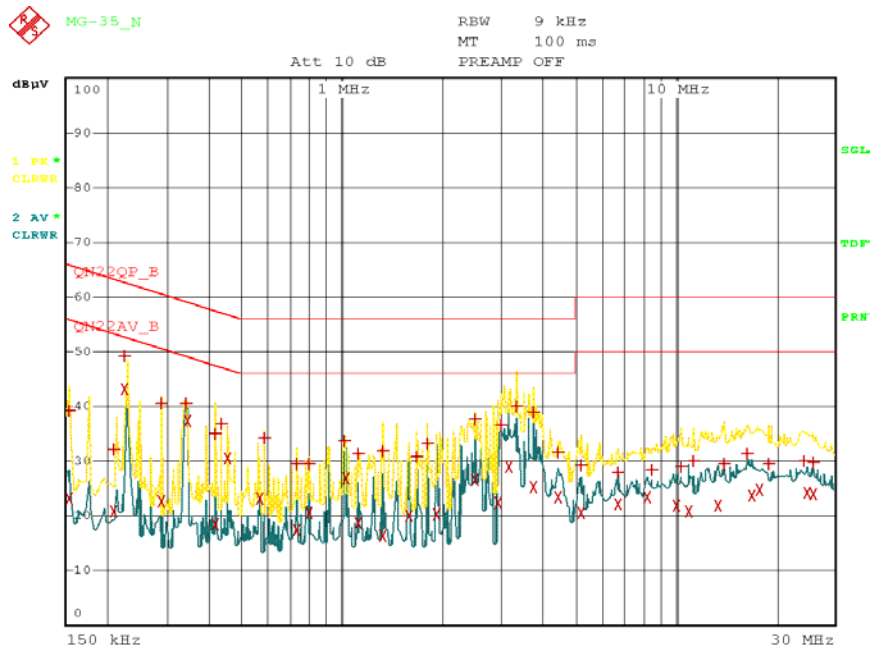

Date: 28.JAN.2005 14:30:53

EMI TEST REPORT



Report reference No: KST-FCC0503

7.2 Radiated Emission

Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2005.3.17
Ultra broadband antenna	HL562	100075	R&S	2005.3.16
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10m Open area site	none	none	KOSTEC Lab	-
chamber(3 m)	none	none	FRANCONIA	-

Measurement uncertainty

Radiated Emission measurement :
30-300 MHz +3.96 dB / -4.04 dB
300-1000 MHz +3.04 dB / -3.00 dB

Test data

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
60.00	19.10	V	1.80	45	3.60	3.30	25.80	30.0	4.20
113.14	11.83	H	3.80	90	9.40	3.77	25.00	30.0	5.00
120.00	11.50	V	1.70	270	9.60	3.70	24.80	30.0	5.20
180.00	11.20	H	3.50	90	8.20	4.60	24.00	30.0	6.00
240.00	17.50	V	1.90	90	9.10	5.20	31.80	37.0	5.20
300.00	9.00	V	2.00	270	11.00	6.50	26.50	37.0	10.50
360.00	11.26	V	2.00	45	12.60	7.14	31.00	37.0	6.00
450.00	6.80	H	2.60	120	14.60	7.90	29.30	37.0	7.70

Reading = Test receiver reading / P= antenna Polarization / H=antenna Height
/ A=turntable Angle / Antenna = antenna factor / Cable loss = used cable loss
/ Result = reading + antenna + loss / Margin = Limit – result / * Receiving Antenna Mode:
Horizontal, Vertical