

TABLE OF CONTENTS LIST

APPLICANT: ASE TELECOM CO., LTD.

FCC ID: PM9-GMRS1

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED & RF POWER OUTPUT
PAGE 3.....MODULATION CHARACTERISTICS & OCCUPIED BANDWIDTH
PAGE 4.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 5.....UNWANTED RADIATION
PAGE 6.....METHOD OF MEASURING SPURIOUS EMISSIONS
PAGE 7.....FREQUENCY STABILITY
PAGE 8.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....FCC ID LABEL SAMPLE
EXHIBIT 2.....SKETCH OF LOCATION
EXHIBIT 3A.....EXTERNAL FRONT VIEW PHOTOGRAPH
EXHIBIT 3B.....EXTERNAL SIDE VIEW PHOTOGRAPH
EXHIBIT 3C.....EXTERNAL BACK VIEW PHOTOGRAPH
EXHIBIT 3D.....INTERNAL COMPONENT VIEW PHOTOGRAPH
EXHIBIT 3E.....INTERNAL COPPER VIEW PHOTOGRAPH
EXHIBIT 4.....BLOCK DIAGRAM
EXHIBIT 5.....SCHEMATICS
EXHIBIT 6A-6L.....USER'S MANUAL
EXHIBIT 7A-7C.....CIRCUIT DESCRIPTION
EXHIBIT 8.....AUDIO LOW PASS FILTER
EXHIBIT 9.....AUDIO FREQUENCY RESPONSE
EXHIBIT 10A.....MODULATION LIMITING 300 Hz
EXHIBIT 10B.....MODULATION LIMITING 1000 Hz
EXHIBIT 10C.....MODULATION LIMITING 3000 Hz
EXHIBIT 11.....OCCUPIED BANDWIDTH CW PLOT
EXHIBIT 12.....OCCUPIED BANDWIDTH
EXHIBIT 13.....TEST SET UP PHOTO

APPLICANT: ASE TELECOM CO., LTD.

FCC ID: PM9-GMRS1

DATE: FEBRUARY 23, 2001

REPORT #: A\ASE\449ZAK1\449ZAK1RPT.DOC

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR CERTIFICATION

2.1033(c)(1)(2) ASE TELECOM CO., LTD. will manufacture the
FCCID: PM9-GMRS1 GMRS CHANNELS
TRANSCEIVER in quantity, for use under FCC RULES
PART 95.

ASE TELECOM CO., LTD.
7F., YUNGCHANG B/D., 250 CHEOLSAN-DONG
KWANGMYONG-CITY
KYUNGGI-DO KOREA

2.1033 (c) TECHNICAL DESCRIPTION

2.1033(c)(3) Instruction book. A draft copy of the instruction
manual is included as EXHIBIT 6A-6L.

2.1033(c) (4) Type of Emission: 9K5F3E
95.629

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 1.75K \\ B_n &= 2(3.0) + 2(1.75) = 9.5K \end{aligned}$$

2.1033(c)(5) Authorized Bandwidth 20.0KHz
Frequency Range: 462.5625 - 462.7250 MHz
95.627

2.10311c)(6)(7) The Maximum Output Power Rating:
High: 1.1 Watts
Low: 0.1 Watt effective radiated power.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:
FINAL AMPLIFIER ONLY

FOR LOW POWER SETTING INPUT POWER: (6.0V)(.125A) = .75 Watts
FOR HIGH POWER SETTING INPUT POWER: (6.0V)(.70A) = 4.20 Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included
in the users manual.

APPLICANT: ASE TELECOM CO., LTD.
FCC ID: PM9-GMRS1
DATE: FEBRUARY 23, 2001
REPORT #: A\ASE\449ZAK1\449ZAK1RPT.DOC
PAGE #: 1

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 5 of this report. The block diagram are included as EXHIBIT 4 of this report.

2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.

2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibits 3A-3E.

2.1033(c)(13) Digital modulation is not allowed.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

95.639 Power Output shall not exceed 50.0 Watts effective radiated power. There can be no provisions for increasing the power or varying the power. RF power output.

95.649

2.1046(a) RF power is measured by connecting a 50 ohm, resistive watt meter to the RF output connector. With a nominal battery voltage of 6.0 V, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER: HIGH: 1.1 Watts
LOW: 0.1 Watt

2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1.



APPLICANT: ASE TELECOM CO., LTD.
FCC ID: PM9-GMRS1
DATE: FEBRUARY 23, 2001
REPORT #: A\ASE\449ZAK1\449ZAK1RPT.DOC
PAGE #: 2

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603.

The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See Exhibit 9.

2.1047(b) Audio input versus modulation


The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. See Exhibits 10A-10C.

95.637 Post Limiter Filter Each GMRS transmitter, except a mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20KHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See Exhibit 8.

2.1049 Occupied bandwidth:

95.635(b)(1)(3)(7) At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least $43 + \log_{10}(T)$ on any frequency removed from the center of the authorized bandwidth by more than 250%.

Occupied BW Test Equipment Setup

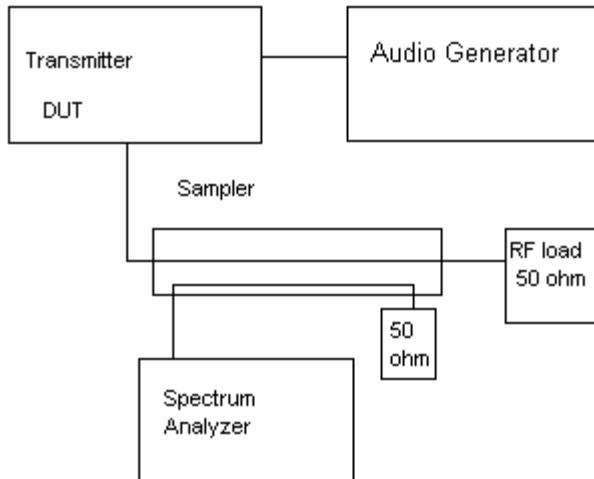

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be $43 +10\log(P_o)$ dB below the mean power output of the transmitter.

TEST RESULTS:

No antenna conducted is necessary since this unit has a fixed antenna.

APPLICANT: ASE TELECOM CO., LTD.
FCC ID: PM9-GMRS1
DATE: FEBRUARY 23, 2001
REPORT #: A\ASE\449ZAK1\449ZAK1RPT.DOC
PAGE #: 4

2.1053
95.635(b)(7)

UNWANTED RADIATION:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the 10th harmonic of the fundamental. This test was conducted per ANSI C63.4-1992.

REQUIREMENTS: HIGH POWER: $43 + 10\log(1.1) = 43.41$ dB
LOW POWER: $43 + 10\log(0.1) = 33.00$ dB

TEST DATA:

HIGH POWER

EMISSION FREQUENCY MHz	MR @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	ATTN dB	MARGIN dB	ANT. POL
462.60	107.70	1.60	18.44	127.74	0.00	0.00	V
925.20	38.90	2.90	24.10	65.90	61.84	18.43	V
1387.80	42.00	1.00	25.55	68.55	59.19	15.78	V
1850.40	33.60	1.01	27.40	62.01	65.73	22.32	H
2313.00	31.80	1.08	28.78	61.66	66.08	22.67	V
2775.60	28.10	1.15	29.94	59.19	68.55	25.14	V
3238.20	32.70	1.22	31.10	65.01	62.73	19.32	H
3700.80	34.20	1.29	32.25	67.74	60.00	16.59	H
4163.40	32.90	1.35	33.18	67.44	60.30	24.03	H
4626.00	32.47	1.42	33.70	67.60	60.14	16.89	V

LOW POWER

EMISSION FREQUENCY MHz	MR @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	ATTN dB	MARGIN dB	ANT. POL
426.60	97.60	1.60	17.61	116.81	0.00	0.00	V
925.20	36.90	2.0	24.10	63.90	52.91	19.91	H
1387.80	32.30	1.00	25.55	58.85	57.96	24.96	H
1850.40	32.90	1.01	27.40	61.31	55.50	22.50	H
2313.00	36.10	1.08	28.78	65.96	50.85	17.85	V
2775.60	26.60	1.15	29.94	57.69	59.13	26.12	V
3238.20	39.10	1.22	31.10	71.41	45.40	12.40	H
3700.80	32.70	1.29	32.25	66.24	50.57	17.57	H
4163.40	32.20	1.35	33.18	66.74	50.07	17.07	H
4626.00	28.60	1.42	33.70	63.73	53.08	20.08	V


METHOD OF MEASUREMENT: The procedure used was TIA/EIA 603. The measurements were made at the test site located at TIMCO ENGINEERING INC. 849 NW State Road 45 Newberry, Florida 32669.

APPLICANT : ASE TELECOM CO., LTD.
FCC ID : PM9-GMRS1
DATE : FEBRUARY 23, 2001
REPORT # : A\ASE\449ZAK1\449ZAK1RPT.DOC
PAGE # : 5

APPLICANT : ASE TELECOM CO., LTD.

FCC ID : PM9-GMRS1

Method of Measuring Radiated Spurious Emissions

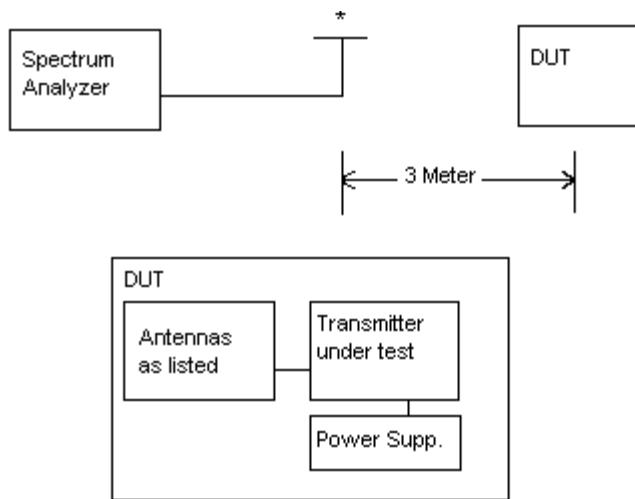

Equipment placed 80cm above ground
on a rotatable platform.

* Appropriate antenna raised from 1 to 4 M.

APPLICANT: ASE TELECOM CO., LTD.
FCC ID: PM9-GMRS1
DATE: FEBRUARY 23, 2001
REPORT #: A\ASE\449ZAK1\449ZAK1RPT.DOC
PAGE #: 6

2.1055
95.621(b)

Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 6.0 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.562 500

<u>TEMPERATURE</u>	<u>FREQUENCY_MHz</u>	<u>PPM</u>
REFERENCE_____	462.562500	00.00
-30C_____	462.563553	+2.28
-20C_____	462.562470	-0.06
-10C_____	462.563640	+2.47
0C_____	462.563234	+1.59
10C_____	462.563715	+2.63
20C_____	462.562824	+0.70
30C_____	462.562264	-0.51
40C_____	462.561440	-2.29
50C_____	462.561227	-2.76

<u>BATT.</u>	<u>DATA</u>	<u>VOLTS</u>	<u>PPM</u>
-15%	462.562772	5.1	0.59
+15%	462.562783	6.9	0.61

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -2.76 to +2.63 ppm. The maximum frequency variation with voltage was 0.61 ppm.

APPLICANT: ASE TELECOM CO., LTD.
FCC ID: PM9-GMRS1
DATE: FEBRUARY 23, 2001
REPORT #: A\ASE\449ZAK1\449ZAK1RPT.DOC
PAGE #: 7

APPLICANT: ASE TELECOM CO., LTD.
FCC ID: PM9-GMRS1

TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. Biconnical Antenna: Eaton Model 94455-1, S/N 1057
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545
13. Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
20. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
21. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99

APPLICANT: ASE TELECOM CO., LTD.
FCC ID: PM9-GMRS1
DATE: FEBRUARY 23, 2001
REPORT #: A\ASE\449ZAK1\449ZAK1RPT.DOC
PAGE #: 8