

TEST-REPORT No. 50104-10327

Product Description	Wireless Headphone System
Brand	Amphony
Model / Type	Model 1000
Serial No.	---

Applicant	Amphony Corporation 1006 S. Raven Road Shorewood, IL 60431, USA
Contact	Mr. Jens Kurrat

Order / Date	May 09, 2001
Test sample received	May 26, 2001

Test Specification	FCC Rules Part 15, Subpart C, Section 15.249
--------------------	---

Test Result	The tested sample complies with the test specification
-------------	---

Tested by		June 28, 2001
Johann Roidt		Date

Checked		June 28, 2001
Johann Roidt		Date

Note	The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.
------	--

Table of Contents

1. ADMINISTRATIVE DATA	3
2. OPERATION MODE OF EUT	4
3. CHANGES MADE TO THE EUT DURING THIS CERTIFICATION TEST	5
4. CONFIGURATION OF EUT AND PERIPHERAL DEVICES	6
5. MEASURING METHODS	7
Transmitter Parameter TestS (§15.209)	7
Radiated Emissions 0.009 – 30 MHz	8
Radiated Emissions 30 MHz – 1 GHz	9
Radiated Emissions above 1 GHz	10
Procedure for preliminary Radiated Emission Tests	11
Method for comparing spectrum analyzer output to the limit	12
Spectrum analyzer setting for final test	12
6. PHOTOGRAPHS TAKEN DURING TESTING	13
7. LIST OF MEASUREMENTS	17
8. TEST RESULTS	18
9. EQUIPMENT LIST	22
10. CHARTS TAKEN DURING TESTING	24

1. Administrative Data

Equipment under Test:	Model 1000, Transmitter and Receiver
Type of equipment:	Wireless Headphone System
Parts / accessories:	AC Adapter, Transmitter, Headphone
Serial Number:	---
Version of EUT:	As delivered
FCC-ID:	PMJT1000

Applicant: (full address)	Amphony Corporation S. Raven Rd. Shorewood, IL 60431, USA
------------------------------	--

Contract Identification:	N/A
--------------------------	------------

Contact person:	Mr. Jens Kurrat
-----------------	------------------------

Manufacturer:	Applicant
---------------	------------------

Receipt of EUT:	May 26, 2001
-----------------	---------------------

Date of Test:	June 2001
---------------	------------------

Responsible for Testing:	J. Roidt
--------------------------	-----------------

Responsible for Report:	J. Roidt
-------------------------	-----------------

2. Operation Mode of EUT

- TX active

3. Changes made to the EUT during this certification test

No changes have been made to the EUT during this certification test.

4. Configuration of EUT and peripheral devices

Configuration of cables connected to the EUT

Not applicable

Configuration of peripheral devices connected to the EUT

Not applicable


5. Measuring Methods

Transmitter Parameter TestS (§15.209)

All transmitter parameter radiated tests are performed at a test distance of 3 meters in a semianechoic chamber. During the tests the EUT will be rotated all around and the receiving antenna will be raised and lowered from 1 meter to 4 meters to find the maximum levels of emission. Cables and equipment will be placed and moved within the position likely to find their maximum emissions. Measurements will be made in horizontal and vertical polarization of the receiving antenna.

The EUT was operating in transmit mode with its internal modulation.

The bandwidth of the emission will be measured with a spectrum analyzer. Resolution Bandwidth and Video Bandwidth will be set to 10 kHz.

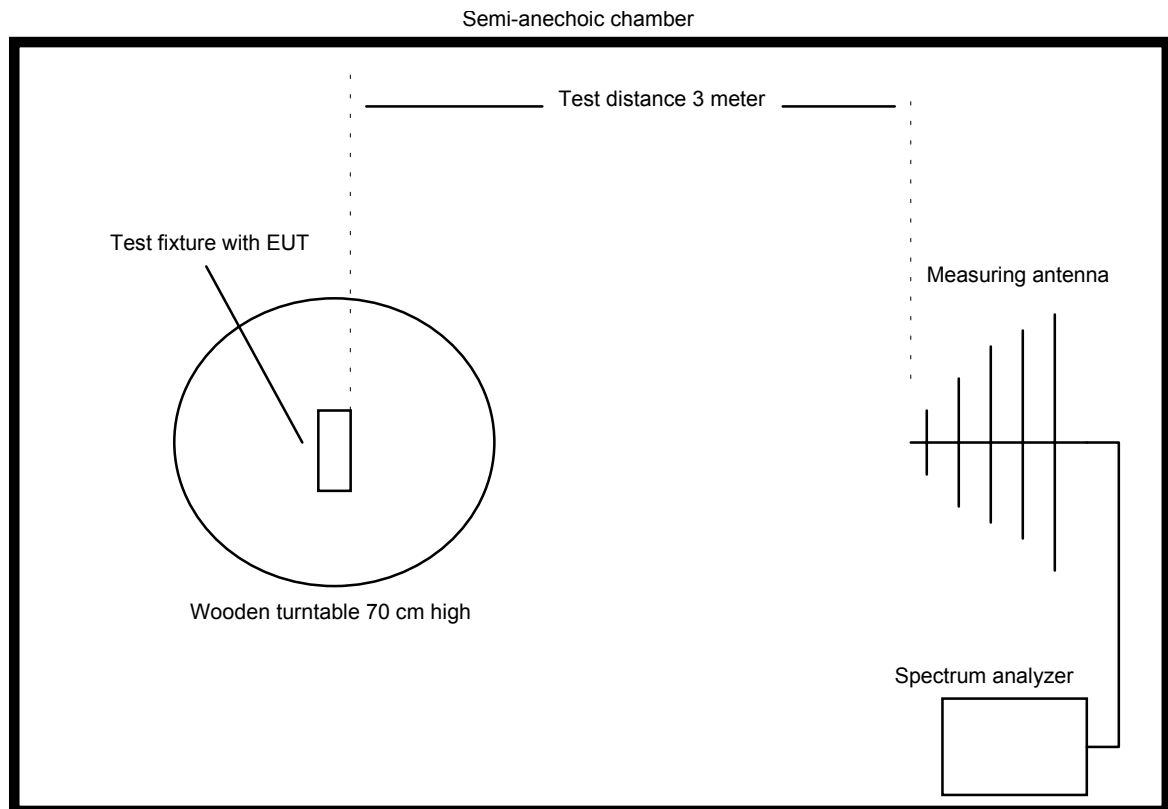

Radiated Emissions 0.009 – 30 MHz

Radiated emissions in the frequency range 0.009 – 30 MHz will be measured initially at a distance of 3 meters. A prescan at 3 meter distance will be performed in a shielded room with the detector of the spectrum analyzer or EMI Receiver set to peak. Final measurement is then performed at 30 meter distance. In case the regulation requires testing at other distances, the result will be extrapolated. The extrapolation factor will be determined by making a second measurement at 10 meter distance. The provisions of 15.31 (d) apply.


According to section 15.209 (d) final measurement is performed with the detector set to Quasi Peak except for the frequency bands 9 – 90 kHz and 110 – 490 kHz where average detector is employed.

Radiated Emissions 30 MHz – 1 GHz

Radiated emissions in the frequency range 30 – 1000 MHz will be measured at a distance of 3 meter. The bandwidth of the spectrum analyzer will be set to 100 kHz and the detector function set to Quasi Peak.

The test setup will be made in accordance with ANSI C.63.4-1992.

Measurements will be made in horizontal and vertical polarization of the receiving antenna. Prescans will be taken in a semianechoic chamber using a spectrum analyzer with the detector function set to peak. All tests will be performed at a test distance of 3 meters. For final testing an open field test site will be used. During the tests the EUT will be rotated all around and the receiving antenna will be raised and lowered from 1 meter to 4 meter to find maximum levels of emissions.

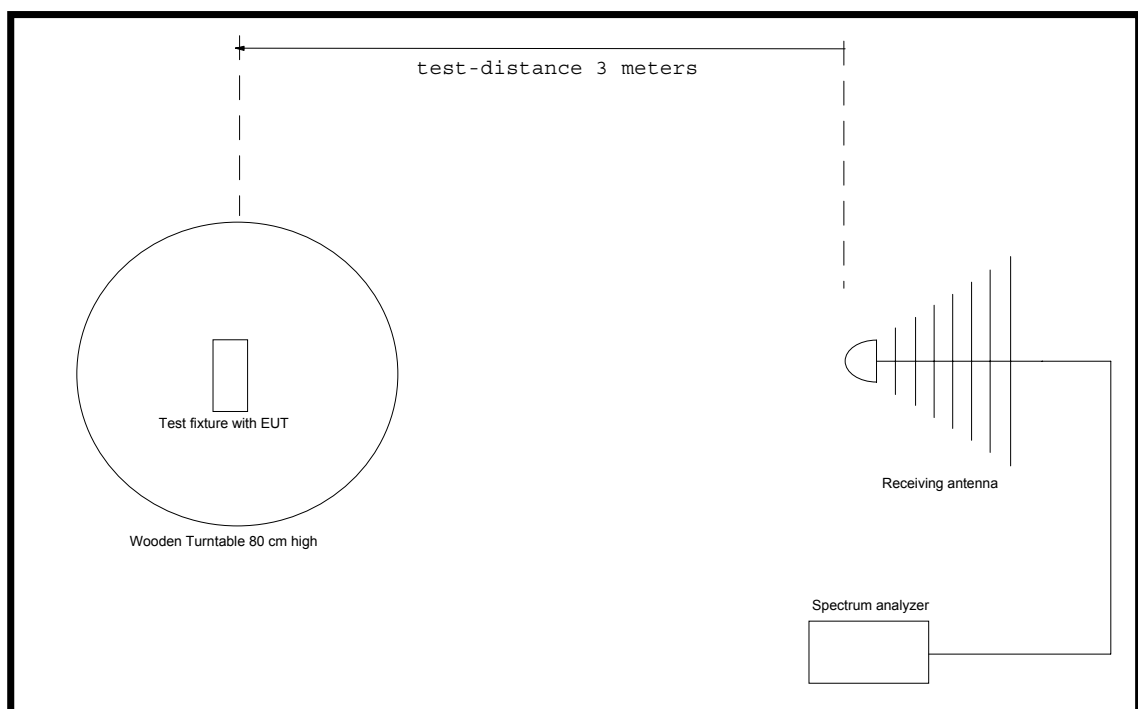


Radiated Emissions above 1 GHz

Radiated emissions were measured in the frequency range 1 GHz to 3.15 GHz in transmit mode. The resolution bandwidth and the video bandwidth of the spectrum analyzer was set to 1 MHz. Prescans with video bandwidth 1 MHz (peak mode) were taken to check out the highest levels (with reference to the limits), see 6.4 for details to prescan procedure. Final measurements were performed at the three highest emissions per band. EUT was rotated all around and receiving antenna was raised and lowered to find the maximum levels of emission. Cables and equipment were placed and moved within the range of position likely to find their maximum emissions. Measurements were made in horizontal and vertical polarization. All tests were performed in a semi-anechoic chamber with a test-distance of 3 meters.

To avoid overload in transmit mode a high pass filter was connected to the input of the preamplifier (in case when a preamplifier was necessary)). In this case a signal generator was used for substitution to eliminate the influence of filter and preamplifier.

Substitution was performed in the following steps:

- antenna cable was disconnected from receiving antenna and connected to signal generator output
- level of signal generator was increased until the reading value of the analyzer was the same as caused by EUT
- level of signal generator was noted
- final value was calculated by converting the signal generator level to dB μ V/m and adding the antenna correction factor.

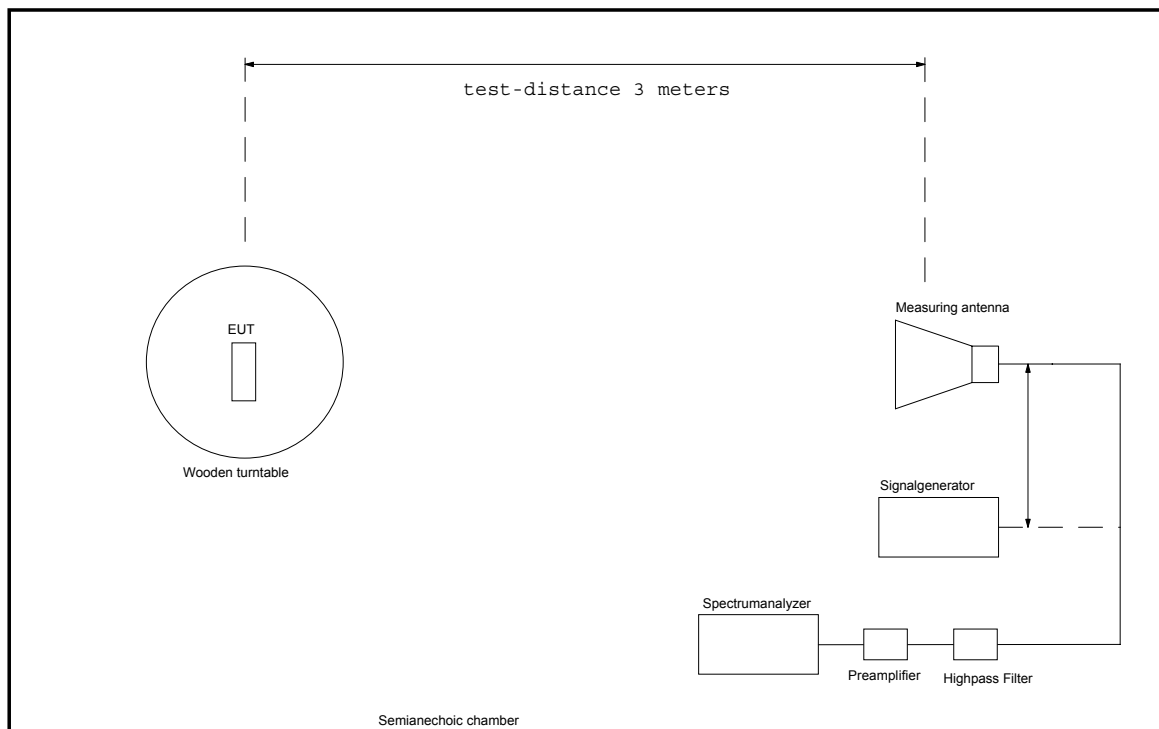

Procedure for preliminary Radiated Emission Tests

The procedure for preliminary radiated emission tests follows section 13.4.1 of ANSI C63.4-1992.

In case the EUT is a handheld device preliminary emission measurements will be performed in three orthogonal axes of the EUT.

Prescans are made in the following frequency range:

0.009 – 30 MHz
30 – 230 MHz
230 – 1000 MHz
1000 – 2600 MHz
2600 – 3950 MHz
3950 – 5850 MHz
5850 – 8200 MHz
8200 – 12400 MHz
12400 – 18000 MHz
18000 – 26500 MHz
26500 – 40000 MHz

with the receiving antenna set to horizontal and vertical polarization.

The following step-by-step procedure will be used:

Monitor the frequency range at a fixed antenna height and EUT azimuth

Rotate the EUT by 360 degrees to maximize the suspected highest azimuth signals. Note the amplitude and frequency of the signals. Orient the EUT azimuth for maximum emission.

Move the antenna over its full allowed range of travel to maximize the emission. If the signal or another one at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to step 2) with the antenna fixed at this height. Otherwise move the antenna to the height that repeats the highest amplitude observation and proceed.

Identify at least the three highest emissions per band by using the multimarker function of the spectrum analyzer. Make a hardcopy of the spectrum.

Repeat steps 1) through 4) for the other orthogonal axes of the EUT.

Repeat steps 1) through 5) for other orthogonal antenna polarization.

Method for comparing spectrum analyzer output to the limit

The following procedure will be used:

Maximize the emission according to 6.4.

Set the spectrum analyzer to **Max Hold**

Wait until the noise is fully maximized.

Put the marker on top of the investigated signal.

Note frequency and level of the investigated signal

Add antenna correction and cable loss to this level and compare it with the limit.

Spectrum analyzer setting for final test

Frequency range	Detector	Resolution Bandwidth	Video Bandwidth	Trace Mode
0.009 – 30 MHz	Quasi Peak	10 kHz	10 kHz	Max Hold
9 – 90 kHz 110 – 490 kHz	Average	10 kHz	100 Hz	Max Hold
30 – 1000 MHz	Quasi Peak	100 kHz	1 MHz	Max Hold
> 1000 MHz	Peak	1 MHz	1 MHz	Max Hold
> 1000 MHz	Average	1 MHz	1 kHz	Max Hold


6. Photographs taken during testing

Conducted Emission Measurement 0.45 – 30 MHz



Radiated emission measurement >30 MHz



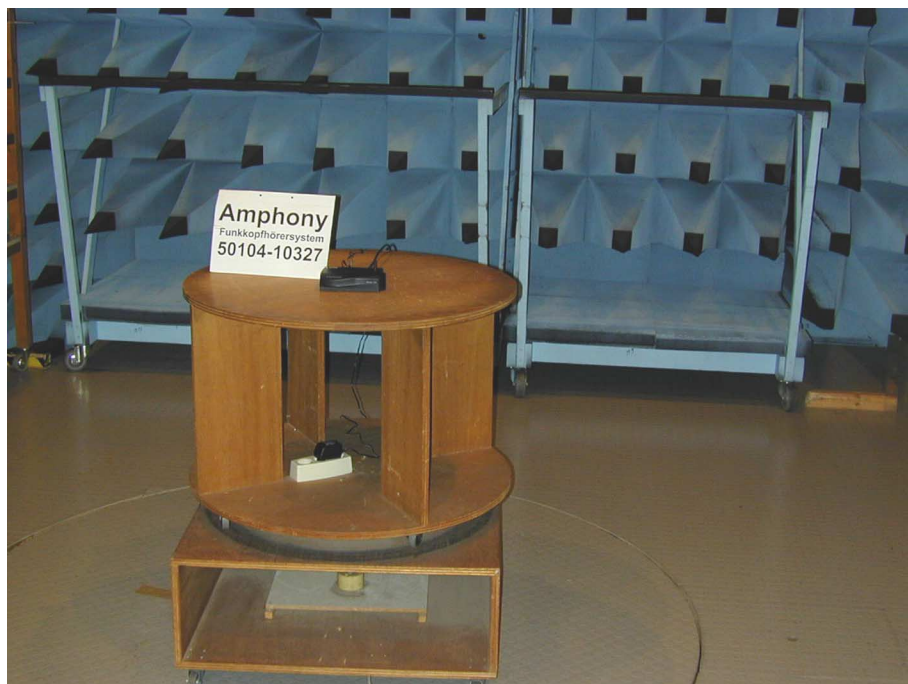

7. List of Measurements

FCC Part 15 Subpart C			
Section(s):	Test	Page	Result
	:		
15.207.a	Conducted emissions		Passed
15.209	Field strength of emissions (RX Mode)		Passed
15.249.c	Field strength of emissions (TX Mode)		Passed

8. Test Results

**Measurement of Conducted Emissions according to FCC Rules,
Part 15, Subpart C, Section 15.207
Frequency Band 0.45 - 30 MHz**

Model: **T1000**
 Type: **Transmitter**
 Serial No. **---**
 Applicant: **Amphony Corp.**
 Test Site: **Shielded Room No. 2**
 Distance: **3 Meter**
 Date of Test:

Frequency (MHz)	Detector	Analyzer Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV)	Limit dBμV	Margin dB
0.45-30	QP	***	---		48	

***** = No emissions above noise floor detected**

Test equipment used (see equipment list for details):
 02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

**Field Strength of Emissions according to FCC Rules,
 Part 15, Subpart C, Section 15.209
 Frequency Band > 30 MHz**

Model: **T1000**
 Type: **Transmitter**
 Serial No. **---**
 Applicant: **Amphony Corp.**
 Test Site: **Open Field Test Site / Semianechoic Chamber**
 Distance: **3 Meter**
 Date of Test:

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit dBμV/m	Margin dB
2397.1	Average	Vertical	20.0	31.2	51.2	54.0	2.8
2429.5	Average	Vertical	60.5	31.2	91.7	94.0	3.3
2483.5	Average	Vertical	20.5	31.2	51.7	54.0	2.3

*** = No emissions above noise floor detected

Sample calculation of field strength values:

Field Strength (dBμV/m) = Analyzer Reading (dBμV) + Correction Factor (dB)

Test equipment used (see equipment list for details):
 02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

**Field Strength of Emissions according to FCC Rules,
Part 15, Subpart C, Section 15.209
Frequency Band > 30 MHz**

Model: **T1000**
Type: **Receiver**
Serial No. **---**
Applicant: **Amphony Corp.**
Test Site: **Open Field Test Site / Semianechoic Chamber**
Distance: **3 Meter**
Date of Test:

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit dBμV/m	Margin dB
364.9	Q.P.	Vertical	12.7	24.2	36.9	46.0	9.1

*** = No emissions above noise floor detected

Sample calculation of field strength values:

Field Strength (dBμV/m) = Analyzer Reading (dBμV) + Correction Factor (dB)

Test equipment used (see equipment list for details):
02, 13, 14, 16, 38, 40 ,42, 57, 64, 67

9. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	R 3261 A	91720155	Advantest
02	Spectrum Analyzer	R 3271	05050023	Advantest
03	Test Receiver	ESH 3	880112/032	Rohde & Schwarz
04	Test Receiver	ESHS 10	860043/016	Rohde & Schwarz
05	Test Receiver	ESV	881414/009	Rohde & Schwarz
06	Test Receiver	ESVP	881120/024	Rohde & Schwarz
07	Audio Analyzer	UPA	862954	Rohde & Schwarz
08	Power Meter	NRVS	836856/015	Rohde & Schwarz
09	Power Sensor	NRV-Z52	837901/030	Rohde & Schwarz
10	Power Sensor	NRV-Z4	863828/015	Rohde & Schwarz
11	Preamplifier	ESV-Z3	860907/004	Rohde & Schwarz
12	Preamplifier	R14601		Advantest
13	Preamplifier	ACX/080-3030	32640	CTT
14	Preamplifier	ACO/180-3530	32641	CTT
15	Signal Generator	SMS	872166/039	Rohde & Schwarz
16	Signal Generator	HP 8673 D	2930A00966	Hewlett Packard
17	Waveform Generator	HP 33120 A	US34005375	Hewlett Packard
18	UHF Attenuator Set	DPU	300771/075	Rohde & Schwarz
19	UHF Attenuator Set	DPU	300788/006	Rohde & Schwarz
20	Pulse Limiter	ESH 3-Z2	1144	Rohde & Schwarz
21	Pulse Limiter	11947 A	3107A00566	Hewlett Packard
22	V-Network	ESH 3-Z5	862770/018	Rohde & Schwarz
23	V-Network	ESH 3-Z5	894785/005	Rohde & Schwarz
24	V-Network	ESH 3-Z5	830952/025	Rohde & Schwarz
25	V-Network	ESH 3-Z6	830722/010	Rohde & Schwarz
26	V-Network	NSLK 8127	8127152	Schwarzbeck
27	V-Network	NNLA 8119	8119148	Schwarzbeck
28	V-Network	SE 01	01	Senton
29	T-Network	ESH 3-Z4	890602/011	Rohde & Schwarz
30	T-Network	ESH 3-Z4	890602/012	Rohde & Schwarz
31	High Impedance Probe	TK 9416	01	Schwarzbeck
32	High Impedance Probe	TK 9416	02	Schwarzbeck
33	Current Probe	ESH 2-Z1	863366/18	Rohde & Schwarz
34	Current Probe	ESV-Z1	862553/3	Rohde & Schwarz

No.	Type	Model	Serial Number	Manufacturer
35	Absorbing Clamp	MDS 21	80911	Lüthi
36	Absorbing Clamp	MDS 21	79690	Lüthi
37	Loop Antenna	HFH2-Z2	882964/1	Rohde & Schwarz
38	Biconical Antenna	HK 116	836239/02	Rohde & Schwarz
39	Biconical Antenna	BBA 9106	A0379 324	Schwarzbeck
40	Log. Periodic Antenna	HL 223	834408/12	Rohde & Schwarz
41	Log. Periodic Antenna	UHALP 9107	9107150	Schwarzbeck
42	Horn Antenna	3115	9508-4553	Emco
43	Horn Antenna	3160-03	9112-1003	Emco
44	Horn Antenna	3160-04	9112-1001	Emco
45	Horn Antenna	3160-05	9112-1001	Emco
46	Horn Antenna	3160-06	9112-1001	Emco
47	Horn Antenna	3160-07	9112-1008	Emco
48	Horn Antenna	3160-08	9112-1002	Emco
49	Horn Antenna	3160-09	9403-1025	Emco
50	Digital multimeter	199	463386	Keithley
51	DC Power Supply	NGSM 32/10	203	Rohde & Schwarz
52	DC Power Supply	NGB	2455	Rohde & Schwarz
53	DC Power Supply	NGA	386	Rohde & Schwarz
54	Temperature Test Chamber	HT4010	07065550	Heraeus
55	Cable	RG214	1309	Senton
56	Cable	150CM_001	1479	Rosenberger
57	Cable	150CM_002	1480	Rosenberger
58	Cable Set EG1	RG214	1189 - 1191	Senton
59	Cable Set Cabine 1	RG214		Senton
60	Cable Set Cabine 2	RG214		Senton
61	Cable Set Cabine 3	RG214		Senton
62	Shielded Room	Nr. 1	1451	Senton
63	Shielded Room	Nr. 2	1452	Senton
64	Semi-anechoic Chamber	Nr. 3	1453	Siemens
65	Shielded Room	Nr. 4	1454	Euroshield
66	Open Area Test Site	EG 1		Senton
67	High pass filter			AT & T

10. Charts taken during Testing

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter


Applicant:
Amphony

Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 70 dB μ V
5 dB/Div.

ATT 0 dB

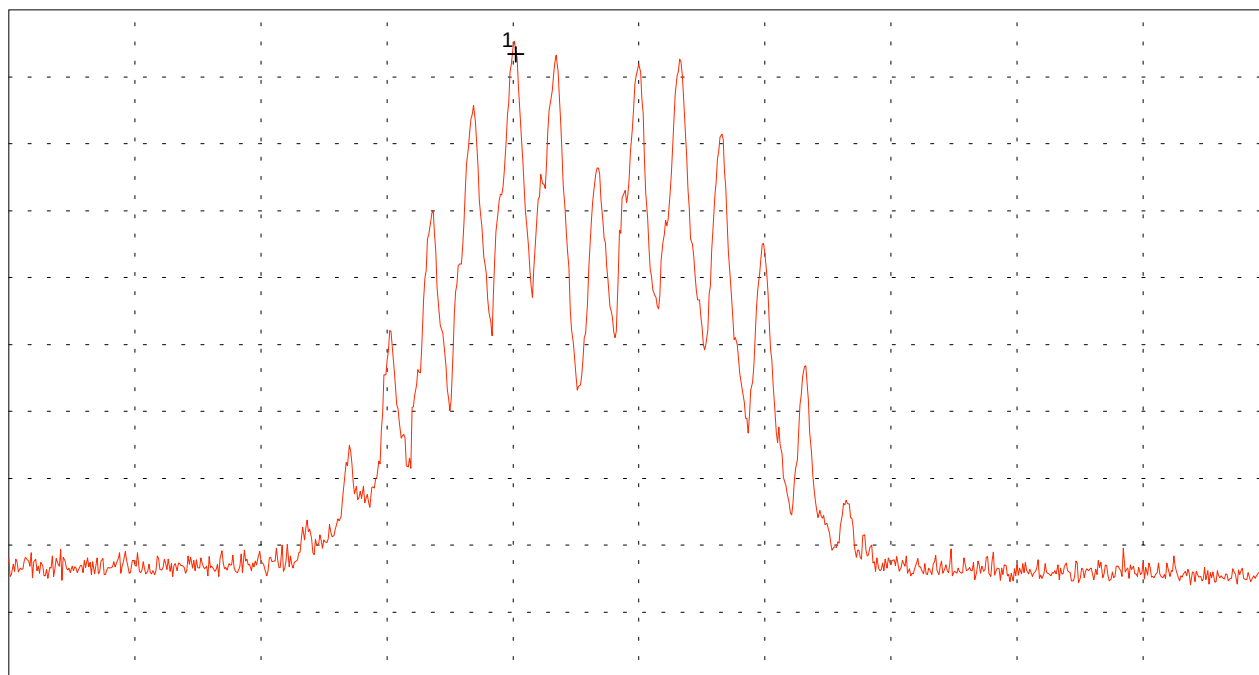

Start 2.350 GHz
RBW 1 MHz

VBW 1 MHz

Stop 2.550 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Power (dB μ V)
1	2.430444	66.69

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter


Applicant:
Amphony

Mode:
Transmitter under Test

Horizontal Polarisation

Ref.Level 60 dB μ V
5 dB/Div.

ATT 0 dB

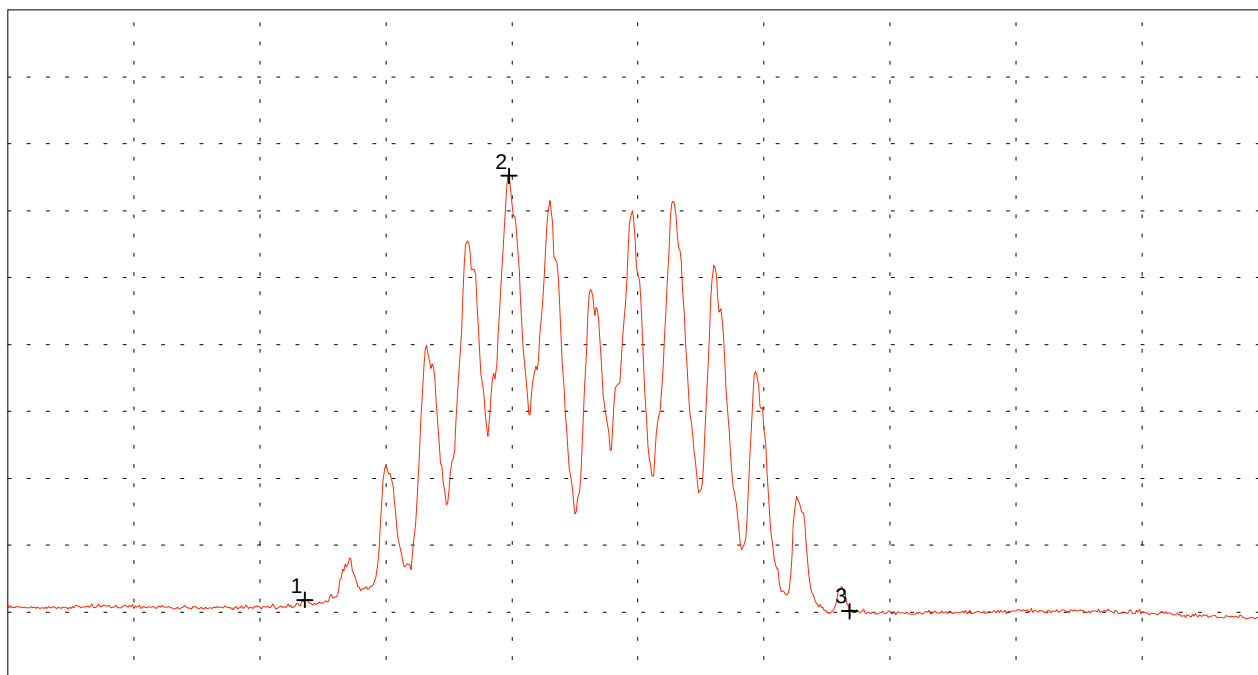

Start 2.350 GHz
RBW 1 MHz

VBW 1 kHz

Stop 2.550 GHz
SWP 600 ms

Multi Marker List

No. 1	2.397111 GHz	15.90 dB μ V
No. 2	2.429556 GHz	47.60 dB μ V
No. 3	2.483556 GHz	15.07 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter


Applicant:
Amphony

Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 60 dB μ V
5 dB/Div.

ATT 0 dB

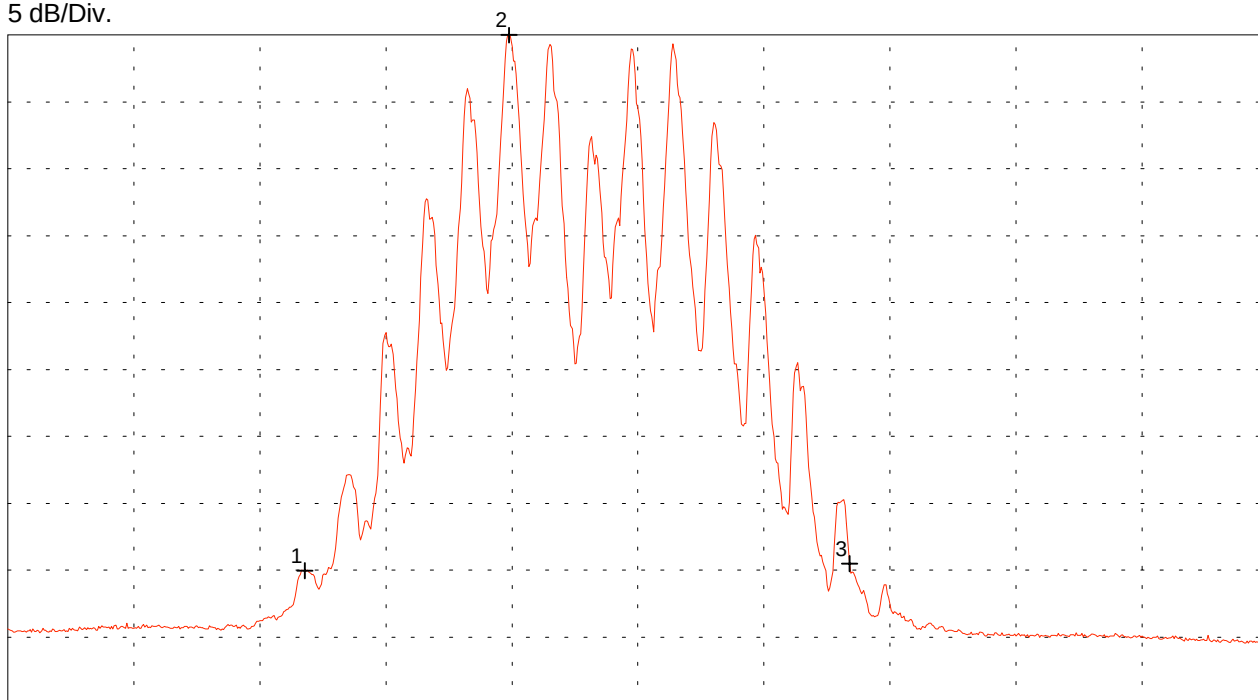

Start 2.350 GHz
RBW 1 MHz

VBW 1 kHz

Stop 2.550 GHz
SWP 600 ms

Multi Marker List

No. 1	2.397111 GHz	19.96 dB μ V
No. 2	2.429556 GHz	60.57 dB μ V
No. 3	2.483556 GHz	20.48 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: June 12, 2001 Operator: J. Roidt

Test performed: automatically File name:


Mode:
Transmitter under Test

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HK 116

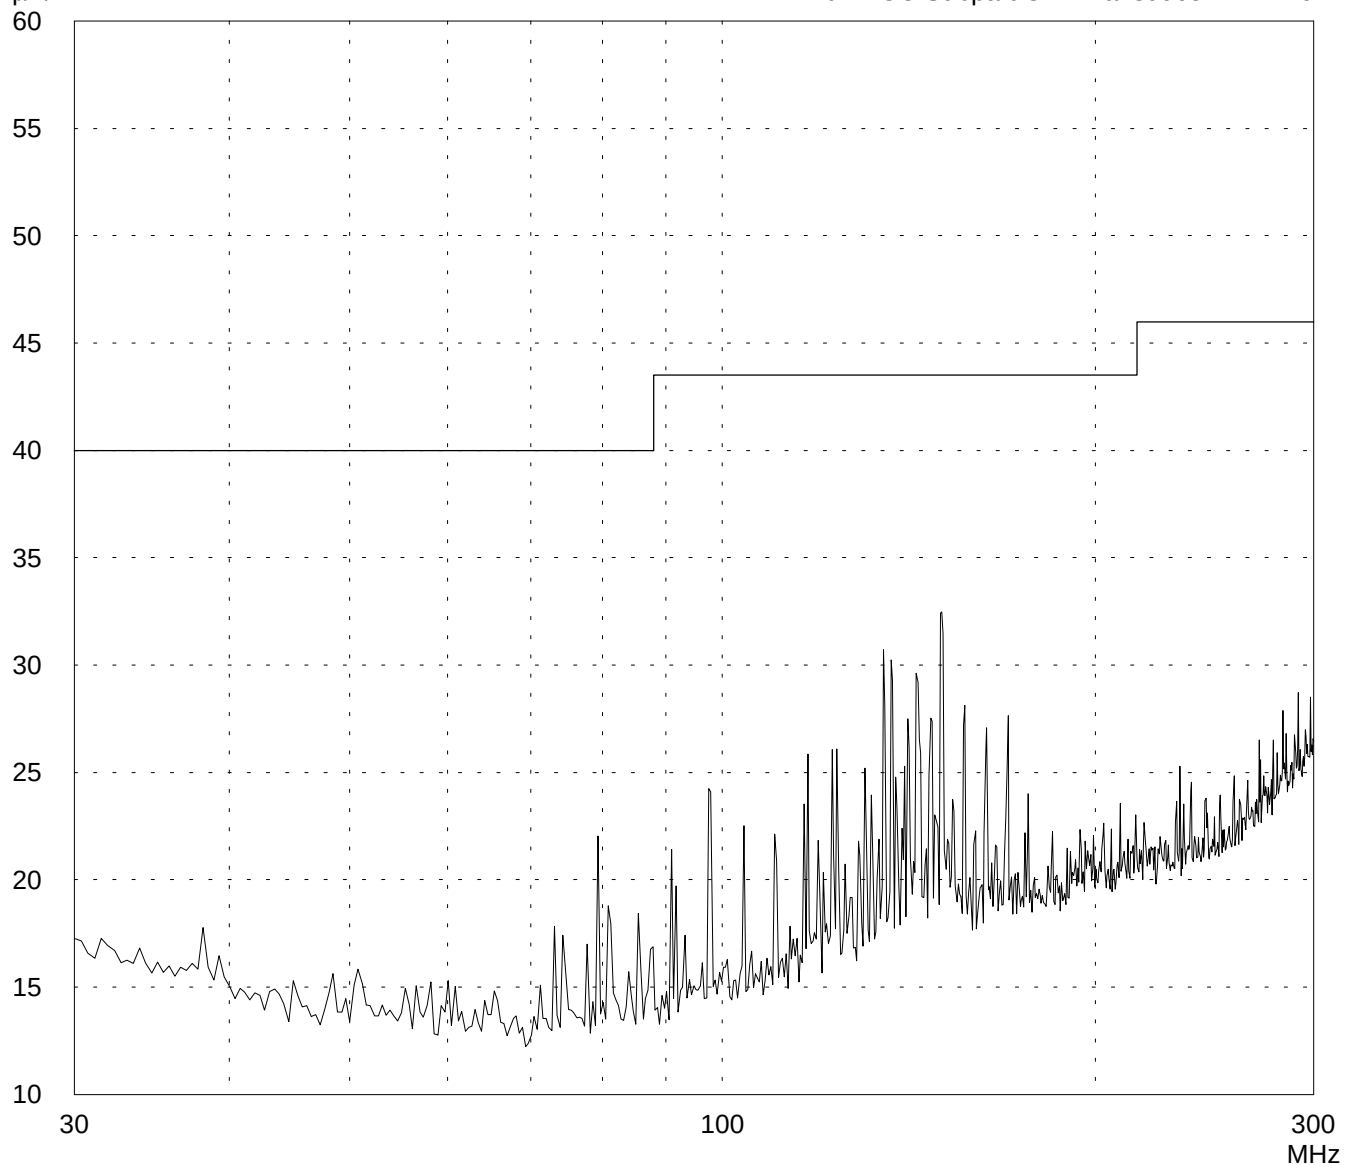

Result:
Prescan

Project file:
50104-10327

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization


Date of test: June 12, 2001
Operator: J. Roidt

Test performed: automatically
File name:

Mode:
Transmitter under Test

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

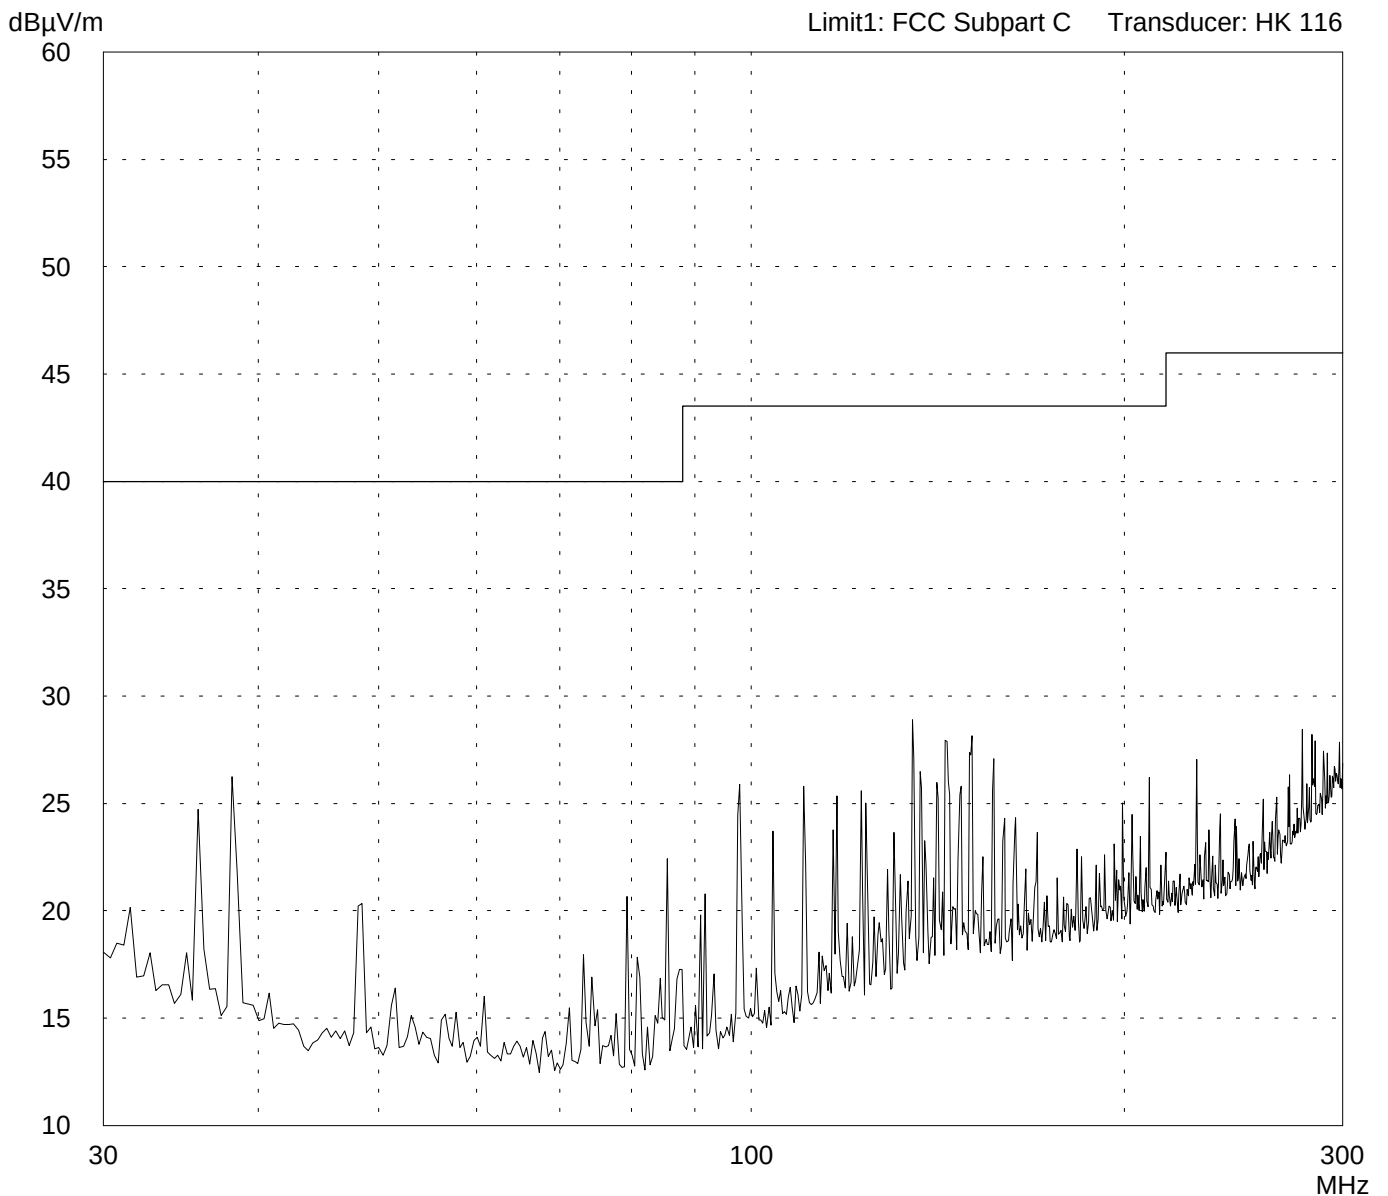

Result:
Prescan

Project file:
50104-10327

Page of Pages

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: June 12, 2001
Operator: J. Roidt

Test performed: automatically
File name:


Mode:
Transmitter under Test

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

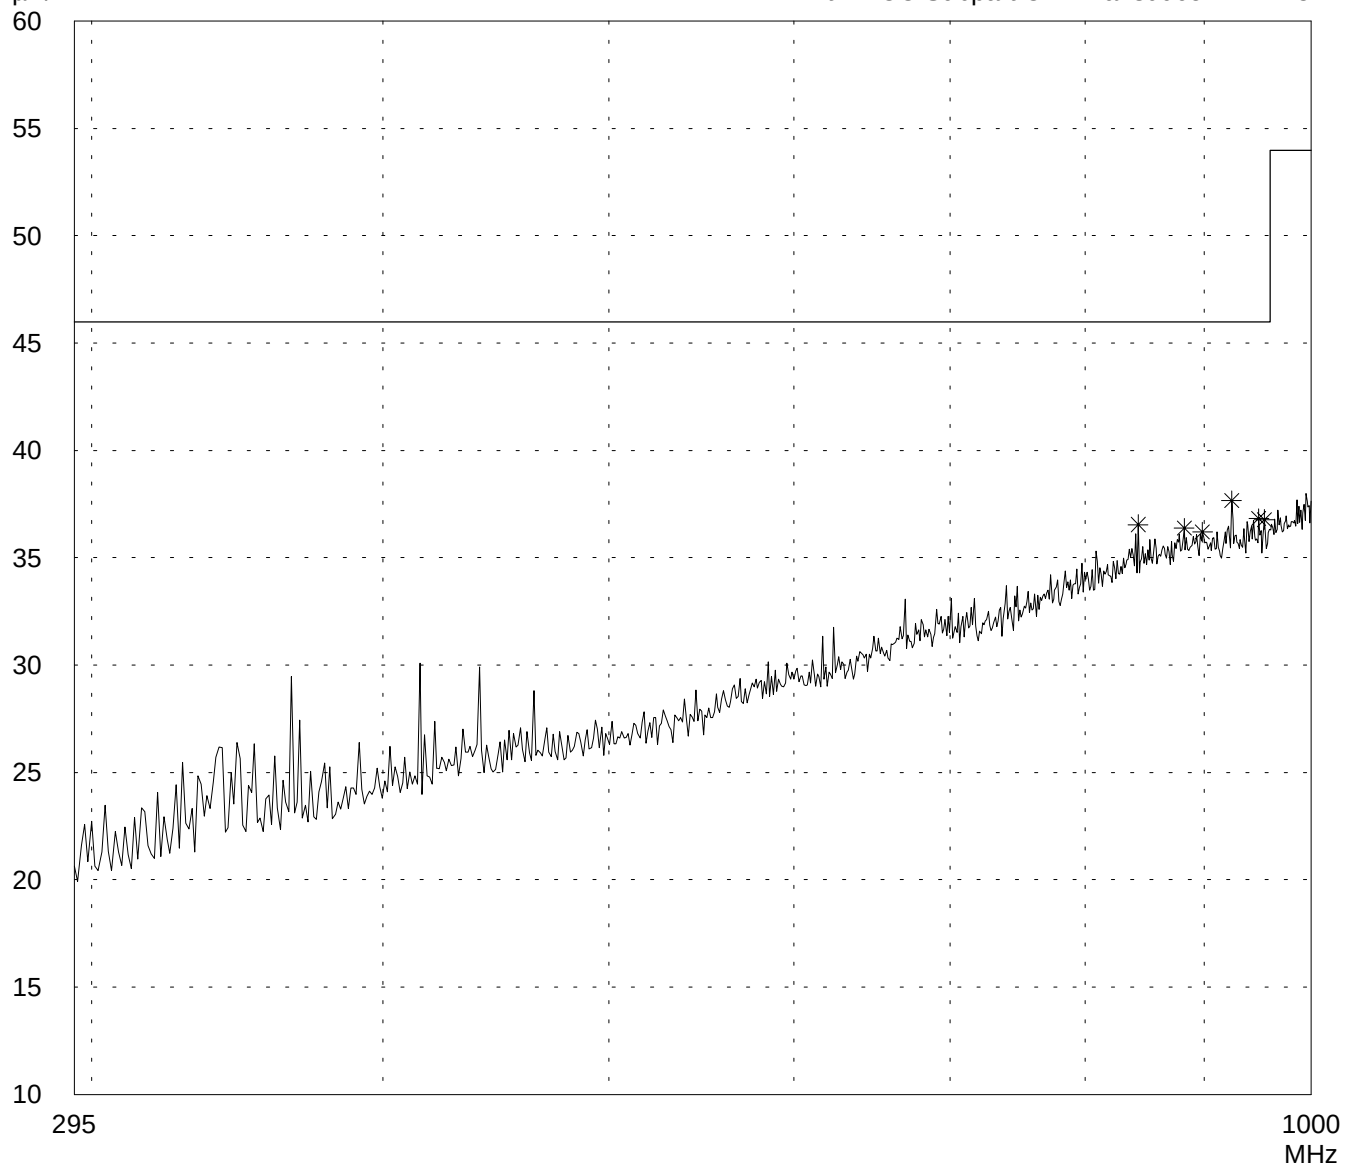

Result:
Prescan

Project file:
50104-10327

Page of Pages

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization


Date of test: June 12, 2001
Operator: J. Roidt

Test performed: automatically
File name:

Mode:
Transmitter under Test

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

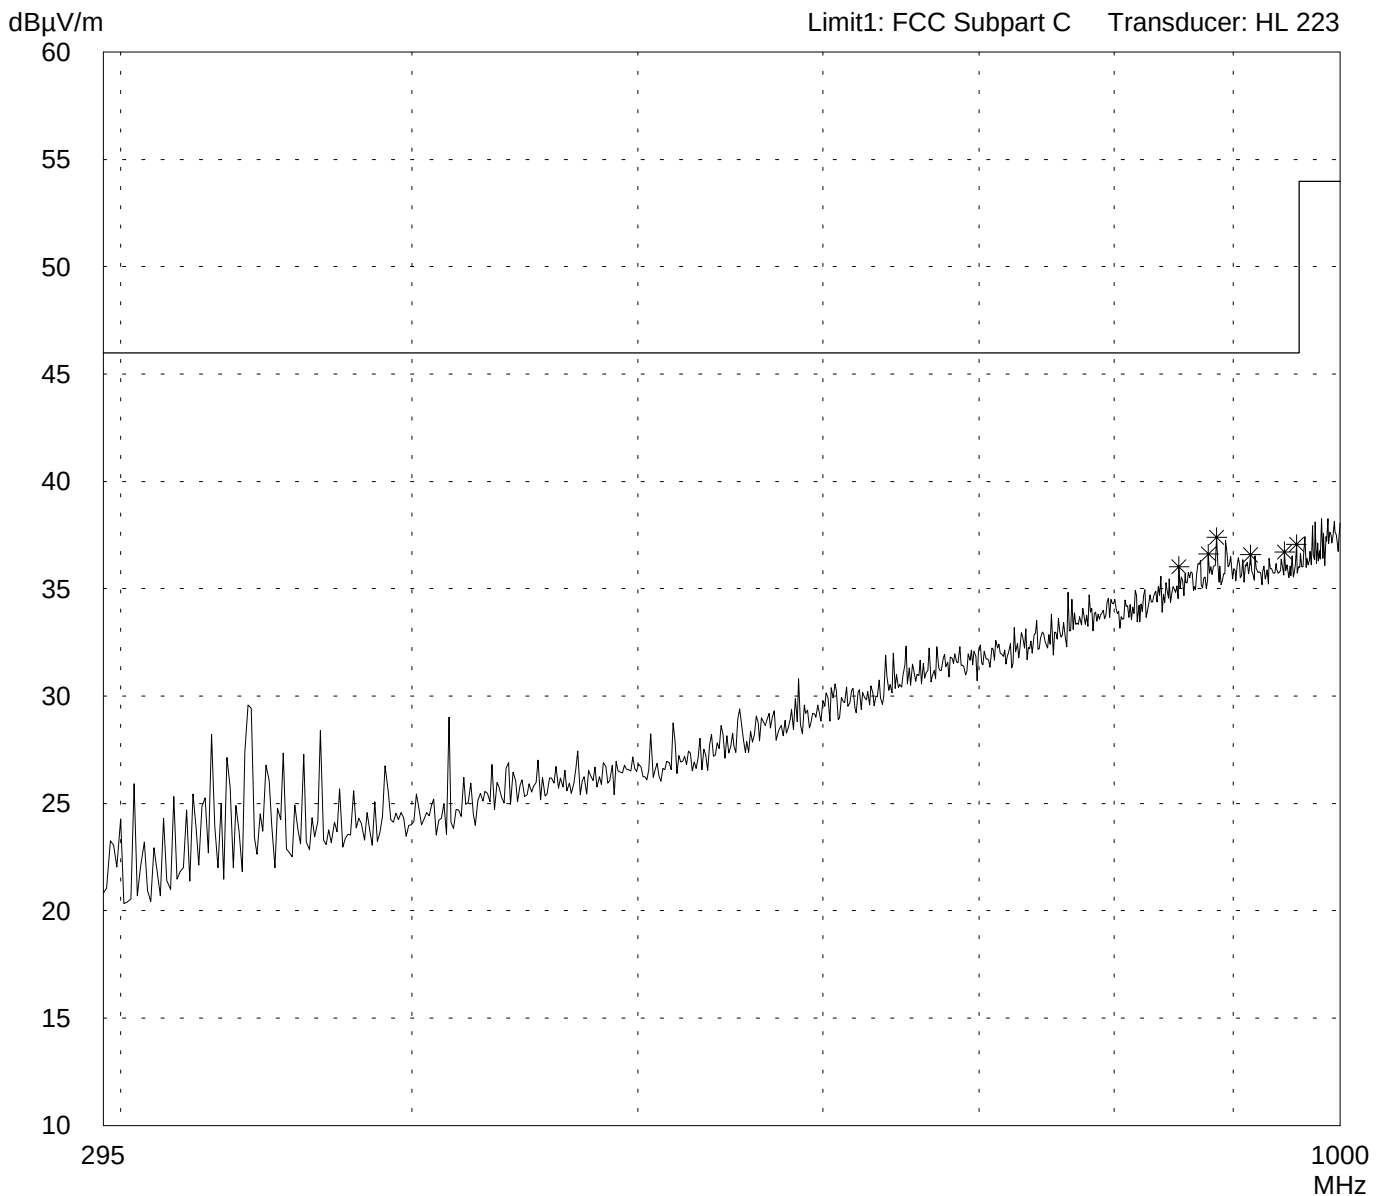

Result:
Prescan

Project file:
50104-10327

Page of Pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Horizontal Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

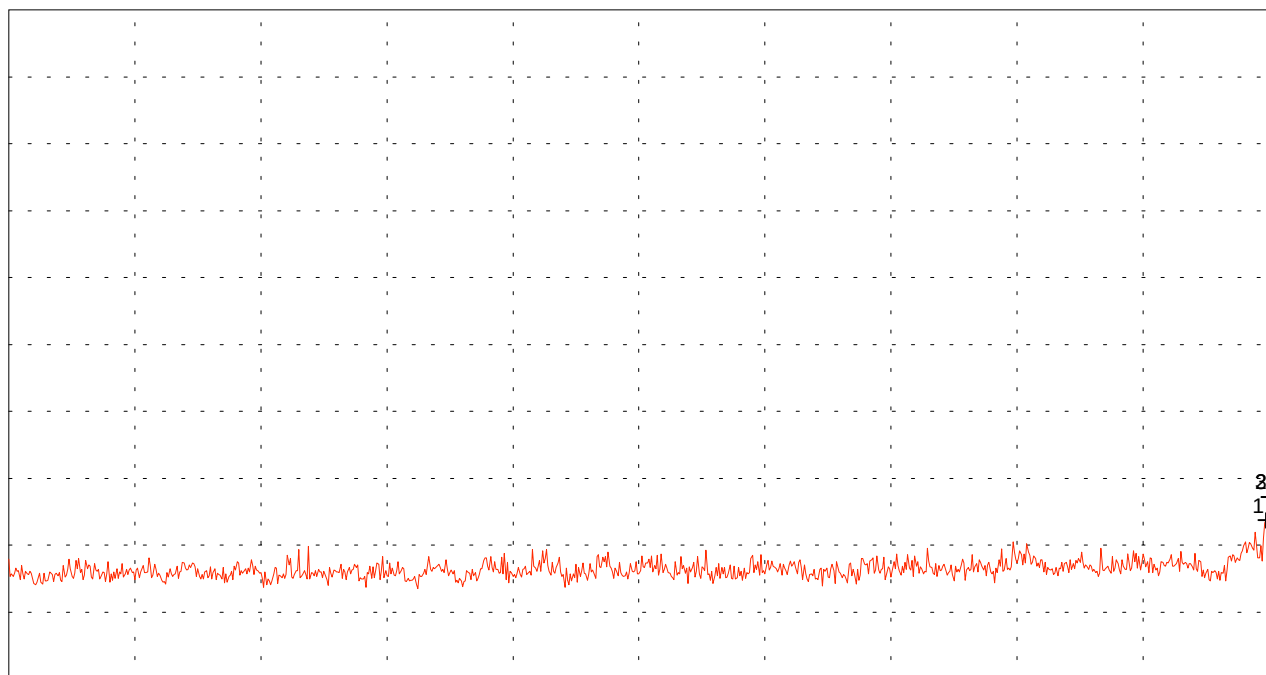

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 2.400 GHz
SWP 20 ms

Multi Marker List

No. 1	2.396889 GHz	11.86 dB μ V
No. 2	2.400000 GHz	13.59 dB μ V
No. 3	2.400000 GHz	13.59 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

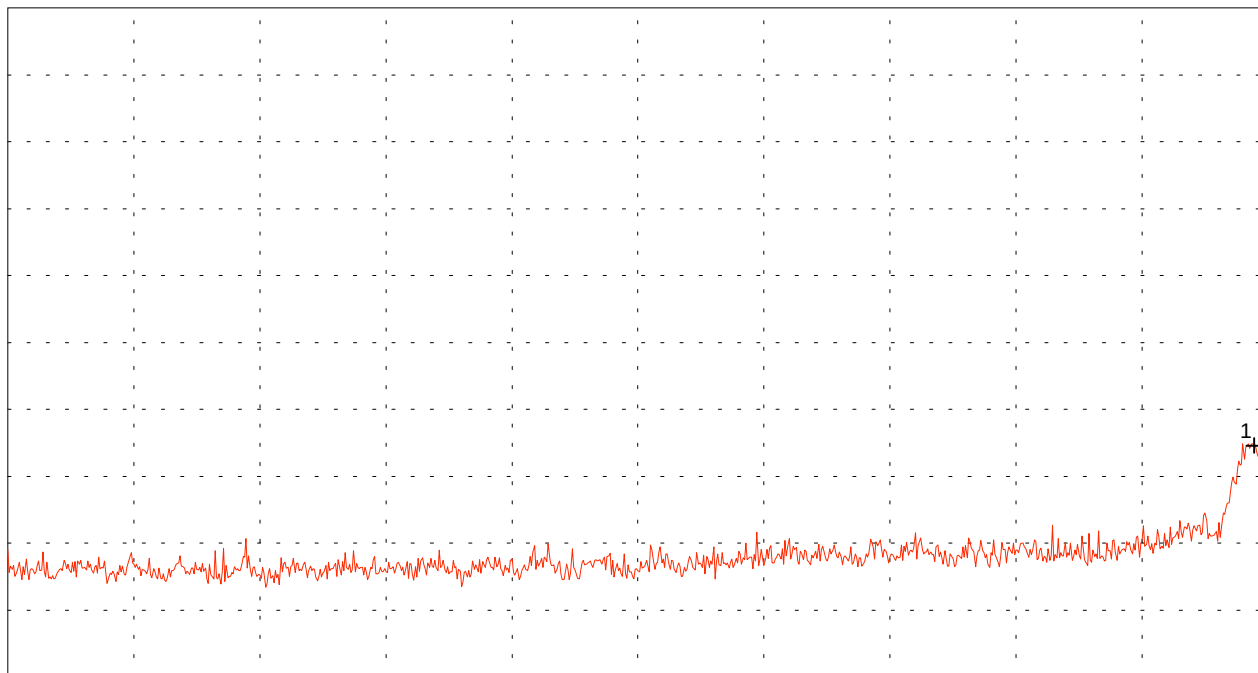

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 2.400 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	2.384444 GHz	17.30 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Horizontal Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

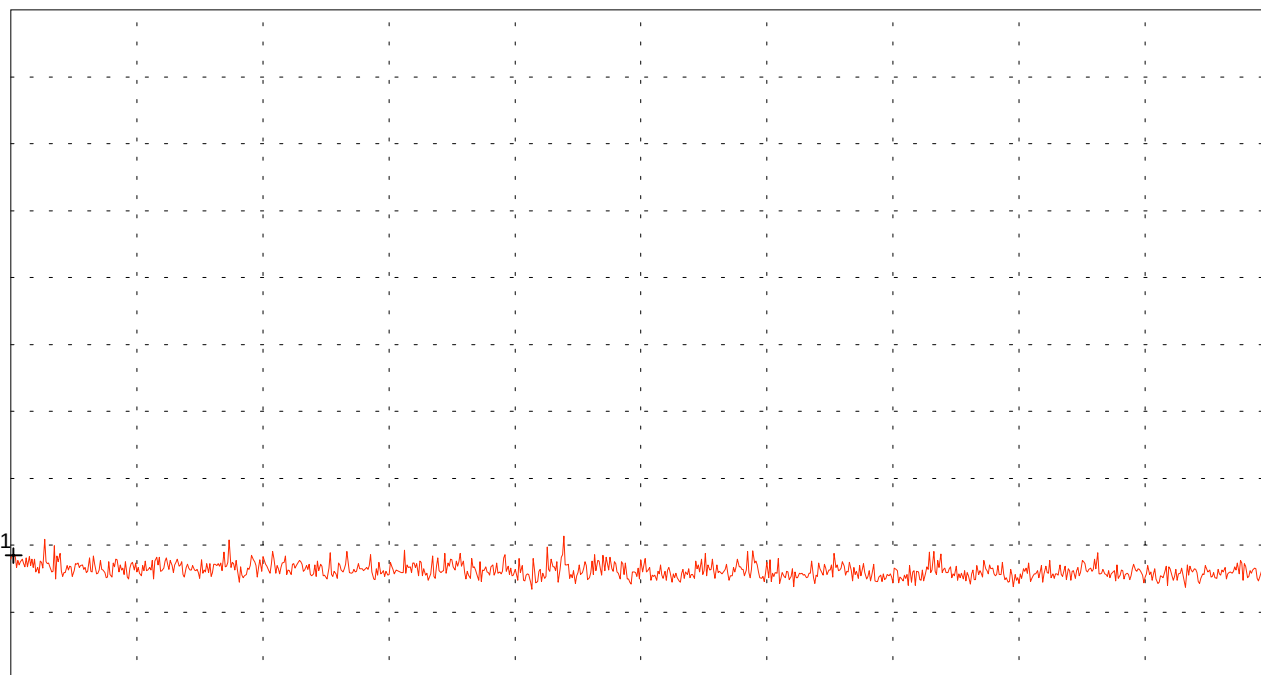

Start 2.500 GHz
RBW 1 MHz

VBW 1 MHz

Stop 3.950 GHz
SWP 20 ms

Multi Marker List

No.	Frequency	Amplitude
1	2.503222 GHz	9.24 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

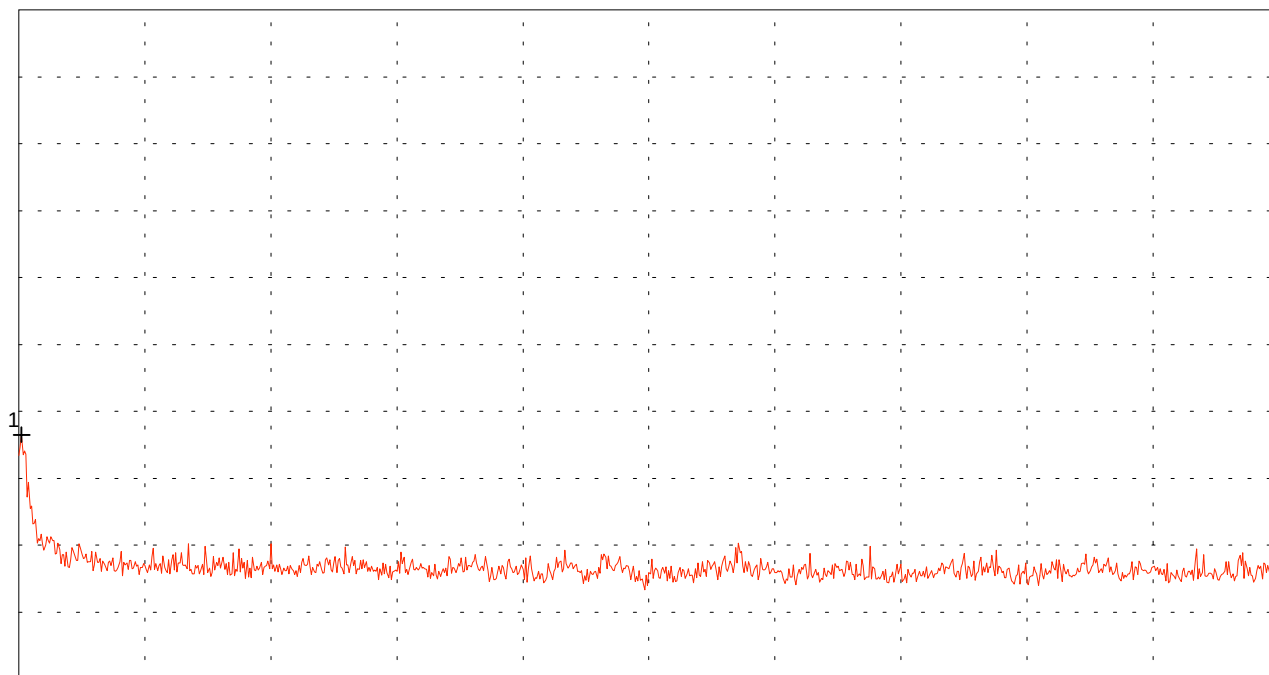

Start 2.500 GHz
RBW 1 MHz

VBW 1 MHz

Stop 3.950 GHz
SWP 20 ms

Multi Marker List

No.	Frequency	Amplitude
1	2.503222 GHz	18.25 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Horizontal Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

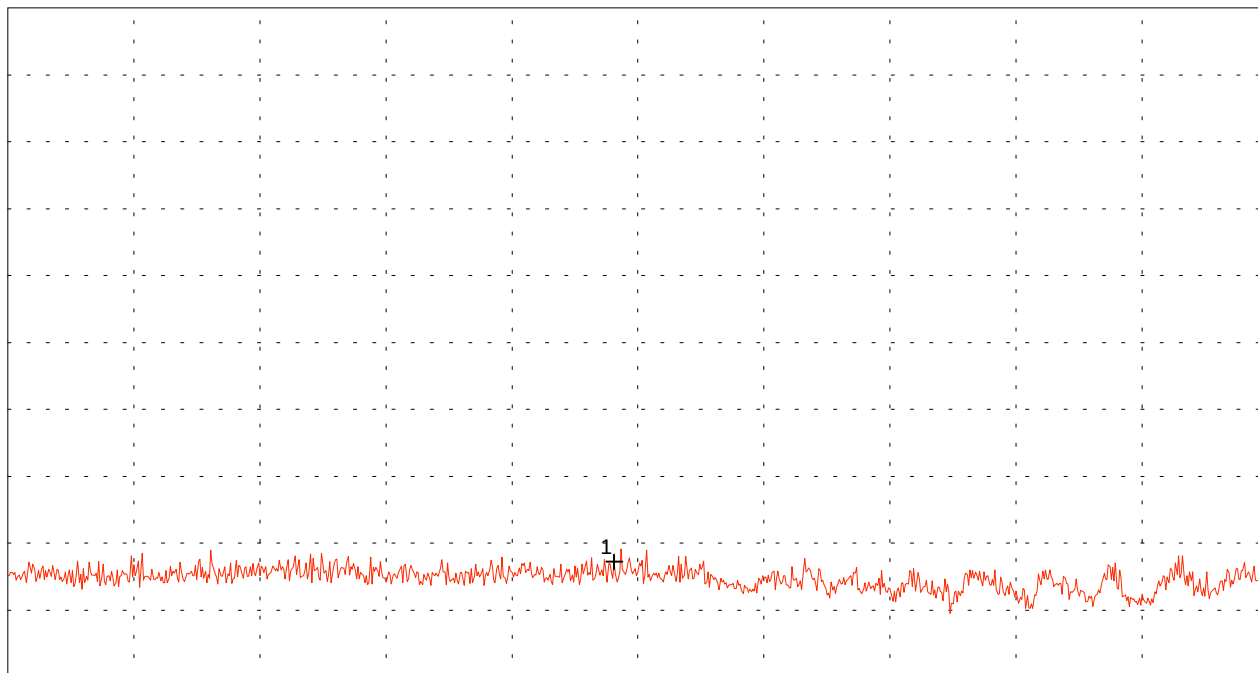

Start 3.950 GHz
RBW 1 MHz

VBW 1 MHz

Stop 5.850 GHz
SWP 20 ms

Multi Marker List

No.	Frequency	Amplitude
No. 1	4.864111 GHz	8.61 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

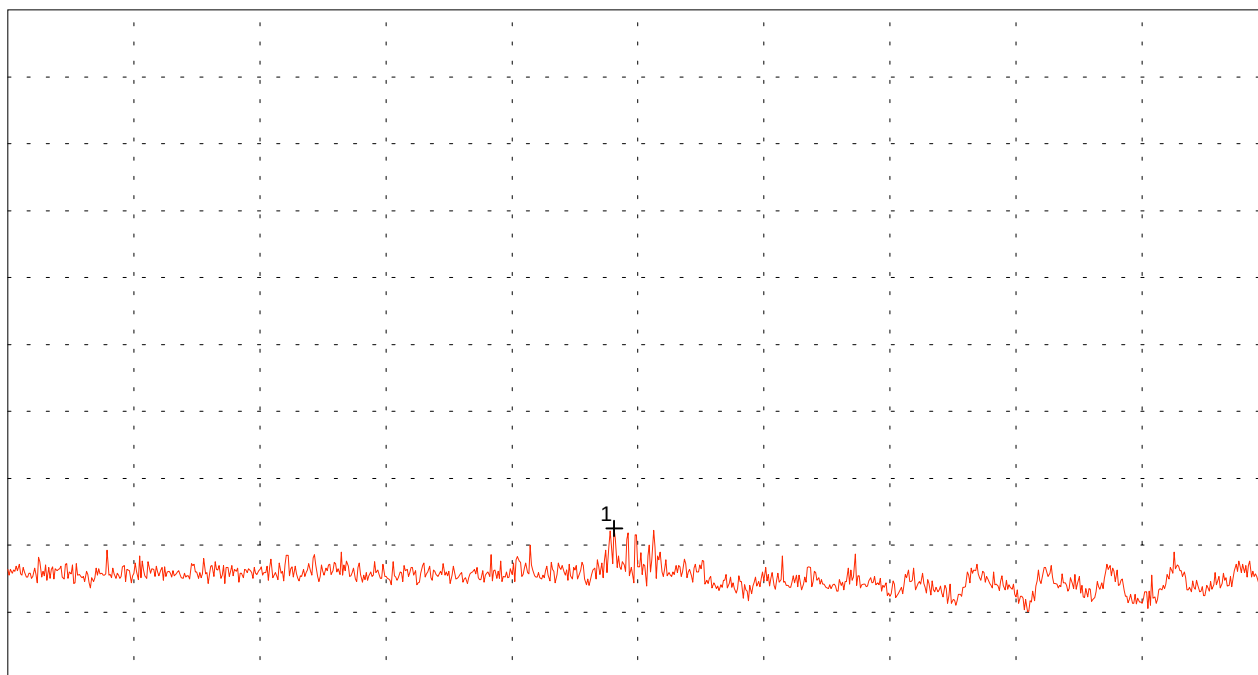

Start 3.950 GHz
RBW 1 MHz

VBW 1 MHz

Stop 5.850 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
1	4.864111	11.25

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Horizontal Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

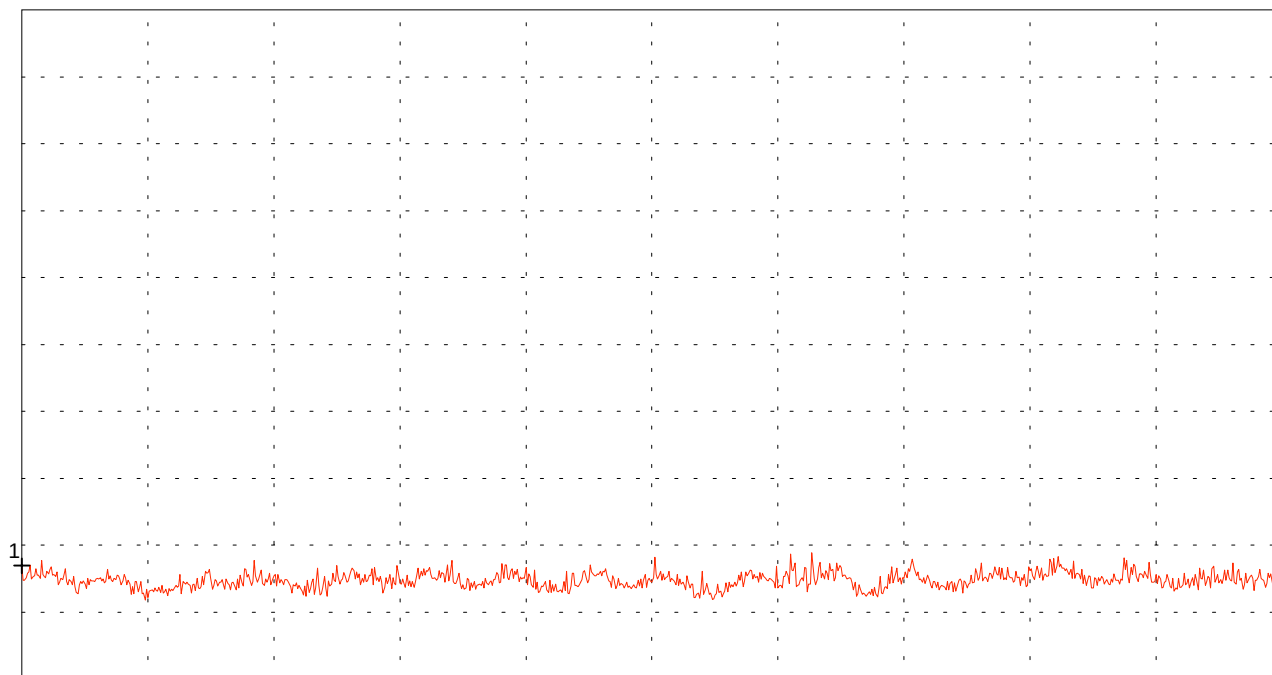

Start 5.850 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.200 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	5.850000 GHz	8.47 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

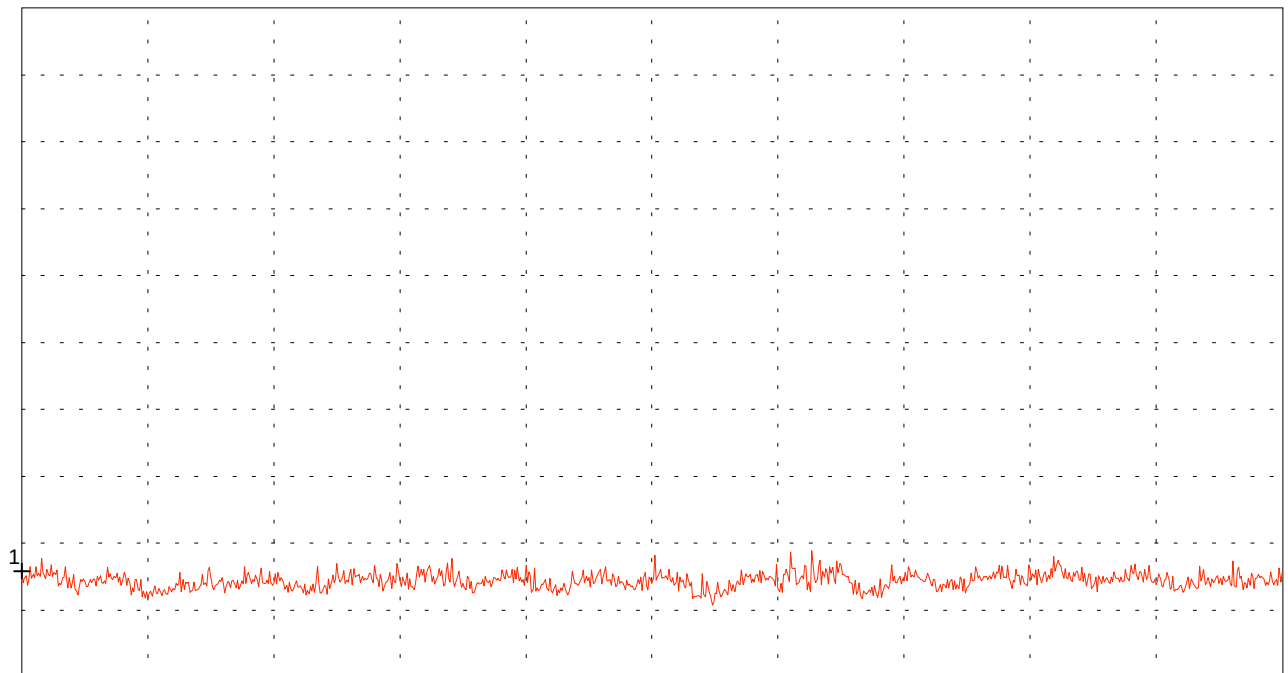

Start 5.850 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.200 GHz
SWP 20 ms

Multi Marker List

No.	Frequency	Amplitude
No. 1	5.850000 GHz	7.92 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Horizontal Polarisation

Ref.Level 45.5 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

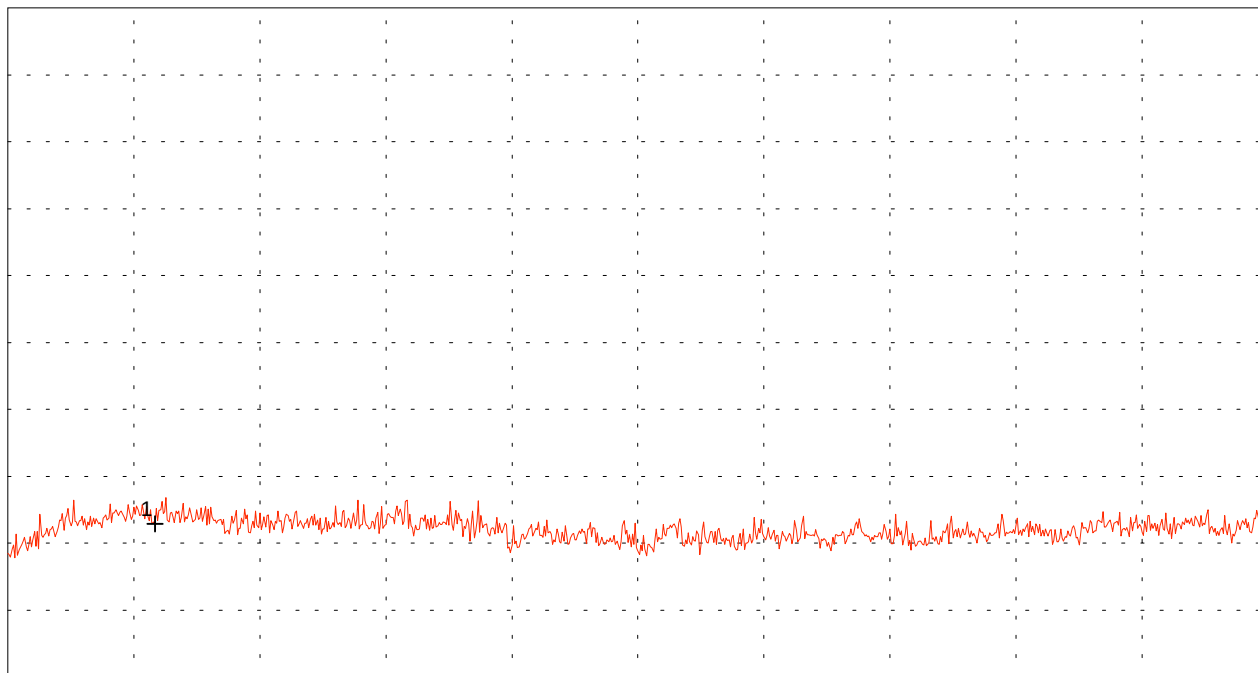

Start 8.200 GHz
RBW 1 MHz

VBW 1 MHz

Stop 12.400 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	8.690000 GHz	6.94 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 45.5 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

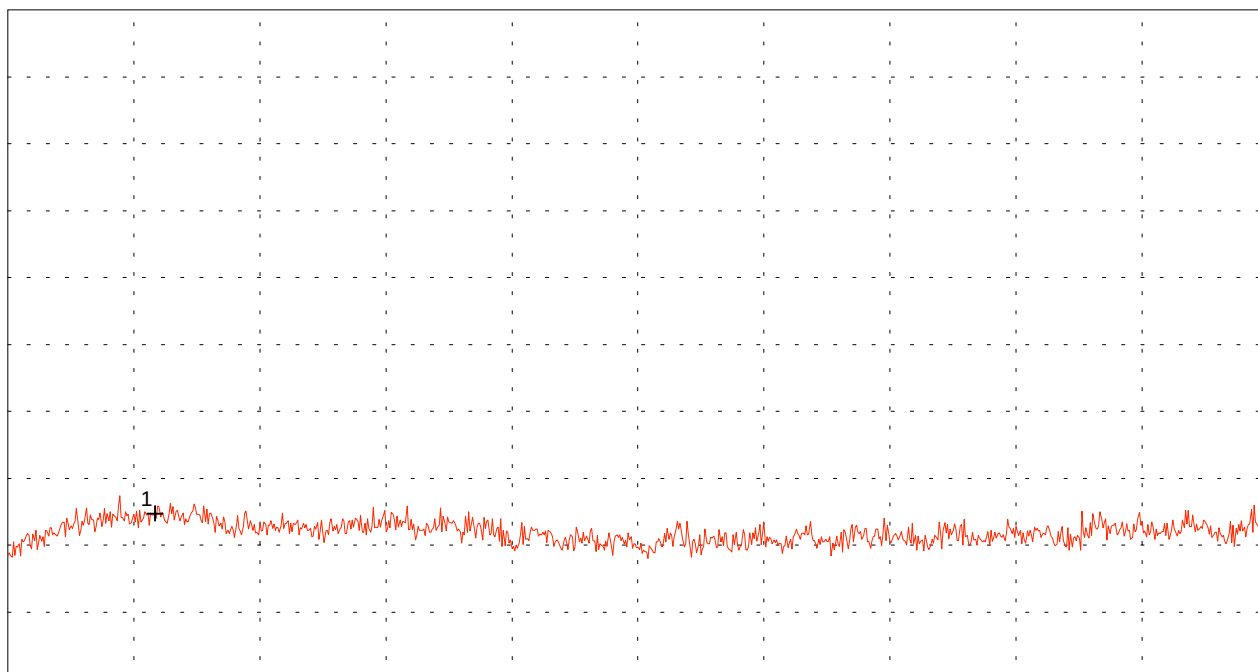

Start 8.200 GHz
RBW 1 MHz

VBW 1 MHz

Stop 12.400 GHz
SWP 20 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	8.690000 GHz	7.87 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Horizontal Polarisation

Ref.Level 45.5 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

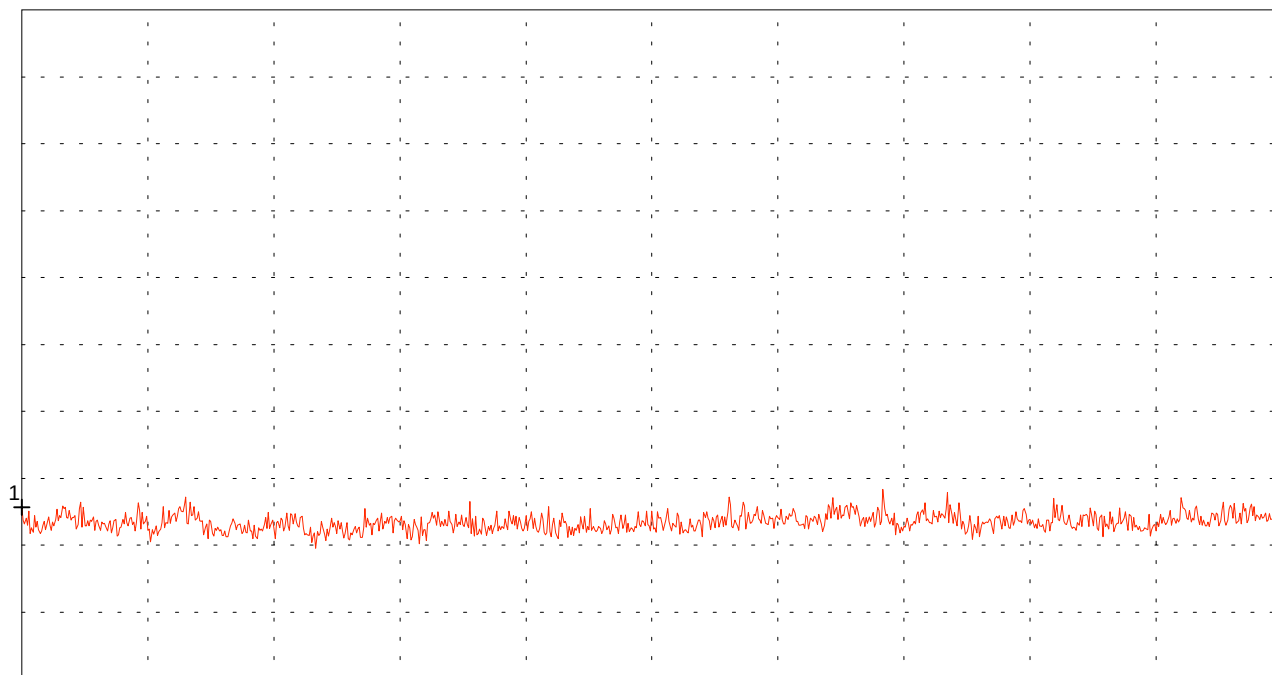

Start 12.400 GHz
RBW 1 MHz

VBW 1 MHz

Stop 18.000 GHz
SWP 40 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	12.400000 GHz	8.33 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Transmitter

Applicant:
Amphony


Mode:
Transmitter under Test

Vertical Polarisation

Ref.Level 45.5 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

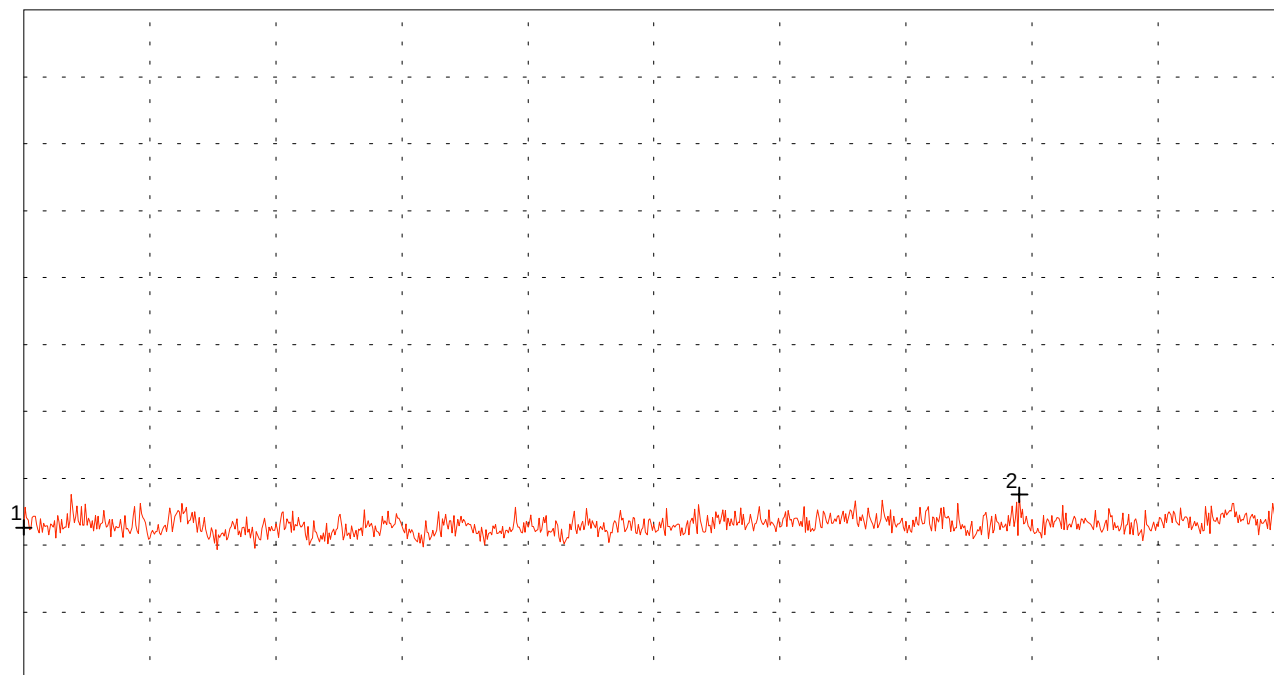

Start 12.400 GHz
RBW 1 MHz

VBW 1 MHz

Stop 18.000 GHz
SWP 40 ms

Multi Marker List

No. 1	12.400000 GHz	6.81 dB μ V
No. 2	16.824000 GHz	9.27 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Conducted Emission Test 450 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
T1000

Serial no.:
USA Version

Applicant:
Amphony Corp.

Test site:
Shielded room, cabin no. 2

Tested on:
Linecord
Phase L1

Date of test:
07/05/2001

Operator:
J. Roidt

Test performed:
automatically

File name:

Mode:
TX active


Detector:
Peak / Final Results: QP

Final results:
20 dB Margin

25 Subranges

dB μ V

Limit1: FCC Subpart C

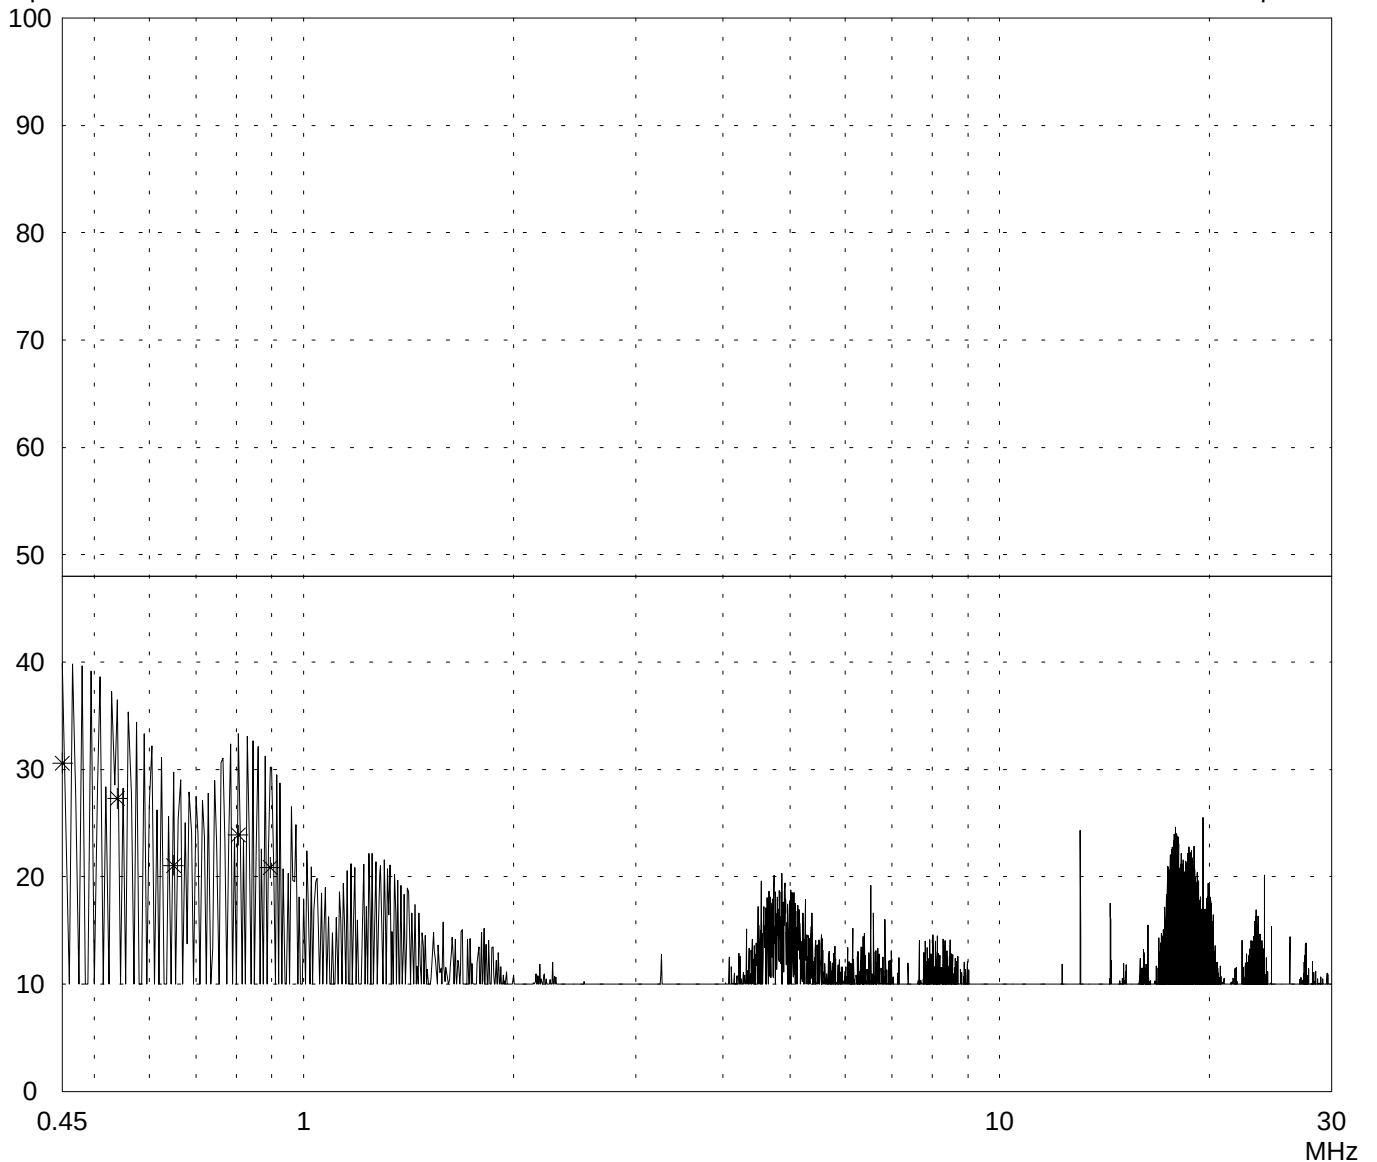

Result:
Limit kept

Project file:
50104-10327

Page of Pages

Conducted Emission Test 450 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
T1000

Serial no.:
USA Version

Applicant:
Amphony Corp.

Test site:
Shielded room, cabin no. 2

Tested on:
Linecord
Phase N

Date of test: 07/05/2001
Operator: J. Roidt

Test performed: automatically
File name:


Mode:
TX active

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

dB μ V

Limit1: FCC Subpart C

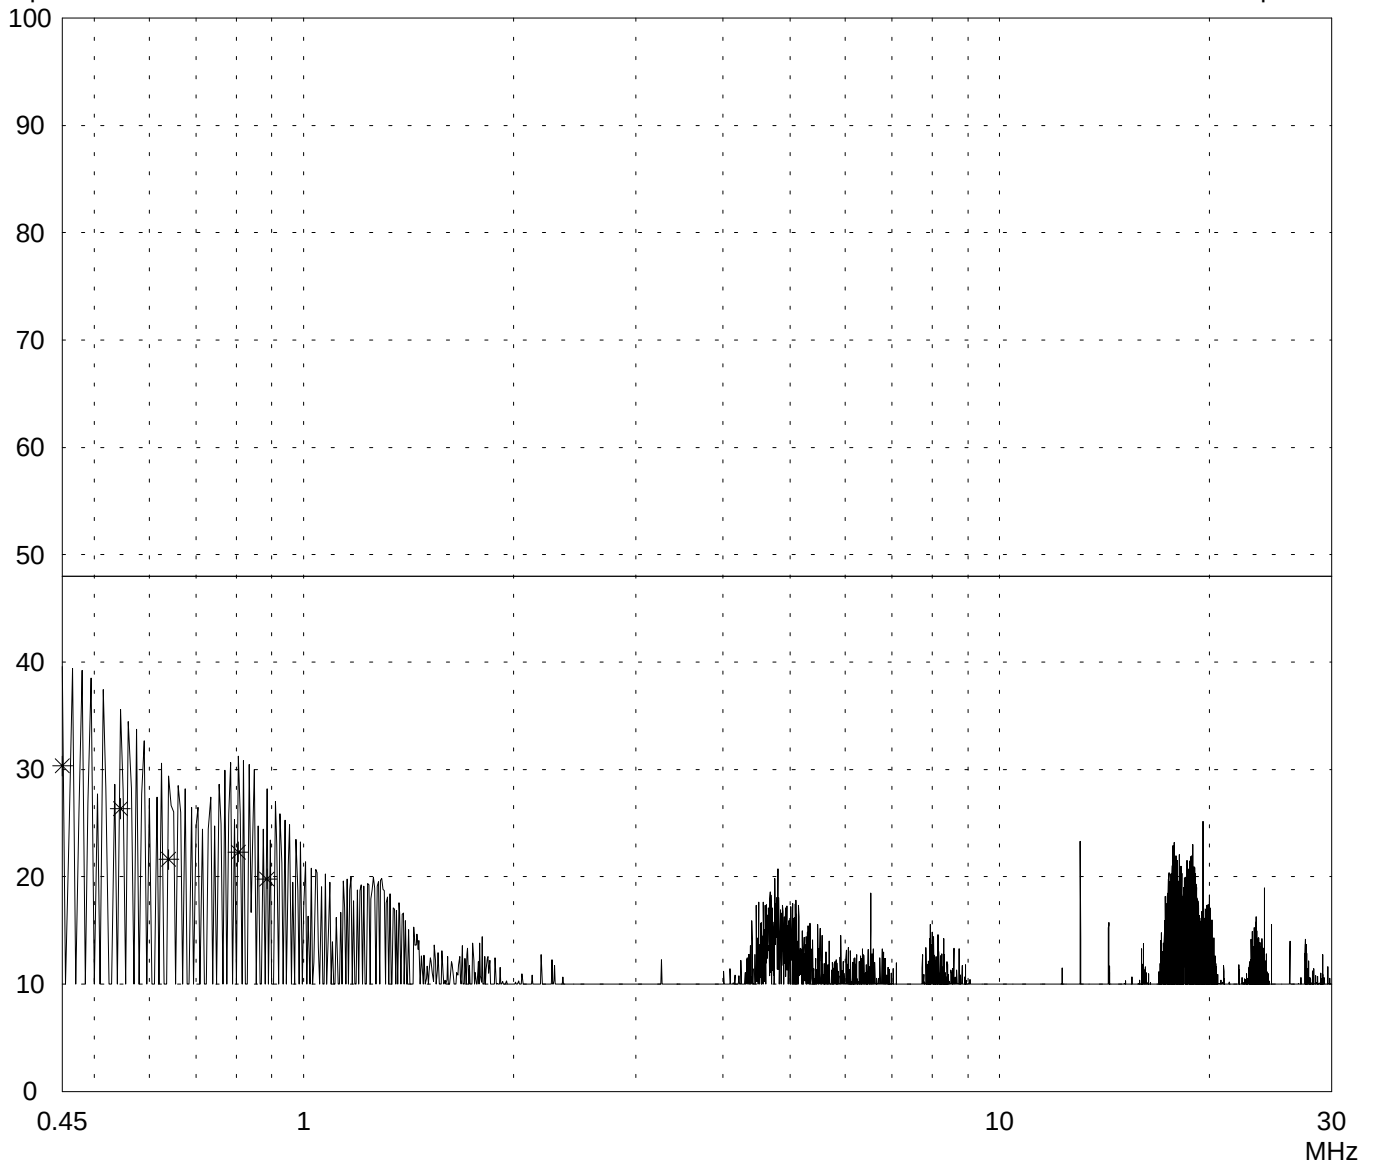

Result:
Limit kept

Project file:
50104-10327

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test:
June 12, 2001

Operator:
J. Roidt

Test performed:
automatically

File name:

Mode:
Receiver under Test


Detector:
Peak

List of values:
10 dB Margin

50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HK 116

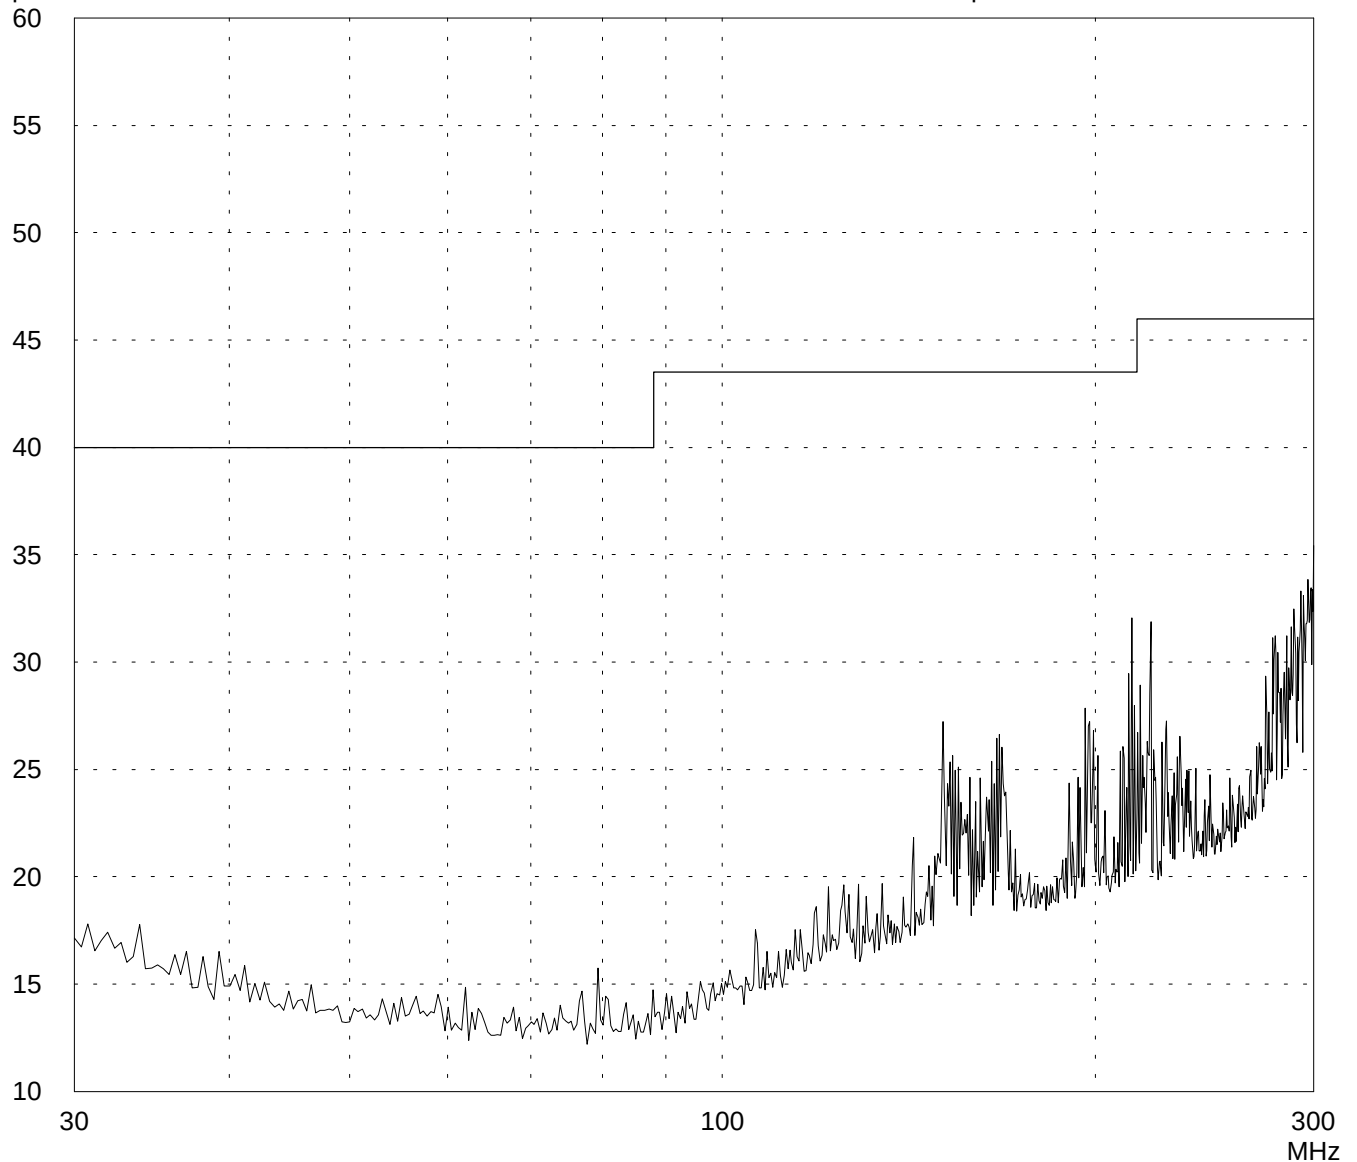

Result:
Prescan

Project file:
50104-10327

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization


Date of test: June 12, 2001
Operator: J. Roidt

Test performed: automatically
File name:

Mode:
Receiver under Test

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

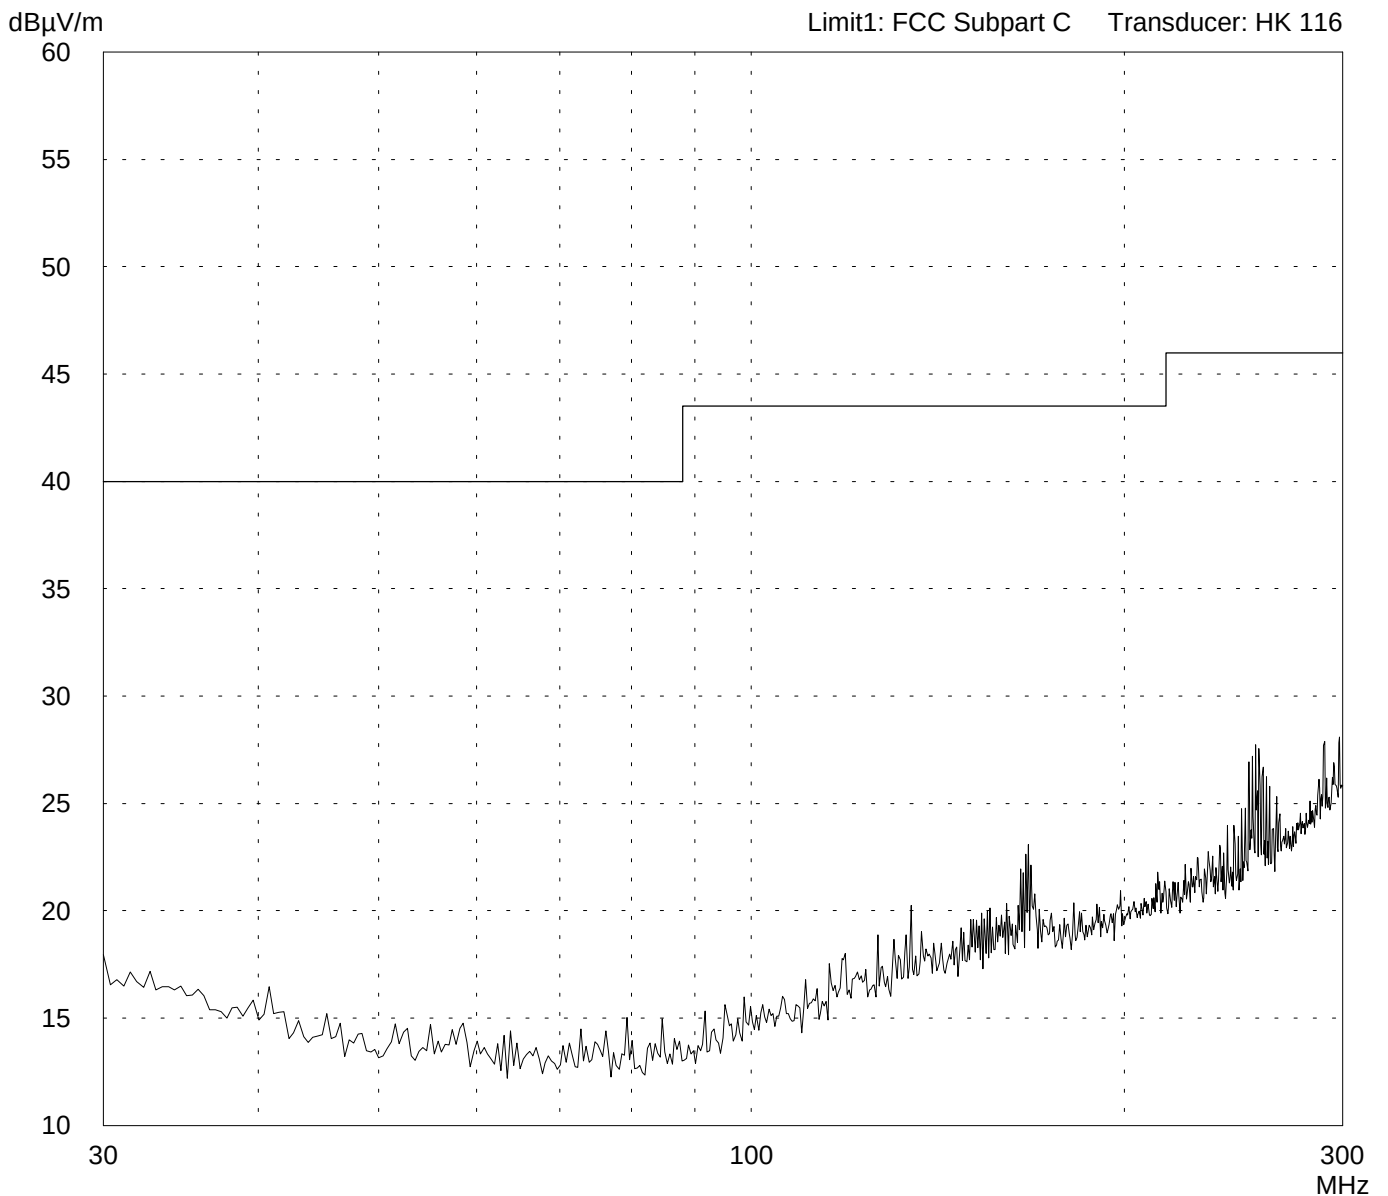

Result:
Prescan

Project file:
50104-10327

Page of Pages

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization


Date of test: June 12, 2001
Operator: J. Roidt

Test performed: automatically
File name:

Mode:
Receiver under Test

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

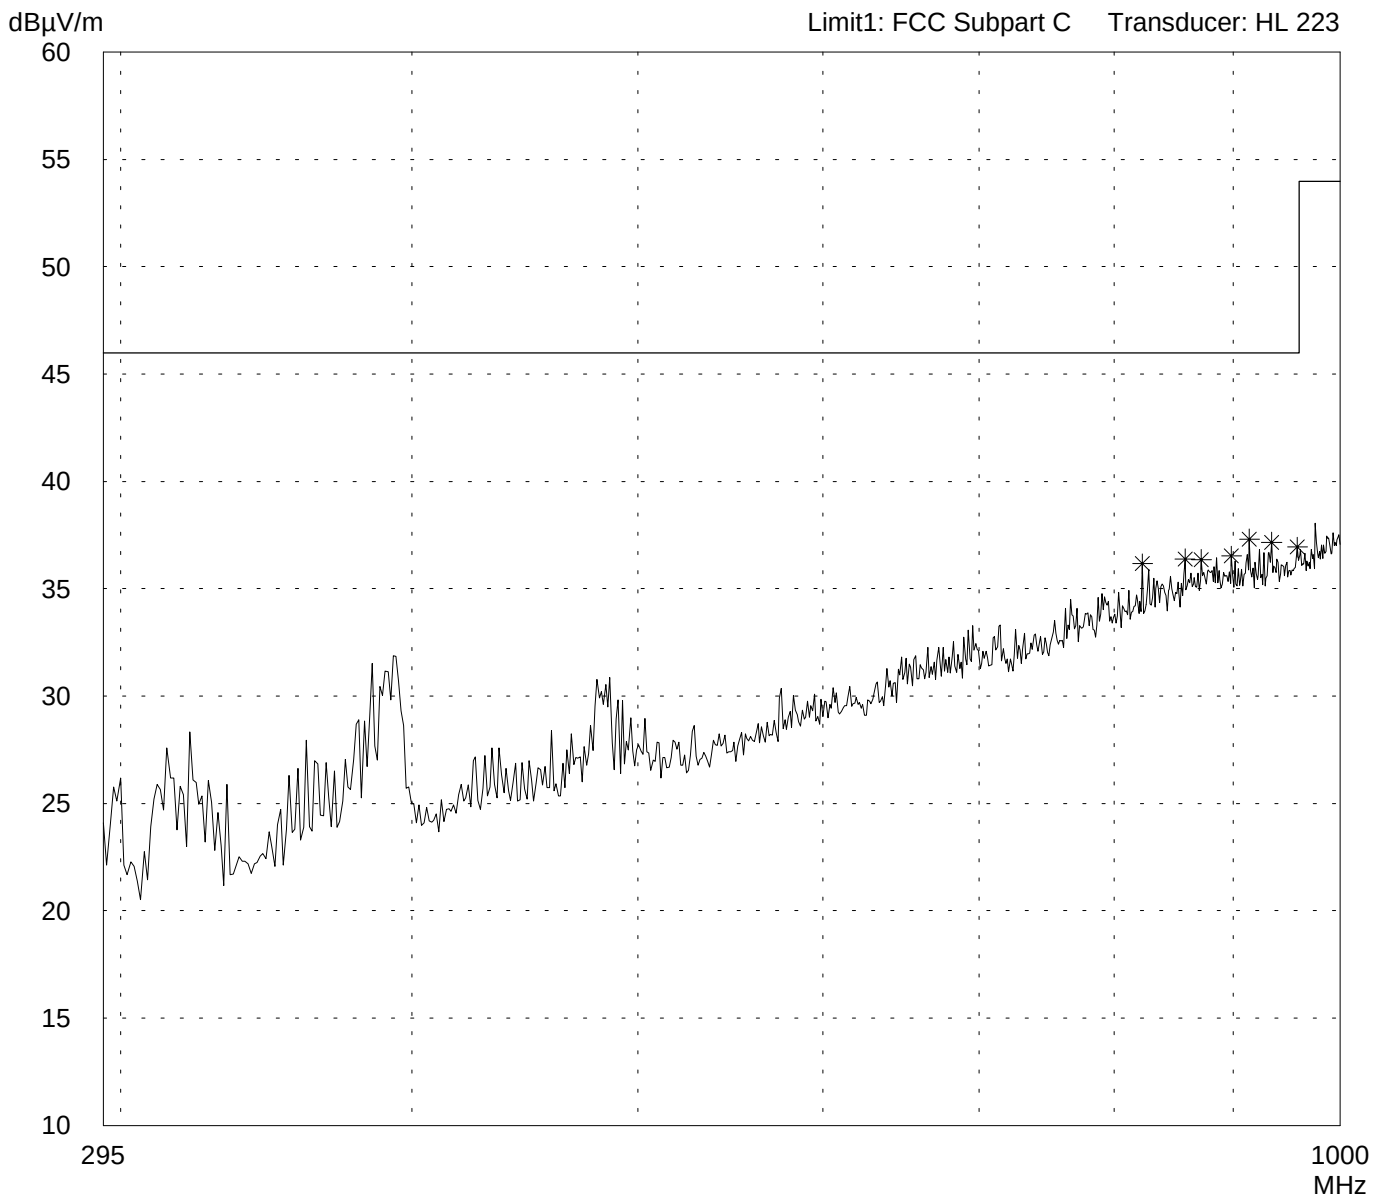

Result:
Prescan

Project file:
50104-10327

Page of Pages

Radiated Emission Test 295 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
Funk-Kopfhörersystem 2.4 GHz

Serial no.:

Applicant:
Amphony (Deutschland) GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: June 12, 2001
Operator: J. Roidt

Test performed: automatically
File name:


Mode:
Receiver under Test

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

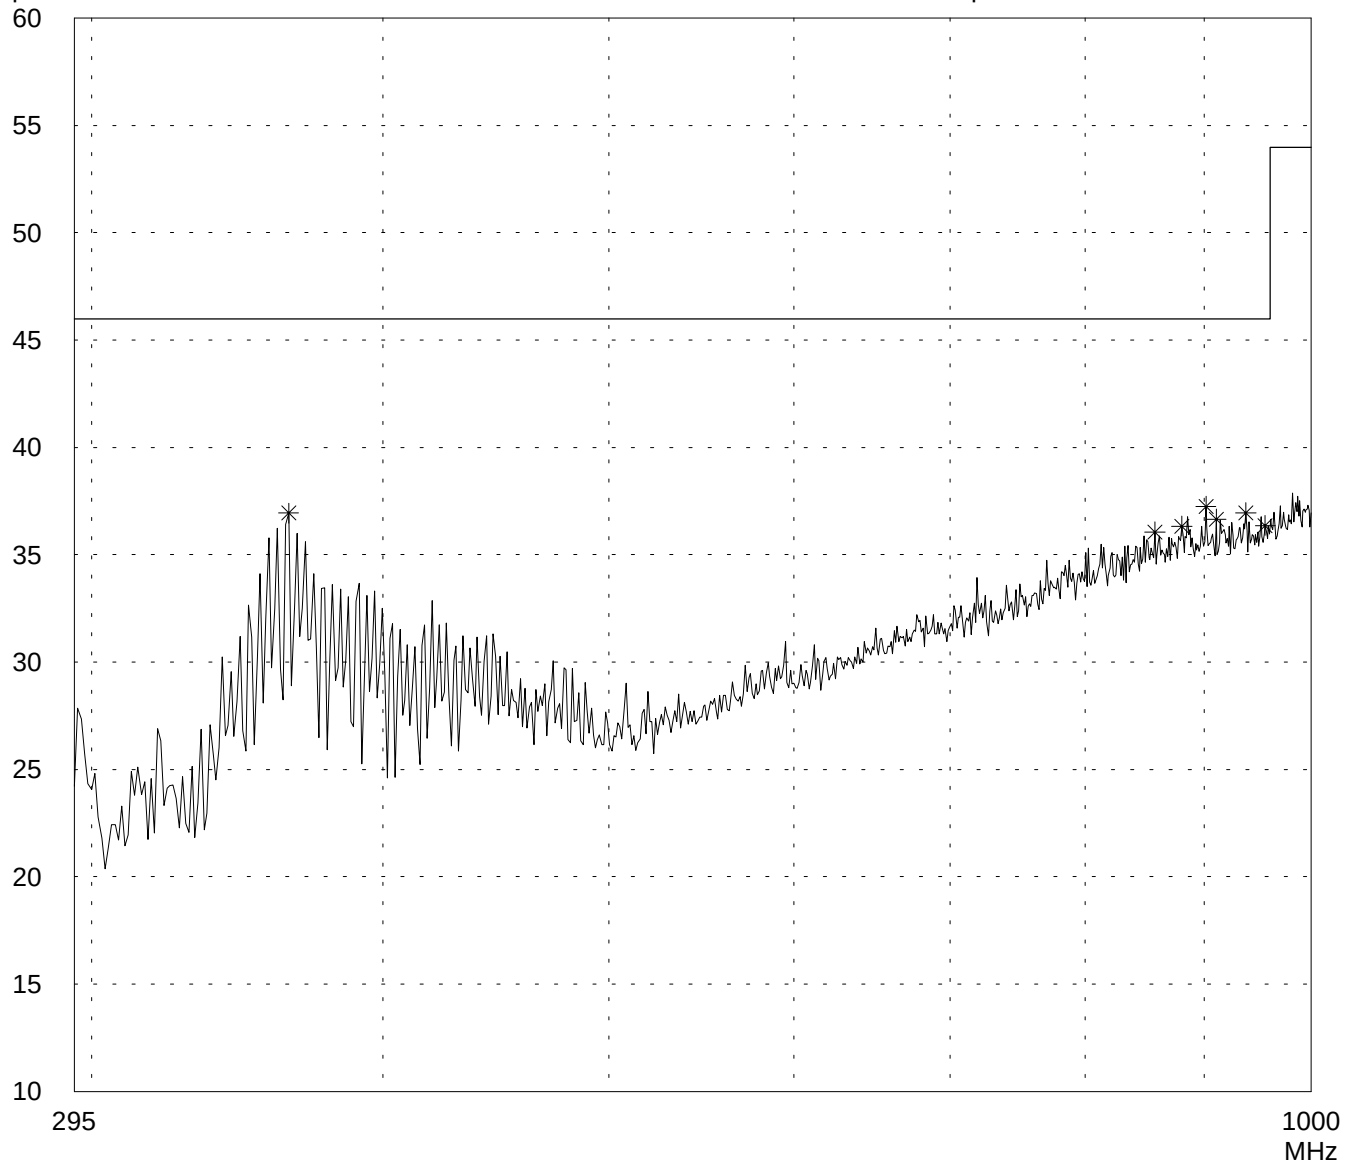

Result:
Prescan

Project file:
50104-10327

Page of Pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Receiver

Applicant:
Amphony


Mode:
Receiver under Test

Horizontal Polarisation

Ref.Level 46.5 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

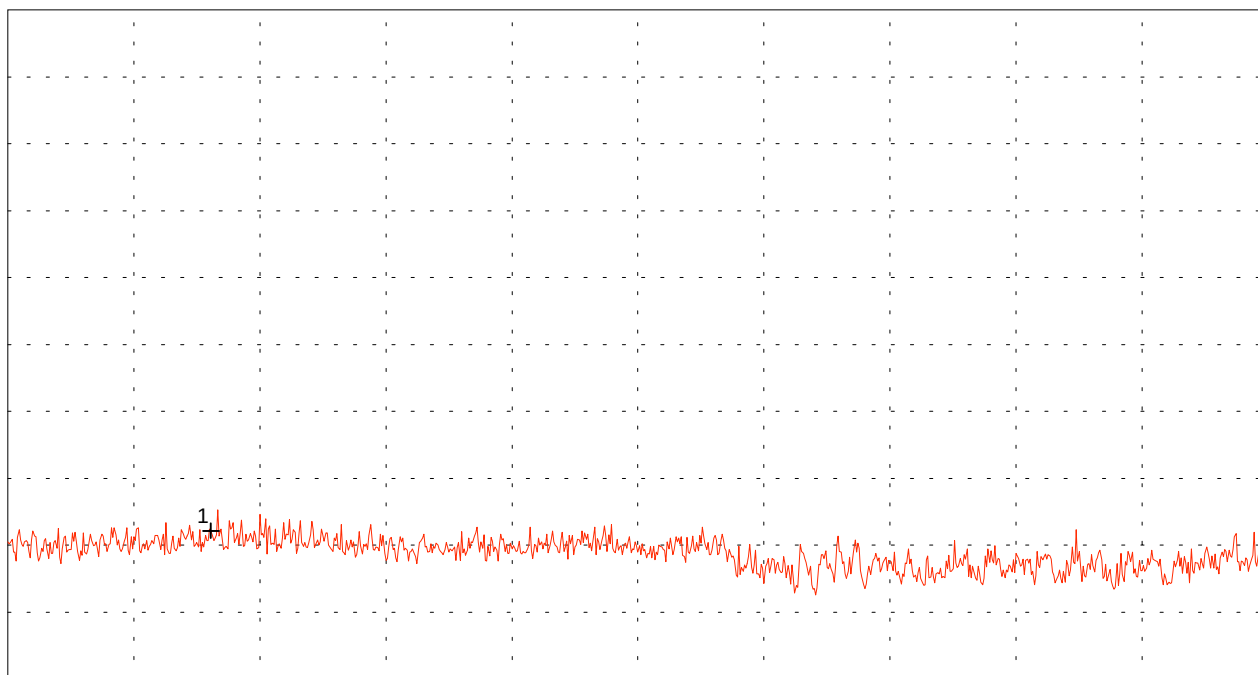

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No.	Frequency	Amplitude
1	2.127778 GHz	7.57 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Receiver

Applicant:
Amphony


Mode:
Receiver under Test

Vertical Polarisation

Ref.Level 46.5 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -30.5 dB

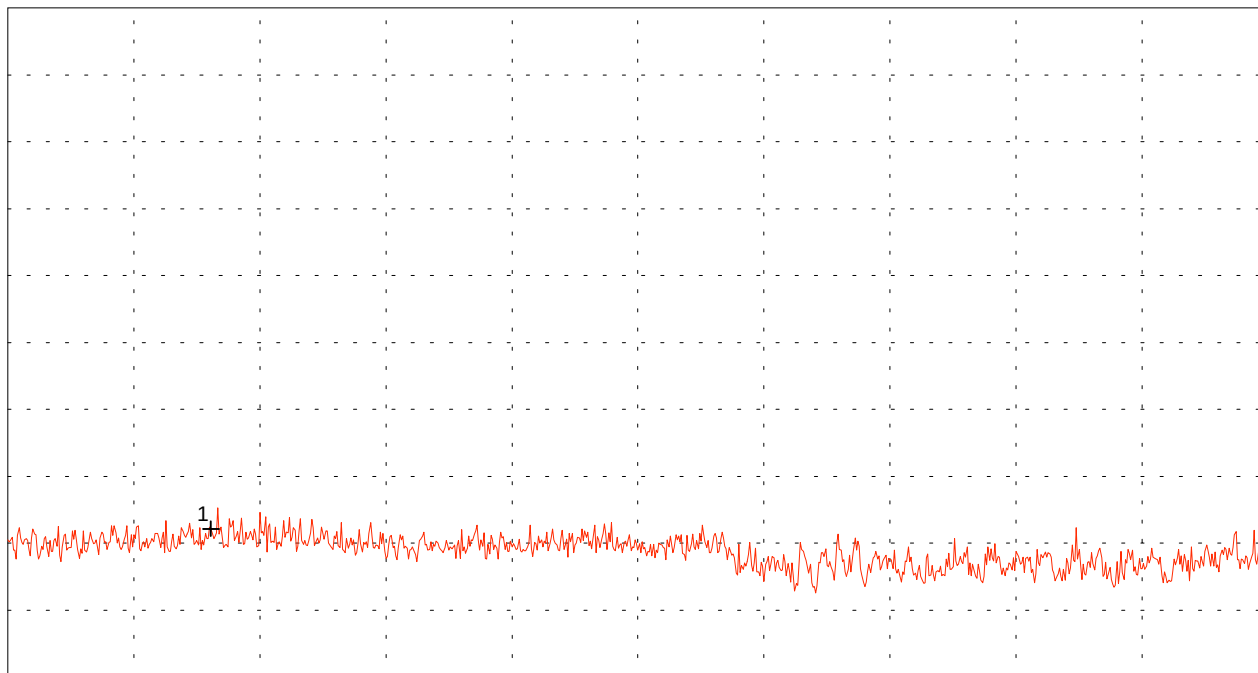

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 8.000 GHz
SWP 40 ms

Multi Marker List

No.	Frequency (GHz)	Level (dB μ V)
No. 1	2.127778 GHz	7.57 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Receiver

Applicant:
Amphony


Mode:
Receiver under Test

Horizontal Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

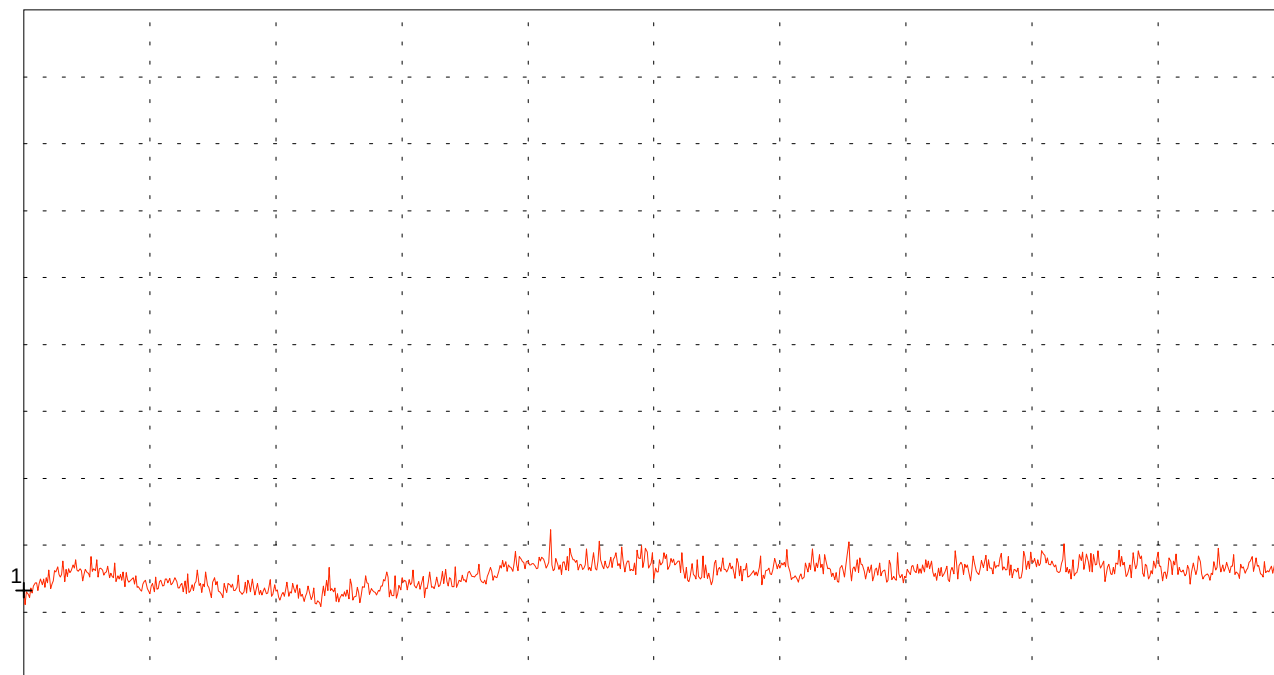

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 18.000 GHz
SWP 40 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	8.000000 GHz	6.62 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages

Spurious emissions according to FCC Rules, section 15.109 / 209

Model:
Wireless Headphone Model 1000

Serial No.:
Receiver

Applicant:
Amphony


Mode:
Receiver under Test

Vertical Polarisation

Ref.Level 50 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset -35 dB

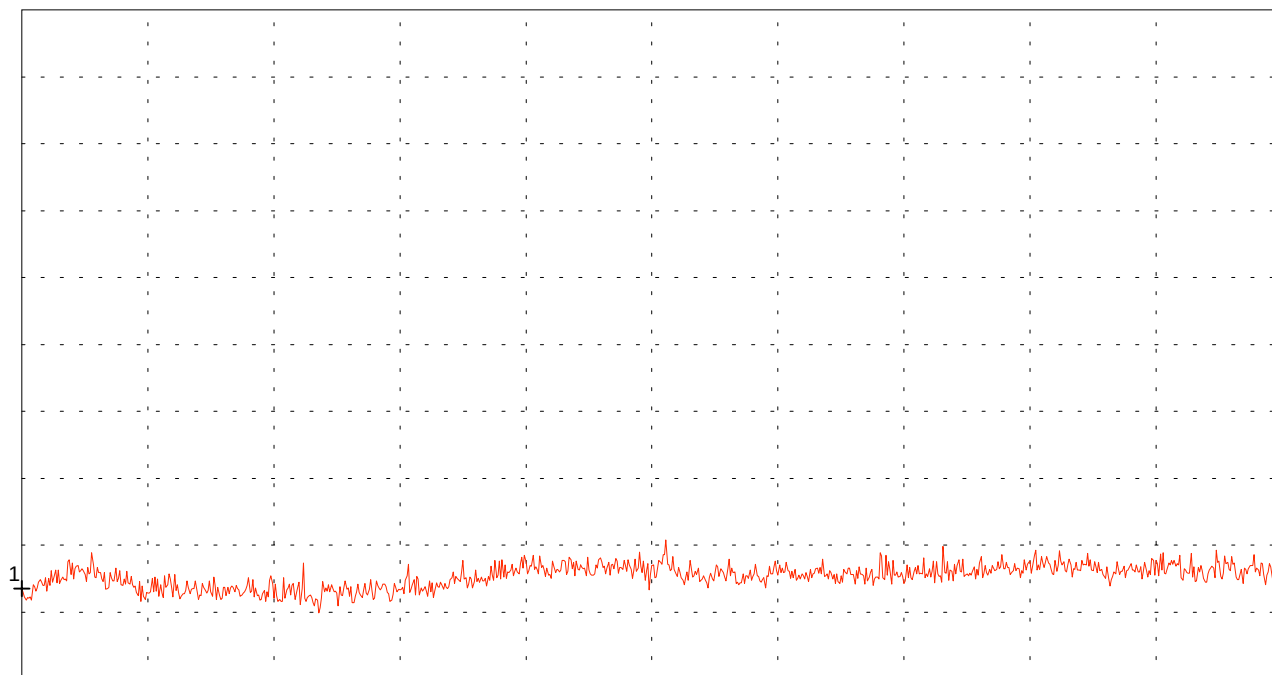

Start 8.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 18.000 GHz
SWP 40 ms

Multi Marker List

No.	Frequency (GHz)	Amplitude (dB μ V)
No. 1	8.000000 GHz	6.76 dB μ V

Tested by:
Johann Roidt

Date:
June 12. 2001

Project-No.:
50104-10327

Page of pages