

Nemko Korea CO., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333 FAX:+82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION**Manufacturer:****XENON Telecommunications Co., Ltd.****Kayang Techno Town 203, Kayang-3Dong,****1487, Kangsea-Ku, Seoul, Korea****Attn : Mr. J. G. Jung****Dates of Issue : May 11, 2001****Test Report No. : NK2BE232****Test Site : Nemko Korea Co., Ltd.****EMC site, Korea****FCC ID*****PNAXEN-1810E*****Brand Name*****DIGILUX*****CONTACT PERSON**

**XENON Telecommunications Co., Ltd.
Kayang Techno Town 203, Kayang-3Dong, 1487,
Kangsea-Ku, Seoul, Korea
Mr. J. G. Jung
Telephone No. : +82 2 3665 9551**

FCC Rule Part(s):

Part 15 & 2

Classification :

FCC Class B Device

EUT Type:

TV combined with TFT LCD Monitor

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By : C. S. Choi
Engineer

Reviewed By : H.H. Kim
Manager & Chief Engineer

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
GENERAL TEST CONDITION	5
DESCRIPTION OF TEST (Conducted Emissions)	6
DESCRIPTION OF TEST (Radiated Emissions)	7
DESCRIPTION OF TEST (Antenna-conducted Power Emissions)	8
TEST DATA (Conducted Emissions)	9
TEST DATA (Radiated Emissions)	10
TEST DATA (Antenna-conducted Power Emissions)	11
PLOT OF EMISSION	12
SAMPLE CALCULATIONS	14
ACCURACY of MEASUREMENT	15
TEST EQUIPMENT	16
RECOMMENDATION/CONCLUSION	17
APPENDIX A - LABELLING REQUIREMENTS	18
APPENDIX B - CIRCUIT DIAGRAM	19
APPENDIX C - PHOTOGRAPHS of TEST SET-UP	20
APPENDIX D - EUT PHOTOGRAPHS	23
APPENDIX E - USER'S MANUAL	44
APPENDIX F - SCHEMATIC DIAGRAM	45

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15 verification.

Responsible Party* : XENON Telecommunications Co., Ltd.

Contact Person : Mr. J. G. Jung

Tel No.: +82 2 3665 9551

Manufacturer : XENON Telecommunications Co., Ltd.

Kayang Techno Town 203, Kayang-3Dong, 1487,
Kangsea-Ku, Seoul, Korea

Tel No.: +82 2 3665 9551

- FCC ID: PNAXEN-1810E
- Model: XEN-1810E
- Brand Name: DIGILUX
- EUT Type: TV combined with TFT LCD Monitor
- Adapter: Input: 100 - 240V AC 50/60Hz
Output: 12.0V DC, 4.5A

- Classification: FCC Class B
- Rule Part(s): FCC Part 15 & Part 2
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: May 10, 2001
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2BE232

* NOTE: Please refer to the duties and responsibilities of the Responsible Party attached.

INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from XENON Telecommunications Co., Ltd.

FCC ID : **PNAXEN-1810E, TV combined with TFT LCD Monitor.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 50 kilometers (30 miles) southeast and Seoul International Airport (Kimpo Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.



Nemko Korea Co., Ltd.
OPEN AREA TEST SITE
300-2, Osan-Ri, Mohyun-Myun, Yongin-City Kyungki-Do, KOREA 449-852
Tel)+82-31-322-2333
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Kimpo Airport.

TEST CONDITIONS & EUT INFORMATION

Operating During Test

The EUT was connected to PC and the monitor was displayed "H" pattern on the screen.
And the EUT was set to video resolution 1280*1024(worst case), vertical refresh rate 75Hz.
The EUT was set to the broadcast receiving channels at TV mode.

Support Equipment

Adapter	Samsung, Model: PSCV540101A 1.8m unshielded AC power cable 2.0m shielded DC power cable	S/N: ML001103394A
PC	HP, Model: P4683A 1.8m unshielded AC power cord	S/N: CN10890107
Monitor	XENON, Fcc ID: PNAXEN-1810E 1.8m unshielded AC power cord 1.5m shielded D-sub cable	S/N: N/A
Keyboard	Samsung, Model: SDM4500P 1.5m shield Din cable	S/N:N/A
PS/2 Mouse	Microsoft, Model: X04-72169 1.8m shield Din cable	S/N:N/A
Mouse	Whale mouse, Model: WS-V1-400 1.8m shield Din cable	S/N:B050402
Optical Mouse	Emmanuel Electronics Model: OMGB30A, 1.5m shielded D-sub cable	S/N:N/A
Speaker	Samsung, Model: SMS-2000 2.0m unshielded AC power cord	S/N: N/A
Printer	HP, Model No: Deskjet 970cxi 1.8m unshielded AC power cord 1.2m Shield USB cable	S/N: MY9C6116DQ

EUT Information

Clock :	12MHz(Y1, USB Board), 18.432MHz(Y1, Tuner Board) 24.576MHz(Y2, Main Board)
Chipset(s) :	AD9884A(U12),PW164(U14), SAA7114H(U21)
Port(s) :	S-Video, Video, Audio(L/R), VGA, Headphone, Line Out Stereo In, USB down, USB up, Antenna In

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN and PMM LISN L3-32 50ohm/50uH line impedance stabilization network are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the PMM LISN. Power to the LISN s are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function was set to CISPR quasi-peak mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

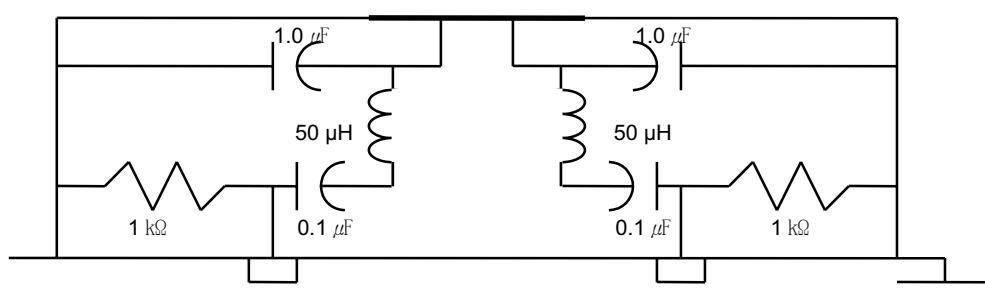


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.(Rohde Schwarz HL025) The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

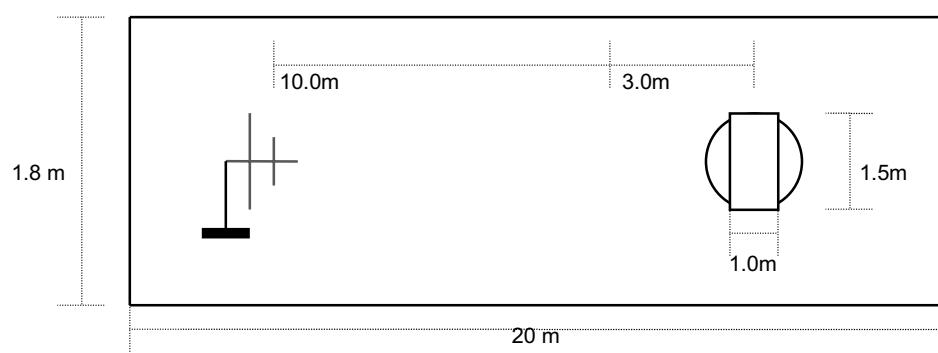


Fig. 3. Dimensions of Outdoor Test Site

DESCRIPTION OF TESTS

Antenna-Conducted Power Measurements

Power on the receive antenna terminals was to be determined by measurement of the voltage present at these terminals.

Antenna –conducted power measurements was performed with the EUT antenna terminals connected directly to measuring instrument (Rohde&Schwarz, ESCS 30) using a impedance-matching network(Rohde&Schwarz, RAM358.5414.02) to connect the measurement instrument to the antenna terminals of the EUT. Losses in decibels in impedance-matching network used was added to the measured values in dBuV.

With the receiver tuned to one of the number of frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirements.

The measurements was repeated with the receiver tuned to another frequency until the number of frequencies had been successively measured.

Power on the receive antenna terminals in the ratio of V^2/R , where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument.

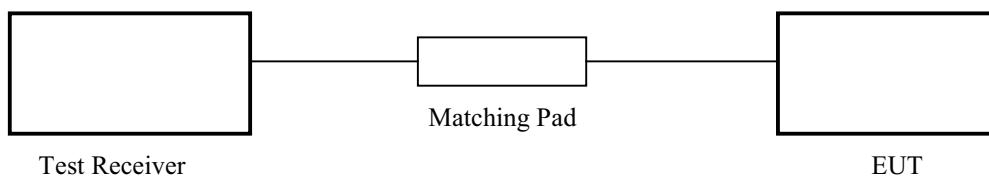


Fig. 4. Description of Test

TEST DATA**Conducted Emissions****FCC ID : PNAXEN-1810E****Test Mode : Display "H" pattern on the screen****(video resolution 1280*1024, vertical refresh rate 75Hz)**

FREQ (MHz)	LEVEL(dB μ V)	LINE	LIMIT(μ V)	(μ V)	MARGIN*(dB)
3.16	37.9	N	250	78.52	10.1
6.11	39.7	L	250	96.61	8.3
10.45	45.6	N	250	190.55	2.4
11.09	45.0	L	250	177.83	3.0
12.56	45.6	N	250	190.55	2.4
20.93	38.2	L	250	81.28	9.8

Table 1. Line Conducted Emissions Tabulated Data**NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is 250 μ V from 450 kHz to 30MHz.
4. Line H = Hot Line N = Neutral

Tested by **C. S. Choi**

TEST DATA

Radiated Emissions

FCC ID : PNAXEN-1810E

Test Mode : Display "H" pattern on the screen

(video resolution 1280*1024, vertical refresh rate 75Hz)

And tuned to the broadcast receiving channels

Frequency (MHz)	Reading (dB μ N)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
162.04	49.9	V	-12.9	37.0	43.5	6.5
175.47	53.2	V	-13.2	40.0	43.5	3.5
270.02	49.0	V	-12.0	37.0	46.0	9.0
540.03	45.6	V	-5.2	40.4	46.0	5.6
513.01	47.4	V	-6.0	41.4	46.0	4.6
675.04	41.9	V	-1.6	40.3	46.0	5.7

*) No values due to other frequencies according to the local oscillator higher than 20dB below the limit was measured during radiated disturbance

Table 2. Radiated Measurements at 3meters

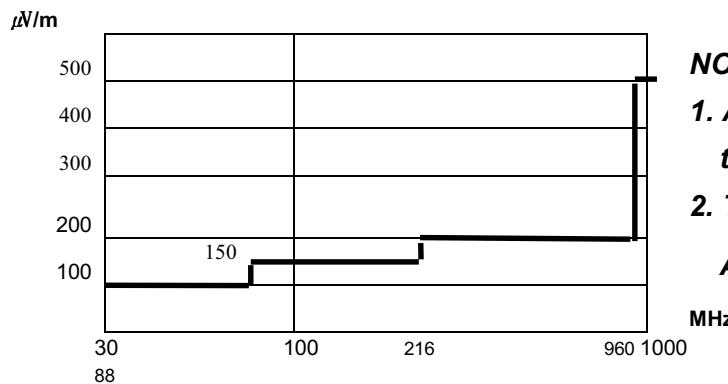


Fig. 6. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4. Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

Tested by C. S. Choi

TEST DATA**Antenna-Conducted Power Measurements****FCC ID : PNAXEN-1810E****Test Mode : Tuned to the broadcast receiving channels.**

CHANNEL	Frequency (MHz)	Reading (dB μ W)	MPL * (dB)	Result (dB μ W)	Limit		Margin (dB)
					(nW)	(dB μ W)	
2	101.00	15.0	7.8	22.8	2.0	50.0	27.2
	605.97	7.2	7.8	15.0	2.0	50.0	35.0
3	107.00	17.4	7.8	25.2	2.0	50.0	24.8
	641.97	7.0	7.8	14.8	2.0	50.0	35.2
4	113.00	28.0	7.8	35.8	2.0	50.0	14.2
	677.97	7.4	7.8	15.2	2.0	50.0	34.8
5	984.00	7.9	7.8	15.7	2.0	50.0	34.3
6	129.00	7.2	7.8	15.0	2.0	50.0	35.0
7	663.00	9.0	7.8	16.8	2.0	50.0	33.2
8	908.00	7.6	7.8	15.4	2.0	50.0	34.6
9	932.00	12.1	7.8	19.9	2.0	50.0	30.1
10	956.00	13.2	7.8	21.0	2.0	50.0	29.0
11	980.00	12.0	7.8	19.8	2.0	50.0	30.2
13	514.00	8.8	7.8	16.6	2.0	50.0	33.4
19	547.00	9.5	7.8	17.3	2.0	50.0	32.7

* No values higher than 10dB below the limit was measured during Antenna-Conducted Power testing.

Table 3. Antenna-Conducted Power Measurements**NOTES:**

1. *MPL = Impedance Matching Network Loss
2. Measurements using CISPR quasi-peak mode. The limits is 2.0 nanowatts from 30MHz to above 1GHz.



Tested by C. S. Choi

PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Line)


```

Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
Start      Stop       Step     IF BW  Detector  M-Time  Atten  Preamp
450k       30M        5k      9k    PK        20ms   10dBILN OFF

Transducer No. Start      Stop       Name
5          150k      30M       NLOSS

Final Measurement: x QP
Meas Time: 1 s
Subranges: 8
Acc Margin: 30dB


```

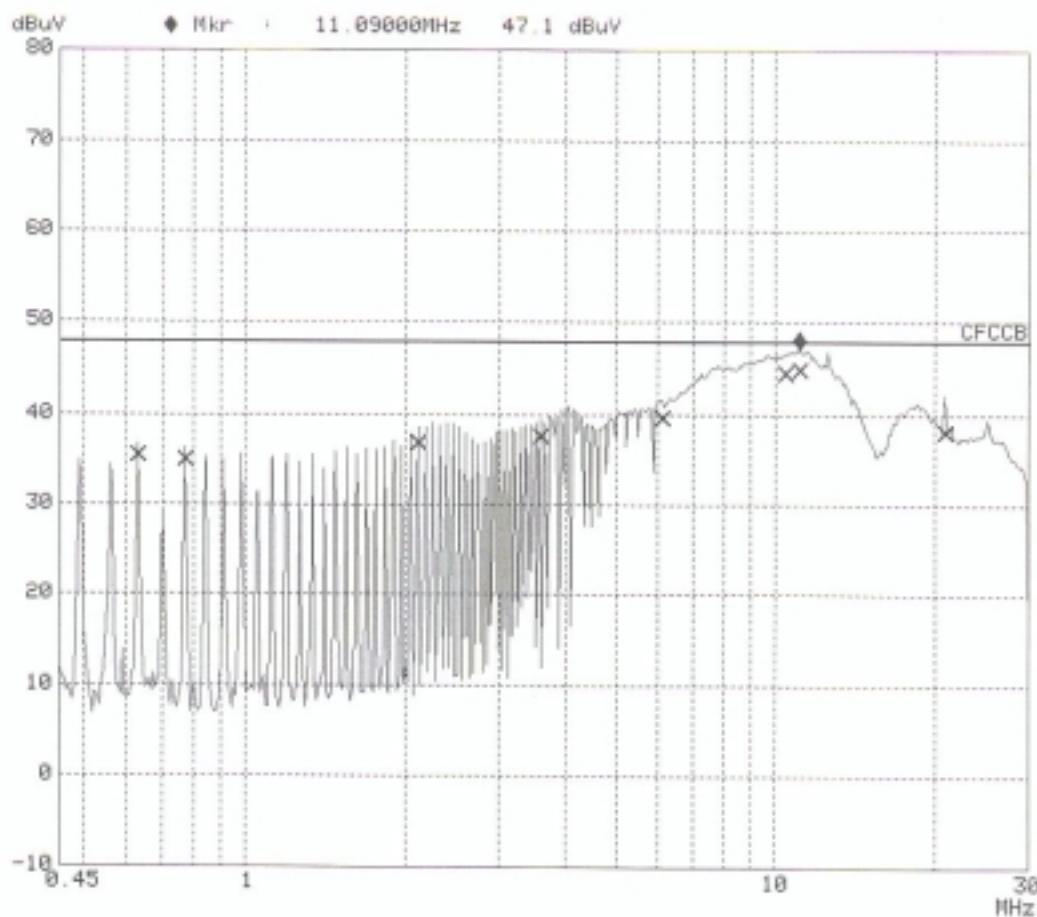

PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Neutral)

Scan Settings (1 Range)
 |----- Frequencies -----| |----- Receiver Settings -----|
 Start Stop Step IF BW Detector N-Time Atten Preamp
 450k 30M 5k 9k PK 20ms 10dBIN OFF
 Transducer No. Start Stop Name
 5 150k 30M NLOSS
 Final Measurement: x QP
 Meas Time: 1 s
 Subranges: 8
 Acc Margin: 30dB

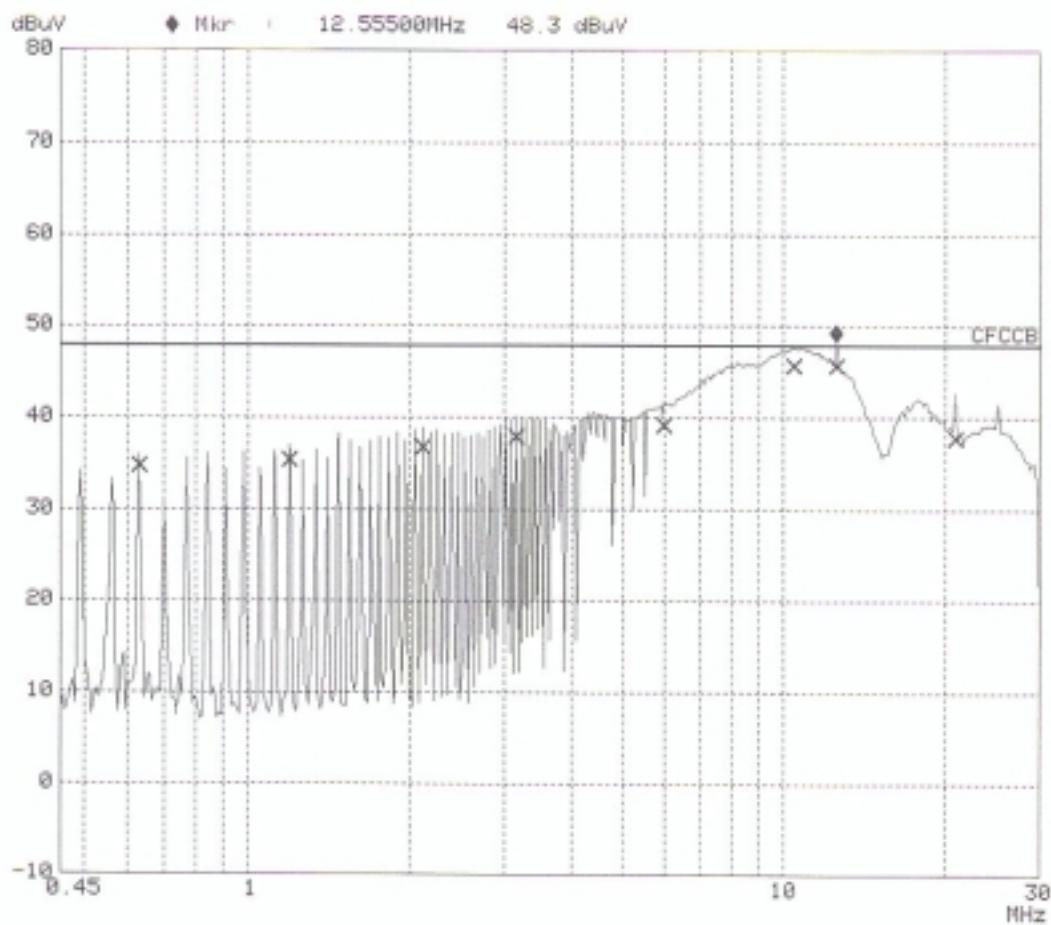

SAMPLE CALCULATIONS

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB } \mu\text{V}/20)}$$

EX. 1.

@20.3 MHz

Class B limit = 250 μV = 48.0 dB μV Reading = 40.8 dB μV (calibrated level)

$$10^{(40.8/20)} = 109.64 \mu\text{V}$$

$$\text{Margin} = 48.0 - 40.8 = 7.2$$

7.2 dB below limit**EX. 2.**

@57.7 MHz

Class B limit = 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$ Reading = 19.1 dB μV (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

$$\text{Total} = 29.22 \text{ dB } \mu\text{V}/\text{m}$$

$$\text{Margin} = 40.0 - 29.22 = 10.78$$

10.78 dB below the limit**EX. 3.**

@98.20 MHz

Class B limit = 2 nW = 50.0 dB μV Reading = 19.1 dB μV (calibrated level)

Impedance matching Network Loss = 7.5 dB

$$\text{Total} = 26.6 \text{ dB } \mu\text{V}$$

$$\text{Margin} = 50.0 - 26.6 = 23.4$$

23.4 dB below the limit

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

1. Radiation Uncertainty Calculation

<i>Contribution</i>	<i>Probability Distribution</i>	<i>Uncertainty(+/-dB)</i>
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity	Rectangular	± 1.0
Antenna Factor variation with Height		
Antenna Phase Center Variation		
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch: Receiver VRC ri=0.3 Antenna VRC rR=0.1(Bi)0.4(Lp) Uncertainty Limits 20Log(1+/-ri rR)	U-Shaped	+ 0.25 / - 0.26
System Repeatability	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expended Uncertainty U	Normal (k=2)	± 3.5

2. Conducted Uncertainty Calculation

<i>Contribution</i>	<i>Probability Distribution</i>	<i>Uncertainty(+/-dB)</i>
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch: Receiver VRC ri=0.3 LISN vrc rg=0.1 Uncertainty Limits 20Log(1+/-ri rR)	U-Shaped	± 0.26
System Repeatability		
Repeatability of EUT		
Combined Standard Uncertainty		
Expended Uncertainty U		

TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Calibration Date
1	*Test Receiver	R & S	ESCS 30	2001.01
2	Test Receiver	PMM	PMM9000	2001.04
3	*Amplifier	HP	8447F	2000.08
4	*Amplifier	HP	8447F	2000.08
5	Spectrum Analyzer	Advantest	R4136	2000.12
6	*Logbicon Super Antenna	Schwarzbeck	VULB9166	2001.01
7	Log-Periodic Antenna	R & S	HL025	2001.01
8	Dipole Antenna	R & S	VHA9103	2001.01
9	Dipole Antenna	R & S	UHA9105	2001.01
10	Biconical Antenna	Schwarzbeck	VHA9103	2001.01
11	Biconical Log Antenna	ARA	LPB-2520/A	2001.01
12	Asorbing Clamp	R & S	MDS21	2001.01
13	High Voltage Probe	R & S	ESH2-Z3	2001.02
14	Signal Generater	R & S	SMP02	2001.01
15	*Matching Pad	R & S	RAM358.5414.02	2000.05
16	LISN	R & S	ESH3-Z5	2001.02
17	LISN	PMM	L3-9103	2001.04
18	*Position Controller	EM Eng.	N/A	N/A
19	*Turn Table	EM Eng.	N/A	N/A
20	*Antenna Mast	EM Eng.	N/A	N/A
21	*Anechoic Chamber	EM Eng.	N/A	N/A
22	*Shielded Room	EM Eng.	N/A	N/A

*) Test equipment used during the test

RECOMMENDATION/CONCLUSION

The data collected shows that the **XENON Telecommunications Co., Ltd.**


FCC ID : PNAXEN-1810E, TV combined with TFT LCD Monitor. complies with § 15.107 ,15.109,15.111 of the FCC Rules.

The highest emission observed was at **10.45 MHz** for conducted emissions with a margin of **2.4 dB**, at **175.47 MHz** for radiated emissions with a margin of **3.5 dB**,
at **113.00 MHz** for antenna-conducted power measurements with a margin of **14.2dB** .

APPENDIX A – SAMPLE LABEL

Labelling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

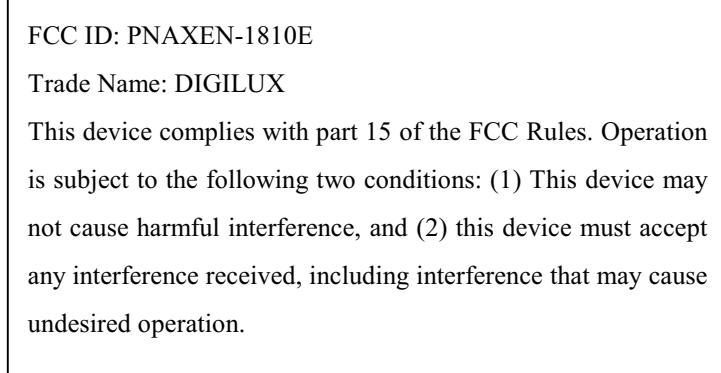

● FCC ID Location of EUT



APPENDIX B – CIRCUIT DIAGRAM

APPENDIX E – USER'S MANUAL

APPENDIX F – Schematic Diagrams
