

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E079R-005

AGR No. : A076A-123R

Applicant : Be Interactive Co., Ltd.
Address : #1007 Byucksan DigitalValley 5th, 60-73 Gasan-Dong, Geumchun-Gu, Seoul,
153-807, Korea

Manufacturer : Be Interactive Co., Ltd.
Address : #1007 Byucksan DigitalValley 5th, 60-73 Gasan-Dong, Geumchun-Gu, Seoul,
153-807, Korea

Type of Equipment : Industrial Mobile Computer with Bluetooth

FCC ID. : PNGUD720

Model Name : UD720

Multiple Model Name : UD720W, UD720B, UD720WB, UD721, UD721W, UD721B, UD721WB

Serial number : N/A

Total page of Report : 43 pages (including this page)

Date of Incoming : July 30, 2007

Date of issue : September 04, 2007


SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.247.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	6
2.3 RELATED SUBMITTAL(s) / GRANT(s).....	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(s)/MODEL(s); ALSO COVERED BY THIS TEST REPORT.	7
4. EUT MODIFICATIONS	8
5. SYSTEM TEST CONFIGURATION.....	9
5.1 JUSTIFICATION.....	9
5.2 PERIPHERAL EQUIPMENT	9
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM	10
5.5 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. 20DB BANDWIDTH.....	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST EQUIPMENT USED	11
7.4 TEST DATA.....	11
8. HOPPING FREQUENCY SEPARATION	14
8.1 OPERATING ENVIRONMENT	14
8.2 TEST SET-UP	14
8.3 TEST EQUIPMENT USED	14
8.4 TEST DATA.....	14

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

9. NUMBER OF HOPPING CHANNELS	16
9.1 OPERATING ENVIRONMENT	16
9.2 TEST SET-UP	16
9.3 TEST EQUIPMENT USED	16
9.4 TEST DATA	16
10. TIME OF OCCUPANCY	20
10.1 OPERATING ENVIRONMENT	20
10.2 TEST SET-UP	20
10.3 TEST EQUIPMENT USED	20
10.4 TEST DATA	21
11. MAXIMUM PEAK OUTPUT POWER.....	24
11.1 OPERATING ENVIRONMENT	24
11.2 TEST SET-UP	24
11.3 TEST EQUIPMENT USED	24
11.4 TEST DATA	24
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	27
12.1 OPERATING ENVIRONMENT	27
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	27
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	27
12.4 TEST EQUIPMENT USED	27
12.5. TEST DATA	28
12.5.1. TEST DATA FOR CONDUCTED EMISSION	28
12.5.2. TEST DATA FOR RADIATED EMISSION	32
12.5.2.1. RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	32
12.5.2.2. SPURIOUS & HARMONIC RADIATED EMISSION	33
13. PEAK POWER SPECTRUL DENSITY	35
13.1 OPERATING ENVIRONMENT	35
13.2 TEST SET-UP	35
13.3 TEST EQUIPMENT USED	35
13.4 TEST DATA	35
14. RADIO FREQUENCY EXPOSURE.....	38
14.1 RF EXPOSURE LIMIT	38
14.2 EUT DESCRIPTION	38
14.3 TEST RESULT	38

15. RADIATED EMISSION TEST FOR DIGITAL DEVICE PART.....39

15.1 OPERATING ENVIRONMENT39

15.2 TEST SET-UP39

15.3 TEST EQUIPMENT USED39

15.4 TEST DATA.....40

16. CONDUCTED EMISSION TEST41

16.1 OPERATING ENVIRONMENT41

16.2 TEST SET-UP41

16.3 TEST EQUIPMENT USED41

16.4 TEST DATA.....42

1. VERIFICATION OF COMPLIANCE

APPLICANT : Be Interactive Co., Ltd.
ADDRESS : #1007 Byucksan DigitalValley 5th, 60-73 Gasan-Dong, Geumchun-Gu, Seoul, 153-807, Korea
CONTACT PERSON : Mr. Ho-Il, Kim / Lead Engineer
TELEPHONE NO : +82-2-3281-6716
FCC ID : PNGUD720
MODEL NAME : UD720
SERIAL NUMBER : N/A
DATE : September 04, 2007

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	Industrial Mobile Computer
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	Yes
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (a) (2)	Minimum 6dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (b) (5)	Radio Frequency Exposure Level	Met the Limit / PASS
15.247 (c)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (c)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (d)	Peak Power Spectral Density	Met the Limit / PASS
15.209 and 15.109	Radiated Emission Limits	Met the Limit / PASS
15.207 and 15.107	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-080, Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 31, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

3. GENERAL INFORMATION

3.1 Product Description

The Be Interactive Co., Ltd., Model UD720 (referred to as the EUT in this report) is an Industrial Mobile Computer which has a function of data uploading/downloading, Bluetooth and WLAN modes. This report is for Bluetooth function. And the report for the WLAN and Peripheral Device for Class B Computing Device will be issued by other report. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Industrial Mobile Computer with Bluetooth
OPERATING FREQUENCY	2402-2480 MHz
TEMPERATURE RANGE	Operating: -20 ~ 50°C, Storage: -40 ~ 70°C
RF OUTPUT POWER	-3.83 dBm
NUMBER OF CHANNEL	79 Channels
MAX. DATA TRANSFER RATE	1Mbps
MODULATION TYPE	GFSK
ANTENNA	MFR.: WINiZEN, Model No.: W51-DF
ANTENNA CONNECTOR TYPE	Internal Chip Antenna
ANTENNA GAIN	2.0dBi
LIST OF EACH OSC. OR CRYSTAL. FREQ.(FREQ.>=1MHz)	13 MHz, 3.6864 MHz, 2405760 MHz, 14.7456 MHz and 1.8432 MHz
NUMBER OF LAYER	8 Layers
POWER REQUIREMENT	DC 5V, 3A from an AC/DC Adaptor, Model Name: HAPU05B5, MFR: HJC Rechargeable Lithium-ion Battery, Standard Type: 3.7V, 20000mAh

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

	Model Name	Model Differences
Basic Model	UD720	Only PDA function
Multiple Models	UD720W	PDA + Wireless LAN functions
	UD720B	PDA + Bluetooth functions
	UD720WB	PDA + Wireless LAN + Bluetooth functions
	UD721	PDA + Barcode Scanner functions
	UD721W	PDA + Barcode Scanner + Wireless LAN functions
	UD721B	PDA + Barcode Scanner + Bluetooth functions
	UD721WB	PDA + Barcode Scanner + Wireless LAN + Bluetooth functions

4. EUT MODIFICATIONS

Mod #

- EMC Test

- C334 and C335 exchanged 100pF capacitors for 120pF capacitors
- Two ferrite cores are attached to the USB cable.
- A radio wave absorbent unit attached to the PXA270 area of PCB.

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Beinteractive	NIRVANA V1.2	N/A
Function Key Board	Beinteractive	KEYPAD V1.2	N/A
Bluetooth Board	N/A	N/A	N/A
LCD	N/A	N/A	N/A
Barcode Scanner Board	N/A	N/A	N/A
Cradle Main Board	Beinteractive	CRADLE-MAIN V1.2	N/A
Cradle Connector Board	Beinteractive	CRADLE-PIN V1.2	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
UD720	Be Interactive Co., Ltd.	PNGUD720	Industrial Mobile Computer (EUT)	PC
HAPU05B5	HJC	N/A	AC/DC Adapter	EUT
PP10L	Dell Computer	DoC	PC	-
MO56UOA	Dell Computer	N/A	Mouse	PC

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. For final testing, Bluetooth was set at Low Channel (2402MHz), Middle Channel (2441MHz), and High Channel (2480MHz). To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to adaptor and the power line of adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power lines Conducted Emission tests were performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is installed inside of the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
TX mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX mode	X


7. 20dB BANDWIDTH

7.1 Operating environment

Temperature : 25.2 °C
Relative humidity : 47.4 %

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

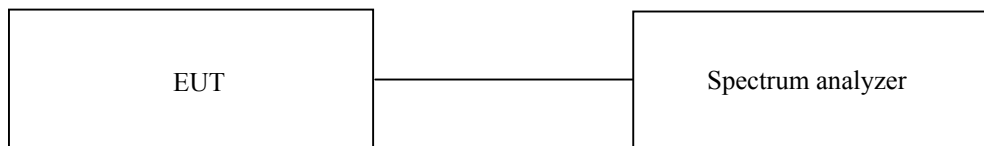

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 19, 2007

All test equipment used is calibrated on a regular basis.

7.4 Test data

- Test Date : August 28, 2007
- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2402	825	1000	-175
Middle	2441	825	1000	-175
High	2480	825	1000	-175

Remark: See next page for an overview sweep performed with peak detector.

Tested by: Ki-Hong, Nam / Test Engineer



Low Channel



Middle Channel



High Channel

8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 25.2 °C
Relative humidity : 47.4 %

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold , then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.



8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 19, 2007


All test equipment used is calibrated on a regular basis.

8.4 Test data

- Test Date : August 28, 2007
- Test Result : Pass

MEASURED VLAUE (kHz)	LIMIT, 20dB Bandwidth (kHz)	MARGIN (kHz)
1020	825	-195

Tested by: Ki-Hong, Nam / Test Engineer

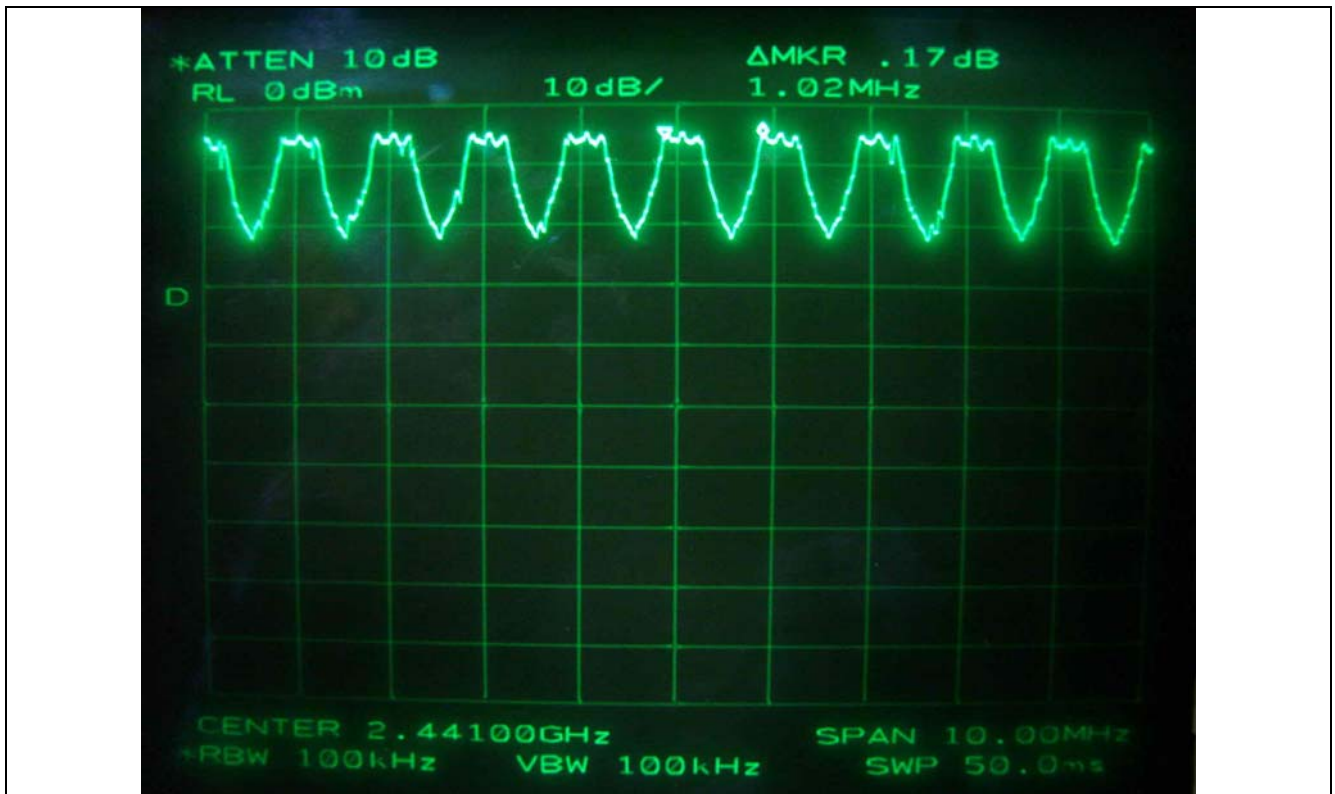

9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 25.2 °C
Relative humidity : 47.4 %

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.



9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 19, 2007


All test equipment used is calibrated on a regular basis.

9.4 Test data


- Test Date : August 28, 2007
- Test Result : Pass

MEASURED VLAUE (Number)	LIMIT (Number)	MARGIN (Number)
79	Minimum of 75	4


Tested by: Ki-Hong, Nam / Test Engineer

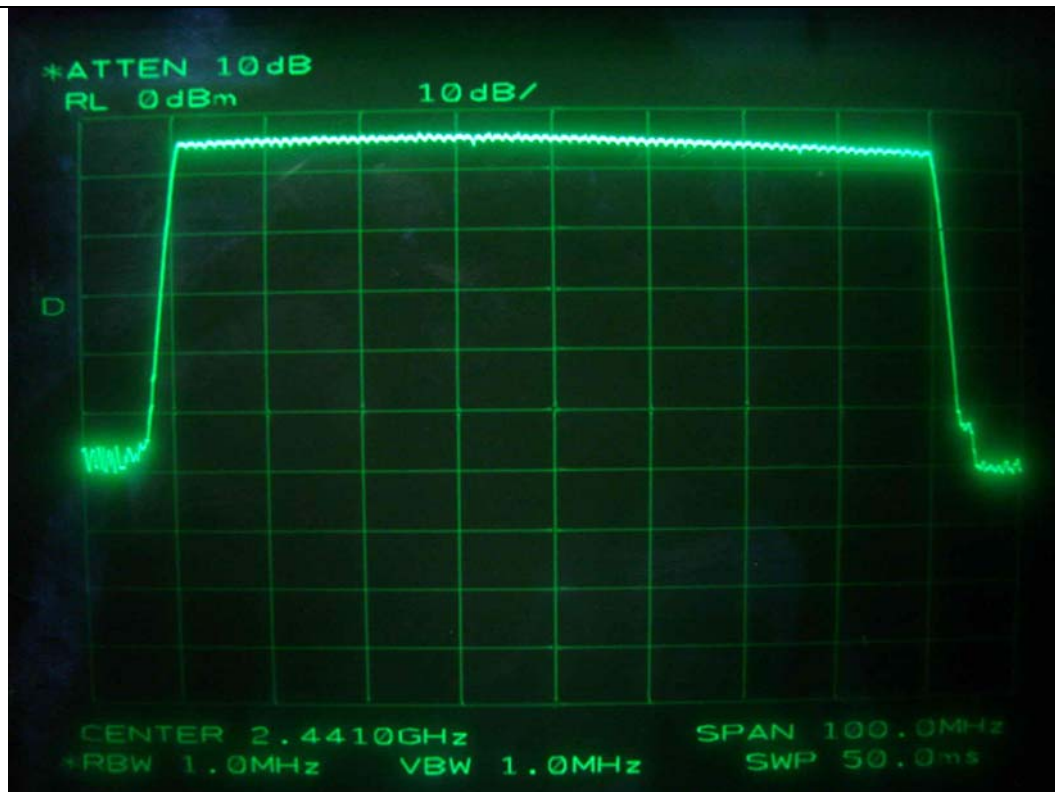

Total number of hopping channel: $28+30+21 = 79$

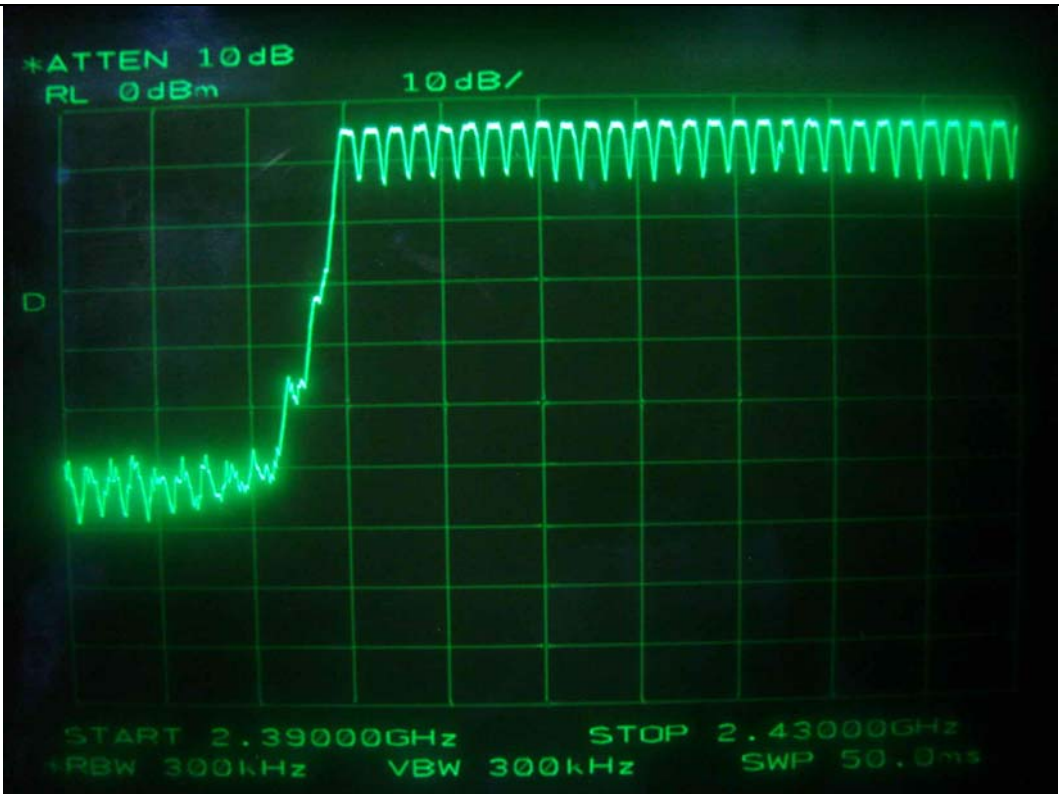

Number of hopping channel: 28

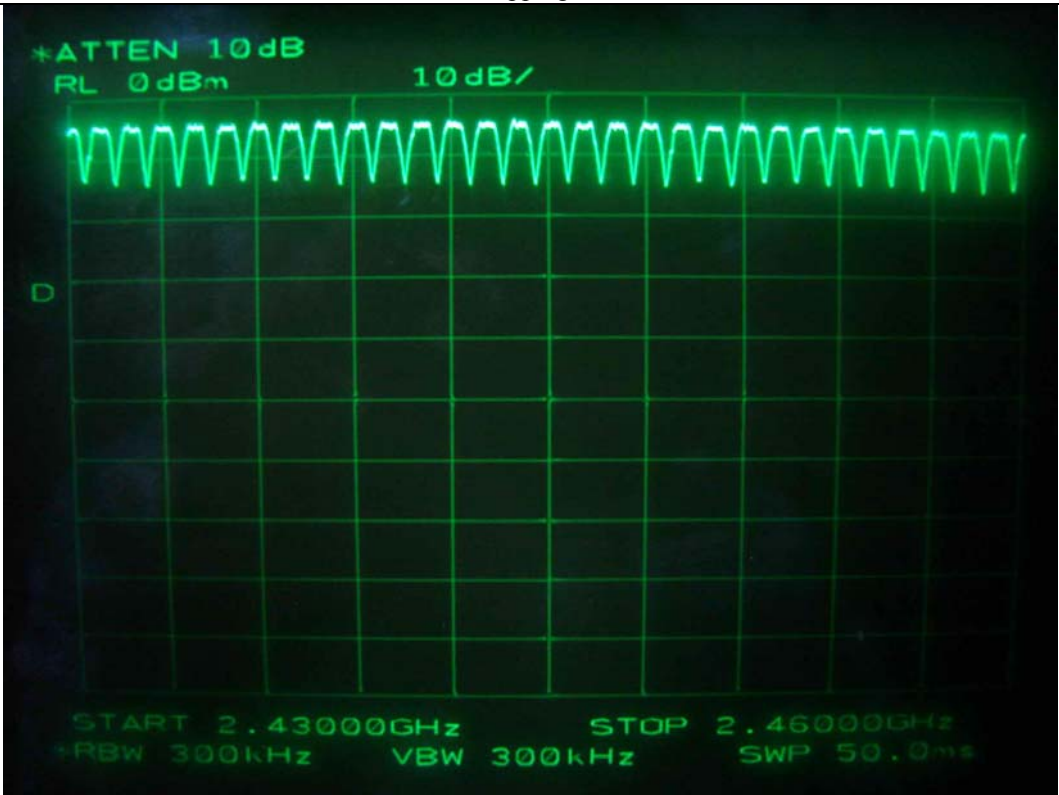

Number of hopping channel: 30

It should not be reproduced except in full, without the written approval of ONETECH. EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



Number of hopping channel: 21


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 25.2 °C
Relative humidity : 47.4 %

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

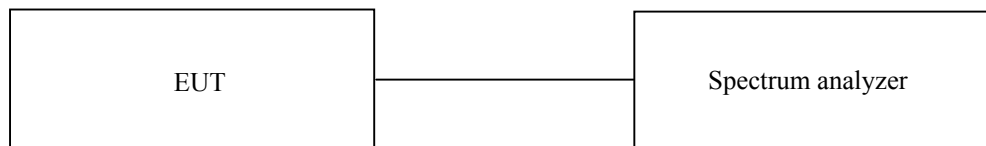

10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	June 19, 2007

All test equipment used is calibrated on a regular basis.

10.4 Test data

-. Test Date : August 28, 2007

The system makes worst case 1600 hops per second or 1 time slot has a length of 625us with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($=1600/2/79$) for DH1, and 5.06 times ($=1600/4/79$) for DH3, and 3.38 times ($=1600/6/79$) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.4167	10.13	31.6	133.39	400	PASS
DH3	1.6830	5.06	31.6	269.10	400	PASS
DH5	2.9000	3.38	31.6	309.74	400	PASS


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time



Tested by: Ki-Hong, Nam / Test Engineer



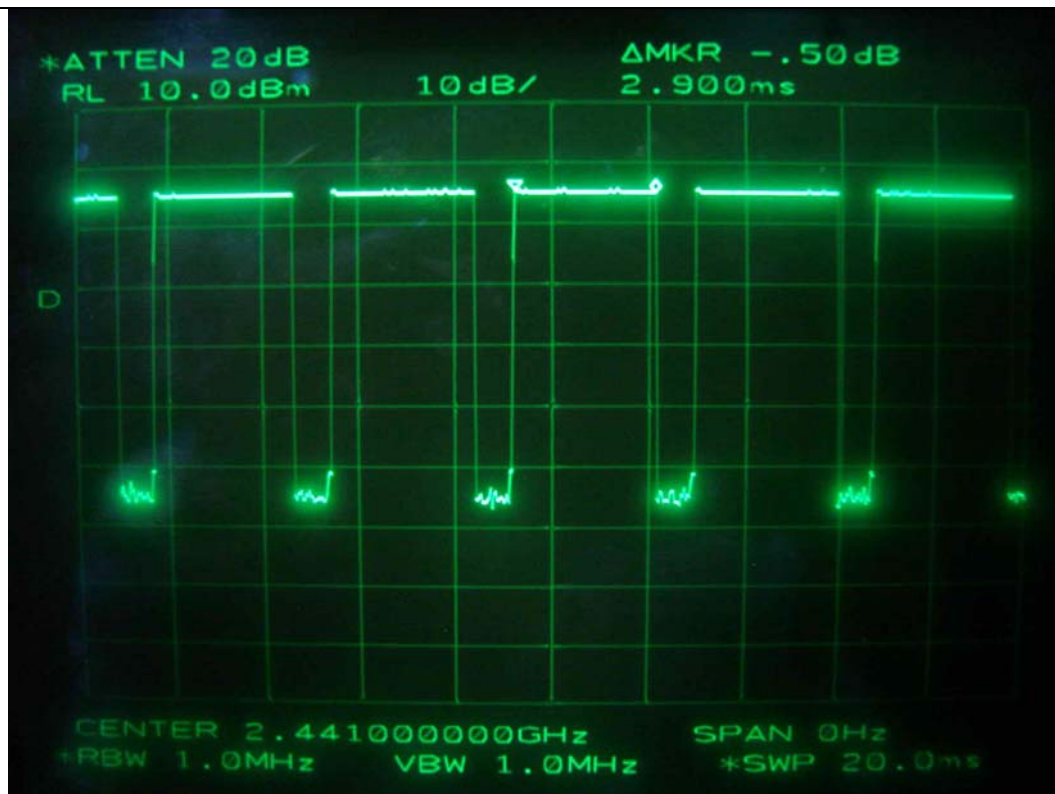

DH5


11. MAXIMUM PEAK OUTPUT POWER

11.1 Operating environment

Temperature : 25.2 °C
Relative humidity : 47.4 %

11.2 Test set-up

The maximum peak output power was measured with the power meter connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.

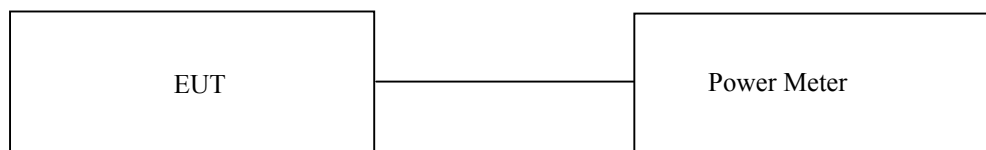

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 19, 2007

All test equipment used is calibrated on a regular basis.


11.4 Test data

- Test Date : August 28, 2007
- Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2402	-3.83	30.0	-33.83
Middle	2441	-3.83	30.0	-33.83
High	2480	-5.33	30.0	-35.33

기홍

Tested by: Ki-Hong, Nam / Test Engineer

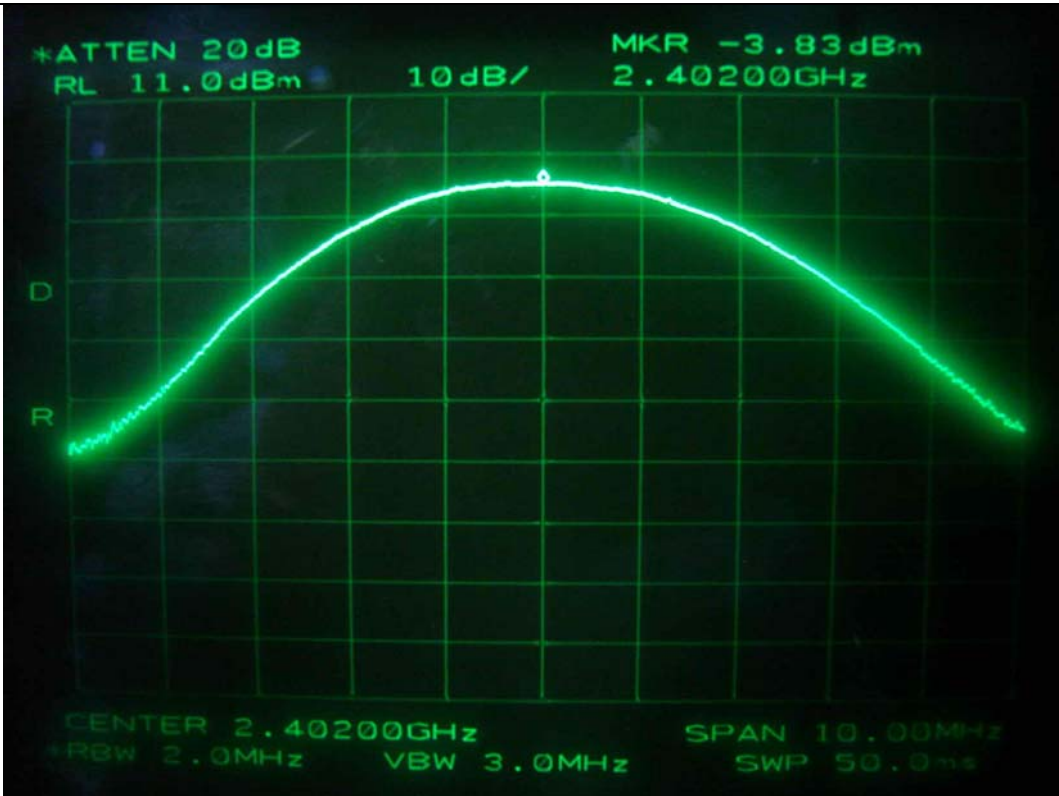

Low Channel

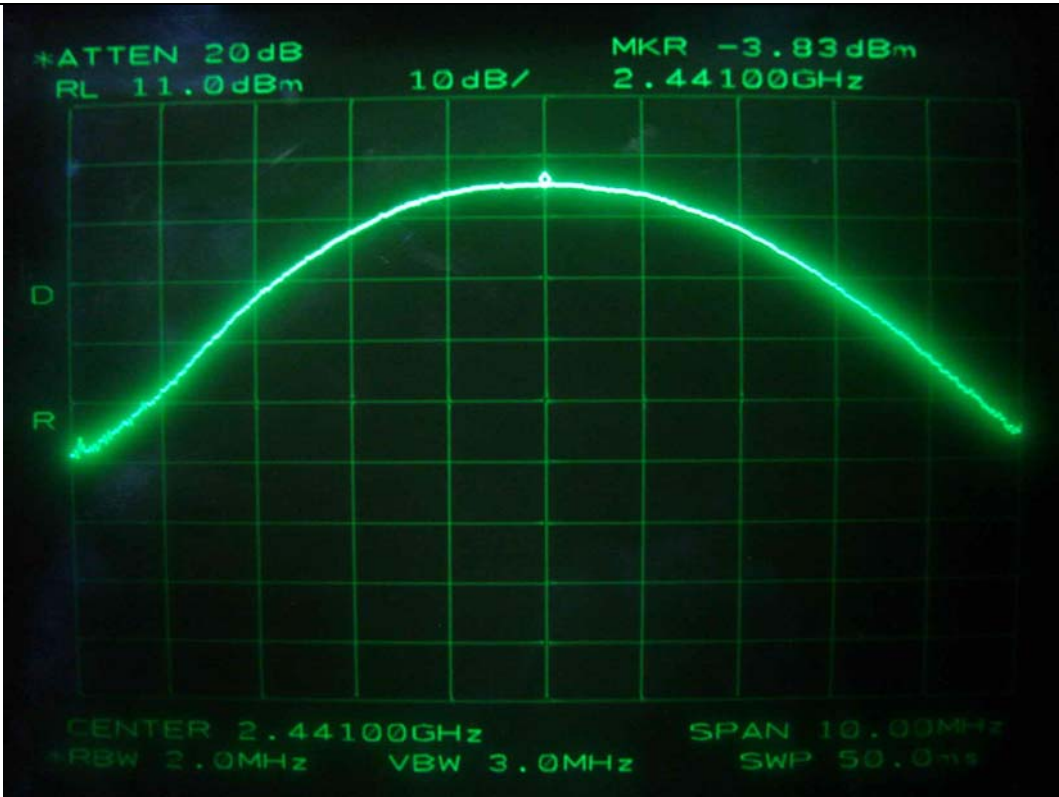


Middle Channel

It should not be reproduced except in full, without the written approval of ONETECH. EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

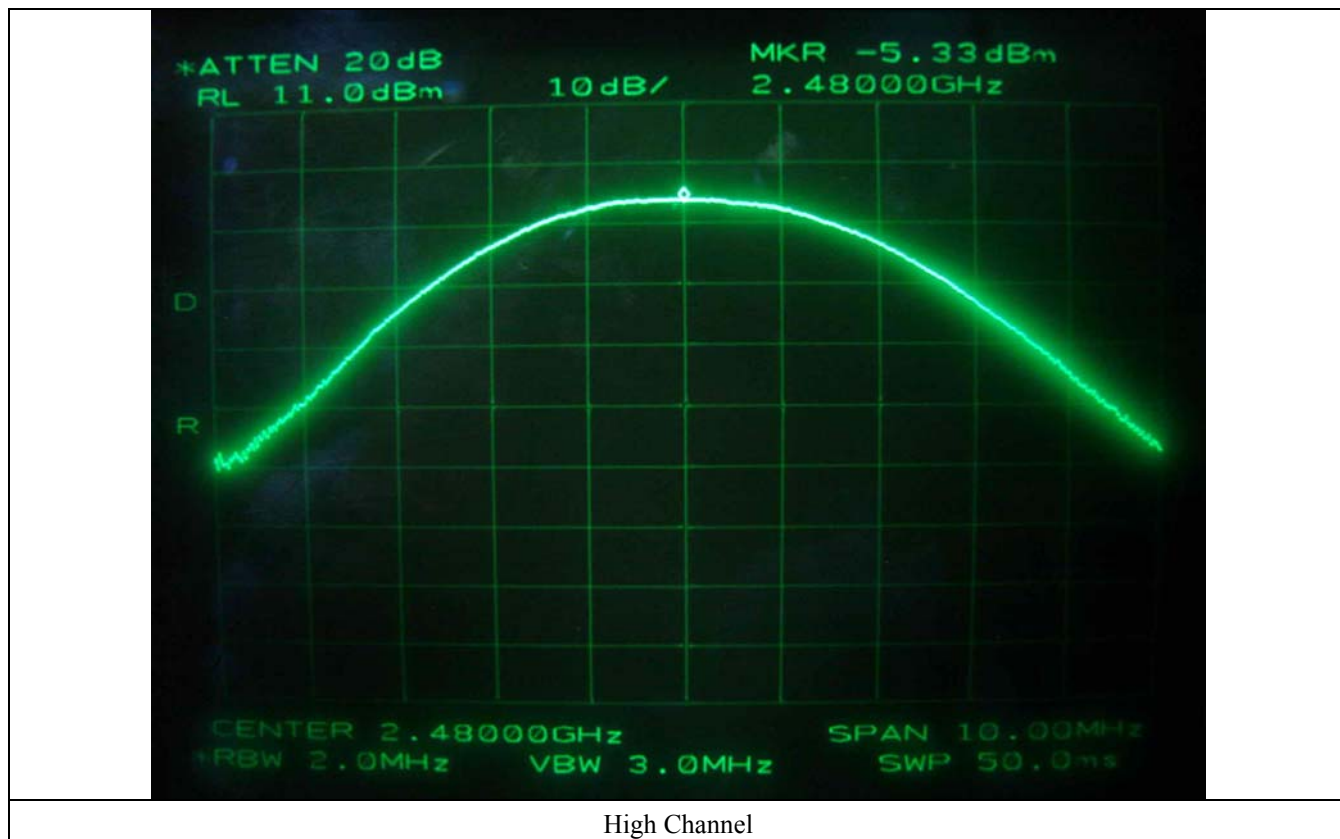

High Channel

12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 29 °C
Relative humidity : 37 %

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3meters, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The frequency spectrum from 30MHz to 25GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	June 19, 2007
■ -	8447D	Hewlett-Packard	Amplifier	2727A04987	June 19, 2007
□ -	83051A	Agilent	Preamplifier	3950M00201	June 20, 2007
■ -	F-40-5000-RF	RLC Electronics	Highpass Filter	0425	July 15, 2007
■ -	MA220	HD	Turn Table	N/A	N/A
■ -	HD240	HD	Antenna Mast	N/A	N/A
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D294	July 03, 2006(2Y)
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.


12.5. Test data

12.5.1. Test data for conducted emission

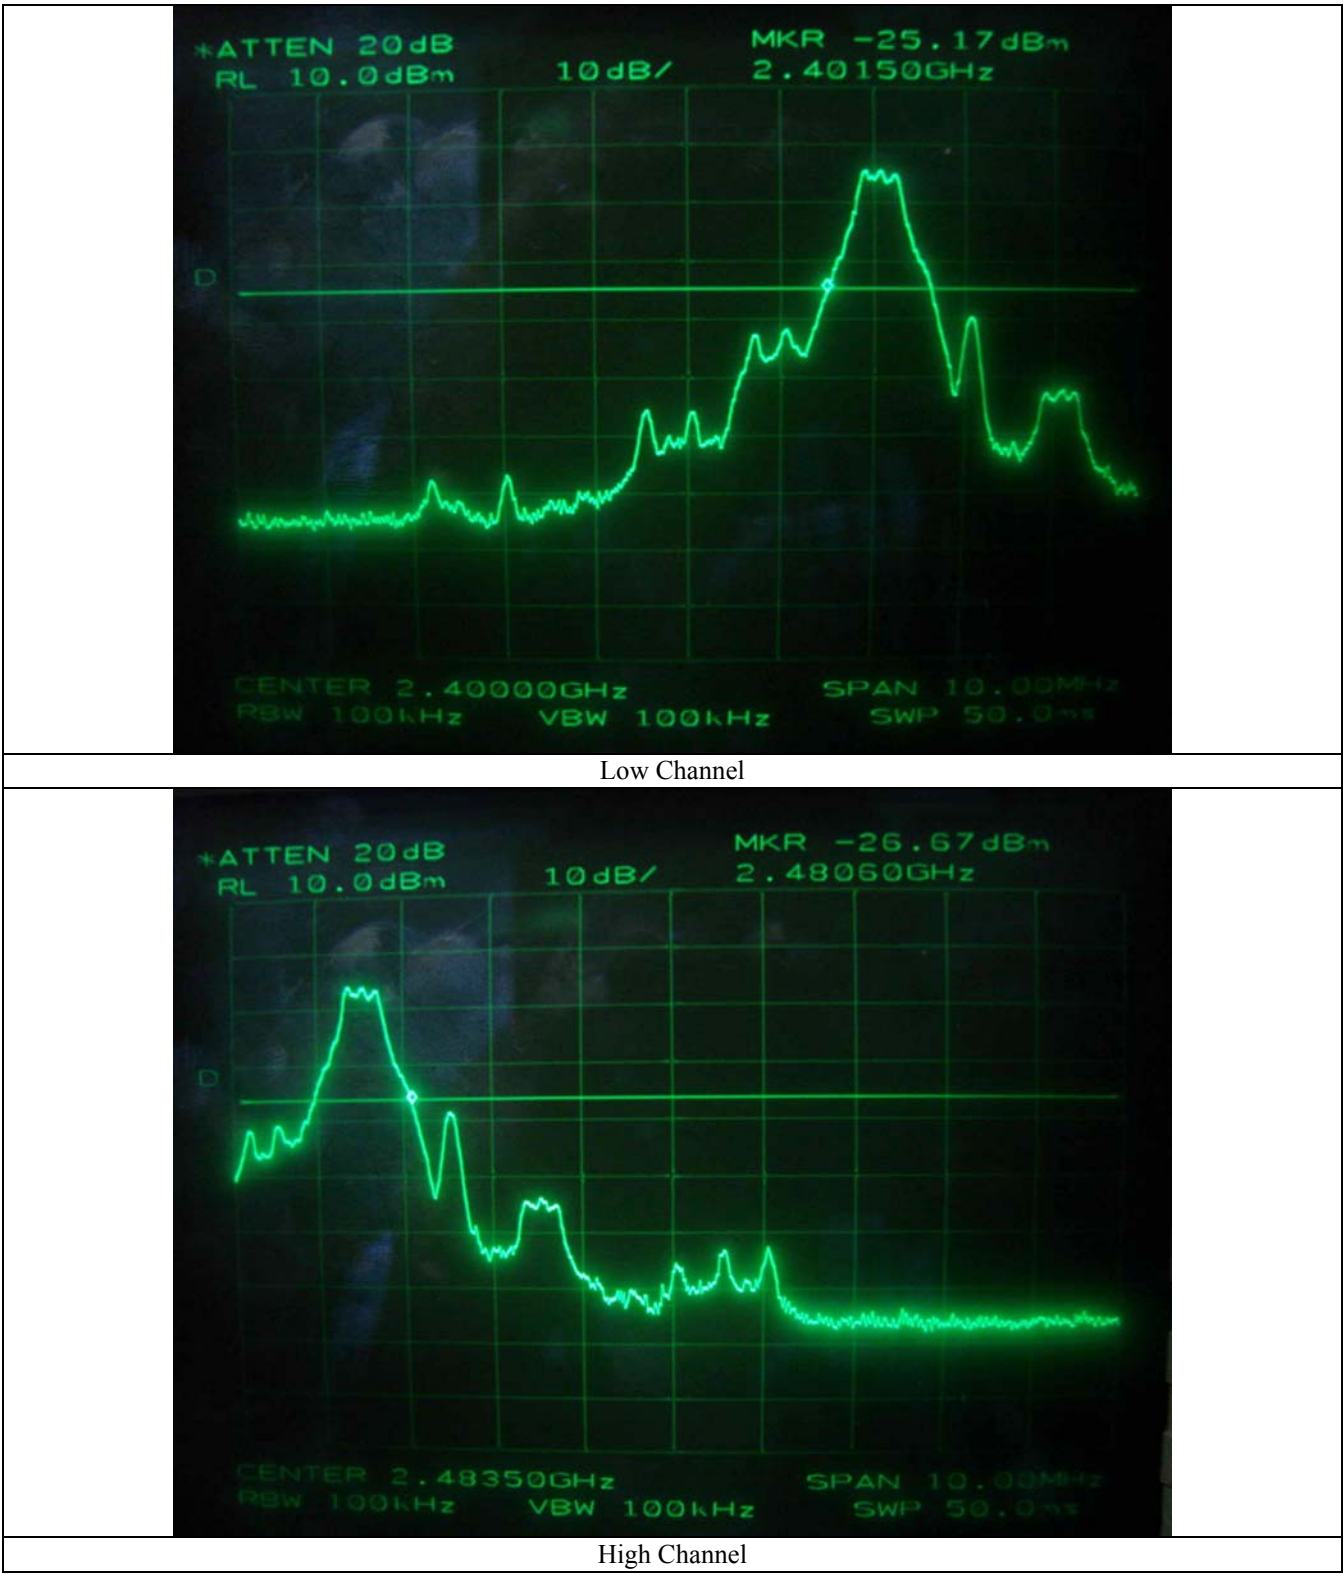

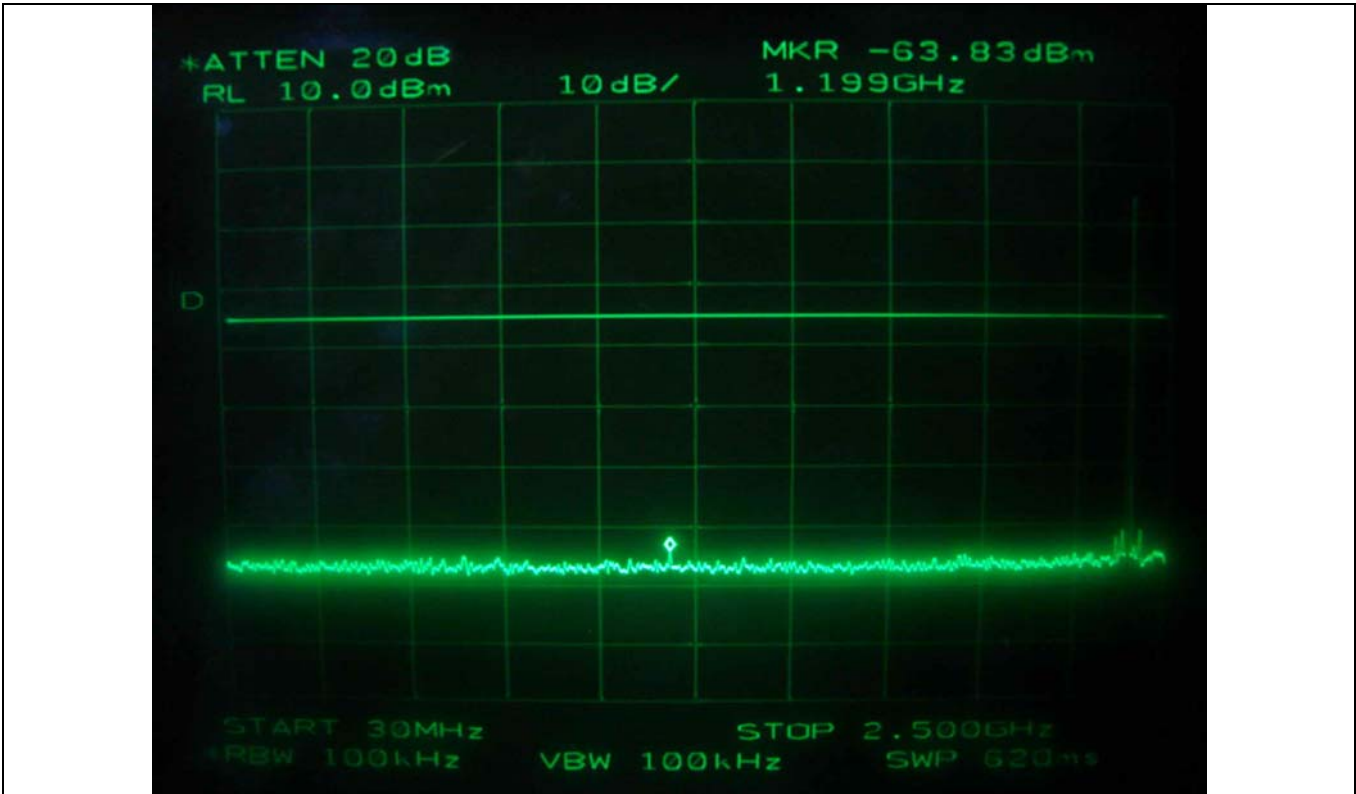

Low Channel

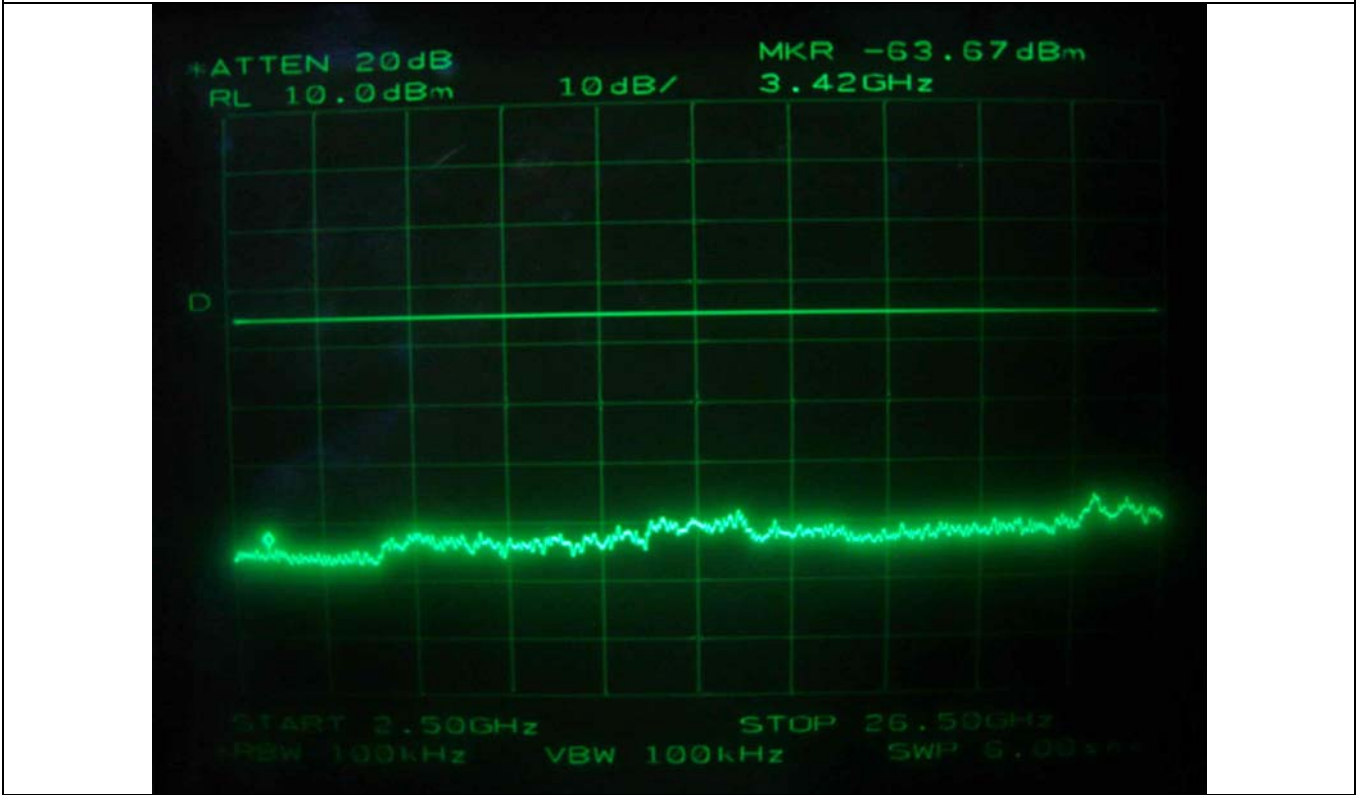

Low Channel

It should not be reproduced except in full, without the written approval of ONETECH. EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)


EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



Middle Channel



Middle Channel

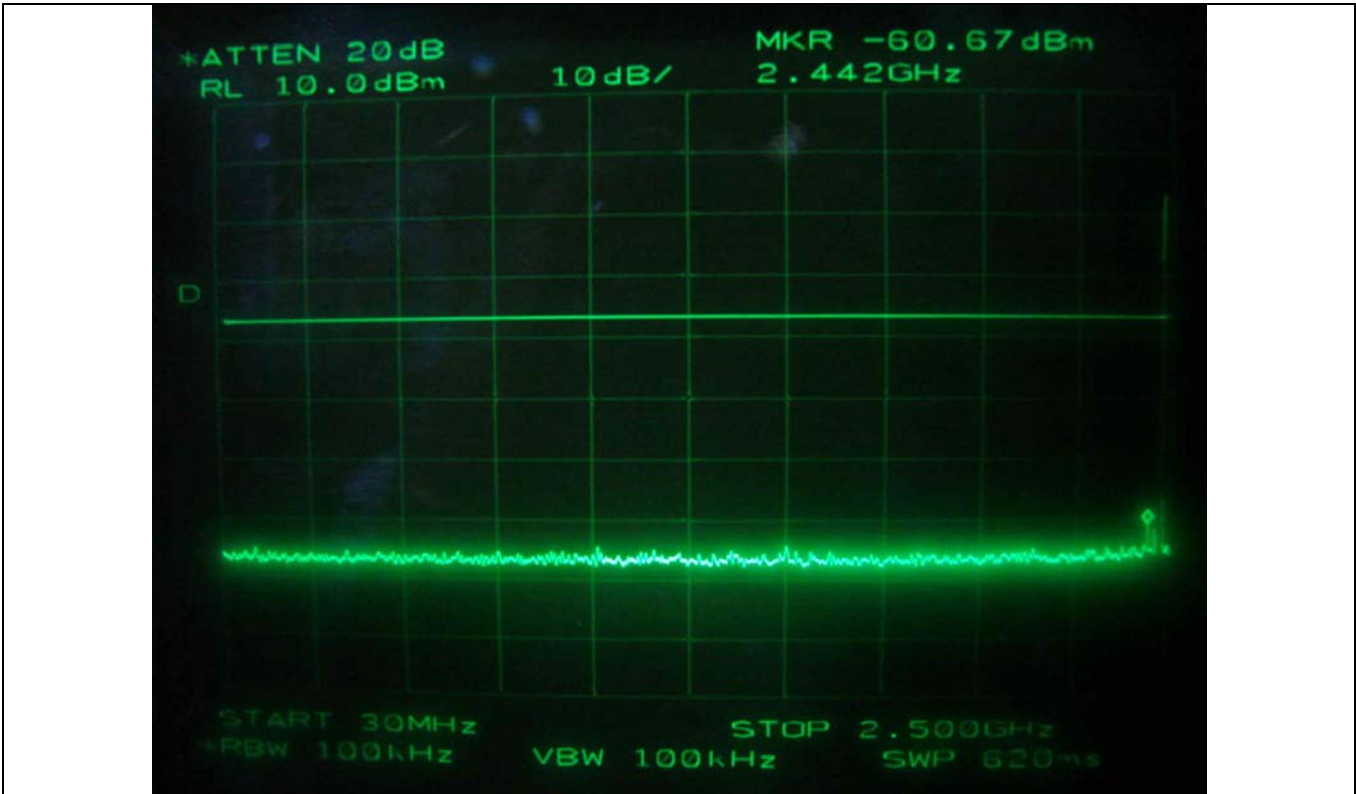

High Channel



High Channel

12.5.2. Test data for radiated emission**12.5.2.1. Radiated Emission which fall in the Restricted Band**

- Test Date : August 30, 2007
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25GHz
- Measurement distance : 3 m
- Operating Condition : Low / High Channel
- Result : PASSED by -22.90 dB at High Channel

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
2390.00	37.83	Peak	H	27.26	3.83	26.10		42.82	74.00	-31.18
	25.83	Average	H					30.82	54.00	-23.18
	37.67	Peak	V					42.66	74.00	-31.34
	25.33	Average	V					30.32	54.00	-23.68
Test Data for High Channel										
2483.53	38.50	Peak	H	27.55	3.83	26.10		43.78	74.00	-30.23
	25.83	Average	H					31.11	54.00	-22.90
	38.17	Peak	V					43.45	74.00	-30.56
	25.67	Average	V					30.95	54.00	-23.06

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Ki-Hong, Nam / Test Engineer

12.5.2.2. Spurious & Harmonic Radiated Emission

- . Test Date : August 30, 2007
- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- . Frequency range : 1 GHz ~ 25 GHz
- . Measurement distance : 3 m
- . Result : PASSED by -15.59 dB at High Channel

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
2402.00	58.83	Peak	H	27.30	3.83			89.96	-	
	50.50	Peak	V					81.63	-	
4804.00*	38.33	Peak	H	31.60	6.54	26.10		50.37	74.00	-23.63
	25.67	Average	H					37.71	54.00	-16.29
	38.17	Peak	V					50.21	74.00	-23.79
	25.50	Average	V					37.54	54.00	-16.46
Test Data for Middle Channel										
2441.00	58.17	Peak	H	27.42	3.83			89.42	-	
	50.00	Peak	V					81.25	-	
4882.00*	38.17	Peak	H	31.74	6.59	26.10		50.40	74.00	-23.60
	25.67	Average	H					37.90	54.00	-16.10
	38.00	Peak	V					50.23	74.00	-23.77
	25.50	Average	V					37.73	54.00	-16.27

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

-Continued

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for High Channel										
2480.00	59.00	Peak	H	27.53	3.83			90.36	-	
	50.50	Peak	V					81.86	-	
4960.00*	38.00	Peak	H	31.87	6.64	26.10		50.41	74.00	-23.59
	25.83	Average	H					38.24	54.00	-15.76
	38.83	Peak	V					51.24	74.00	-22.76
	26.00	Average	V					38.41	54.00	-15.59

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Ki-Hong, Nam / Test Engineer

13. PEAK POWER SPECTRUL DENSITY


13.1 Operating environment

Temperature : 25.2 °C
Relative humidity : 47.4 %

13.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is same as above resolution, and sweep time was set to span / 3 kHz. The sweep time was allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

The maximum level from the EUT in a 3 kHz bandwidth was measured with above condition.

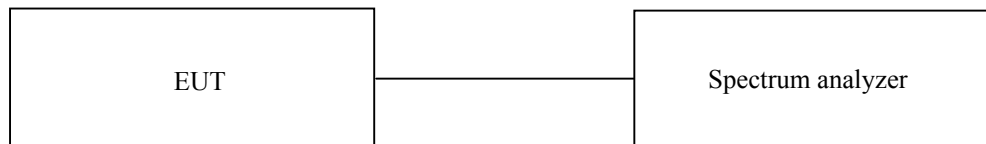

13.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 19, 2007

All test equipment used is calibrated on a regular basis.

13.4 Test data

-. Test Date : August 28, 2007
-. Result : PASSED BY -23.83 dB at Middle Channel

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2402	-15.83	8.00	-23.83
Middle	2441	-16.50	8.00	-24.50
High	2480	-17.83	8.00	-25.83

Tabulated test data for Peak Power Spectral Density.

Remark: See next page for measurement data.

Tested by: Ki-Hong, Nam / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



Low Channel



Middle Channel



14. RADIO FREQUENCY EXPOSURE

14.1 RF Exposure Limit

According to the FCC rule §1.1310, the limit for General Population/Uncontrolled exposure is 1mW/cm² for the device operating 1,500~100,000 MHz.

14.2 EUT Description

Kind of EUT	Industrial Mobile Computer with Bluetooth and WLAN 802.11b, 802.11g
Operating Frequency Band	☐ WLAN: 2400 ~ 2483.5 MHz ☐ WLAN: 5180 ~ 5320 MHz / 5500 ~ 5700 MHz ☐ WLAN: 5745 ~ 5825 MHz ☒ Bluetooth: 2400 ~ 2483.5 MHz
Device Category	☒ Portable (<20cm separation) ☐ Mobile (>20cm separation) ☐ Others
Max. Output Power	-3.83 dBm(0.414mW) at 2402MHz
Used Antenna	MFR.: WINiZEN, Model No.: W51-DF
Used Antenna Gain	2.0dBi
Exposure Evaluation Applied	☐ MPE ☐ SAR ☒ N/A

14.3 Test Result

According to the rule, §1.1307(b) (1) and §2.1093, PORTABLE devices using Bluetooth technology according to §15.247 are exempt from the regulation.

So, the device meets the RF exposure requirement.

15. RADIATED EMISSION TEST FOR DIGITAL DEVICE PART**15.1 Operating environment**

Temperature : 29 °C
Relative humidity : 37 %

15.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30MHz to 1000MHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

15.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Dec. 21, 2006
■ - 8566B	HP	Spectrum Analyzer	3407A08547	June 20, 2007
■ - 8447D	Hewlett Packard	Amplifier	2727A04987	June 19, 2007
■ - MA240	HD GmbH	Antenna Master	N/A	N/A
■ - HD100	HD GmbH	Position Controller	N/A	N/A
■ - DS420S	HD GmbH	Turn Table	N/A	N/A
■ - VHA9103	Schwarzbeck	Biconical Antenna	91031852	Feb. 08, 2007
■ - 9108-A(494)	Schwarzbeck	Log Periodic Antenna	62281001	Feb. 08, 2007

All test equipment used is calibrated on a regular basis.

15.4 Test data

- . Test Date : August 30, 2007
- . Resolution bandwidth : 120 kHz
- . Frequency range : 30MHz ~ 1000MHz
- . Measurement distance : 3m
- . Test result : Passed by -7.39 dB at 214.12 MHz(High Channel)

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
Low Channel							
34.85	12.50	V	16.74	1.49	30.73	40.00	-9.27
116.24	17.70	V	12.49	2.62	32.81	43.52	-10.71
202.49	15.83	H	16.51	3.42	35.76	43.52	-7.76
214.12	15.50	H	16.95	3.51	35.96	43.52	-7.56
517.42	12.33	H	19.40	5.37	37.10	46.02	-8.92
723.82	10.50	H	21.58	6.50	38.58	46.02	-7.44
Middle Channel							
34.85	12.00	V	16.74	1.49	30.23	40.00	-9.77
116.24	17.50	V	12.49	2.62	32.61	43.52	-10.91
202.49	16.00	H	16.51	3.42	35.93	43.52	-7.59
214.12	15.33	H	16.95	3.51	35.79	43.52	-7.73
517.42	12.17	H	19.40	5.37	36.94	46.02	-9.08
723.82	10.33	H	21.58	6.50	38.41	46.02	-7.61
Low Channel							
34.85	12.83	V	16.74	1.49	31.06	40.00	-8.94
116.24	17.67	V	12.49	2.62	32.78	43.52	-10.74
202.49	15.50	H	16.51	3.42	35.43	43.52	-8.09
214.12	15.67	H	16.95	3.51	36.13	43.52	-7.39
517.42	12.00	H	19.40	5.37	36.77	46.02	-9.25
723.82	10.00	H	21.58	6.50	38.08	46.02	-7.94

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical



Tested by: Ki-Hong, Nam / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

16. CONDUCTED EMISSION TEST

16.1 Operating environment

Temperature : 25 °C
Relative humidity : 48 %

16.2 Test set-up

The EUT was placed on a wooden table, 0.8 meters height above the floor. The power of the EUT was connected through a 50 ohm/ 50 uH + 5ohm Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

16.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	May 11, 2007
■ - NSLK 8128	Schwarzbeck	AMN	8128-216	July 04, 2007
■ - 3825/2	EMCO	AMN	9109-1867	June 21, 2007

All test equipment used is calibrated on a regular basis.

16.4 Test data

- . Test Date : August 31, 2007
- . Resolution bandwidth : 9 kHz
- . Frequency range : 0.15MHz ~ 30MHz
- . Test Result : PASSED BY -7.85dB at 0.17 MHz under average mode

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Limits		Emission level	Limits	
0.16	H	55.51	65.46	-9.95	26.84	55.46	-28.62
0.17	H	54.37	64.96	-10.59	47.11	54.96	-7.85
0.34	N	43.11	59.20	-16.09	35.74	49.20	-13.46
0.84	N	40.28	56.00	-15.72	30.42	46.00	-15.58
1.36	H	41.11	56.00	-14.89	29.03	46.00	-16.97
2.55	N	44.83	56.00	-11.17	27.36	46.00	-18.64


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line


See next page for an overview sweep performed with peak and average detector modes.



Tested by: Ki-Hong, Nam / Test Engineer

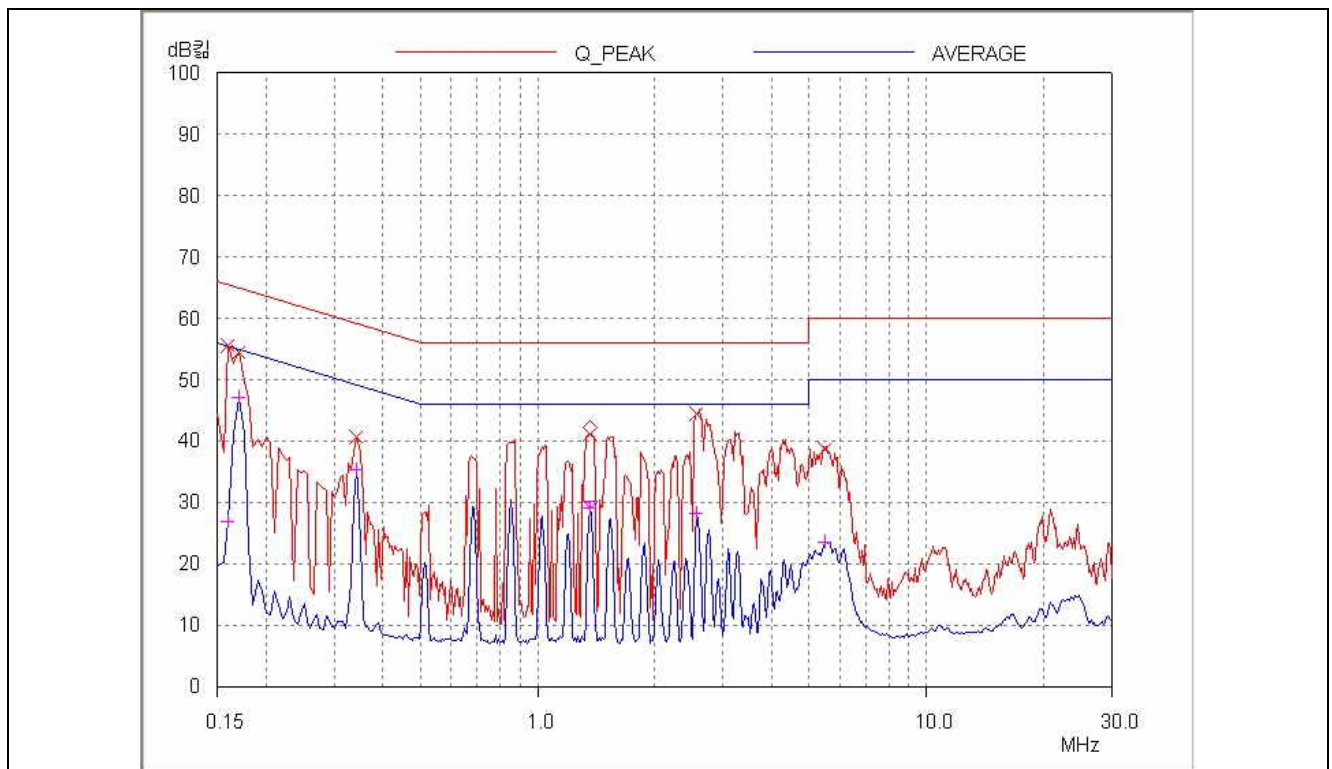

HOT LINE

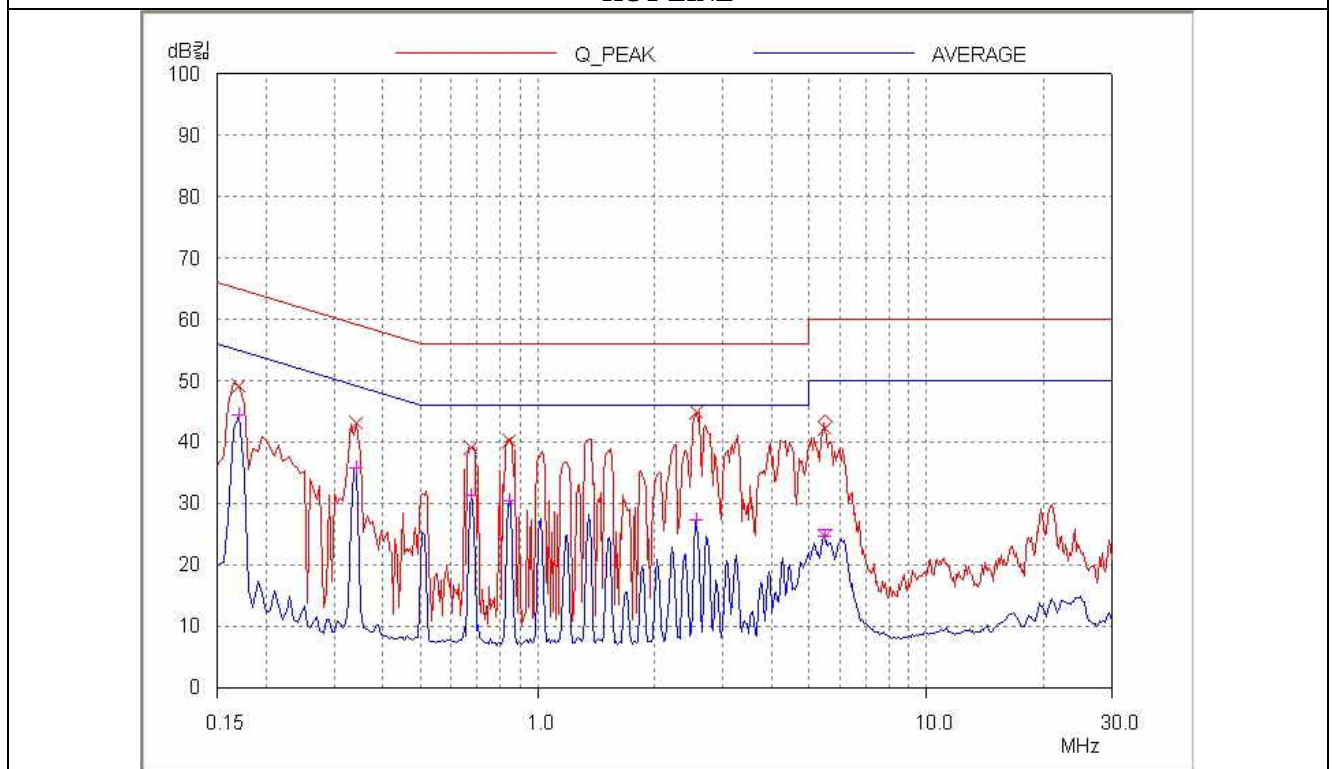

NEUTRAL LINE

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)