



Shenzhen Huatongwei International Inspection Co., Ltd.

Keji S, 12th, Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China

Phone: 86-755-26748099

Fax: 86-755-26748089

http://www.szhtw.com.cn



FCC TEST REPORT

47 CFR FCC Part 15.249

Report Reference No.....: TRE12090090 R/C: 59037

FCC ID.....: PONFDBB-V2B

Compiled by

(position+printed name+signature)...: File administrators Eric Zhang

Eric Zhang

Supervised by

(position+printed name+signature)...: Test Engineer Tim Zhang

Tim Zhang

Approved by

(position+printed name+signature)...: Manager Wenliang Li

Wenliang Li

Date of issue.....: Dec 04, 2012

Testing Laboratory Name.....: Shenzhen Huatongwei International Inspection Co., Ltd

Address.....: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name.....: Famidoc Technology Co., Ltd.

Address.....: No.212 Yilong Road, Hexi Industrial Zone, Jinxia, Changan Town, Dongguan 523853, Guangdong Province, P.R.China.

Manufacturer's name.....: Famidoc Technology Co., Ltd.

Address.....: No.212 Yilong Road, Hexi Industrial Zone, Jinxia, Changan Town, Dongguan 523853, Guangdong Province, P.R.China.

Test specification:

Standard.....: 47 CFR FCC Part 15 Subpart C & 15.249

ANSI C63.10: 2009

TRF Originator.....: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test.....: Baby Monitor

Trade Mark.....: /

Model/Type reference.....: FDBB-V2(baby unit)

Listed Models.....: /

Modulation.....: GFSK

Result.....: Complied

TEST REPORT

Test Report No. : TRE12090090	Dec 04, 2012 Date of issue
--------------------------------------	-------------------------------

Equipment under Test : Baby Monitor

Model /Type : FDBB-V2(baby unit)

Listed Models : /

Applicant : **Famidoc Technology Co., Ltd.**

Address : No.212 Yilong Road, Hexi Industrial Zone, Jinxia,
Changan Town, Dongguan 523853, Guangdong Province,
P.R.China.

Manufacturer : **Famidoc Technology Co., Ltd.**

Address : No.212 Yilong Road, Hexi Industrial Zone, Jinxia,
Changan Town, Dongguan 523853, Guangdong Province,
P.R.China.

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	Related Submittal(s) / Grant (s)	5
2.6.	Modifications	5
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Statement of the measurement uncertainty	7
3.4.	Summary of standards and result	7
3.5.	Environmental conditions	7
3.6.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	ANTENNA REQUIREMENT	9
4.2.	Conducted Emissions Test	10
4.3.	Radiated Emission Test	13
4.4.	Out of band emissions	20
4.5.	20dB Bandwidth Measurement	22
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>25</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>27</u>

1. TEST STANDARDS

The tests were performed according to following standards:

47 CFR FCC Rules Part 15.249: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

ANSI C63.10: 2009 – American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Oct 11, 2012
Testing commenced on	:	Oct 11, 2012
Testing concluded on	:	Dec 04, 2012

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☒ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

AC Adapter

MODEL: JD5W-0900350 US
 INPUT: 100-240V ~ 50/60Hz 0.2A
 OUTPUT: 9V 350mA
 Power Cable: 150cm
☐ Shield ☒ Unshield

2.3. Short description of the Equipment under Test (EUT)

2.4 GHz (Baby Monitor(baby unit)),

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: PONFDBB-V2B** filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 29, 2012. Valid time is until Feb. 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun. 01, 2012, valid time is until Jun. 01, 2015.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the authorization is valid through July 07, 2013

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2009. Valid time is until Dec. 19, 2012.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2010. Valid time is until May 06, 2013.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2013.

3.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.09~30MHz	3.85dB	(1)
Radiated Emission	30~1000MHz	4.22dB	(1)
Radiated Emission	1~18GHz	4.35dB	(1)
99% Bandwidth	/	0.25dB	(1)
Deactivation Time	/	0.5ms	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4. Summary of standards and result

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Compliance
§15.109, §15.205(a), §15.209(a), 15.249(a), §15.249(c), §15.35	Radiated Emissions	Compliance
§15.249(d)	Out of Band Emissions	Compliance
§15.215(c)	20 dB Bandwidth	Compliance

NOTE: 1) The detailed test result please see section 4.

2) The test report merely corresponds to the test sample.

3) It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.6. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCS30	100038	2012/10/27
2	ARTIFICIAL MAINS	Rohde & Schwarz	ESH2-Z5	100028	2012/10/27
3	PULSE LIMITER	Rohde & Schwarz	ESHSZ2	100044	2012/10/27
4	EMI TEST SOFTWARE	Rohde & Schwarz	ES-K1 1.71	N/A	2012/10/27

Radiated Emissions / Band Edge Measurement					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	Rohde & Schwarz	HL562	100015	2012/10/27
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2012/10/27
3	RF TEST PANEL	Rohde & Schwarz	TS / RSP	335015/ 0017	2012/10/27
4	TURNTABLE	ETS	2088	2149	2012/10/27
5	ANTENNA MAST	ETS	2075	2346	2012/10/27
6	EMI TEST SOFTWARE	Rohde & Schwarz	ESK1	N/A	2012/10/27
7	HORN ANTENNA	Rohde & Schwarz	HF906	100039	2012/10/27
8	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100020	2012/10/27
9	Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	470	2012/10/27
10	Amplifier	Compliance Direction systems	PAP-1G-40	48	2012/10/27
11	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	539	2012/10/27
12	HORN ANTENNA	ShwarzBeck	9120D	1012	2012/10/27
13	TURNTABLE	MATURO	TT2.0	----	2012/10/27
14	ANTENNA MAST	MATURO	TAM-4.0-P	----	2012/10/27

20dB Bandwidth					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCI	100106	2012/10/27

The Calibration Interval was one year.

4. TEST CONDITIONS AND RESULTS


4.1. ANTENNA REQUIREMENT

According to FCC Part 15C § 15.203,

- a), An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b), The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


The EUT complied the antenna requirement., Please refer to the EUT Internal photos.

Antenna

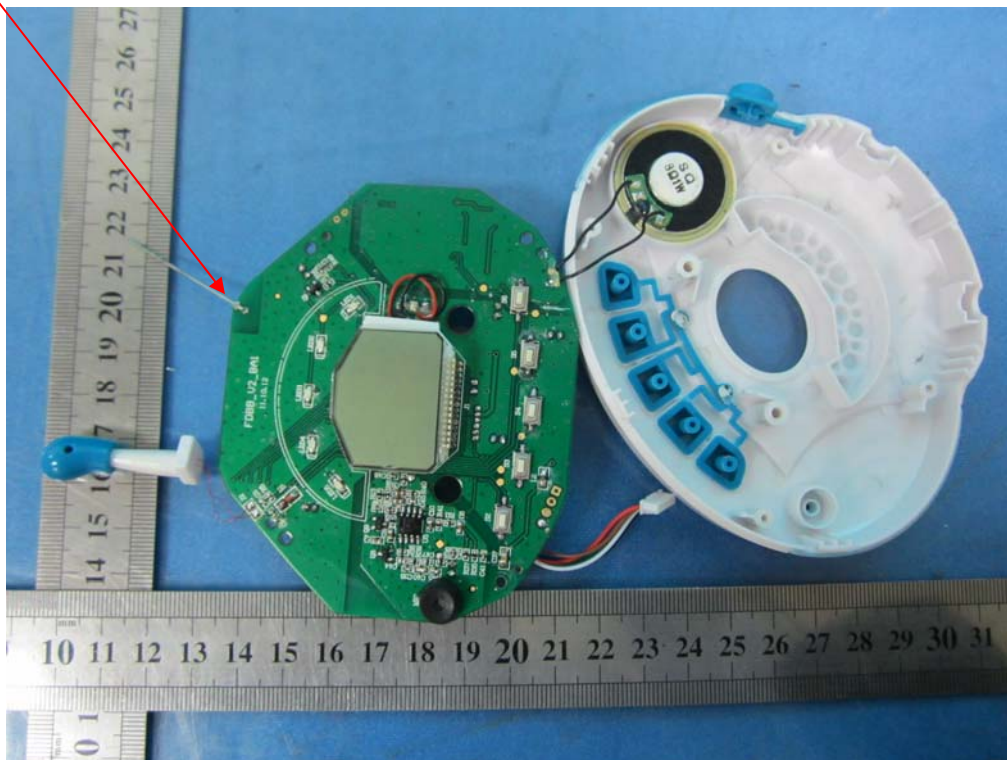

4.2. Conducted Emissions Test

TEST CONFIGURATION

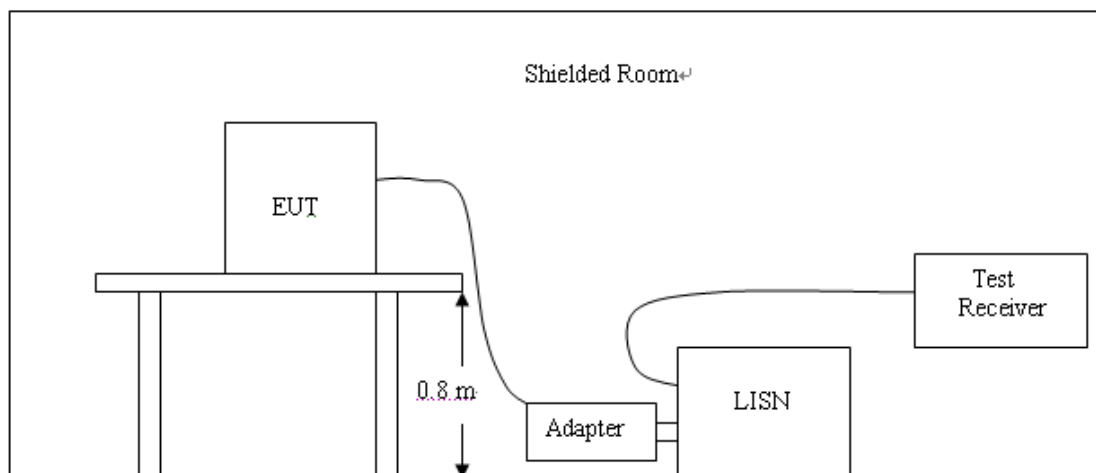

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Weather station Transmitter; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2 Support equipment, if needed, was placed as per ANSI C63.10.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4 All support equipments received AC power from a second LISN, if any.
- 5 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 7 During the above scans, the emissions were maximized by cable manipulation.

CONDUCTED LIMIT

According to FCC Subpart 15 B § 15.207 AC Conducted Emission Limits is as following :


Frequency fange (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.1~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50
* Decreasing linearly with the logarithm of the frequency		

TEST RESULTS

Test mode :Transmitting

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

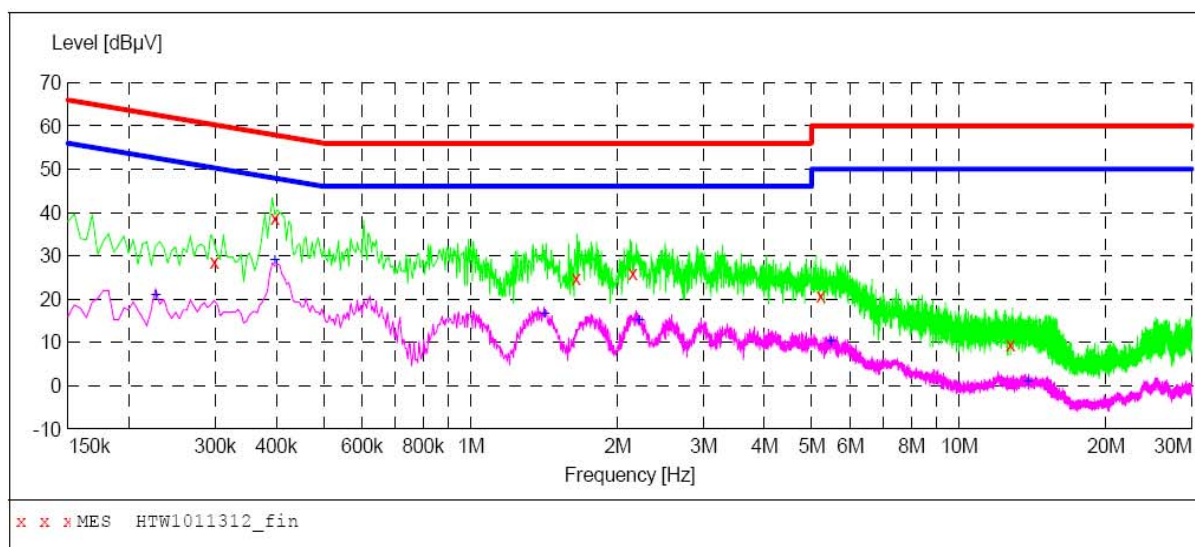**MEASUREMENT RESULT: "HTW1011312_fin"**

10/11/2012 1:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.298500	28.70	10.1	60	31.6	QP	N	GND
0.397500	38.90	10.1	58	19.0	QP	N	GND
1.644000	25.00	10.2	56	31.0	QP	N	GND
2.148000	26.10	10.2	56	29.9	QP	N	GND
5.212500	20.90	10.2	60	39.1	QP	N	GND
12.763500	9.50	10.4	60	50.5	QP	N	GND


MEASUREMENT RESULT: "HTW1011312_fin2"

10/11/2012 1:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.226500	20.90	10.1	53	31.7	AV	N	GND
0.397500	28.90	10.1	48	19.0	AV	N	GND
1.419000	16.40	10.2	46	29.6	AV	N	GND
2.215500	15.00	10.2	46	31.0	AV	N	GND
5.473500	10.00	10.2	50	40.0	AV	N	GND
13.879500	1.00	10.4	50	49.0	AV	N	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

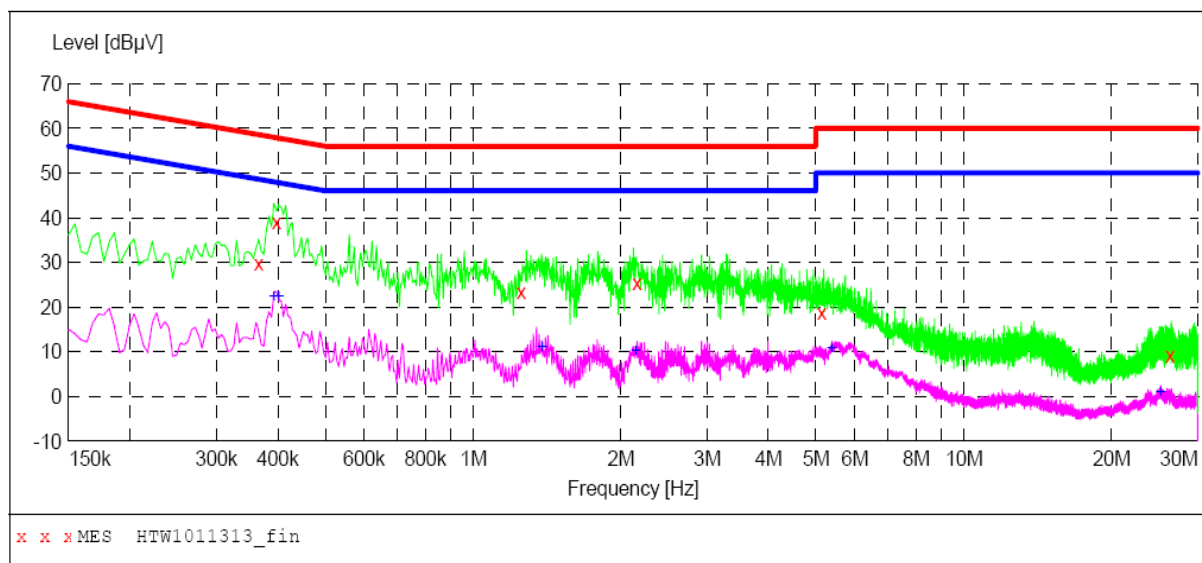**MEASUREMENT RESULT: "HTW1011313_fin"**

10/11/2012 1:32PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.366000	29.90	10.1	59	28.7	QP	L1	GND
0.397500	39.00	10.1	58	18.9	QP	L1	GND
1.252500	23.40	10.2	56	32.6	QP	L1	GND
2.157000	25.50	10.2	56	30.5	QP	L1	GND
5.140500	18.80	10.2	60	41.2	QP	L1	GND
26.353500	9.20	10.8	60	50.8	QP	L1	GND

MEASUREMENT RESULT: "HTW1011313_fin2"

10/11/2012 1:32PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.393000	22.20	10.1	48	25.8	AV	L1	GND
0.402000	22.20	10.1	48	25.6	AV	L1	GND
1.383000	11.10	10.2	46	34.9	AV	L1	GND
2.148000	10.10	10.2	46	35.9	AV	L1	GND
5.383500	10.80	10.2	50	39.2	AV	L1	GND
25.206000	0.90	10.7	50	49.1	AV	L1	GND


Page 1/1 10/11/2012 1:32PM HTW1011313

4.3. Radiated Emission Test


TEST CONFIGURATION

Radiated Emission Test Set-Up


Frequency range 9KHz – 30MHz

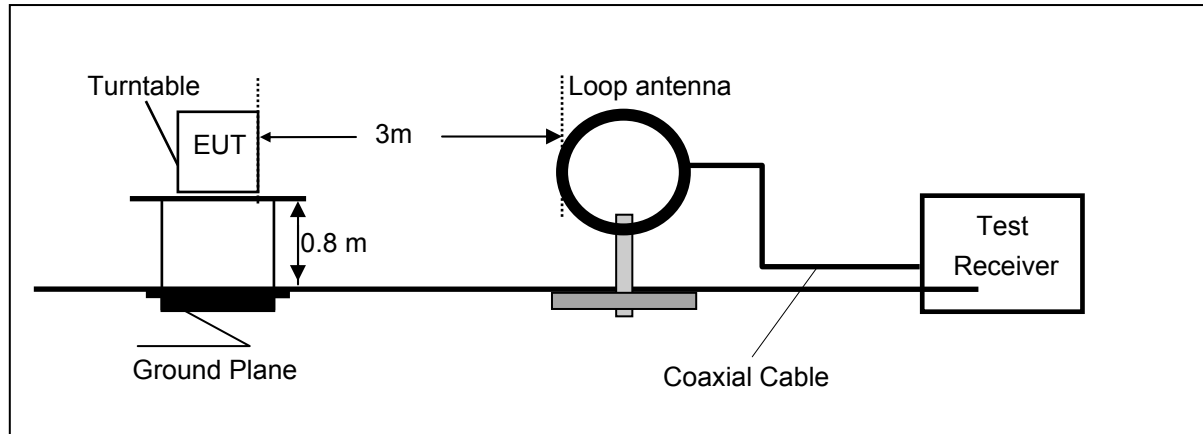

Frequency range 30MHz – 1000MHz

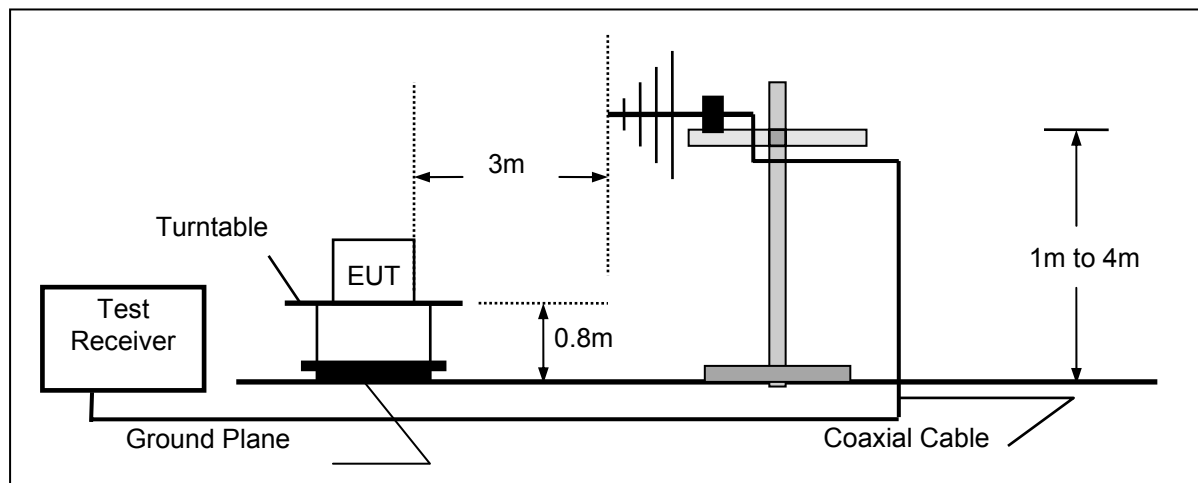

Frequency range above 1GHz-25GHz

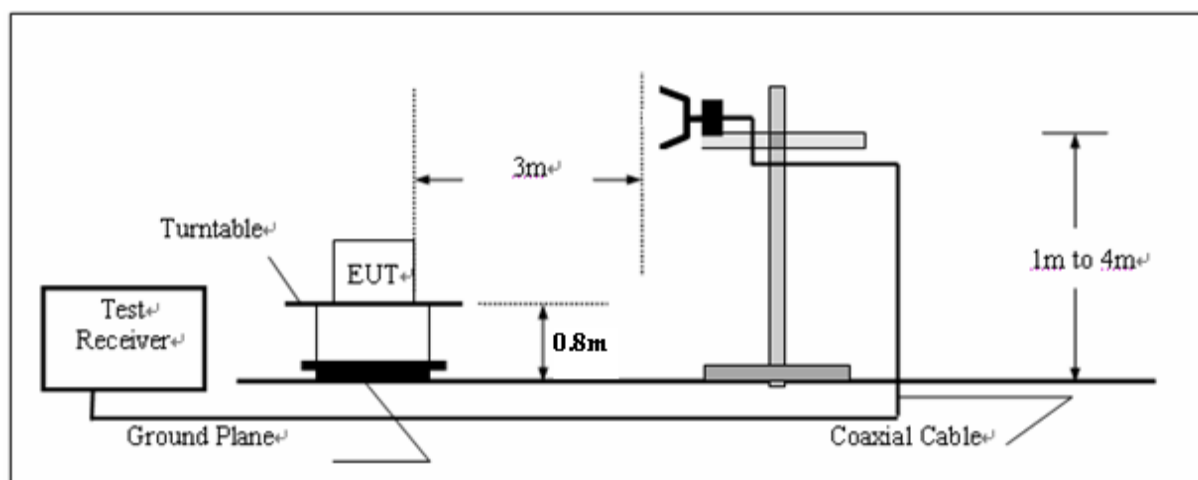

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. the frequency range of EUT is 2.4GHz-2.4835GHz and the lowest crystal frequency is 16MHz, So the radiation emissions frequency range were tested from 9KHz to 25GHz.

RADIATION LIMIT

according to § 15.209, the field strength of radiated emissions limits comply with the following:

Frequency (MHz)	Field strength (microvolts/meter)	Measure- ment dis- tance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

As per §15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per §15.249 (c), Field strength limits are specified at a distance of 3 meters.

Note: We tested three (High, Middle, Low) channels' Radiated emission and recorded worst case data below 1G

TEST RESULTS


Radiated emission (below 30MHz)

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Result
16.00	55.96	69.54	13.58	QP	Pass
21.36	45.78	69.54	23.76	QP	Pass
24.58	41.34	69.54	28.20	QP	Pass

Radiated emission (below 1G)

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	120 kHz	HL562

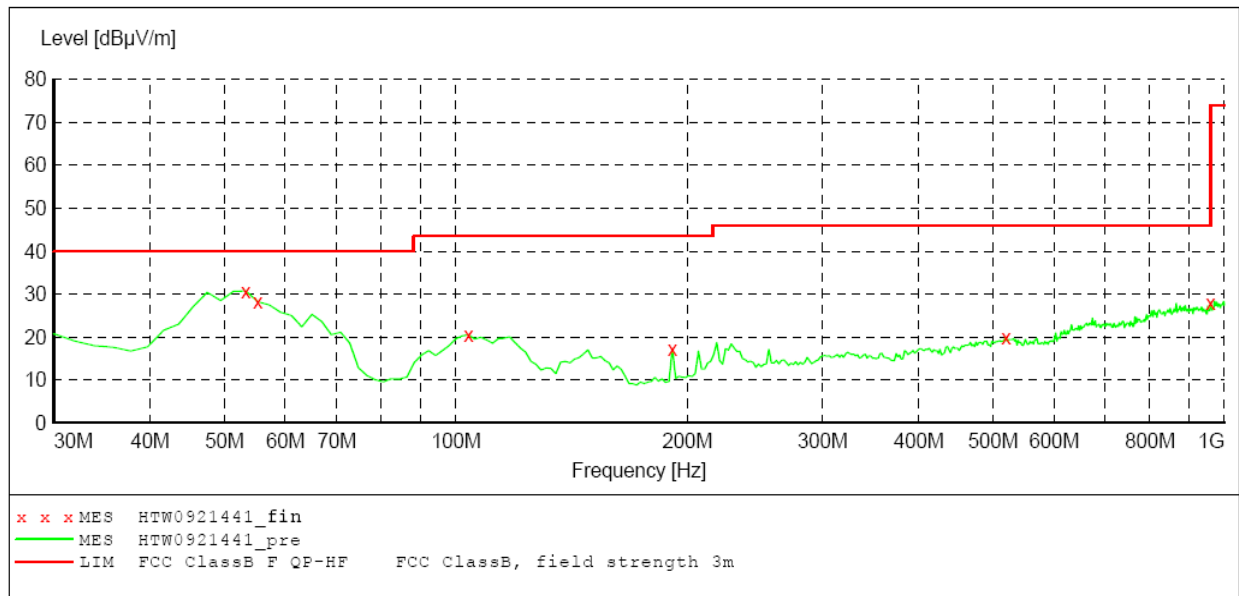
***MEASUREMENT RESULT: "HTW0921441_fin"***

9/21/2012 3:13PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.326653	30.70	-23.3	40.0	9.3	QP	100.0	224.00	VERTICAL
55.270541	28.20	-23.9	40.0	11.8	QP	300.0	345.00	VERTICAL
103.867735	20.50	-19.6	43.5	23.0	QP	100.0	262.00	VERTICAL
191.342685	17.30	-22.3	43.5	26.2	QP	100.0	75.00	VERTICAL
519.859719	19.90	-13.0	46.0	26.1	QP	300.0	179.00	VERTICAL
959.178357	28.00	-7.1	46.0	18.0	QP	100.0	42.00	VERTICAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	120 kHz	HL562

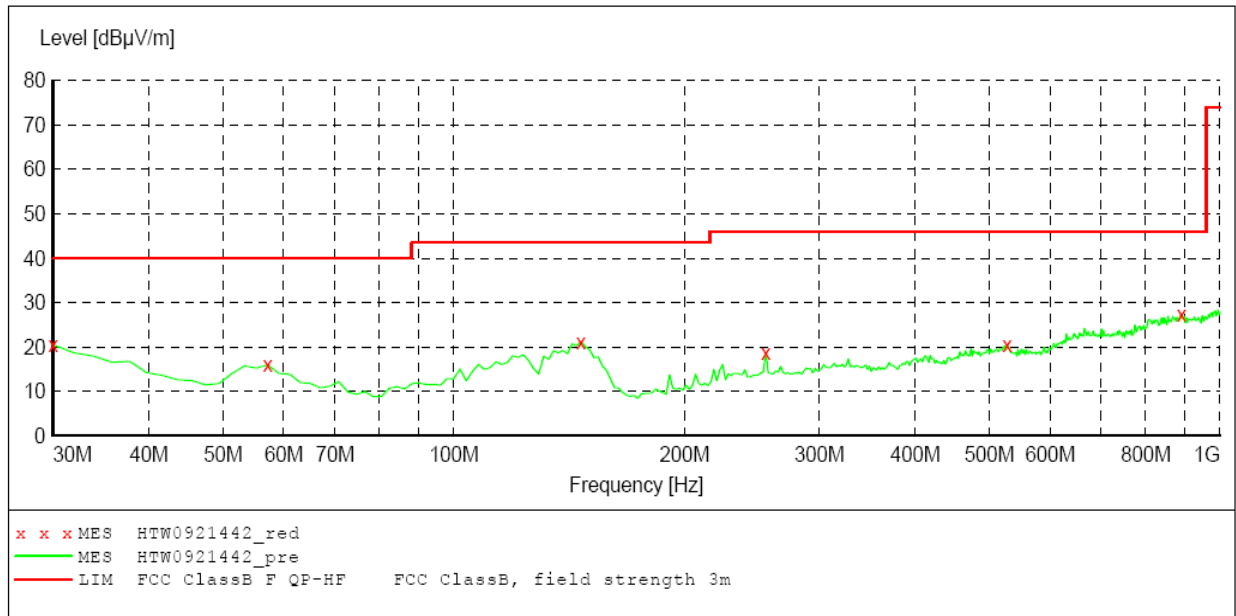***MEASUREMENT RESULT: "HTW0921442_red"***

9/21/2012 3:16PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	20.50	-11.1	40.0	19.5	---	300.0	148.00	HORIZONTAL
57.214429	16.00	-24.6	40.0	24.0	---	300.0	306.00	HORIZONTAL
146.633267	21.30	-22.5	43.5	22.2	---	300.0	163.00	HORIZONTAL
255.490982	18.70	-18.4	46.0	27.3	---	100.0	255.00	HORIZONTAL
527.635271	20.60	-13.1	46.0	25.4	---	300.0	202.00	HORIZONTAL
891.142285	27.40	-6.7	46.0	18.6	---	100.0	225.00	HORIZONTAL

Radiated emission (above 1G)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2410MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2410.00	92.69	PK	114.00	21.31	1.00 H	360	95.89	28.3	4.90	-36.6	-3.40
1	*2410.00	81.98	AV	94.00	12.02	1.00 H	360	85.18	28.3	4.90	-36.6	-3.40
2	4820.00	58.98	PK	74.00	15.02	1.00 H	359	55.58	32.7	7.00	-36.5	3.20
2	4820.00	48.15	AV	54.00	5.85	1.00 H	359	44.75	32.7	7.00	-36.5	3.20
3	7230.00	53.17	PK	74.00	20.83	1.00 H	152	43.77	35.8	8.90	-35.3	9.40
3	7230.00	43.62	AV	54.00	10.38	1.00 H	152	34.22	35.8	8.90	-35.3	9.40
4	9640.00	51.02	PK	74.00	22.98	1.00 H	140	38.42	37.2	10.20	-34.8	12.60
4	9640.00	43.25	AV	54.00	10.75	1.00 H	140	30.65	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2410MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2410.00	96.70	PK	114.00	17.30	1.00 V	124	99.90	28.3	4.90	-36.6	-3.40
1	*2410.00	86.48	AV	94.00	7.52	1.00 V	124	89.68	28.3	4.90	-36.6	-3.40
2	4820.00	61.69	PK	74.00	12.31	1.00 V	339	58.49	32.7	7.00	-36.5	3.20
2	4820.00	51.26	AV	54.00	2.74	1.00 V	339	39.86	32.7	7.00	-36.5	3.20
3	7230.00	52.19	PK	74.00	21.81	1.00 V	340	42.79	35.8	8.90	-35.3	9.40
3	7230.00	41.52	AV	54.00	12.48	1.00 V	340	32.12	35.8	8.90	-35.3	9.40
4	9640.00	53.64	PK	74.00	20.36	1.00 V	20	41.04	37.2	10.20	-34.8	12.60
4	9640.00	43.57	AV	54.00	10.43	1.00 V	20	30.97	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2440MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2440.00	91.56	PK	114.00	22.44	1.00 H	153	94.76	28.3	5.10	-36.6	-3.20
1	*2440.00	80.46	AV	94.00	13.54	1.00 H	153	83.66	28.3	5.10	-36.6	-3.20
2	4880.00	56.12	PK	74.00	17.88	1.00 H	202	52.72	32.3	7.60	-36.5	3.40
2	4880.00	45.06	AV	54.00	8.94	1.00 H	202	41.66	32.3	7.60	-36.5	3.40
3	7320.00	51.36	PK	74.00	22.64	1.00 H	355	41.96	36.1	8.60	-35.3	9.40
3	7320.00	39.48	AV	54.00	14.52	1.00 H	355	30.08	36.1	8.60	-35.3	9.40
4	9760.00	63.63	PK	74.00	10.37	1.00 H	28	51.03	37.2	10.20	-34.8	12.60
4	9760.00	51.20	AV	54.00	2.8	1.00 H	28	38.60	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2440MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2440.00	96.47	PK	114.00	17.53	1.00 V	121	99.67	28.3	5.10	-36.6	-3.20
1	*2440.00	86.01	AV	94.00	7.99	1.00 V	121	89.21	28.3	5.10	-36.6	-3.20
2	4880.00	57.23	PK	74.00	16.77	1.00 V	97	53.83	32.3	7.60	-36.5	3.40
2	4880.00	45.13	AV	54.00	8.87	1.00 V	97	41.73	32.3	7.60	-36.5	3.40
3	7320.00	59.52	PK	74.00	14.48	1.00 V	288	50.12	3	8.60	-35.3	9.40
3	7320.00	49.78	AV	54.00	4.22	1.00 V	288	40.38	36.1	8.60	-35.3	9.40
4	9760.00	59.85	PK	74.00	14.15	1.00 V	89	47.25	37.2	10.20	-34.8	12.60
4	9760.00	48.55	AV	54.00	5.45	1.00 V	89	35.95	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2473MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2473.00	90.19	PK	114.00	23.81	1.00 H	154	93.49	28.6	4.70	-36.6	-3.30
1	*2473.00	79.96	AV	94.00	14.04	1.00 H	154	83.26	28.6	4.70	-36.6	-3.30
2	4946.00	59.24	PK	74.00	14.76	1.00 H	100	55.44	33.0	7.00	-36.2	3.80
2	4946.00	49.91	AV	54.00	4.09	1.00 H	100	46.11	33.0	7.00	-36.2	3.80
3	7419.00	55.79	PK	74.00	18.21	1.00 H	190	46.39	36.2	8.50	-35.3	9.40
3	7419.00	40.62	AV	54.00	13.38	1.00 H	190	31.22	36.2	8.50	-35.3	9.40
4	9892.00	50.56	PK	74.00	23.44	1.00 H	113	37.96	37.2	10.20	-34.8	12.60
4	9892.00	40.52	AV	54.00	13.48	1.00 H	113	27.92	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2473MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2473.00	96.20	PK	114.00	17.8	1.00 V	247	99.50	28.6	4.70	-36.6	-3.30
1	*2473.00	86.45	AV	94.00	7.55	1.00 V	247	89.75	28.6	4.70	-36.6	-3.30
2	4946.00	54.93	PK	74.00	19.07	1.00 V	90	51.13	33.0	7.00	-36.2	3.80
2	4946.00	45.83	AV	54.00	8.17	1.00 V	90	42.03	33.0	7.00	-36.2	3.80
3	7419.00	63.60	PK	74.00	10.4	1.00 V	29	54.20	36.2	8.50	-35.3	9.40
3	7419.00	50.57	AV	54.00	3.43	1.00 V	29	41.17	36.2	8.50	-35.3	9.40
4	9892.00	56.22	PK	74.00	17.78	1.00 V	222	43.62	37.2	10.20	-34.8	12.60
4	9892.00	43.57	AV	54.00	10.43	1.00 V	222	30.97	37.2	10.20	-34.8	12.60

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) +Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. The limit value is defined as per 15.249
 6. "*" ": Fundamental frequency


4.4. Out of band emissions

TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBM to 300 KHz, to measure the conducted peak band edge.

EUT Setup

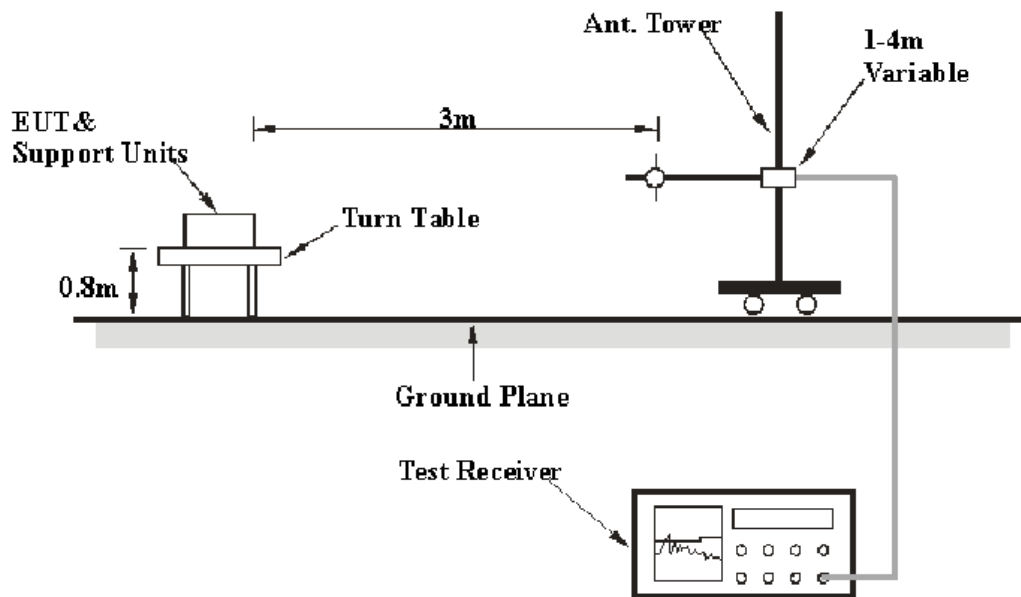

LIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

TEST RESULTS

Test Mode: Transmitting

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Polarization
Out of left side band					
2390.00	60.34	74	13.66	PK	Horizontal
2390.00	48.33	54	5.67	AV	Horizontal
2390.00	59.90	74	14.10	PK	Vertical
2390.00	47.97	54	6.03	AV	Vertical
Out of right side band					
2483.50	52.19	74	21.81	PK	Horizontal
2483.50	40.77	54	11.23	AV	Horizontal
2483.50	50.76	74	23.24	PK	Vertical
2483.50	40.77	54	13.23	AV	Vertical


Note: 1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

2. The average measurement was not performed when the peak measured data under the limit of average detection.

3. The test data is the worst case data in the restrict band.

4.5. 20dB Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The spectrum analyzer center frequency is set to the transmitter frequency. The RBW is set to 100 KHz and VBW is set 300 KHz.


LIMIT

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

TEST RESULTS


Operating Frequency	Limits(MHz)		Result
	Lower Frequency	Upper Frequency	
Low Channel	>2400	<2483.5	PASS
Middle Channel	>2400	<2483.5	PASS
High Channel	>2400	<2483.5	PASS

Low Channel

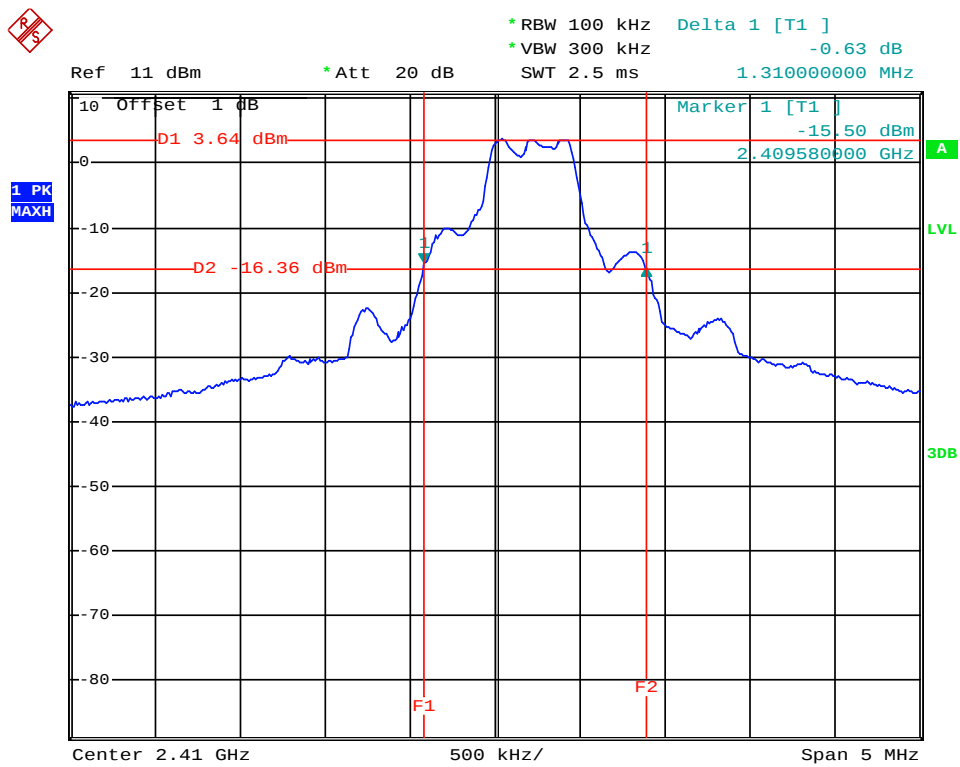


Date: 21.NOV.2012 14:41:29

Mid Channel

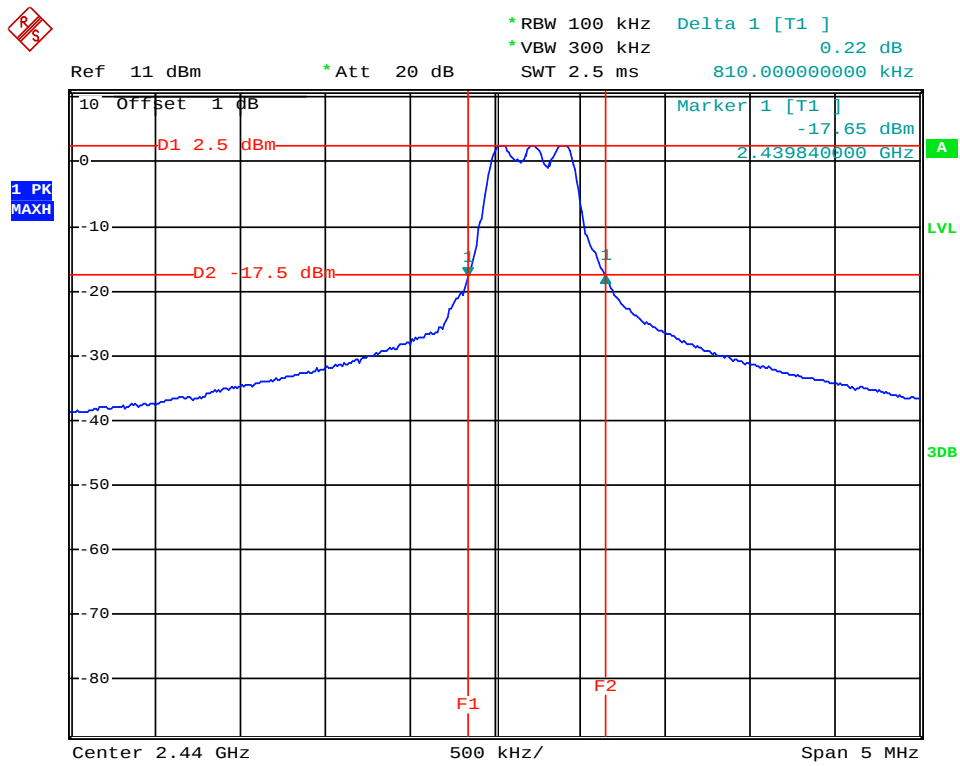

Date: 21.NOV.2012 14:39:26

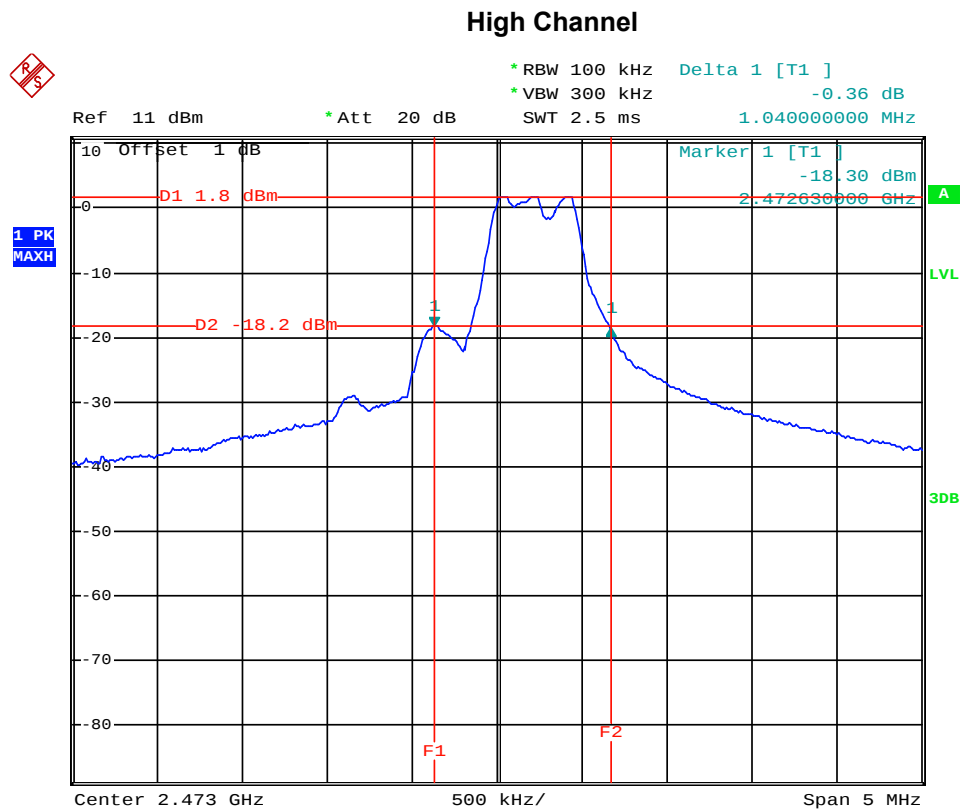

Date: 21.NOV.2012 14:43:50

5. Test Setup Photos of the EUT






6. External and Internal Photos of the EUT



External Photos(baby unit)








Internal Photos

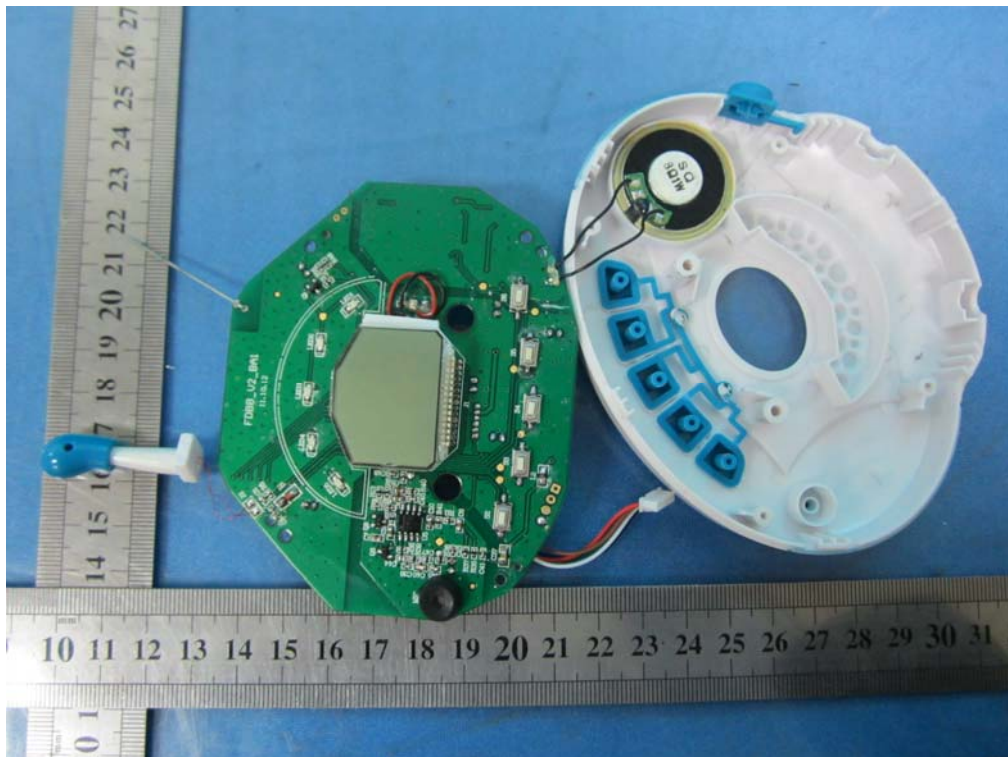

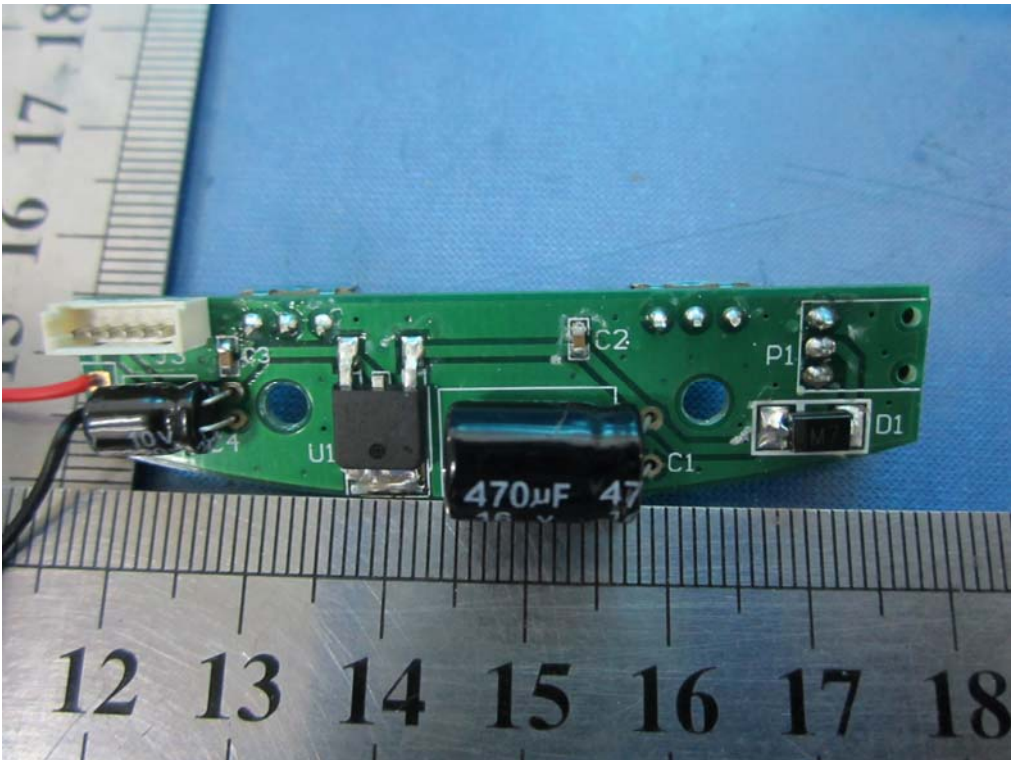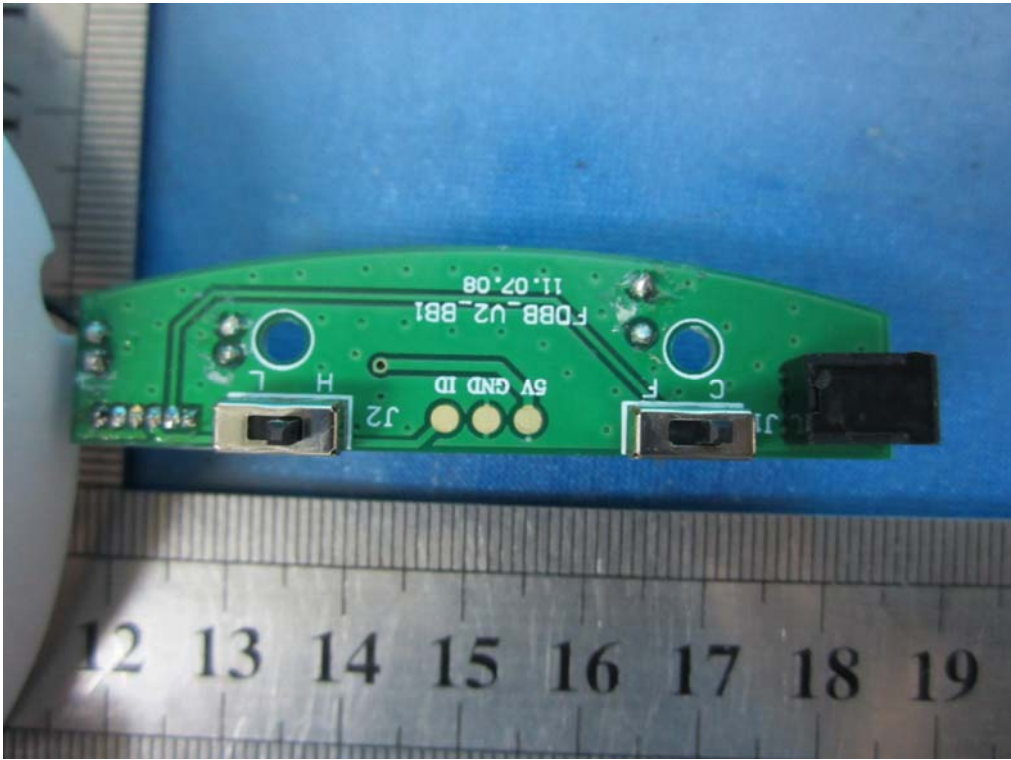

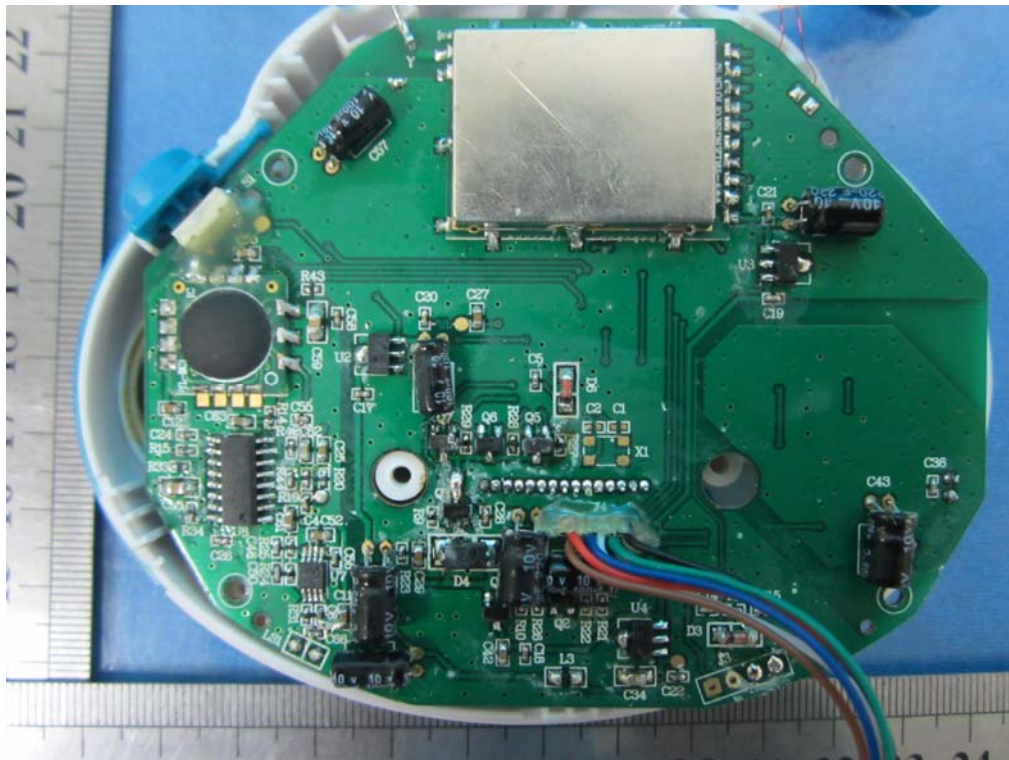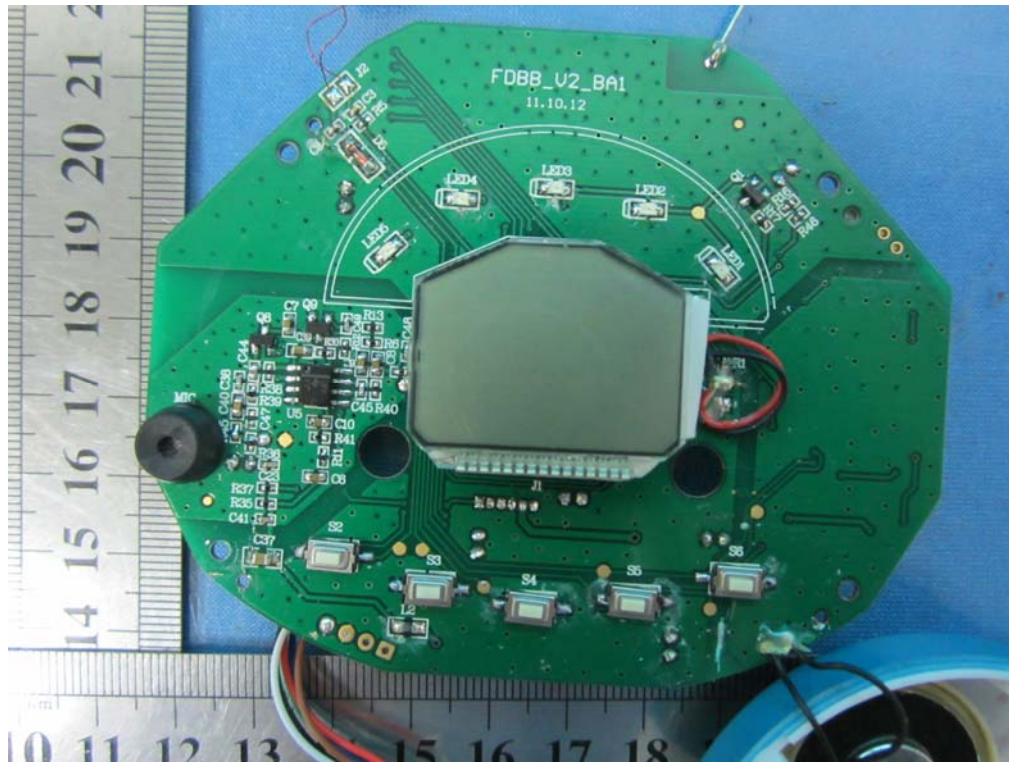

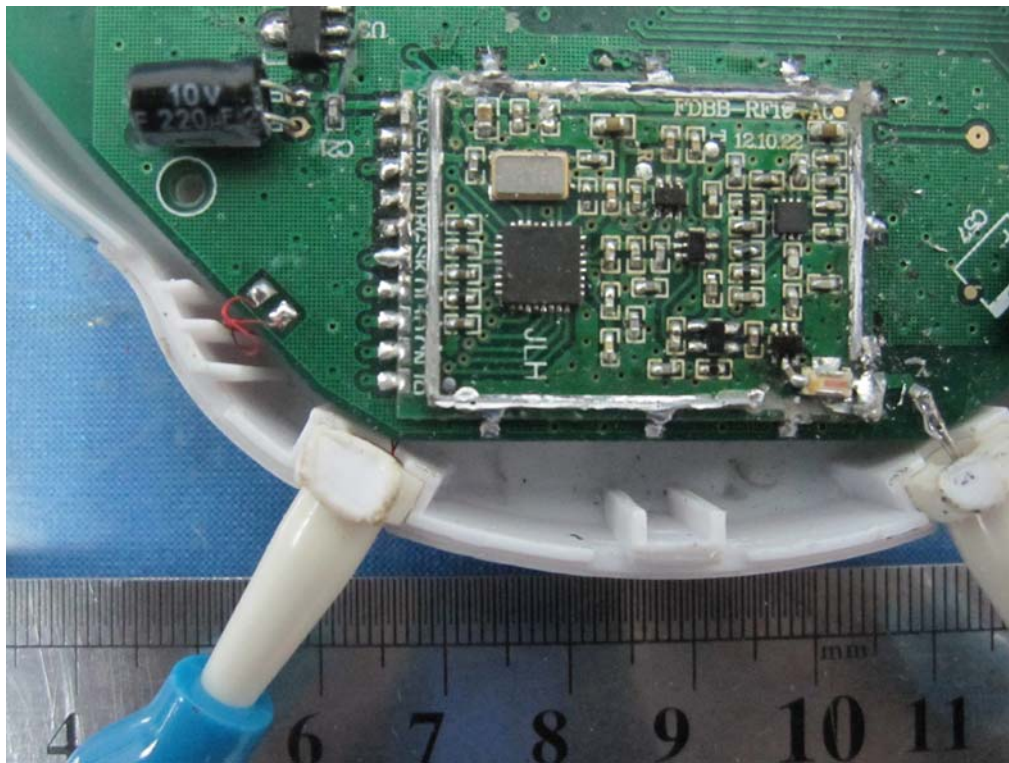

Adapter photos



.....End of Report.....