

CERTIFICATE OF COMPLIANCE FCC PART 22 CERTIFICATION

Test Lab:

CELLTECH RESEARCH INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250 - 860-3130
Fax: 250 - 860-3110
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant:

WITHUS IT CO., LTD.
2F, DongNam Bldg. 448-16
Shingil-5Dong, YongDungPo-Ku,
Seoul, Korea

FCC Classification:

Licensed Non-Broadcast Transmitter Held to Ear (TNE)

FCC Rule Part(s):

§22(H), §22.901(d), §2

FCC ID:

POQWCE-210

Model(s):

WCE-210

Equipment Type:

Dual-Mode AMPS/CDMA Cellular Phone

Tx Frequency Range:

824.04 - 848.97 MHz (AMPS)

824.70 - 848.31 MHz (CDMA)

Rx Frequency Range:

869.04 - 893.97 MHz (AMPS)

869.70 - 893.31 MHz (CDMA)

Max. RF Output Power:

0.333 Watts ERP (AMPS)

0.265 Watts ERP (CDMA)

Frequency Tolerance(s):

± 0.00025 % (AMPS)

± 300 Hz (CDMA)

Emission Designator(s):

40K0F8W, 40K0F1D, 1M25F9W

This equipment is shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947 of FCC Rules.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Research Inc.
The results and statements contained in this report pertain only to the device(s) evaluated.*



Shawn McMillen
General Manager
Celltech Research Inc.



TABLE OF CONTENTS

1.0 SCOPE	1
1.1 GENERAL INFORMATION - §2.1033(a).....	1
2.0 MEASUREMENT PROCEDURES	2
2.1 TRANSMITTER AUDIO FREQUENCY RESPONSE - §2.1047(a).....	2
2.2 AUDIO LOW PASS FILTER FREQUENCY RESPONSE - §22.915(d)	2
2.3 MODULATION LIMITING - §2.1047(b), §22.915(b)	2
2.4 RF OUTPUT POWER - §2.1046	3
2.5 OCCUPIED BANDWIDTH - §2.1049(c), §22.917.....	3
2.6 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051, §22.917.....	3
2.7 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053.....	3
2.8 RECEIVER SPURIOUS EMISSIONS - §22.917(f).....	3
3.0 NECESSARY BANDWIDTH & EMISSION BANDWIDTH - §2.202.....	4
4.0 RADIATED MEASUREMENT TEST SETUP	5
4.1 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055.....	6
4.2 MODULATION LIMITING - §2.1047(b), §22.915	7
4.3 FREQUENCY RESPONSE OF AUDIO LOW PASS FILTER - §22.915(d).....	8
4.4 TRANSMITTER AUDIO FREQUENCY RESPONSE - §2.1047(a).....	9
4.5 EFFECTIVE RADIATED POWER OUTPUT - §2.1046	10 - 11
4.6 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053.....	12 - 17
4.7 FREQUENCY STABILITY - §2.1055	18 - 19
5.0 TEST EQUIPMENT.....	20
6.0 CONCLUSION	21

FCC PART 22 MEASUREMENT REPORT

1.0 SCOPE

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission.

1.1 GENERAL INFORMATION §2.1033(a)

APPLICANT:	
WITHUS IT CO., LTD. 2F. DongNam Bldg. 448-16 Shingil-5Dong, YongDungPo-Ku, Seoul, Korea	
FCC ID	POQWCE-210
Model(s)	WCE-210
EUT Type	Single-Band Dual-Mode Cellular Phone
Classification	Licensed Non-Broadcast Transmitter Held to Ear (TNE)
Rule Part(s)	§22(H), §22.901(d), §2
Modulation(s)	AMPS / CDMA
Max. RF Output Power	0.333 Watts ERP (AMPS) 0.265 Watts ERP (CDMA)
Tx Freq. Range	824.04 - 848.97 MHz (AMPS) 824.70 - 848.31 MHz (CDMA)
Rx Freq. Range	869.04 - 893.97 MHz (AMPS) 869.70 - 893.31 MHz (CDMA)
Emission Designator(s)	40K0F8W, 40K0F1D, 1M25F9W
Antenna Type	Retractable Whip (1/4λ)
Battery Type(s)	3.7V 950mAh Lithium-Ion Standard Battery 3.7V 1700mAh Lithium-Ion Extended Battery

2.0 MEASUREMENT PROCEDURES

2.1 TRANSMITTER AUDIO FREQUENCY RESPONSE - §2.1047(a)

The frequency response of the audio modulating circuit over the frequency range 300-3000 Hz is measured. The audio signal generator is connected to the audio input circuit/microphone of the EUT. The audio signal input is adjusted to obtain 20% modulation at 1kHz and this point is taken as the 0dB reference. With the input held constant and below the limit at all frequencies, the audio signal generator is varied from 300 to 3000 Hz.


2.2 AUDIO LOW PASS FILTER FREQUENCY RESPONSE - §22.915(d)

The response in dB relative to 1kHz is measured using the HP8901 Modulation Analyzer. For the frequency response of the audio low-pass filter, the audio input is connected at the input to the modulation limiter and the modulated stage. The audio output is connected at the output of the modulated stage.

2.3 MODULATION LIMITING - §2.1047(b), §22.915(b)

The audio signal generator is connected to the audio input circuit/microphone of the EUT. The modulation response is measured for each of the three modulating frequencies (300Hz, 1000Hz, and 3000Hz), and the input voltage is varied from 30% modulation ($\pm 3.6\text{kHz}$ deviation) to at least 20dB higher than the saturation point. Measurements of modulation and test plots are attached. Measurements were performed for ST, SAT, and wide-band data modulations.

Note: ST, SAT, & Wide-Band data were internally generated by the EUT.

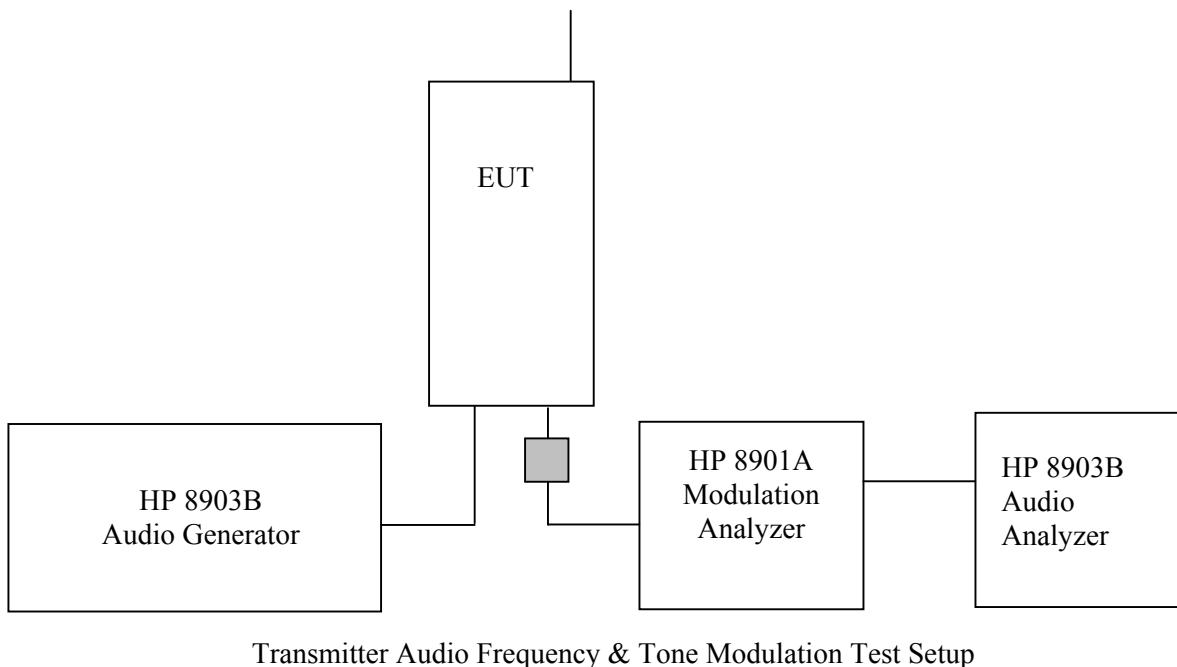

2.4 RF OUTPUT POWER - §2.1046

The conducted power was measured with a Gigatronics 8650A Universal Power Meter using modulated average power (MAP) mode for CDMA and CW for AMPS mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed before the sensor input. The transmitter terminal was coupled to the power meter and the EUT was placed into test mode via keypad access or a base station simulator. For CDMA modulations a full data rate in the “always up” power control mode was used. All subsequent tests were performed using the same tune up procedures.

2.5 OCCUPIED BANDWIDTH - §2.1049(c), §22.917

The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator. The radio transmitter was operating at maximum output power. 100% of the in-band modulation was below the specified mask per §22.917.

Specified Limits:

- (a) On any frequency removed from the assigned carrier frequency by more than 20kHz, up to and including 45kHz, the sideband was at least 26dB below the carrier.
- (b) On any frequency removed from the assigned carrier frequency by more than 45kHz, up to and including 90kHz, the sideband was at least 45dB below the carrier.
- (c) On any frequency removed from the assigned carrier frequency by more than 90kHz, up to the first multiple of the carrier frequency, the sideband was at least 60dB below the carrier of $40 + \log_{10}$ (mean power output in Watts) dB, whichever was the smaller attenuation.

2.6 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051, §22.917

The level of the carrier and the various conducted spurious frequencies were measured by means of a calibrated spectrum analyzer. The spectrum was scanned from 10MHz to 20GHz. The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable.

2.7 FIELD STRENGTH OF SPURIOUS RADIATION - §2.105

Radiated and harmonic emissions were measured on a 3-meter outdoor site. The EUT was placed on the turntable with the transmitter transmitting into a non-radiating load. A receiving antenna located 3 meters from the turntable received any signal radiated from the transmitter and its operating accessories. The receiving antenna was varied in height from 1 to 4 meters and the polarization was varied (horizontal and vertical) to determine the worst-case emission level.

2.8 RECEIVER SPURIOUS EMISSIONS - §22.917(f)

Conducted spurious emissions were measured at the antenna terminal of the EUT using a spectrum analyzer. The transmitter of the EUT was placed into full power and the frequency span of the spectrum analyzer was set to the receiving band of the device. The recorded spurious emissions at the antenna terminal must be attenuated to a level not to exceed -80dBm.

3.0 NECESSARY BANDWIDTH & EMISSION BANDWIDTH - §2.202

a) Emission Designator: 1M25F9W

Calculation: 2M + 2DK
CDMA BW = 1.25 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

b) Emission Designator: 40K0F8W


Calculation: Voice + SAT
Modulation: Voice is 2.5 kHz and SAT is 6 kHz - maximum modulation is M = 6 kHz
Deviation: Voice is 12 kHz and SAT is 2 kHz - maximum deviation is D= 12+2= 14 kHz
Bn = 2xM+2xDK with K =1
Bn= 40 kHz

Calculation: Signaling Tone (ST) + SAT
Modulation: ST is 10 kHz and SAT is 6 kHz - maximum modulation is M = 10 kHz
Deviation: ST is 8 kHz and SAT is 2 kHz - maximum deviation is D= 8+2= 10 kHz
Bn = 2xM+2xDK with K =1
Bn= 40 kHz


c) Emission Designator: 40K0F1D (wide Band Data)

Calculation: Voice + SAT
Modulation: Wideband Data is 10 kHz and SAT is 6 kHz - maximum modulation is M = 10 kHz
Deviation: Wideband Data is 8kHz and SAT is 2 kHz - maximum deviation is D= 8+2 = 10 kHz
Bn = 2xM+2xDK with K =1
Bn= 40 kHz

4.0 RADIATED MEASUREMENT TEST SETUP

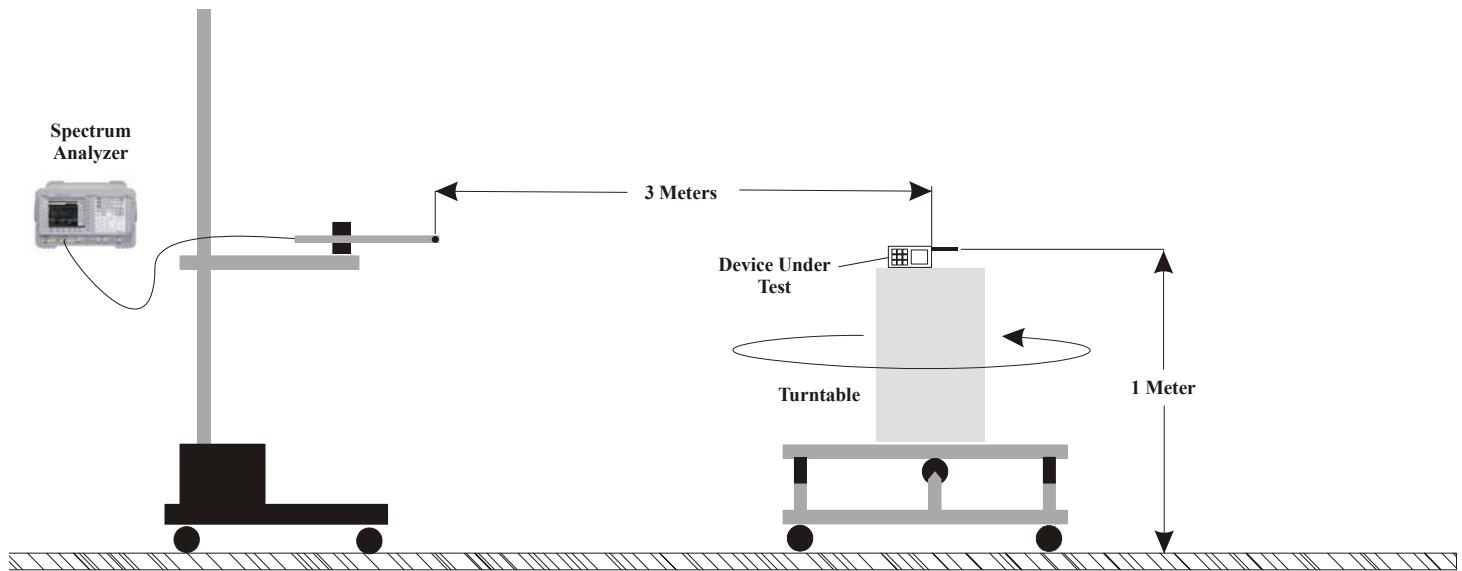

Radiated Measurement Test Setup Diagram

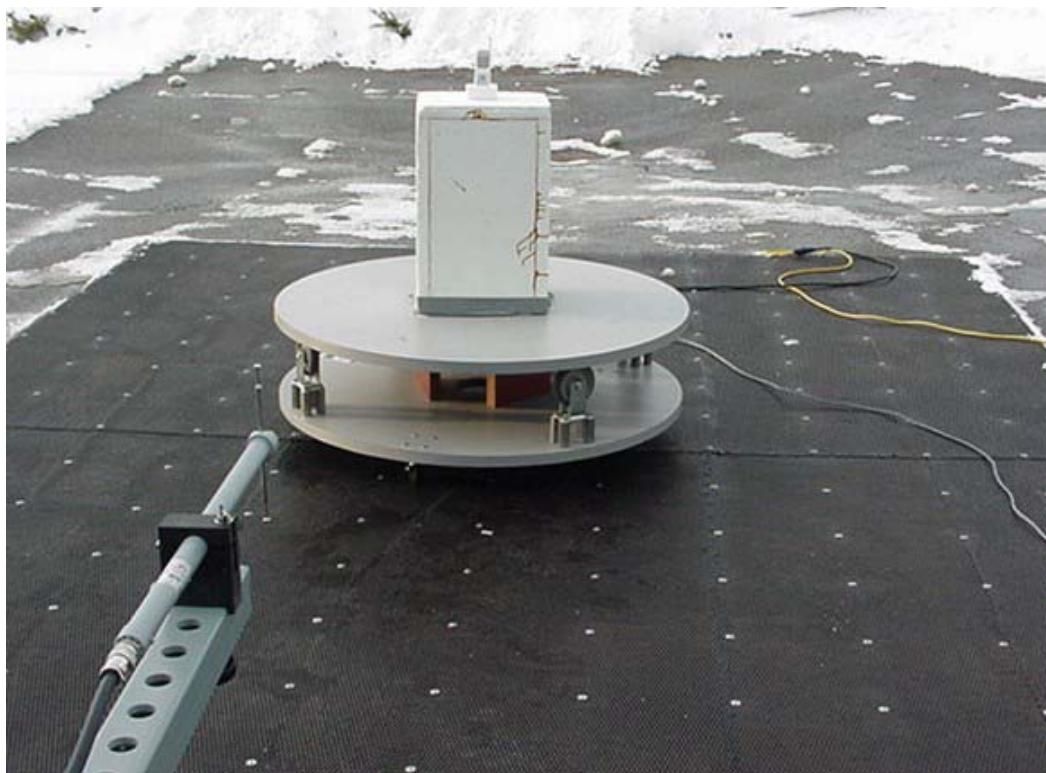

Radiated Measurement Test Setup Photograph

4.1 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055

The minimum frequency stability for analog mode shall be $\pm 0.000075\%$ referenced to a received carrier frequency from a base station. This meets the requirement for operational accuracy of 0.00025% in analog mode. The minimum frequency stability for digital mode shall be $\pm 300\text{Hz}$ referenced to a received carrier frequency from a base station. This meets the requirement for operational accuracy of 0.00005% in digital mode. A base station simulator was used to measure the error in the frequency.

Measurement Method:

The frequency stability of the transmitter was measured by:

1. Temperature: The temperature was varied from -30°C to $+60^\circ\text{C}$ at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement.
2. Primary Supply Voltage: The primary supply voltage was set at the specified nominal rating and reduced to the battery operating endpoint specified by the manufacturer. When the battery voltage reaches its endpoint the device switches off. The voltage was measured at the terminals of the power supply or at the input to the cable normally provided with the equipment.

Time Period and Procedure:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment was subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C , the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.


Frequency measurements were made at 10°C intervals up to $+60^\circ\text{C}$, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

4.2 MODULATION LIMITING - §2.1047(b), §22.915

Test Date: 01/14/02
FCC ID: POQWCE-210
Model: WCE-210
Mode: AMPS (Analog)

0 dB REFERENCE: 1 kHz, 126 mV at Input 8.0 kHz Deviation


Audio Input Level (db)	FM Deviation (kHz Peak)		
	Modulation Frequency		
	3 kHz	1 kHz	300 Hz
-33.979	9.02	6.67	2.99
-27.959	10.03	7.61	4.14
-24.437	10.36	8.32	5.4
-21.938	10.48	8.91	6.6
-20	10.67	9.51	7.73
-18.416	10.67	10	8.86
-17.077	10.84	10.46	9.59
-15.918	11.15	10.91	10.09
-14.895	11.25	11.35	10.31
-13.979	11.32	11.66	10.51
-13.152	11.33	11.96	10.7
-12.396	11.46	12.12	10.9
-11.701	11.46	12.14	11.25
-11.057	11.49	12.15	11.3
-10.458	11.39	11.98	11.45
-9.897	11.37	11.9	11.54
-9.37	11.36	12.04	11.68
-8.874	11.3	12.13	11.66
-8.404	11.39	12.22	11.91
-7.959	11.46	12.19	11.85
-7.535	11.42	12.22	12.31
-7.131	11.43	12.27	12.52
-6.745	11.37	12.24	12.46
-6.375	11.39	12.29	12.56
-6.021	11.4	12.16	12.58
-5.68	11.33	12.14	12.59
-5.352	11.37	12.11	12.48
-5.036	11.39	12.09	12.46
-4.731	11.37	12.1	12.54
-4.437	11.36	12.2	12.57
-4.152	11.34	12.12	12.59
-3.876	11.4	12.09	12.48
-3.609	11.46	12.08	12.34
-3.35	11.34	12.07	12.18
-3.098	11.39	12.1	12.13
-2.853	11.33	12.16	12.15
-2.615	11.36	12.05	12.2
-2.384	11.42	12.1	12.2
-2.158	11.45	12.04	12.19
-1.938	11.34	12.03	12.27
-1.724	11.37	11.99	12.24
-1.514	11.34	11.99	12.31
-1.31	11.4	12.01	12.27
-1.11	11.45	12.03	12.29
-0.915	11.46	12.03	12.25
-0.724	11.35	11.98	12.31
-0.537	11.28	12	12.27
-0.355	11.38	12.06	12.33
-0.175	11.43	11.99	12.3
0	11.36	11.99	12.43

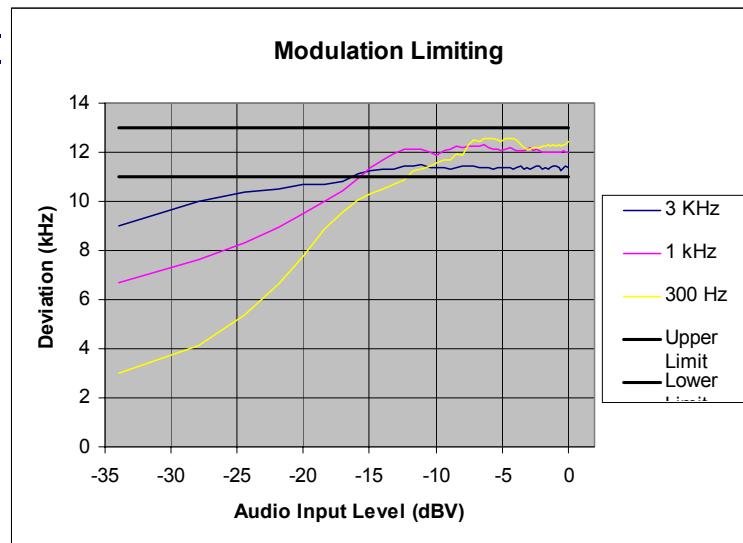

4.3 FREQUENCY RESPONSE OF AUDIO LOW PASS FILTER - §22.915(d)

Test Date: 01/14/02
FCC ID: POQWCE-210
Model: WCE-210
Mode: AMPS (Analog)

REFERENCE: 1 kHz = 0 dB

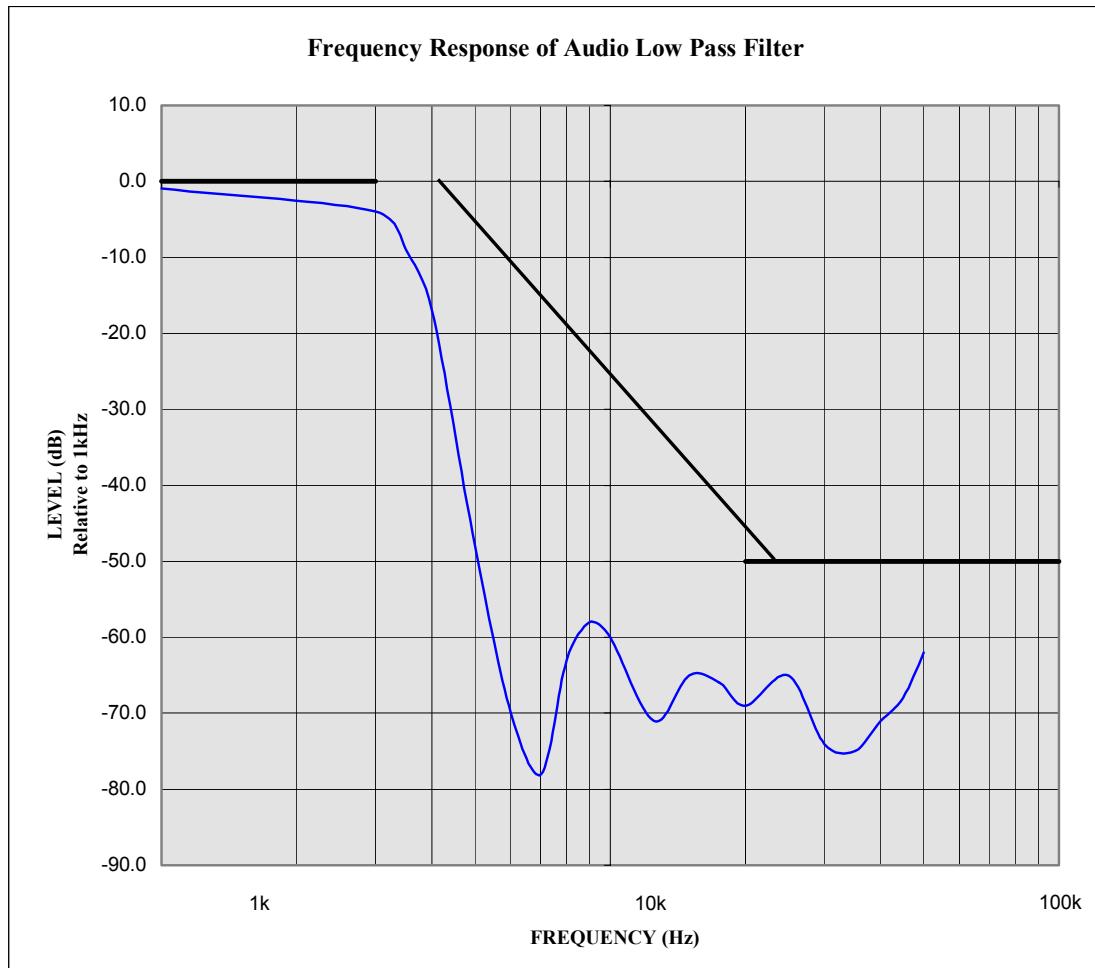

4.4 TRANSMITTER AUDIO FREQUENCY RESPONSE - §2.1047(a)


Test Date: 01/14/02

FCC ID: POQWCE-210

Model: WCE-210

Mode: AMPS (Analog)

REFERENCE: 1 kHz = 0 dB

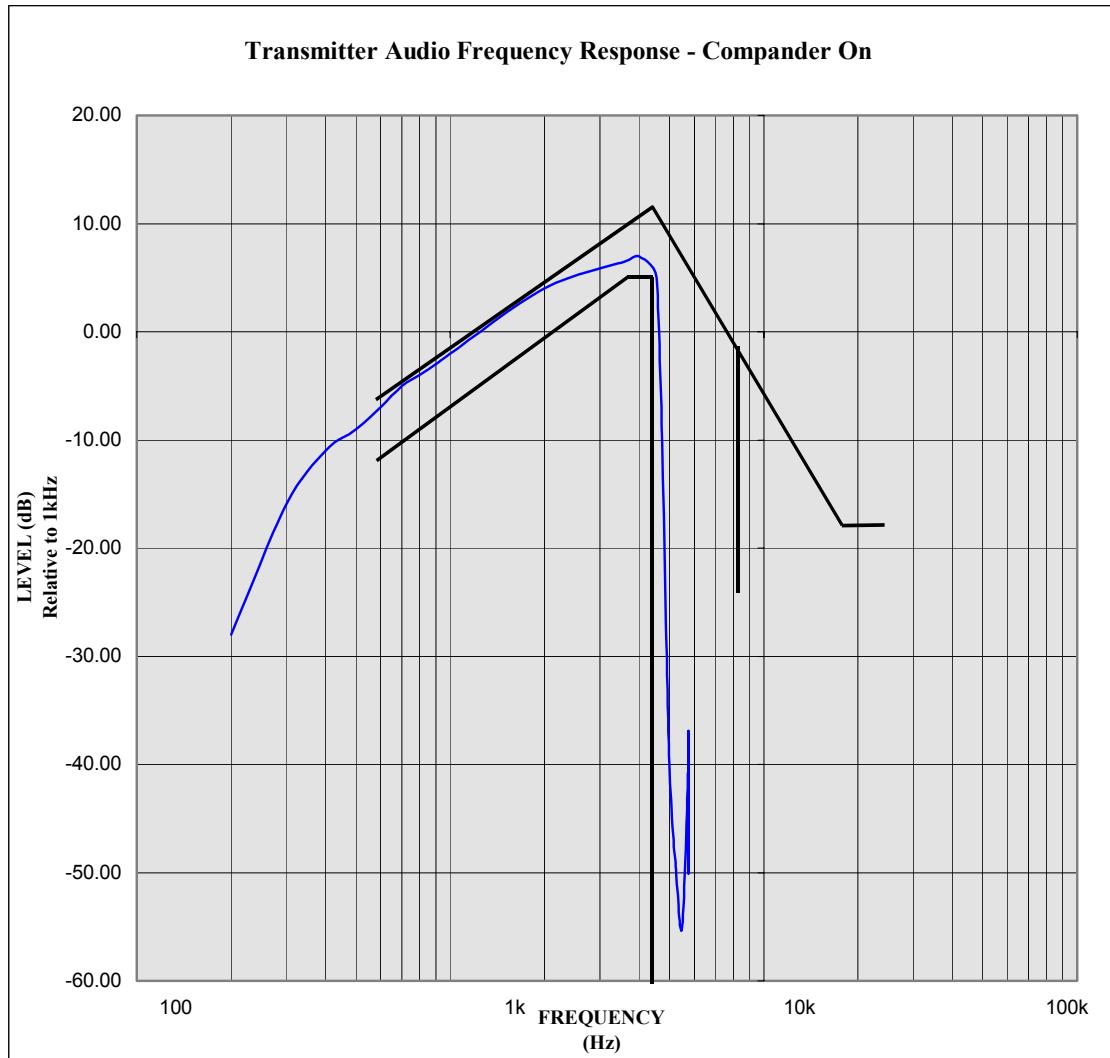

4.5 EFFECTIVE RADIATED POWER OUTPUT - §2.1046

AMPS MODE

Freq. Tuned	EUT Conducted Power	Max. Field Strength of EUT Horiz. Polariz. Antenna Extended	Dipole Gain	Dipole Forward Conducted Power	ERP of EUT Dipole Gain + Dipole Forward Conducted Power	
(MHz)	(dBm)	(dBm)	(dBd)	(dBm)	(dBm)	(Watts)
824.04	26.1	- 9.50	- 1.34	25.93	24.59	0.288
836.49	26.1	- 10.45	- 1.19	26.28	25.09	0.323
848.97	26.1	- 8.52	- 1.04	26.27	25.23	0.333
848.97	26.1	-8.87	- 1.04	26.12	25.08	0.322*

Notes:

1. ERP Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A half-wave dipole was substituted in place of the EUT. A CW signal with the same bandwidth as the EUT was generated, amplified, and fed through a directional coupler. The height and direction of the dipole was adjusted in order to give the field of maximum intensity. The power to the dipole was adjusted in order to give the same field strength reading as previously recorded for the EUT. The power at the coupler port was recorded at this point. The feed point for the dipole was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the dipole antenna. The conducted power at the antenna feed point was recorded. The ERP level was determined by adding the dipole forward conducted power and the dipole gain in dB. For readings above 1GHz the above method is repeated using standard gain horn antennas.

2. EUT measurements were performed in both horizontal and vertical antenna polarizations and for both antenna extended and retracted modes. The worst-case configuration is reported.

3. ERP measurements were performed using the standard battery and *extended battery.

CDMA MODE

Freq. Tuned	EUT Conducted Power	Max. Field Strength of EUT (Horiz. Polar.) Antenna Extended	Dipole Gain	Dipole Forward Conducted Power	ERP of EUT Dipole Gain + Dipole Forward Conducted Power	
(MHz)	(dBm)	(dBm)	(dBd)	(dBm)	(dBm)	(Watts)
824.70	25.1	- 10.47	- 1.34	24.93	23.59	0.229
835.89	25.1	- 11.41	- 1.19	25.28	24.09	0.256
848.31	25.1	- 9.55	- 1.04	25.27	24.23	0.265
848.31	25.1	-9.76	- 1.04	25.12	24.08	0.256*

Notes:

1. ERP Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A half-wave dipole was substituted in place of the EUT. A CDMA signal with the same bandwidth as the EUT was generated, amplified, and fed through a directional coupler. The height and direction of the dipole was adjusted in order to give the field of maximum intensity. The power to the dipole was adjusted in order to give the same field strength reading as previously recorded for the EUT. The power at the coupler port was recorded at this point. The feed point for the dipole was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the dipole antenna. The conducted power at the antenna feed point was recorded. The ERP level was determined by adding the dipole forward conducted power and the dipole gain in dB. For readings above 1GHz the above method is repeated using standard gain horn antennas.

2. EUT measurements were performed in both horizontal and vertical antenna polarizations and for both antenna extended and retracted modes. The worst-case configuration is reported.

3. ERP measurements were performed using the standard battery and *extended battery.

4.6 FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

AMPS MODE

Operating Frequency (MHz): **824.04**
 Channel: 991 (Low)
Measured Cond. Pwr. (dBm): 26.10
Measured ERP (dBm): 24.59
Modulation: ST (Signaling Tone)
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 40.31 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
1648.08	-96.02	-71.13	6.6	H	-64.53	-66.67	91.26
2472.12	-96.63	-67.83	7.8	H	-60.03	-62.17	86.76
3296.16	-98.28	-70.70	7.75	H	-62.95	-65.09	89.68
4120.20	-99.39	-72.37	7.6	H	-64.77	-66.91	91.50
4944.24	-100.09	-72.73	8.5	H	-64.23	-66.37	90.96
5768.28	-100.74	-71.86	8.8	H	-63.06	-65.20	89.79
6592.32	-101.02	-72.14	9.6	H	-62.54	-64.68	89.27
7416.36	-101.98	-74.45	9.0	H	-65.45	-67.59	92.18
8240.40	-102.53	-77.32	9.3	H	-68.02	-70.16	94.75

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.

FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

AMPS MODE

Operating Frequency (MHz): **836.49**
 Channel: 383 (Mid)
Measured Cond. Pwr. (dBm): 26.10
Measured ERP (dBm): 25.09
Modulation: ST (Signaling Tone)
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 40.31 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
1672.98	-96.86	-71.97	6.6	H	-65.37	-67.51	92.60
2509.47	-97.01	-68.21	7.8	H	-60.41	-62.55	87.64
3345.96	-97.86	-70.28	7.75	H	-62.53	-64.67	89.76
4182.45	-99.23	-72.21	7.6	H	-64.61	-66.75	91.84
5018.94	-99.98	-72.62	8.5	H	-64.12	-66.26	91.35
5855.43	-101.23	-72.35	8.8	H	-63.55	-65.69	90.78
6691.92	-101.89	-73.01	9.6	H	-63.41	-65.55	90.64
7528.41	-102.54	-75.01	9.0	H	-66.01	-68.15	93.24
8364.90	-103.37	-78.16	9.3	H	-68.86	-71.00	96.09

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.

FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

AMPS MODE

Operating Frequency (MHz): **848.97**

Channel:	799 (High)
Measured Cond. Pwr. (dBm):	26.10
Measured ERP (dBm):	25.23
Modulation:	ST (Signaling Tone)
Distance:	3 Meters
Limit:	$43 + 10 \log (W) = 40.31 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
1697.94	-97.84	-72.95	6.6	H	-66.35	-68.49	93.72
2546.91	-98.52	-69.72	7.8	H	-61.92	-64.06	89.29
3395.88	-98.91	-71.33	7.75	H	-63.58	-65.72	90.95
4244.85	-99.76	-72.74	7.6	H	-65.14	-67.28	92.51
5093.82	-100.15	-72.79	8.5	H	-64.29	-66.43	91.66
5942.79	-101.02	-72.14	8.8	H	-63.34	-65.48	90.71
6791.76	-101.63	-72.75	9.6	H	-63.15	-65.29	90.52
7640.73	-102.13	-74.60	9.0	H	-65.60	-67.74	92.97
8489.70	-102.87	-77.66	9.3	H	-68.36	-70.50	95.73

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.

FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

CDMA MODE

Operating Frequency (MHz): 824.70
 Channel: 1013 (Low)
Measured Cond. Pwr. (dBm): 25.10
Measured ERP (dBm): 23.59
Modulation: CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 38.13 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
1649.40	-95.68	-70.79	6.6	H	-64.19	-66.33	89.92
2474.10	-96.67	-67.87	7.8	H	-60.07	-62.21	85.80
3298.80	-97.22	-69.64	7.75	H	-61.89	-64.03	87.62
4123.50	-98.02	-71.00	7.6	H	-63.40	-65.54	89.13
4948.20	-98.48	-71.12	8.5	H	-62.62	-64.76	88.35
5772.90	-99.39	-70.51	8.8	H	-61.71	-63.85	87.44
6597.60	-99.92	-71.04	9.6	H	-61.44	-63.58	87.17
7422.30	-101.03	-73.50	9.0	H	-64.50	-66.64	90.23
8247.00	-102.16	-76.95	9.3	H	-67.65	-69.79	93.38

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.

FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

CDMA MODE

Operating Frequency (MHz): **835.89**
 Channel: 363 (Mid)
Measured Cond. Pwr. (dBm): 25.10
Measured ERP (dBm): 24.09
Modulation: CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 38.13 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
1671.78	-96.03	-71.14	6.6	H	-64.54	-66.68	90.77
2507.67	-97.47	-68.67	7.8	H	-60.87	-63.01	87.10
3343.56	-98.22	-70.64	7.75	H	-62.89	-65.03	89.12
4179.45	-98.48	-71.46	7.6	H	-63.86	-66.00	90.09
5015.34	-99.03	-71.67	8.5	H	-63.17	-65.31	89.40
5851.23	-99.38	-70.50	8.8	H	-61.70	-63.84	87.93
6687.12	-100.31	-71.43	9.6	H	-61.83	-63.97	88.06
7523.01	-101.20	-73.67	9.0	H	-64.67	-66.81	90.90
8358.90	-101.98	-76.77	9.3	H	-67.47	-69.61	93.70

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Notes:

All other spurious emissions were found to be below the magnitude of each harmonic.
 Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.

FIELD STRENGTH OF SPURIOUS RADIATION - § 2.1053

CDMA MODE

Operating Frequency (MHz): **848.31**

Channel:	777 (High)
Measured Cond. Pwr. (dBm):	25.10
Measured ERP (dBm):	24.23
Modulation:	CDMA
Distance:	3 Meters
Limit:	$43 + 10 \log (W) = 38.13 \text{ dBc}$

Frequency (MHz)	Field Strength of Spurious Radiation (dBm)	Horn Forward Cond. Pwr. (dBm)	Standard Gain Horn Antenna Gain (dBi)	POL (H/V)	EIRP (dBm)	ERP (dBm)	dBc
1696.62	-96.76	-71.87	6.6	H	-65.27	-67.41	91.64
2544.93	-97.82	-69.02	7.8	H	-61.22	-63.36	87.59
3393.24	-98.38	-70.80	7.75	H	-63.05	-65.19	89.42
4241.55	-99.07	-72.05	7.6	H	-64.45	-66.59	90.82
5089.86	-99.97	-72.61	8.5	H	-64.11	-66.25	90.48
5938.17	-100.74	-71.86	8.8	H	-63.06	-65.20	89.43
6786.48	-101.54	-72.66	9.6	H	-63.06	-65.20	89.43
7634.79	-102.11	-74.58	9.0	H	-65.58	-67.72	91.95
8483.10	-102.91	-77.70	9.3	H	-68.40	-70.54	94.77

Radiated Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Notes:

1. All other spurious emissions were found to be below the magnitude of each harmonic.
2. Spurious emissions more than 20 dB below the limit are reported, though not required per §2.1051.

4.7 FREQUENCY STABILITY - § 2.1055

AMPS Mode


Carrier Frequency (MHz): 836.49

Channel: 383

Mode: AMPS (Analog)

Deviation Limit (PPM): 2.5

Temperature (C)	Voltage (%)	Power (VDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	3.7	0.00	0.000	2.500	-2.500
-30	100	3.7	153.00	0.183	2.500	-2.500
-20	100	3.7	117.00	0.140	2.500	-2.500
-10	100	3.7	108.00	0.129	2.500	-2.500
0	100	3.7	73.00	0.087	2.500	-2.500
+10	100	3.7	-28.00	-0.033	2.500	-2.500
+20	100	3.7	4.00	0.005	2.500	-2.500
+30	100	3.7	48.00	0.057	2.500	-2.500
+40	100	3.7	85.00	0.102	2.500	-2.500
+50	100	3.7	19.00	0.023	2.500	-2.500
+60	100	3.7	-42.00	-0.050	2.500	-2.500
+20	Battery Endpoint	3.3	-18.00	-0.022	2.500	-2.500

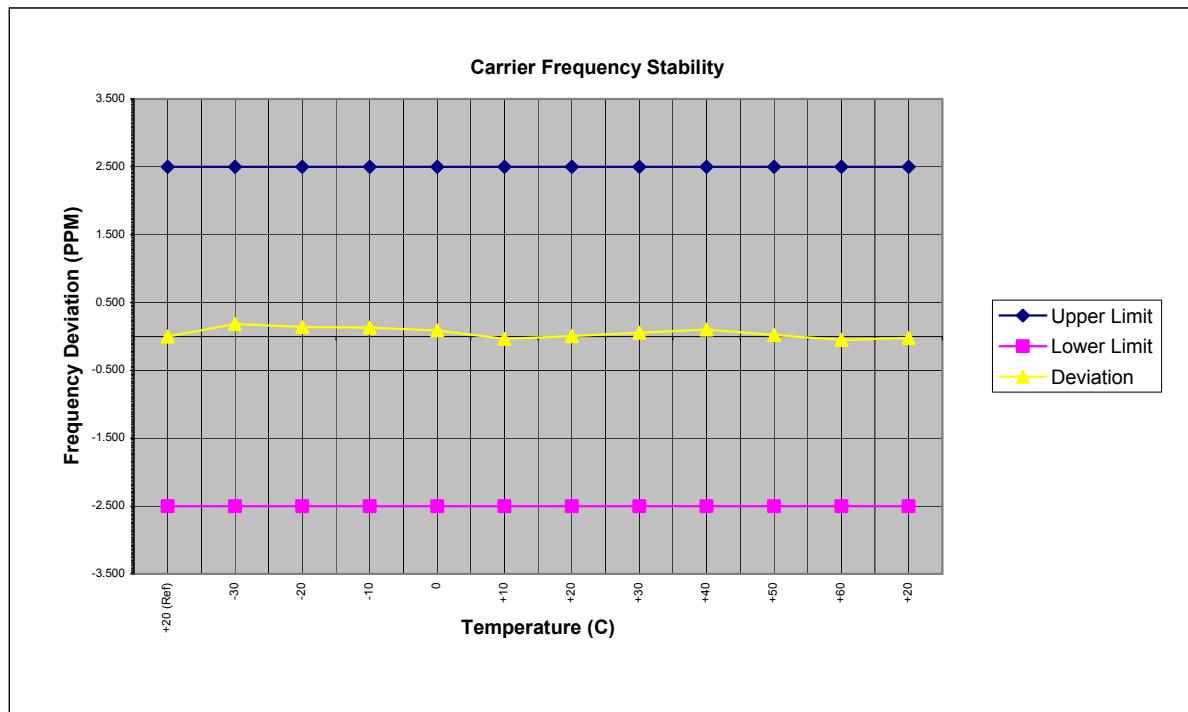

FREQUENCY STABILITY - § 2.1055

CDMA Mode


Carrier Frequency (MHz): 835.89

Channel: 363

Mode: CDMA (Digital)

Deviation Limit (PPM): 0.359

Temperature	Voltage	Power	Carrier Frequency Deviation		Specification				
			(C)	(%)	(VDC)	(Hz)	(PPM)	Upper Limit (PPM)	Lower Limit (PPM)
+20 (Ref)	100	3.7	100	3.7	3.7	1.27	0.002	0.359	-0.359
-30	100	3.7	-30	100	3.7	13.40	0.016	0.359	-0.359
-20	100	3.7	-20	100	3.7	18.35	0.022	0.359	-0.359
-10	100	3.7	-10	100	3.7	14.94	0.018	0.359	-0.359
0	100	3.7	0	100	3.7	-13.87	-0.017	0.359	-0.359
+10	100	3.7	+10	100	3.7	16.64	0.020	0.359	-0.359
+20	100	3.7	+20	100	3.7	3.80	0.005	0.359	-0.359
+30	100	3.7	+30	100	3.7	-12.54	-0.015	0.359	-0.359
+40	100	3.7	+40	100	3.7	1.98	0.002	0.359	-0.359
+50	100	3.7	+50	100	3.7	15.42	0.018	0.359	-0.359
+60	100	3.7	+60	100	3.7	8.74	0.010	0.359	-0.359
+20	Battery Endpoint	3.3	+20		3.3	-10.47	-0.013	0.359	-0.359

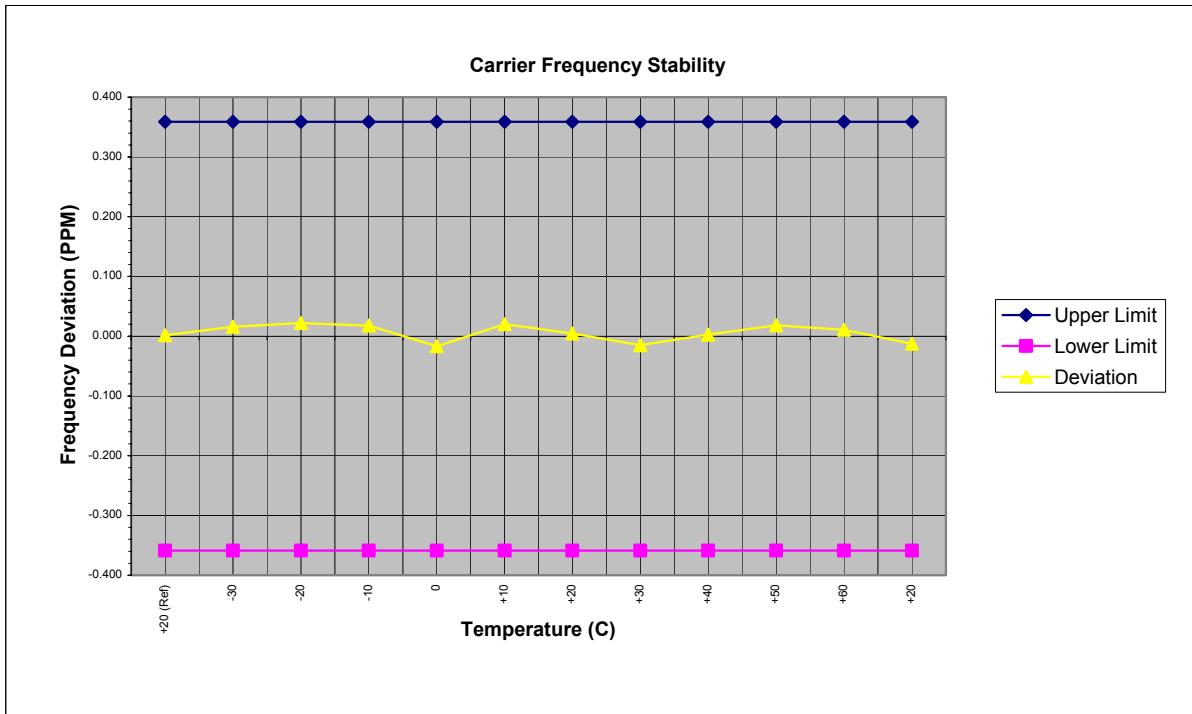

5.0 TEST EQUIPMENT


Type	Model	Calib. Due Date	Serial No.
HP Signal Generator	8648D (9kHz-4.0GHz)	Nov 2002	3847A00611
Rohde & Schwarz Signal Generator	SMR40 (10MHz-40GHz)	Nov 2002	835537/022
Gigatronics Power Meter	8652A	Oct 2002	1835272
Gigatronics Power Sensor	80701A (0.05-18GHz)	Sept. 2002	1833535
Gigatronics Power Sensor	80701A (0.05-18GHz)	Sept. 2002	1833542
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	N/A	26235
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	N/A	3123A00587
Network Analyzer	HP 8753E (30kHz-3GHz)	Nov 2002	US38433013
Audio Analyzer	HP 8903B	Nov 2002	3729A18691
Modulation Analyzer	HP 8901A	July 2002	3749A07154
Frequency Counter	HP 53181A (3GHz)	May 2002	3736A05175
DC Power Supply	HP E3611A	N/A	KR83015294
CDMA Base Station Simulator	Agilent E8285A	Feb. 2002	US40332926
Multi-Device Controller	EMCO 2090	N/A	9912-1484
Mini Mast	EMCO 2075	N/A	0001-2277
Turntable	EMCO 2080-1.2/1.5	N/A	0002-1002
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	Oct. 2002	6267
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	Oct. 2002	6276
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept 2002	9120A-239
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept 2002	9120A-240
Roberts Dipole	ETS DB-4 (400MHz-1GHz)	June 2002	1474
Spectrum Analyzer	HP 8594E	March 2002	3543A02721
Spectrum Analyzer	HP E4408B	Nov 2002	US39240170
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	N/A	16297
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	Feb 2002	0510154-B

6.0 CONCLUSION

The data collected shows that the WITHUS IT CO., LTD. Model: WCE-210 Dual-Mode AMPS/CDMA Cellular Phone FCC ID: POQWCE-210 complies with all the requirements of Parts 2 and 22 of the FCC rules.

EMC TEST PLOTS - AMPS MODE

23: 17: 48 JAN 17, 2002
WITHUS WCE-210 UNMOD CARRIER
REF 26.1 dBm AT 10 dB

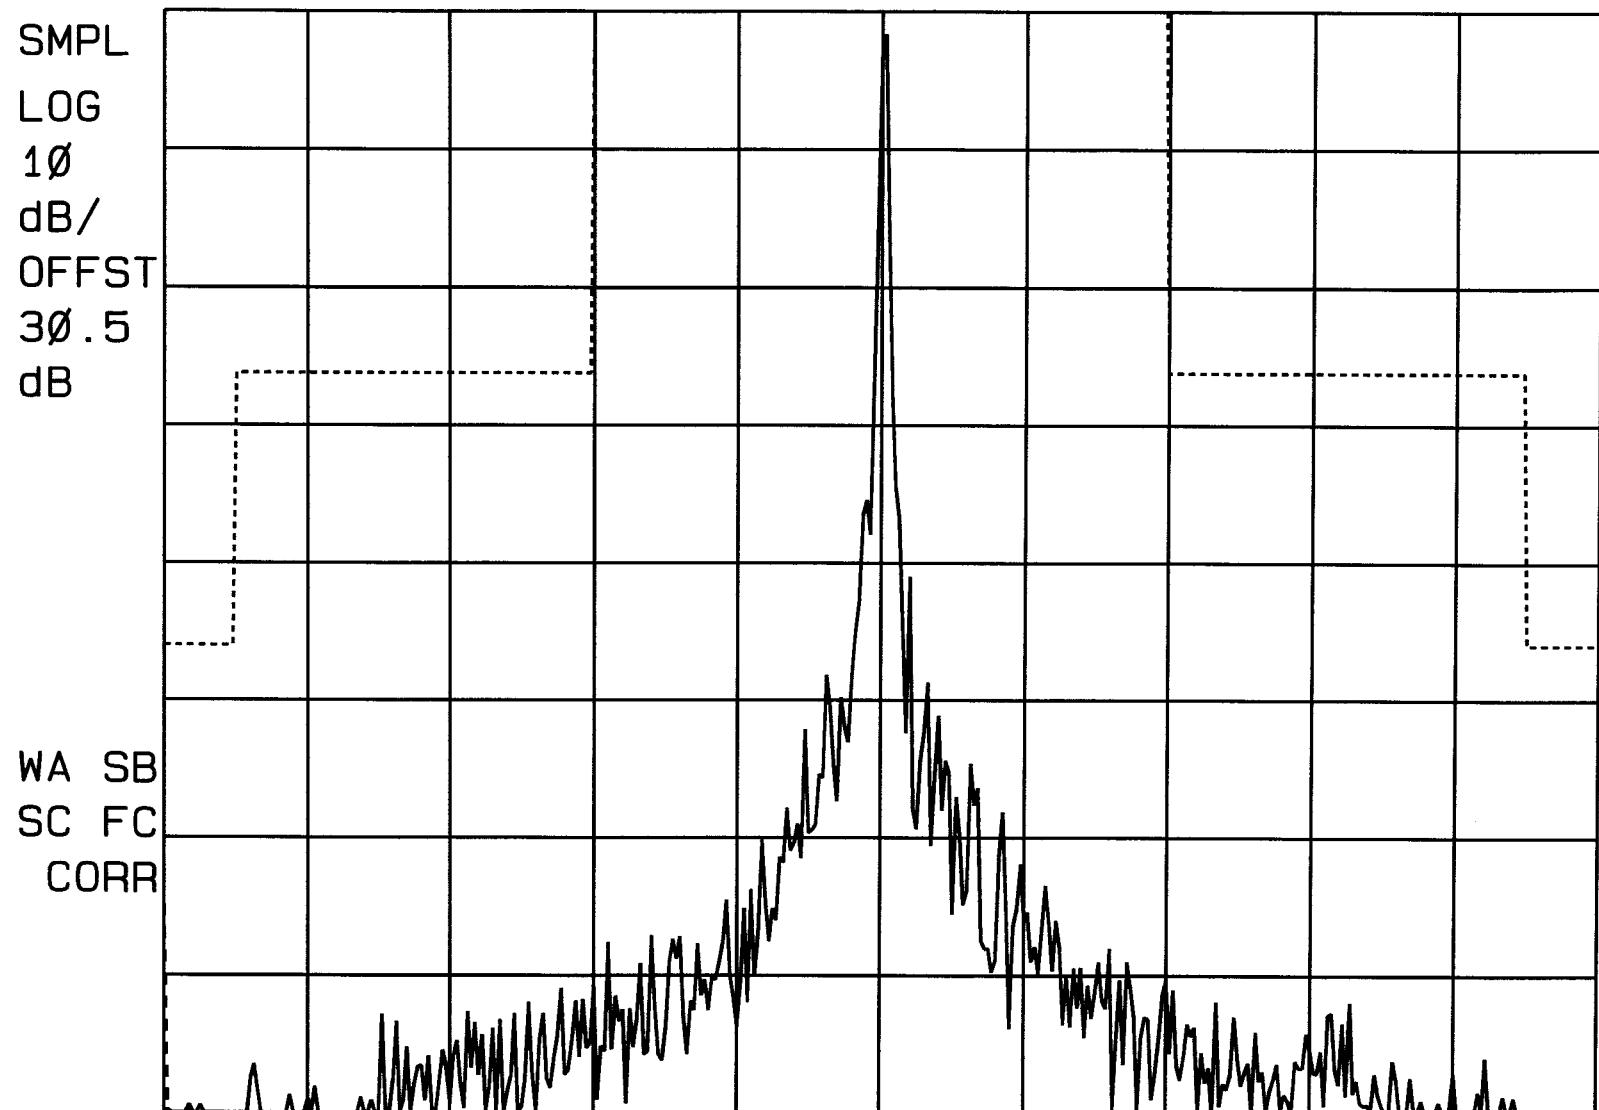

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz

SPAN 100.0 kHz

#SWP 3.60 sec

23: 16: 33 JAN 17, 2002

WITHUS WCE-210 ST

REF 26.1 dBm

AT 10 dB

SMPL

LOG

10

dB/

OFFST


30.5

dB

WA SB

SC FC

CORR

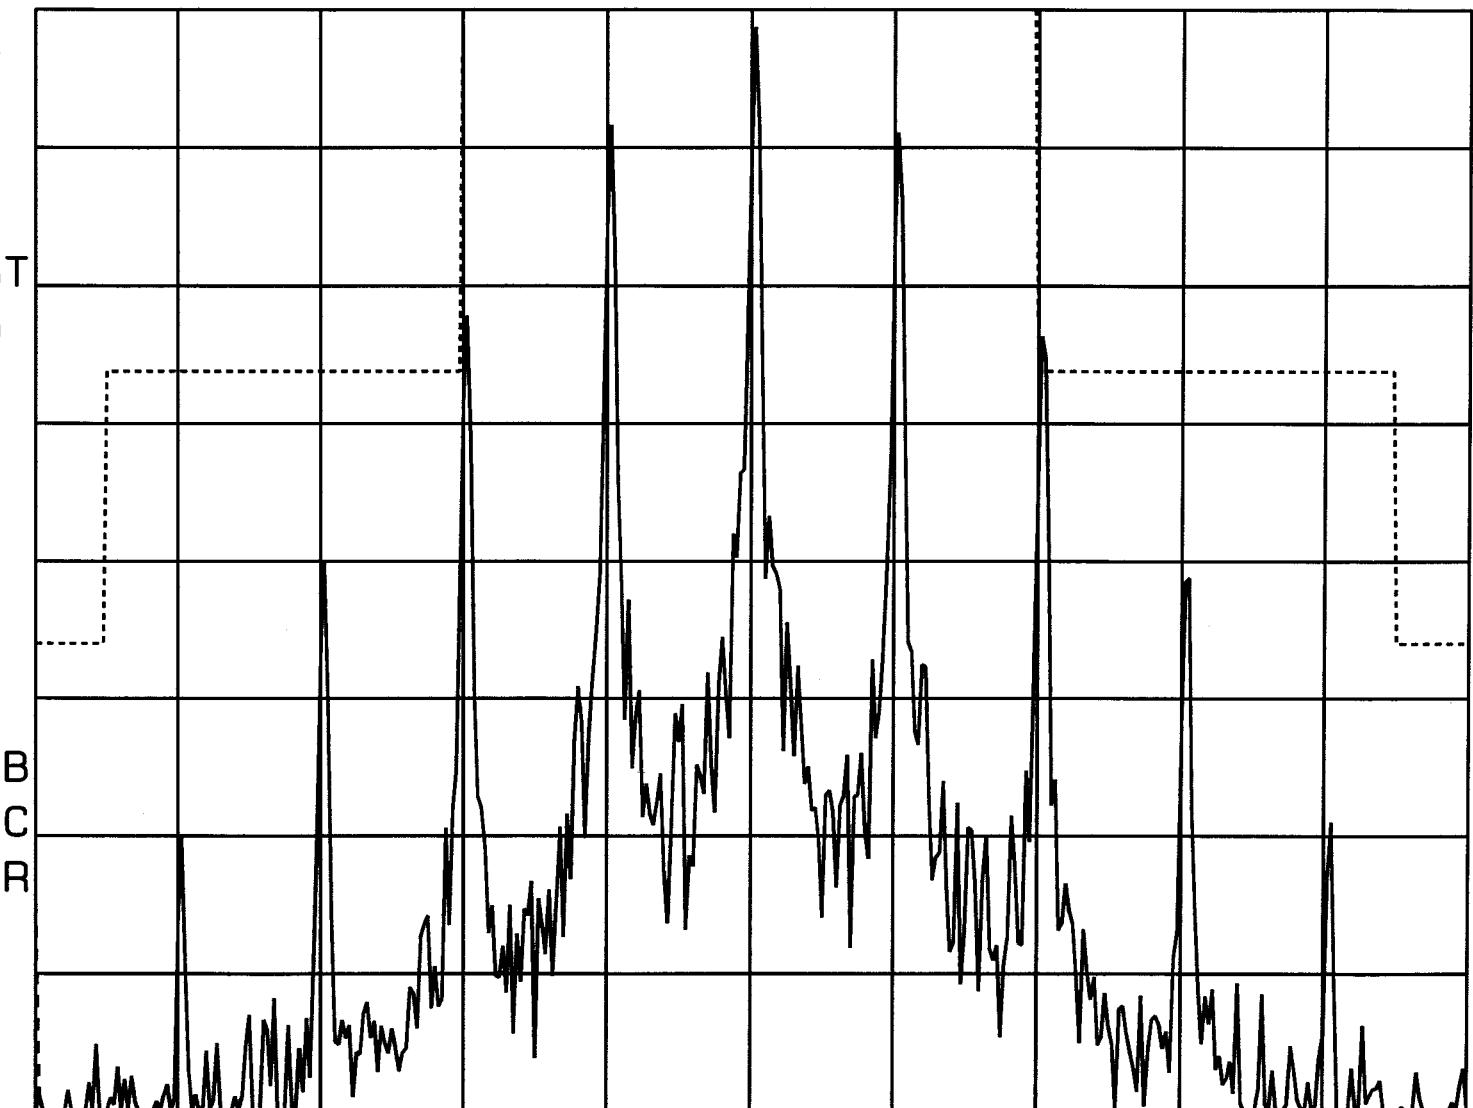

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz


SPAN 100.0 kHz

#SWP 3.60 sec

23: 32: 01 JAN 17, 2002

W WITHUS WCE-210 SAT

REF 26.1 dBm AT 10 dB

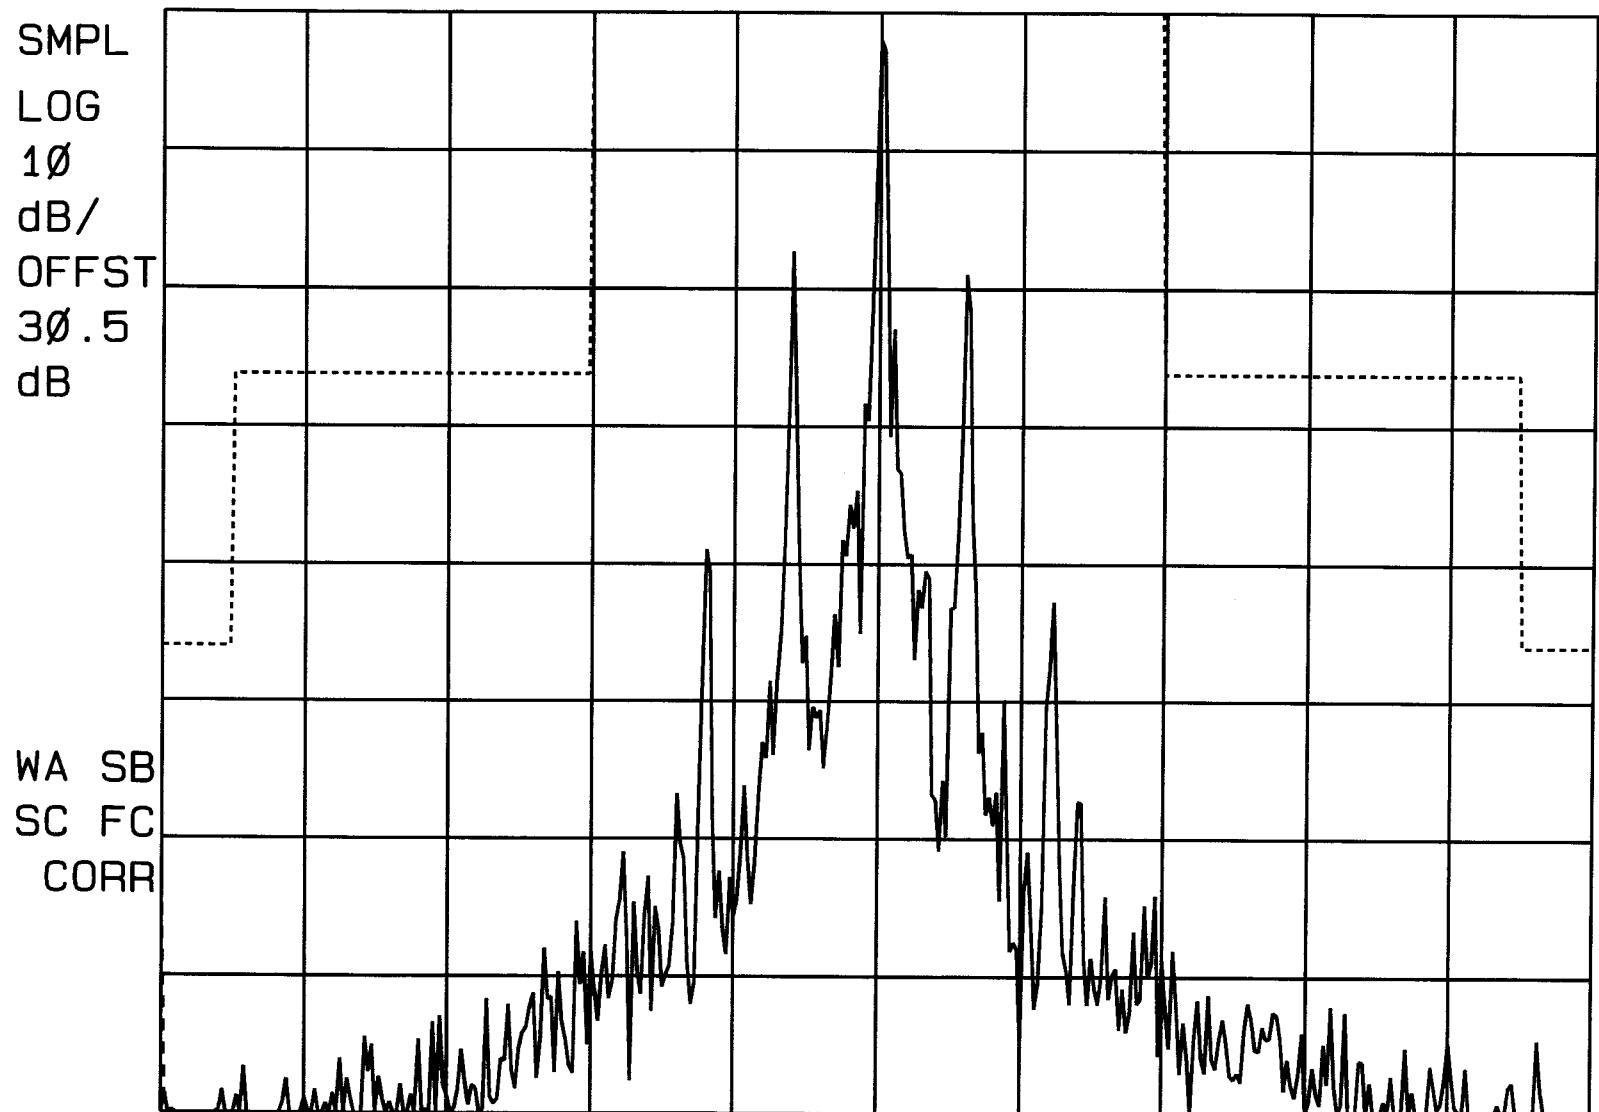

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz


SPAN 100.0 kHz

#SWP 3.60 sec

23:27:02 JAN 17, 2002

WITHUS WCE-210 ST + SAT

REF 26.1 dBm AT 10 dB

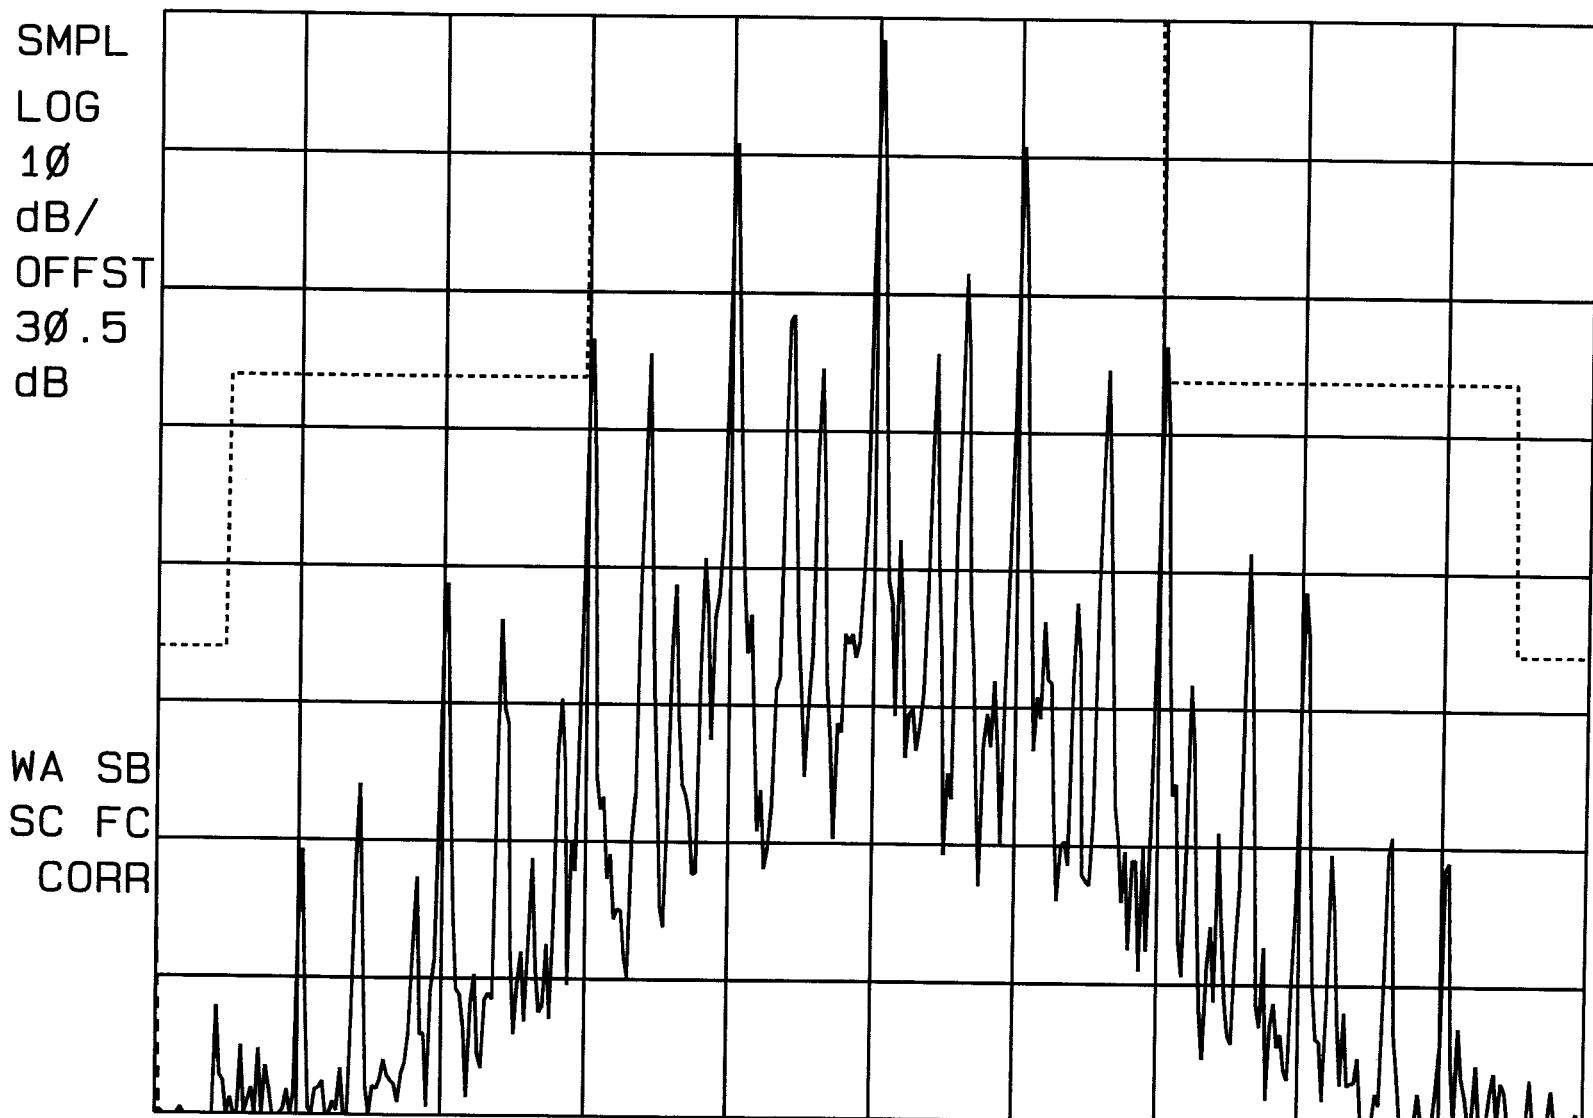

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz

SPAN 100.0 kHz

#SWP 3.60 sec

23: 29: 46 JAN 17, 2002

WITHUS WCE-210 DTMF

REF 26.1 dBm

AT 10 dB

SMPL

LOG

10

dB/

OFFST


30.5

dB

WA SB

SC FC

CORR

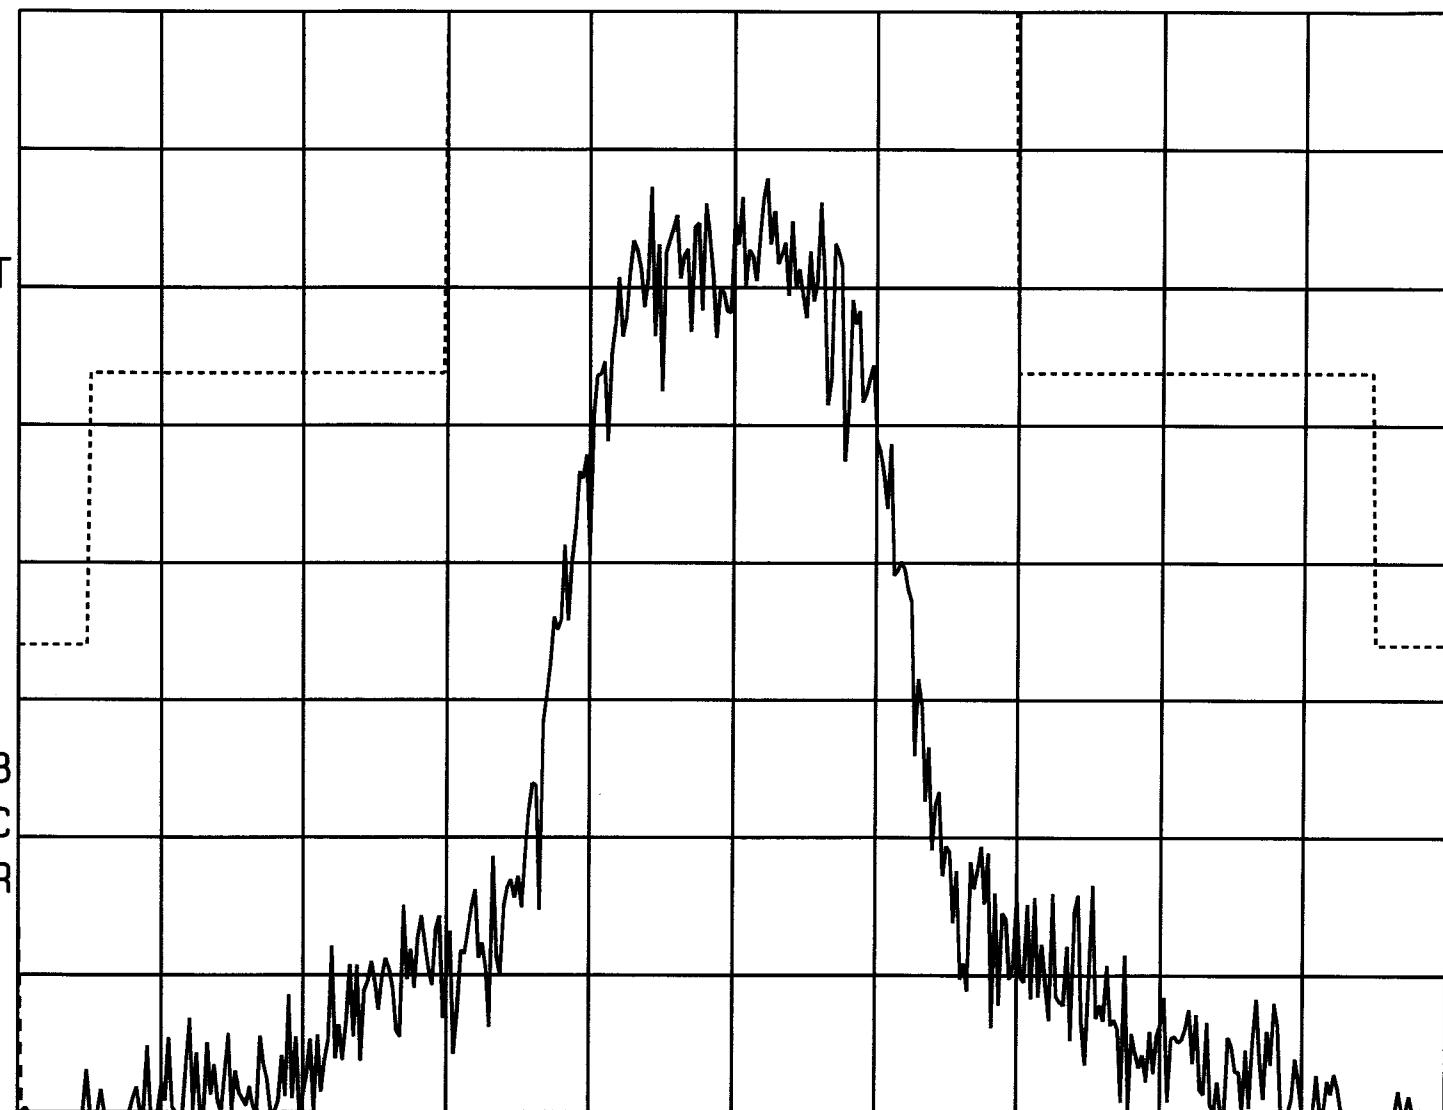

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz


SPAN 100.0 kHz

#SWP 3.60 sec

23: 34: 30 JAN 17, 2002

WITHUS WCE-210 SAT + DTMF

REF 26.1 dBm AT 10 dB

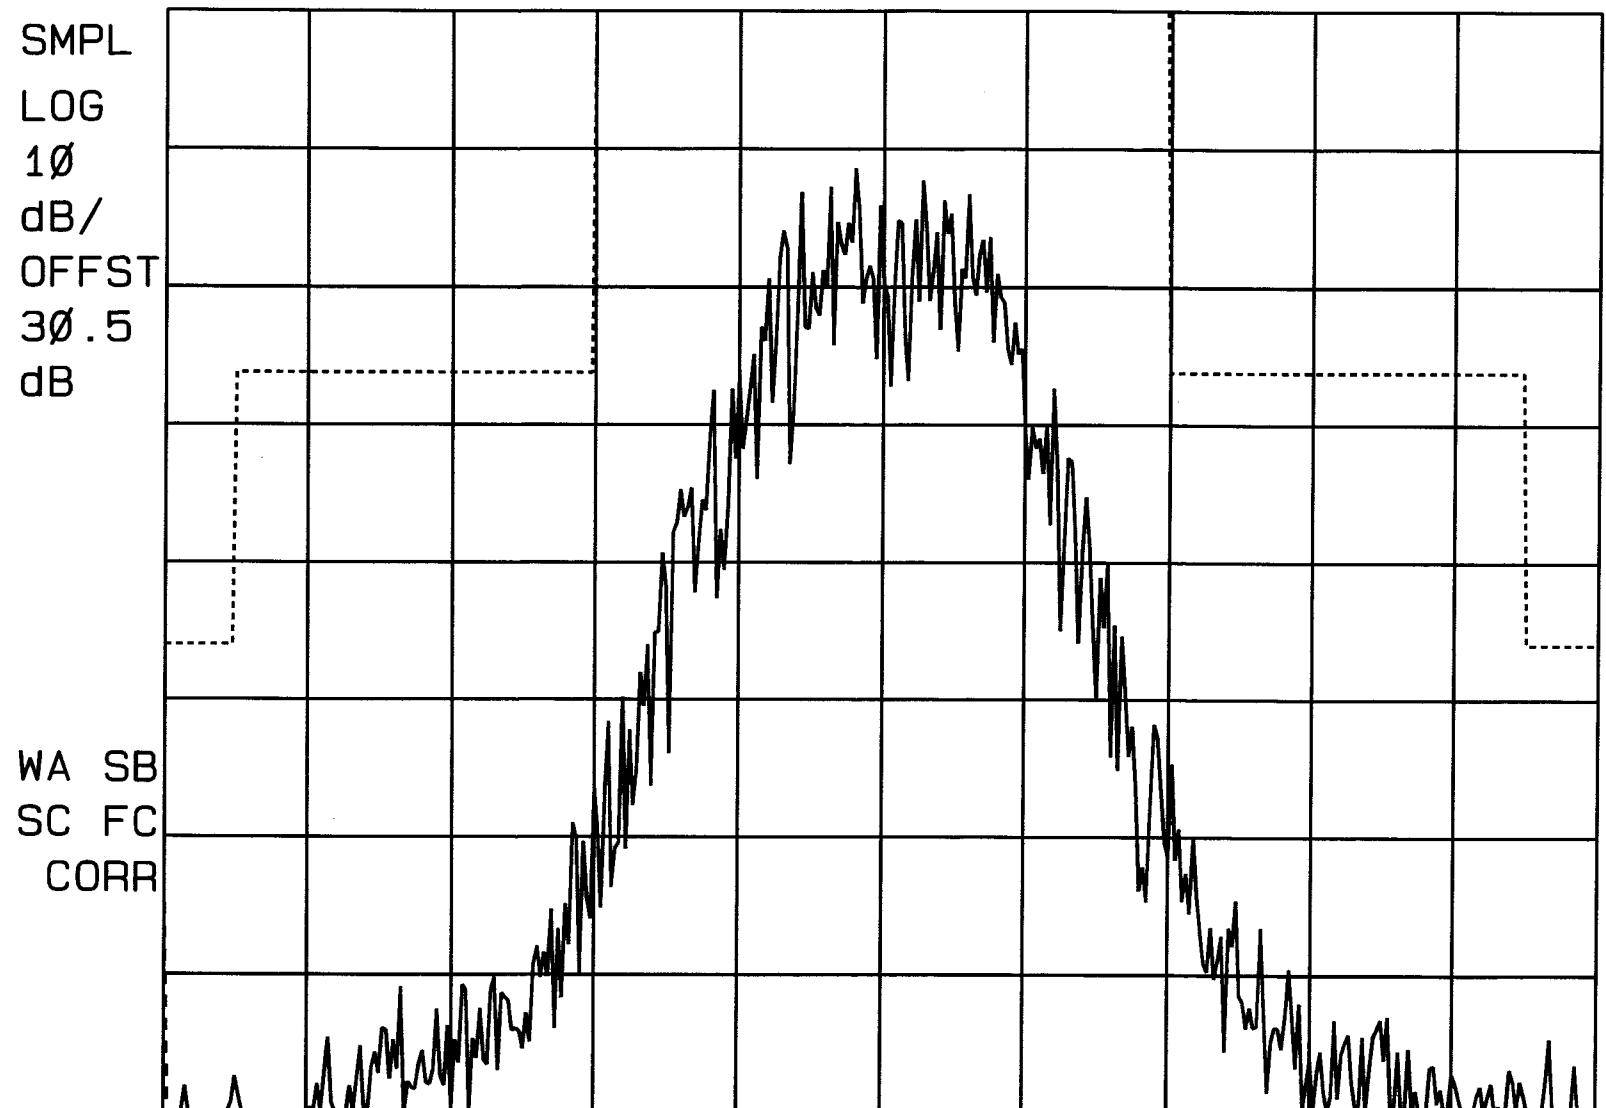

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz

SPAN 100.0 kHz

#SWP 3.60 sec

22:02:38 JAN 17, 2002

WITHUS WCE-210 VOICE

REF 26.1 dBm

AT 10 dB

SMPL

LOG

10

dB/

OFFST


30.5

dB

WA SB

SC FC

CORR

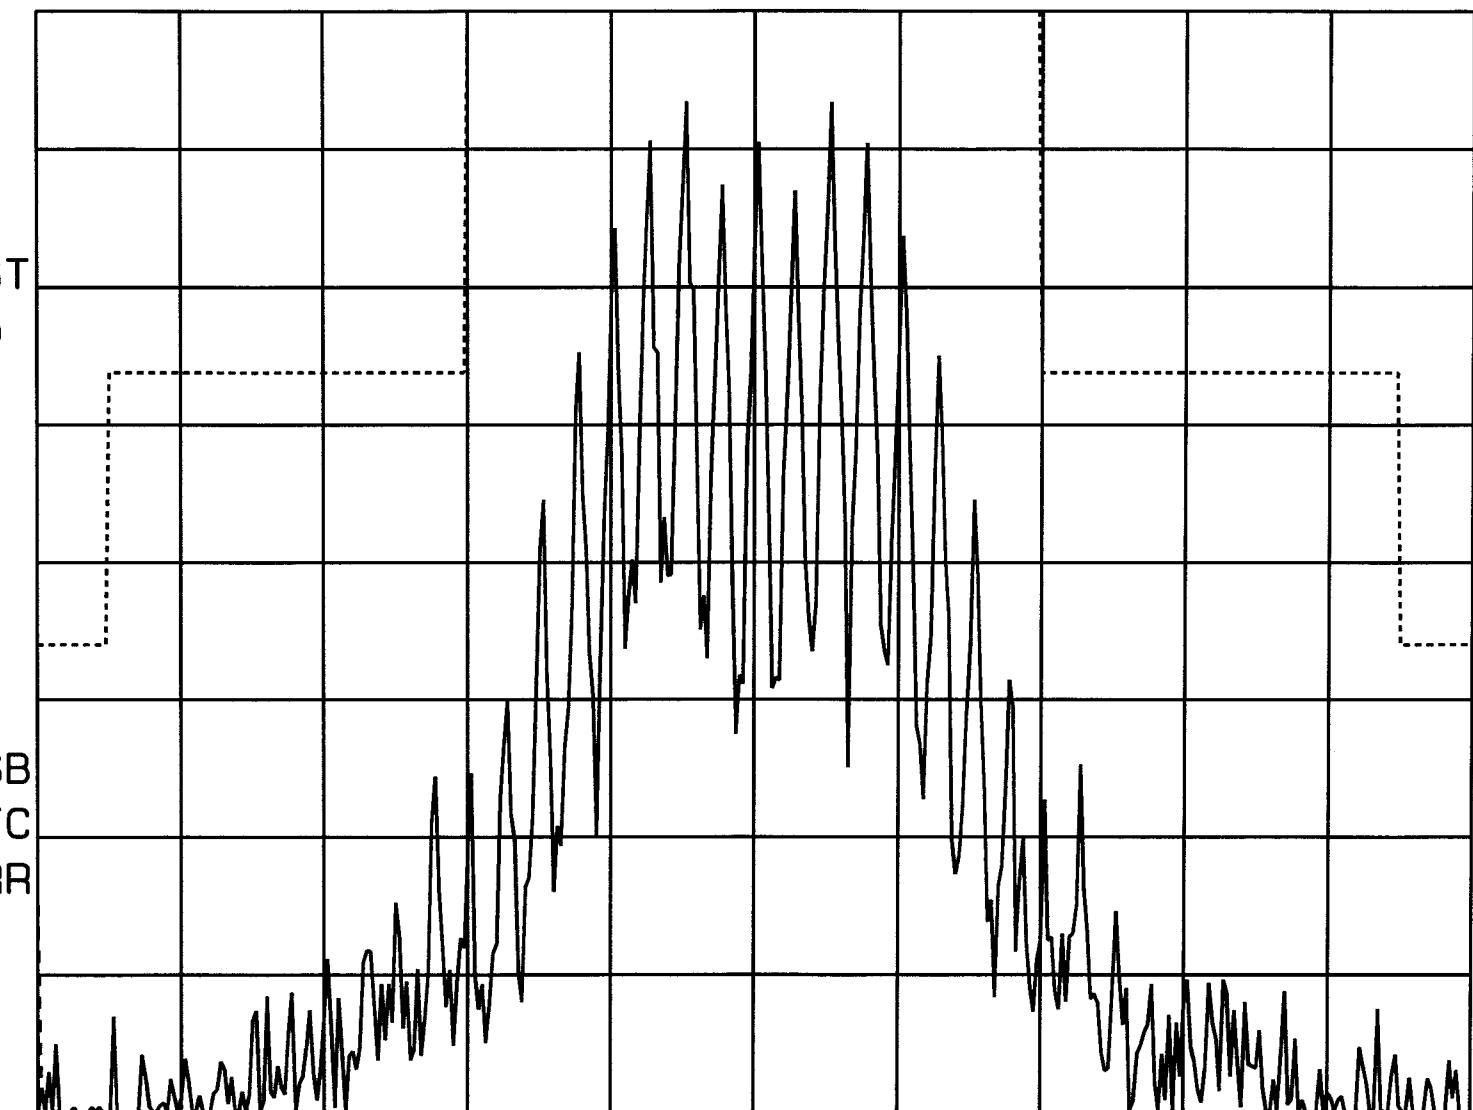

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz

SPAN 100.0 kHz


#SWP 3.60 sec

22:01:32 JAN 17, 2002

WITHUS WCE-210 VOICE + SAT

REF 26.1 dBm

AT 10 dB

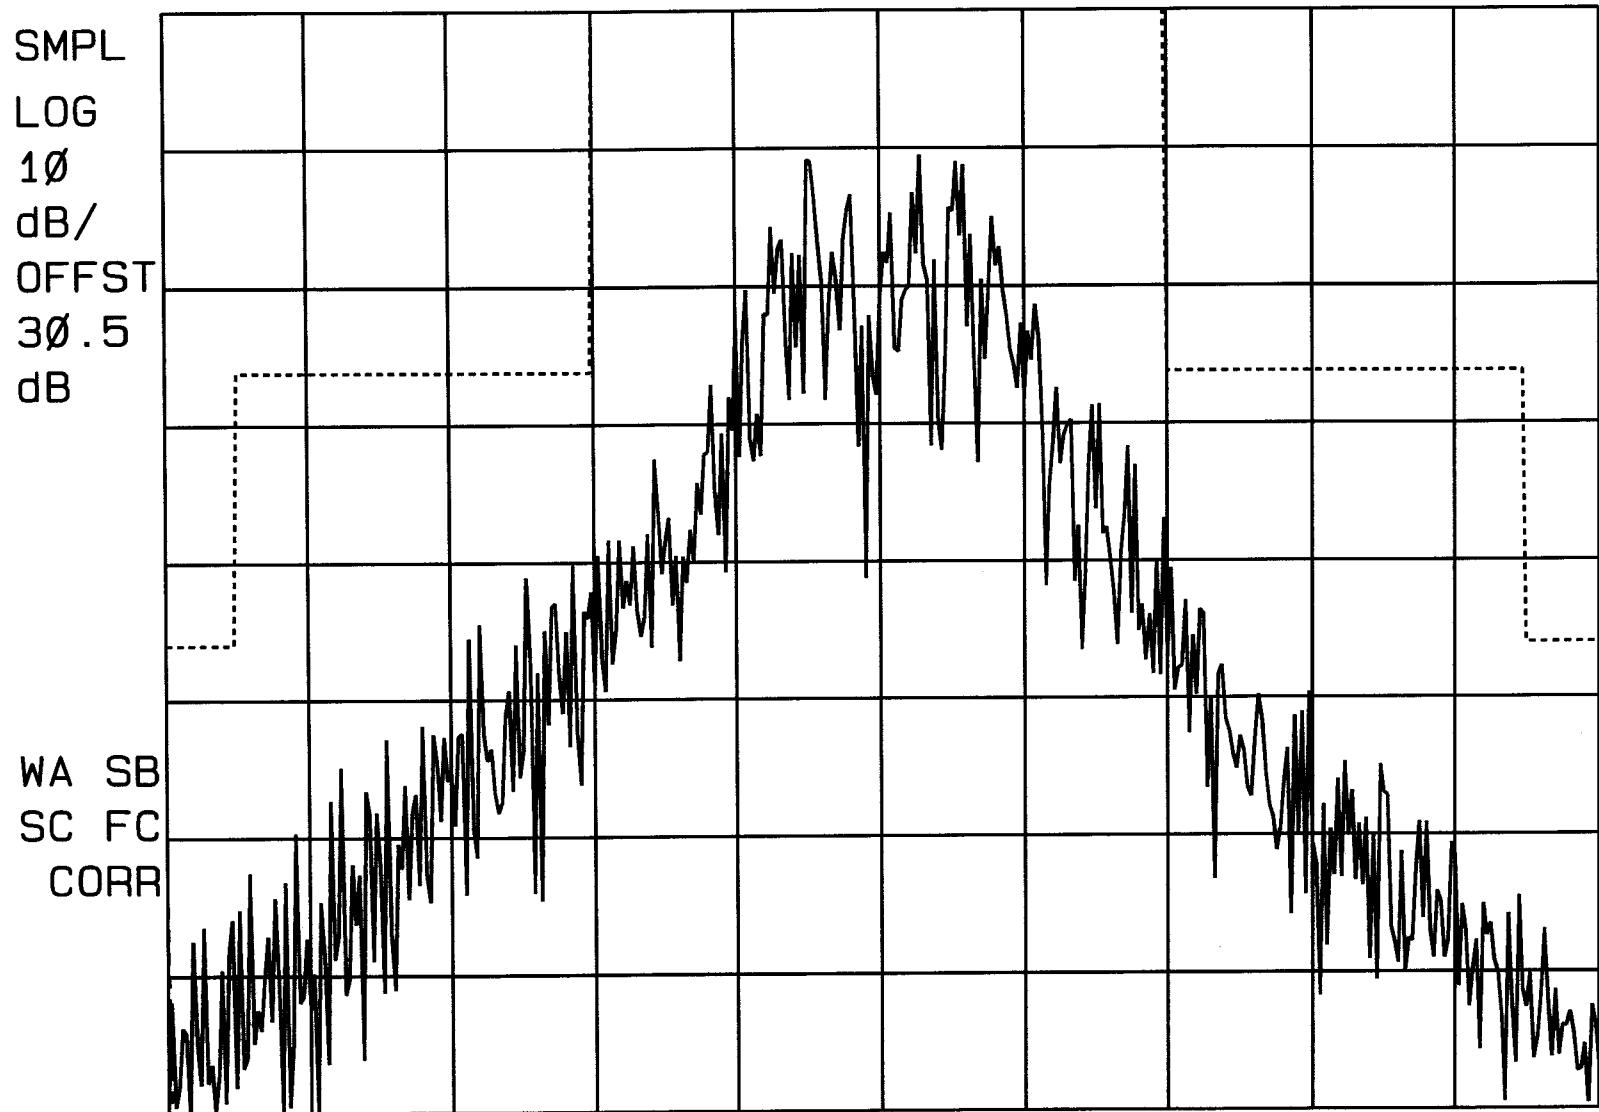

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz


SPAN 100.0 kHz

#SWP 3.60 sec

23: 21: 46 JAN 17, 2002

WITHUS WCE-210 WIDE BAND DATA

REF 26.1 dBm AT 10 dB

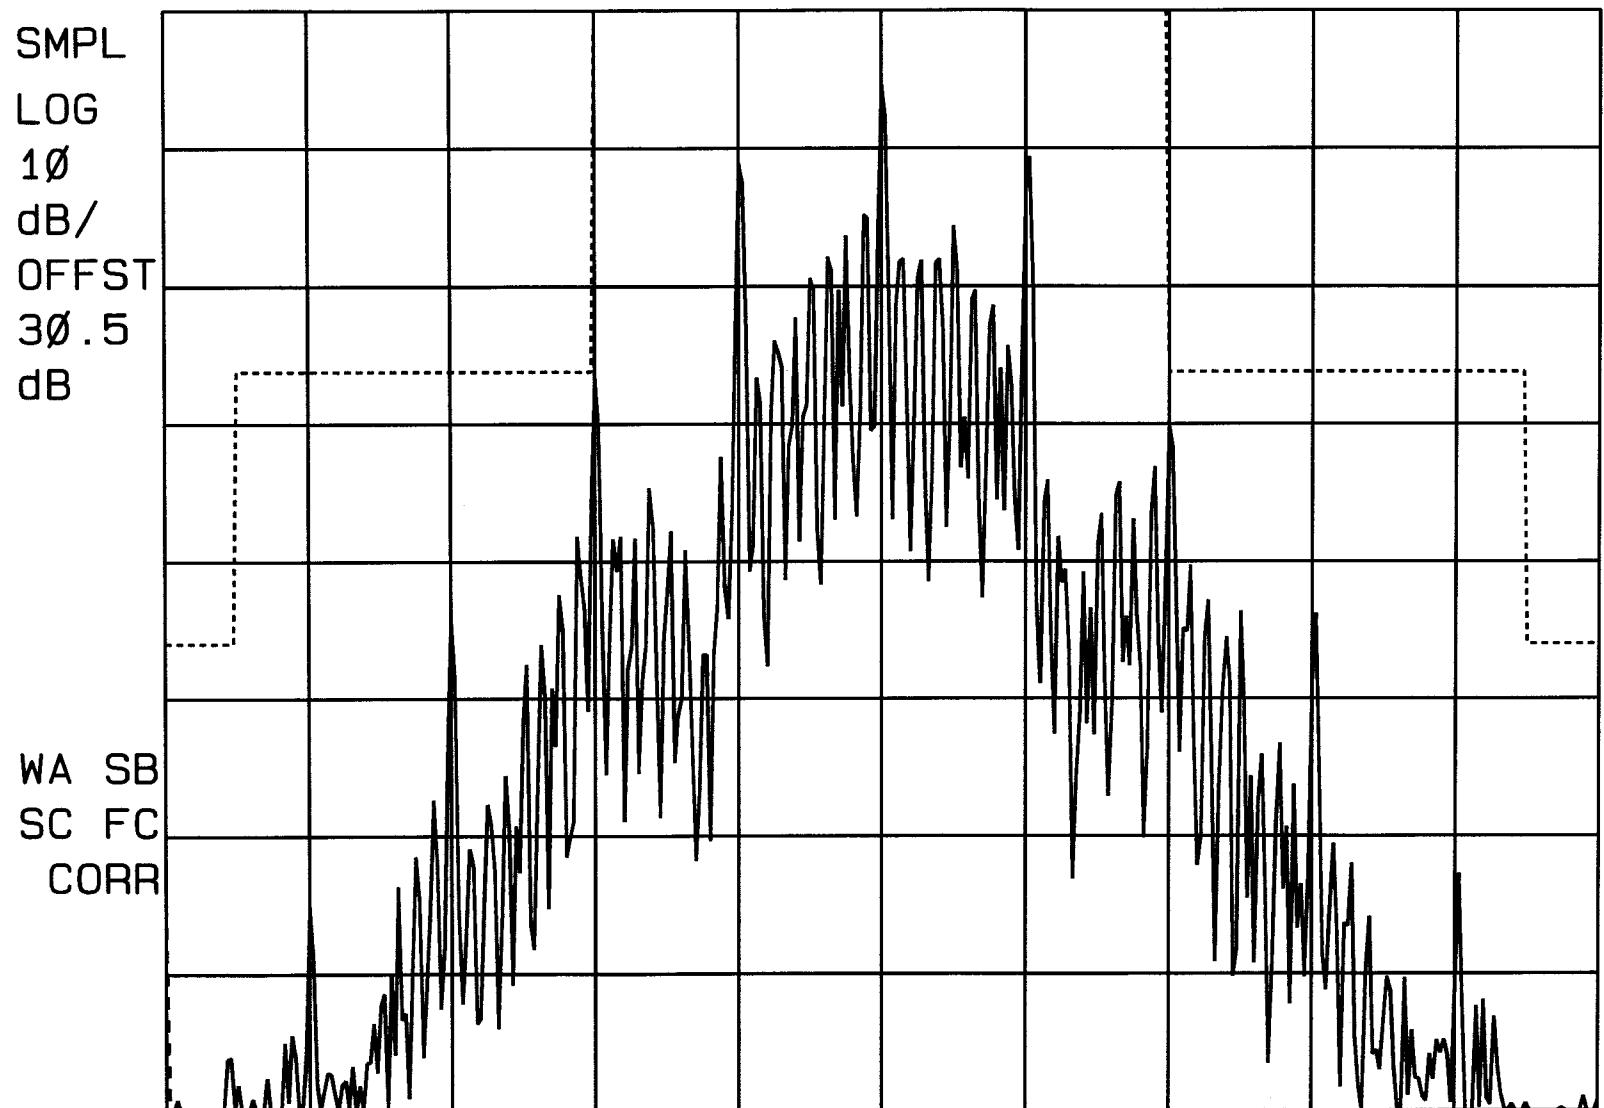

CENTER 836.4900 MHz

#RES BW 300 Hz

#VBW 300 Hz

SPAN 100.0 kHz

#SWP 3.60 sec

hp 09:52:53 Feb 12, 2002


WITHUS IT WCE-210 COND SPURS CH 991

Ref 26.1 dBm

Atten 10 dB

Mkr1 2.481 GHz

-28.77 dBm

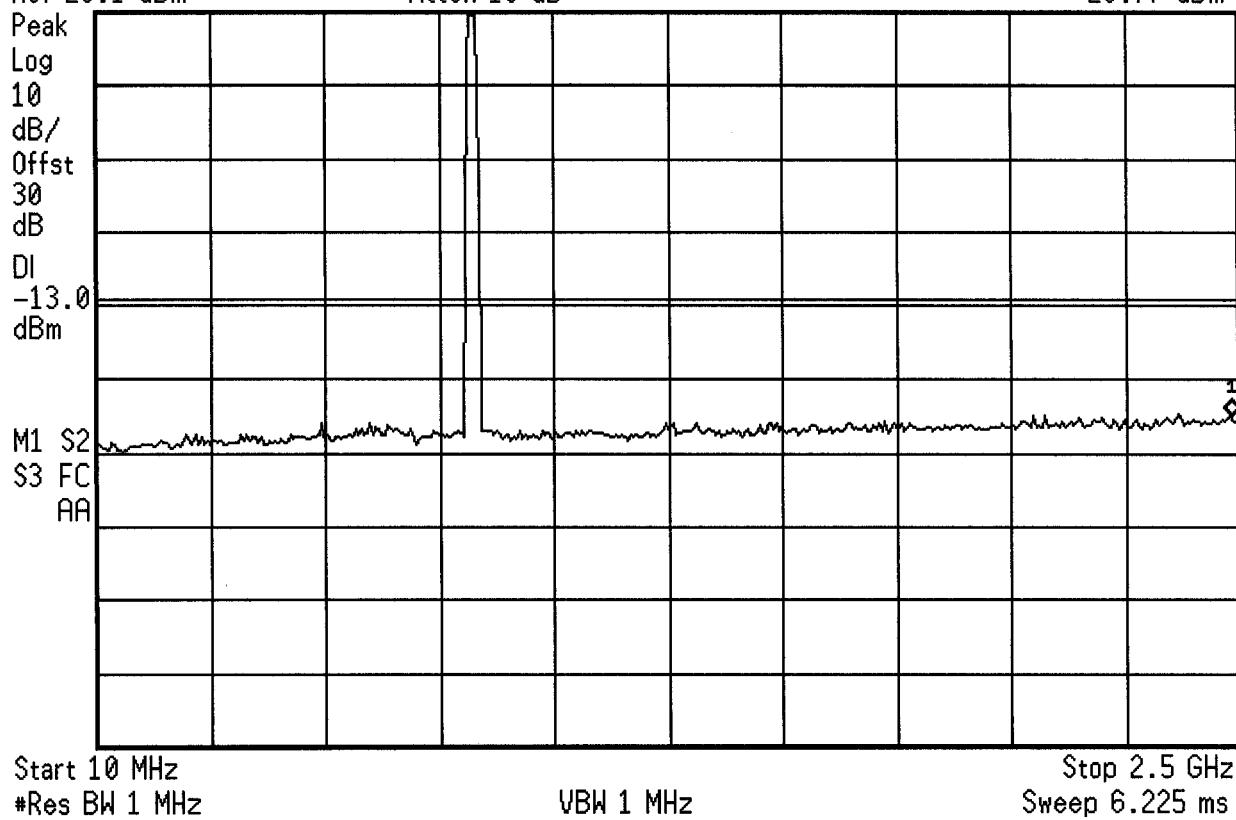

[hp] 09:53:33 Feb 12, 2002


WITHUS IT WCE-210 COND SPURS CH 991

Ref 26.1 dBm

Atten 10 dB

Mkr1 2.988 GHz


-31.22 dBm

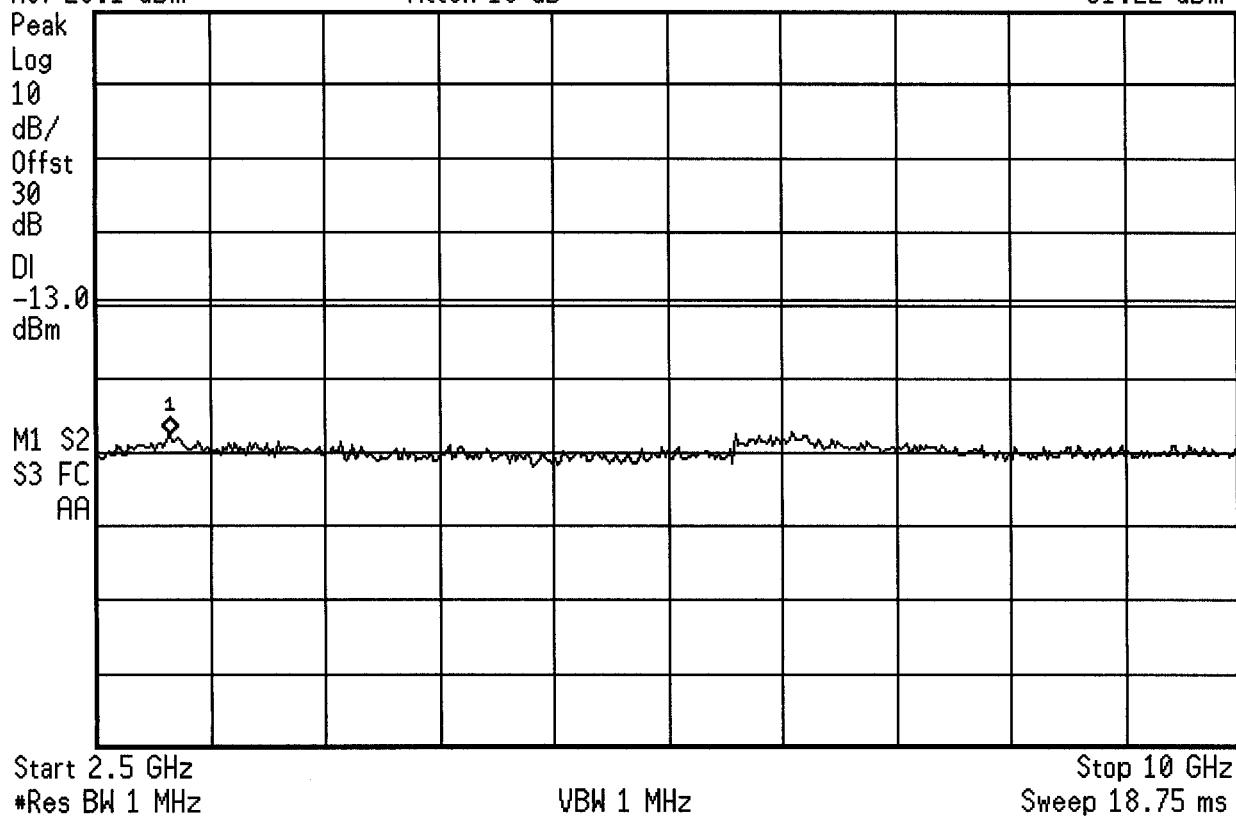

hp 09:54:16 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 991
Ref 26.1 dBm Atten 10 dB

Mkr1 14.03 GHz
-28.55 dBm

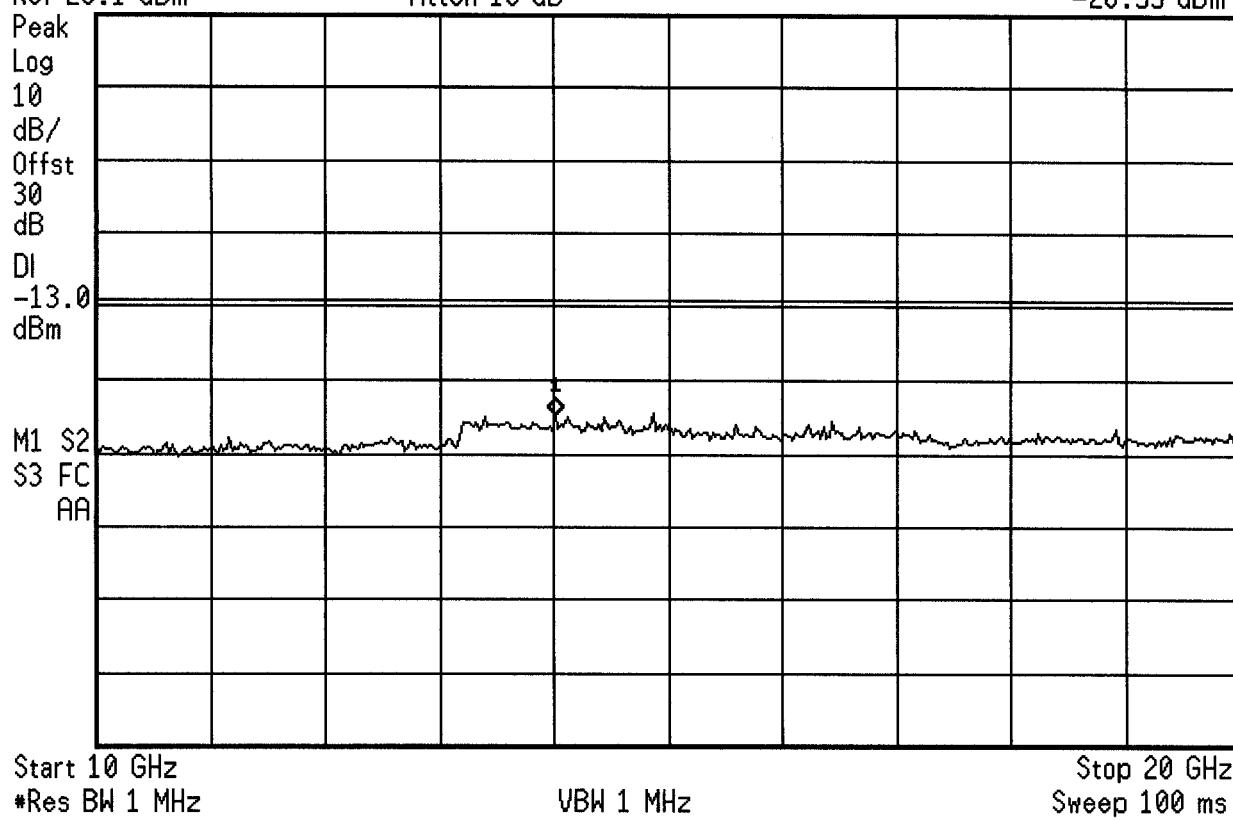

hp 09:56:12 Feb 12, 2002


WITHUS IT WCE-210 COND SPURS CH 383

Ref 26.1 dBm

Atten 10 dB

Mkr1 2.475 GHz


-28.61 dBm

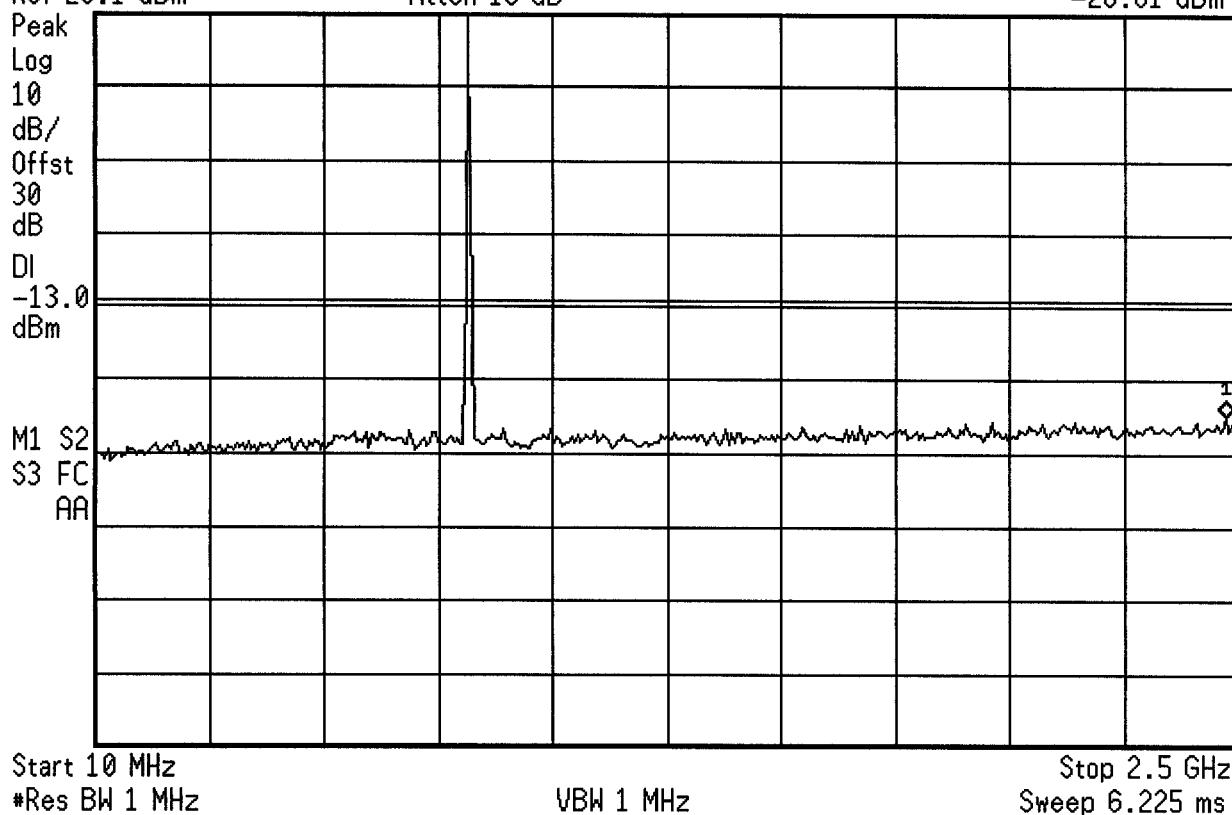

[hp] 09:56:58 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 383
Ref 26.1 dBm Atten 10 dB

Mkr1 2.988 GHz
-30.81 dBm

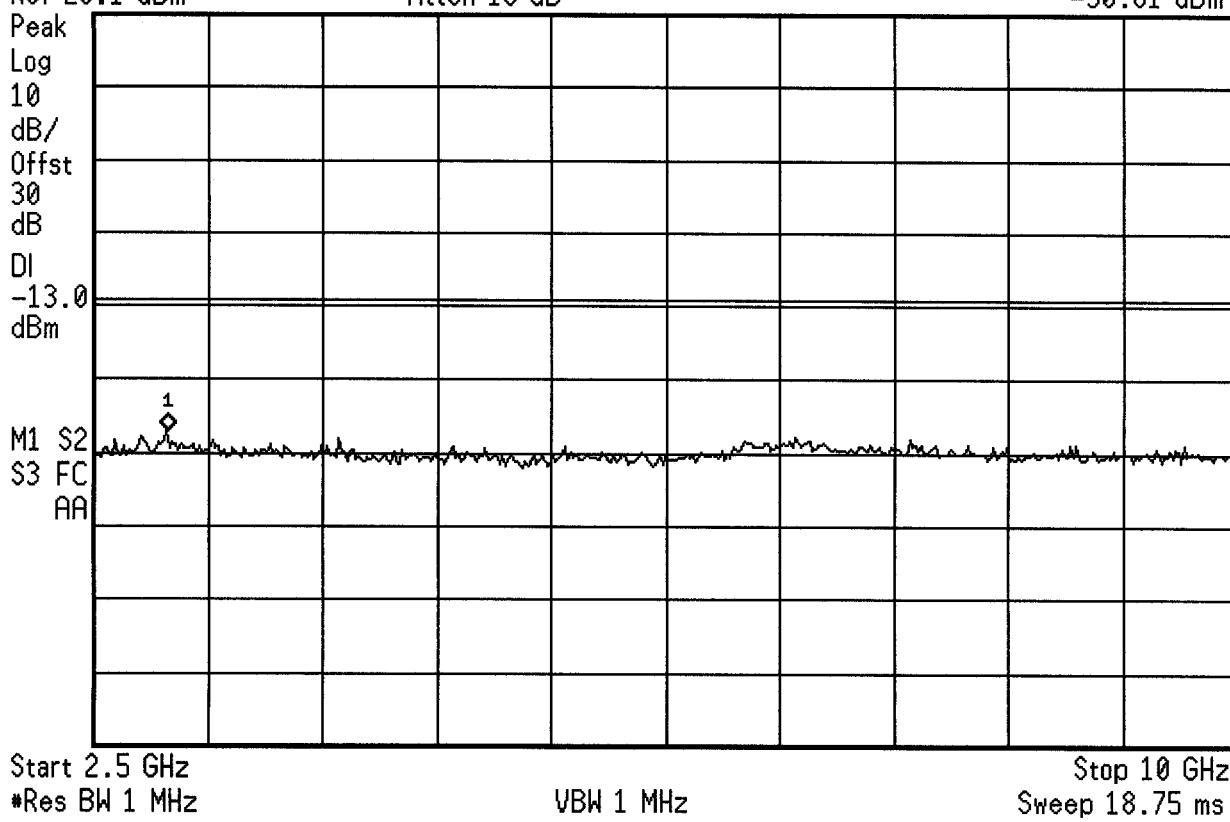

[hp] 09:57:41 Feb 12, 2002


WITHUS IT WCE-210 COND SPURS CH 383

Ref 26.1 dBm

Atten 10 dB

Mkr1 13.23 GHz


-28.99 dBm

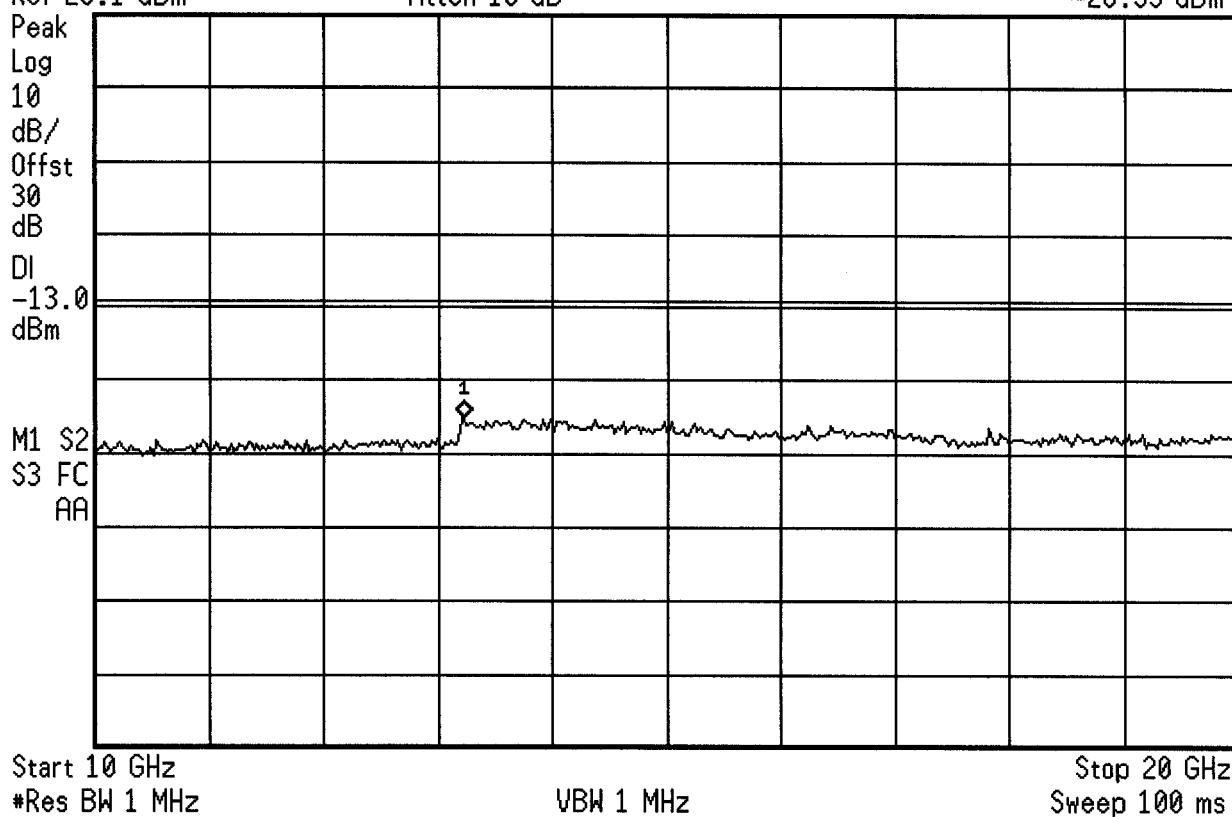

hp 09:58:35 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 799
Ref 26.1 dBm Atten 10 dB

Mkr1 2.475 GHz
-28.26 dBm

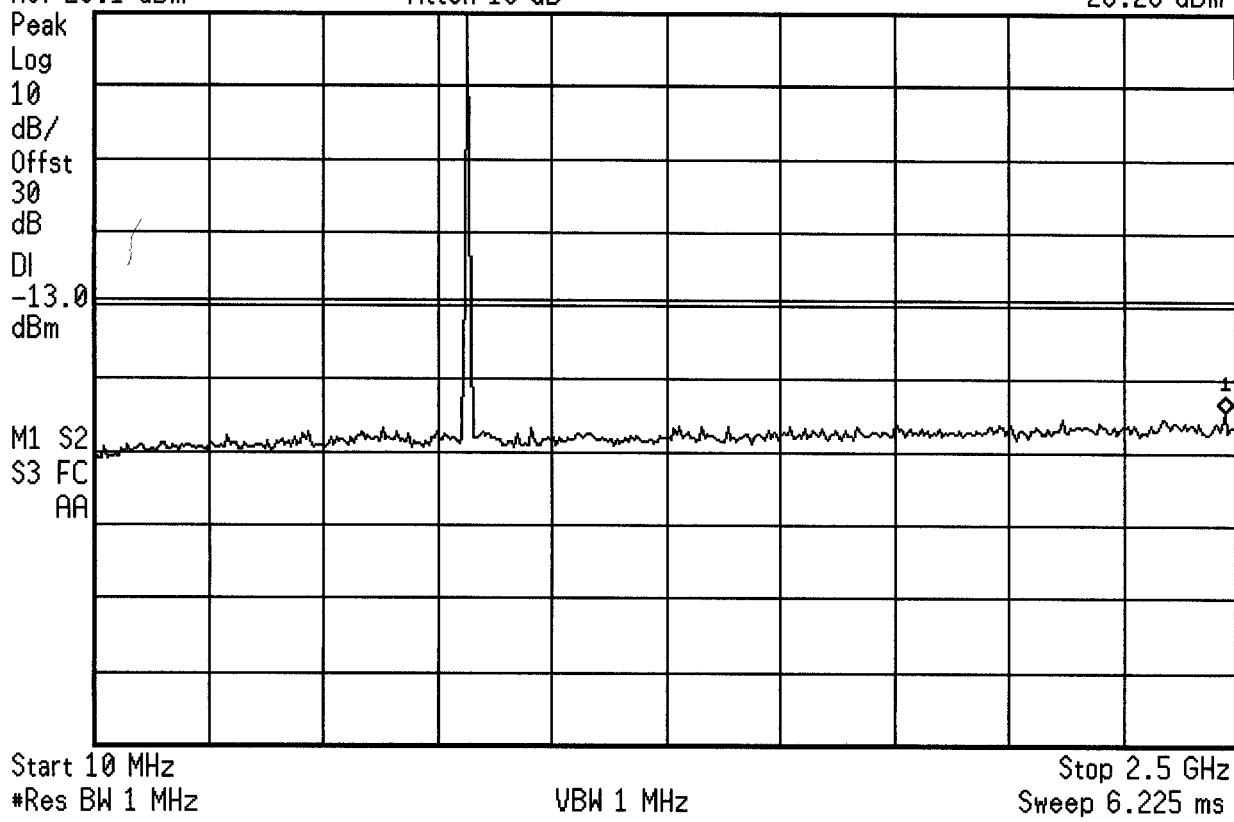

[hp] 09:59:13 Feb 12, 2002


WITHUS IT WCE-210 COND SPURS CH 799

Ref 26.1 dBm

Atten 10 dB

Mkr1 2.988 GHz


-29.99 dBm

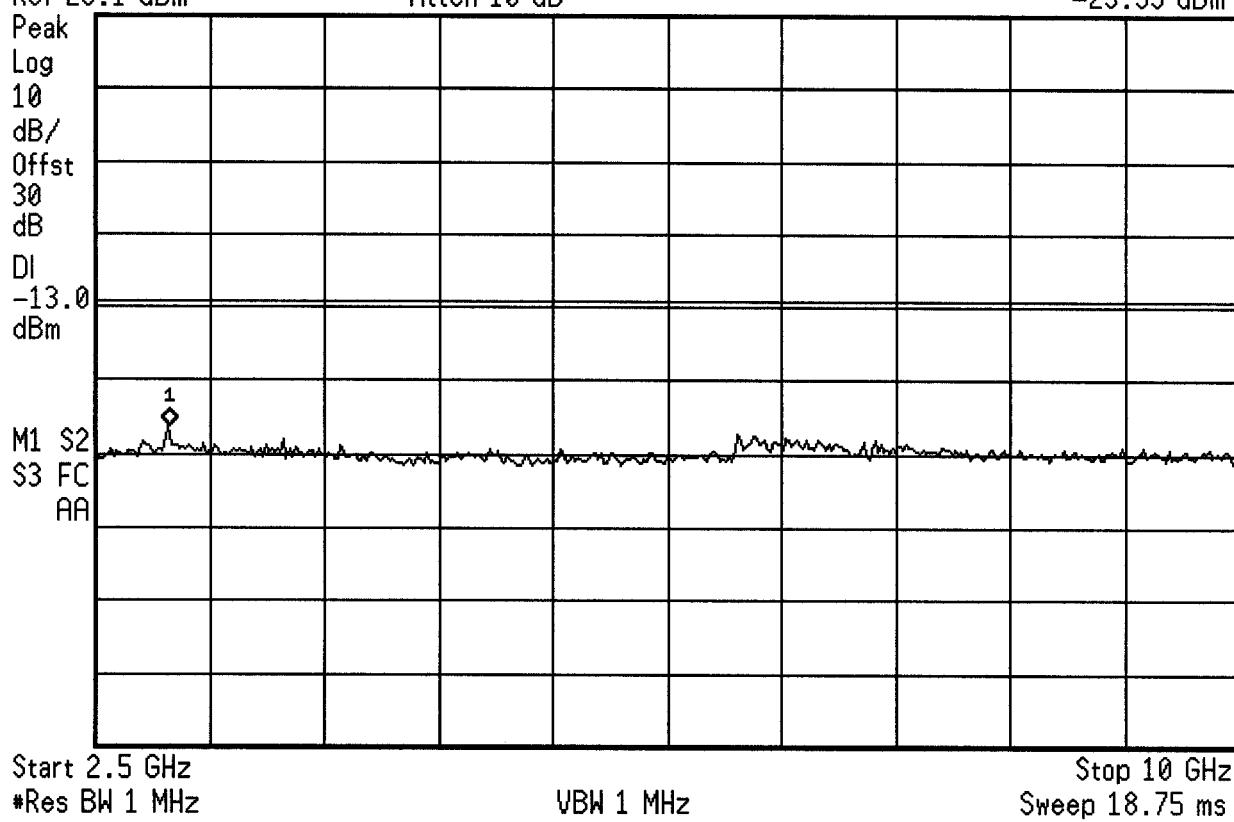

hp 10:00:17 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 799
Ref 26.1 dBm Atten 10 dB


Mkr1 13.48 GHz
-28.42 dBm

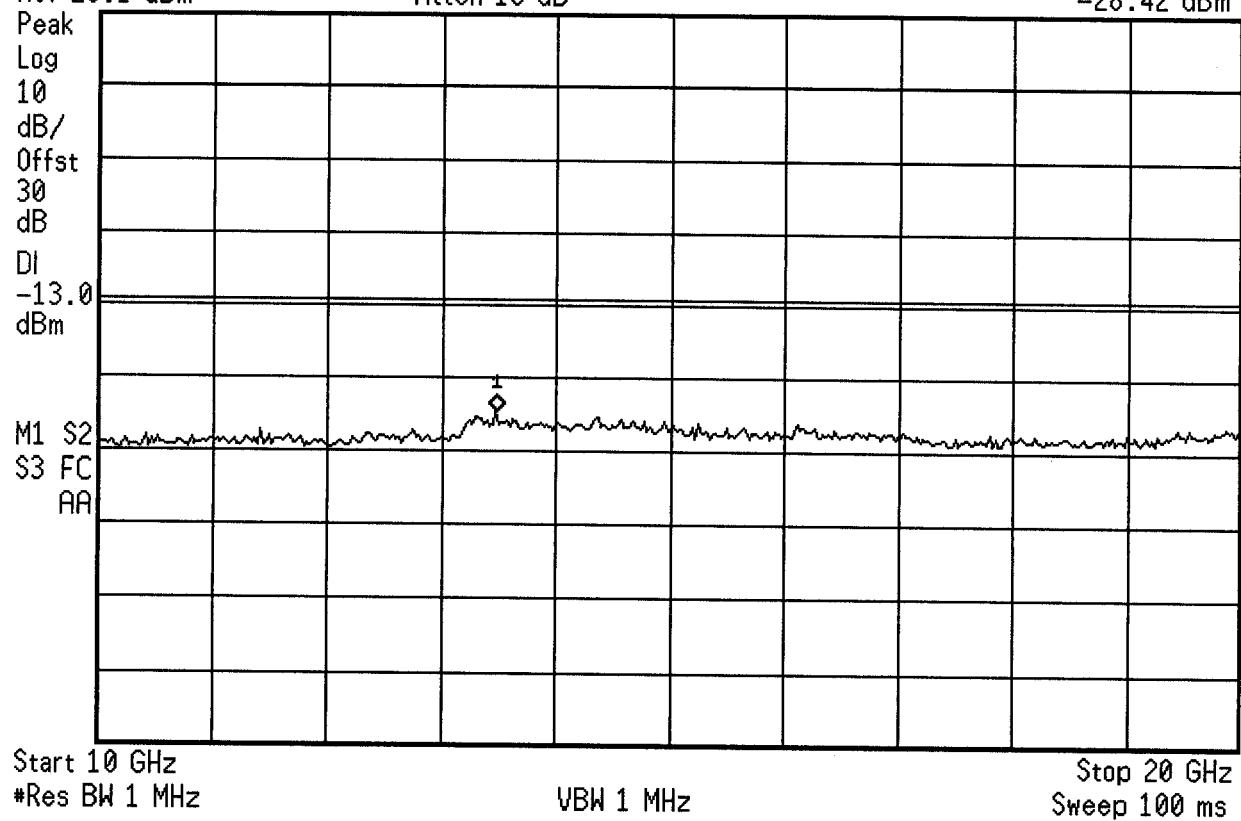

[hp] 09:02:53 Feb 12, 2002

WITHUS WCE-210 RECEIVER SPURS AMPS MODE
Ref -78 dBm Atten 5 dB

Mkr1 874.64 MHz
-86.95 dBm

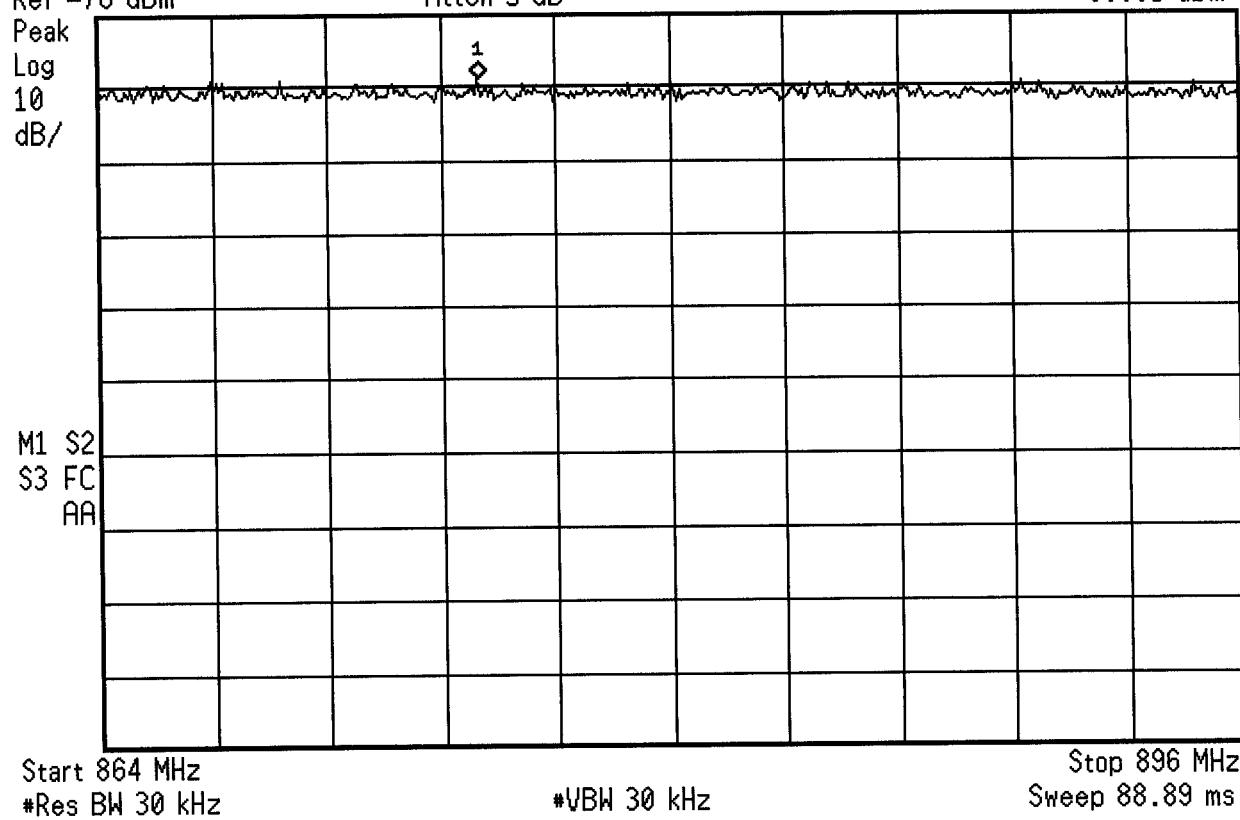


EMC TEST PLOTS - CDMA MODE

[hp] 10:31:57 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 1013
Ref 25.1 dBm Atten 5 dB


Mkr1 2.475 GHz
-30.4 dBm

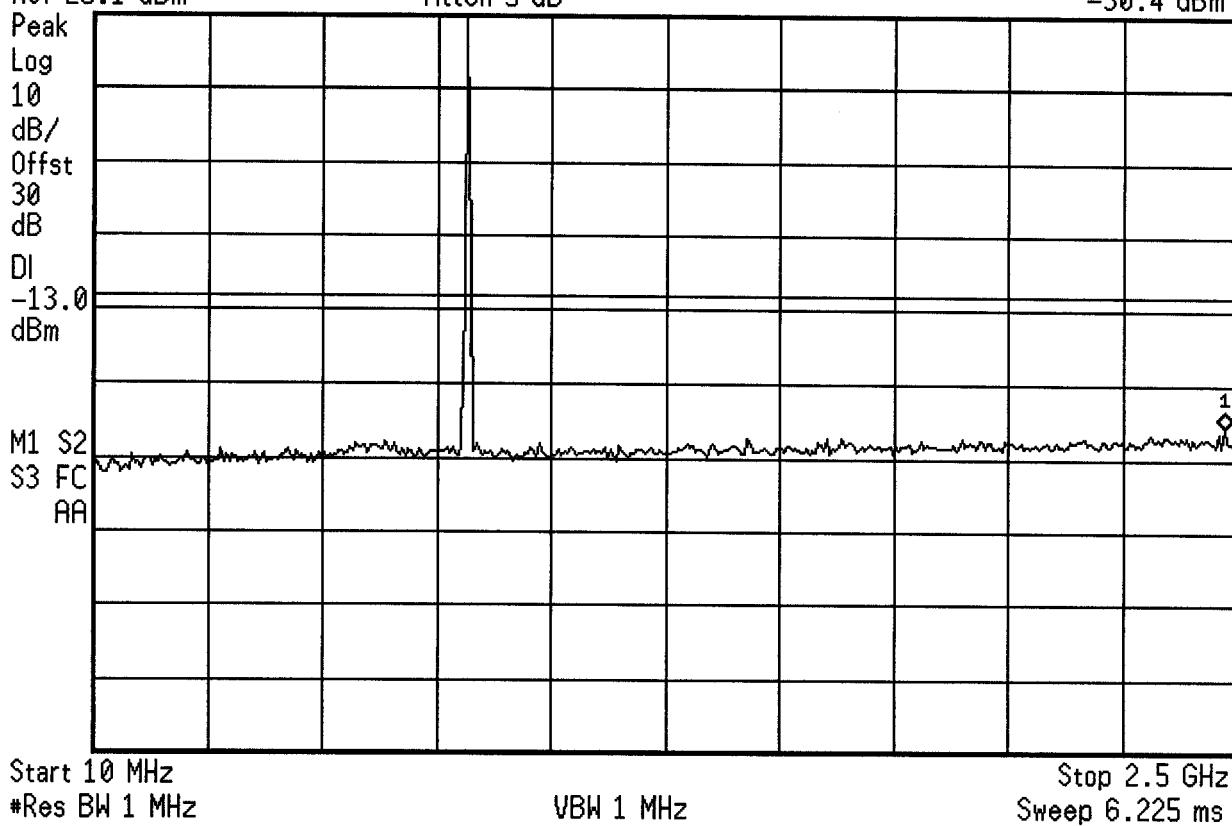

hp 10:34:28 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 1013
Ref 25.1 dBm Atten 5 dB


Mkr1 2.988 GHz
-32.65 dBm

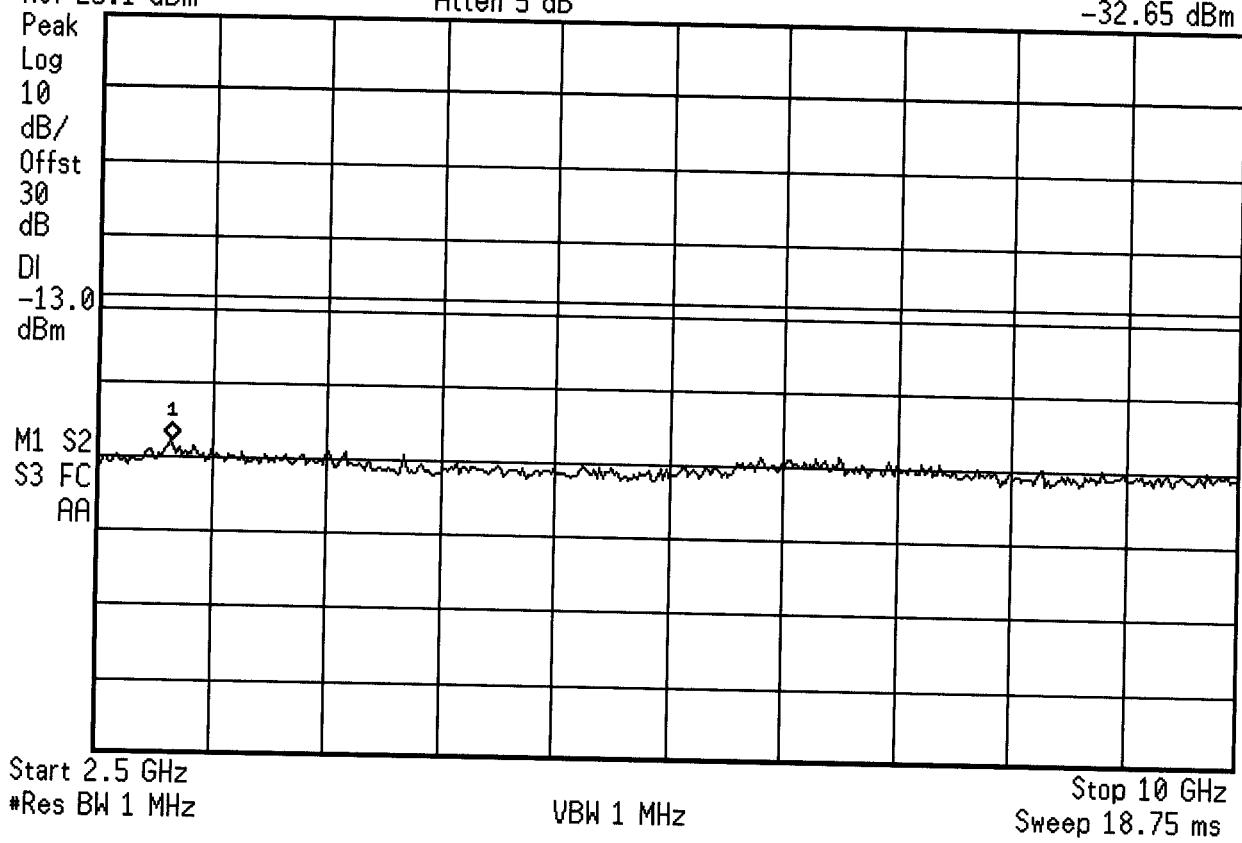

[hp] 10:35:06 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 1013
Ref 25.1 dBm Atten 5 dB


Mkr1 13.75 GHz
-31.72 dBm

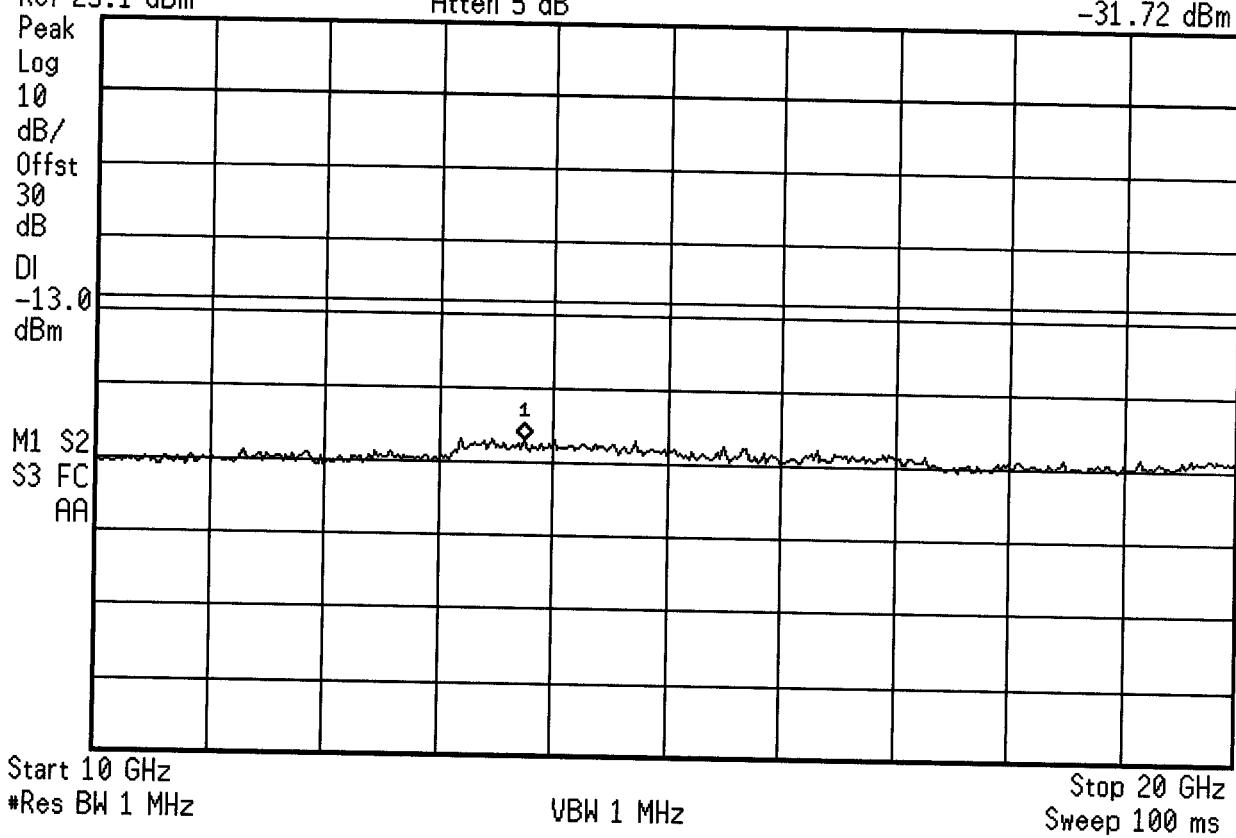

hp 10:40:59 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 363
Ref 25.1 dBm Atten 5 dB


Mkr1 1.672 GHz
-29.26 dBm

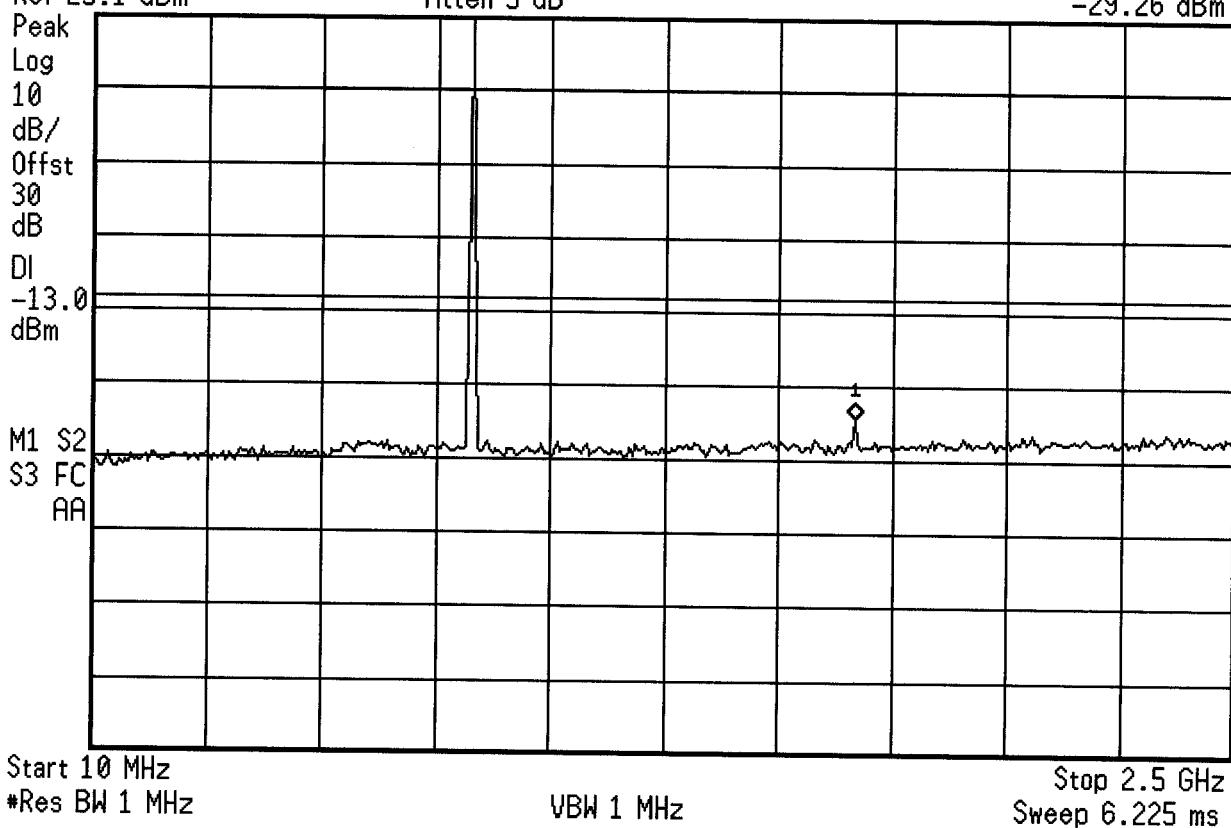

hp 10:41:23 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 363
Ref 25.1 dBm Atten 5 dB


Mkr1 2.500 GHz
-29.46 dBm

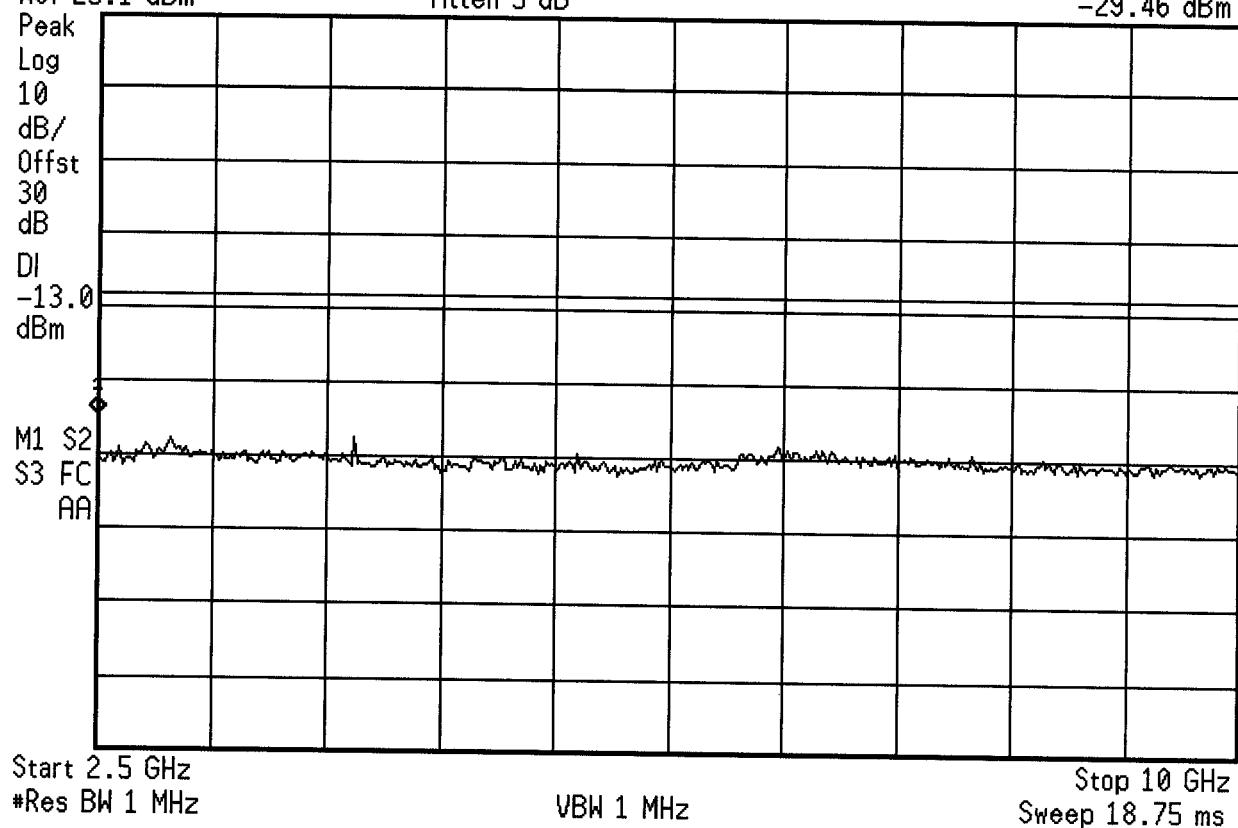

hp 10:40:20 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 363
Ref 25.1 dBm Atten 5 dB


Mkr1 13.33 GHz
-31.28 dBm

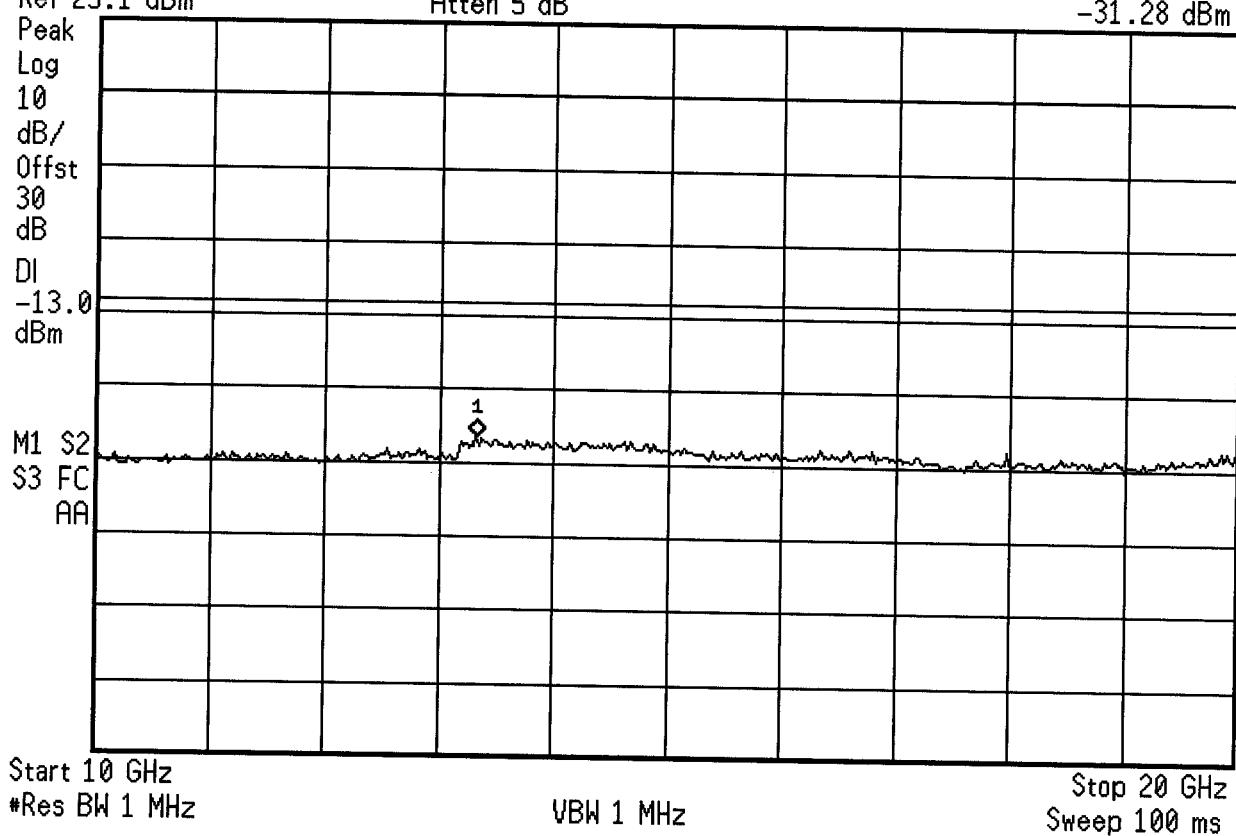

[hp] 10:45:45 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 777
Ref 25.1 dBm Atten 5 dB


Mkr1 1.697 GHz
-30.63 dBm

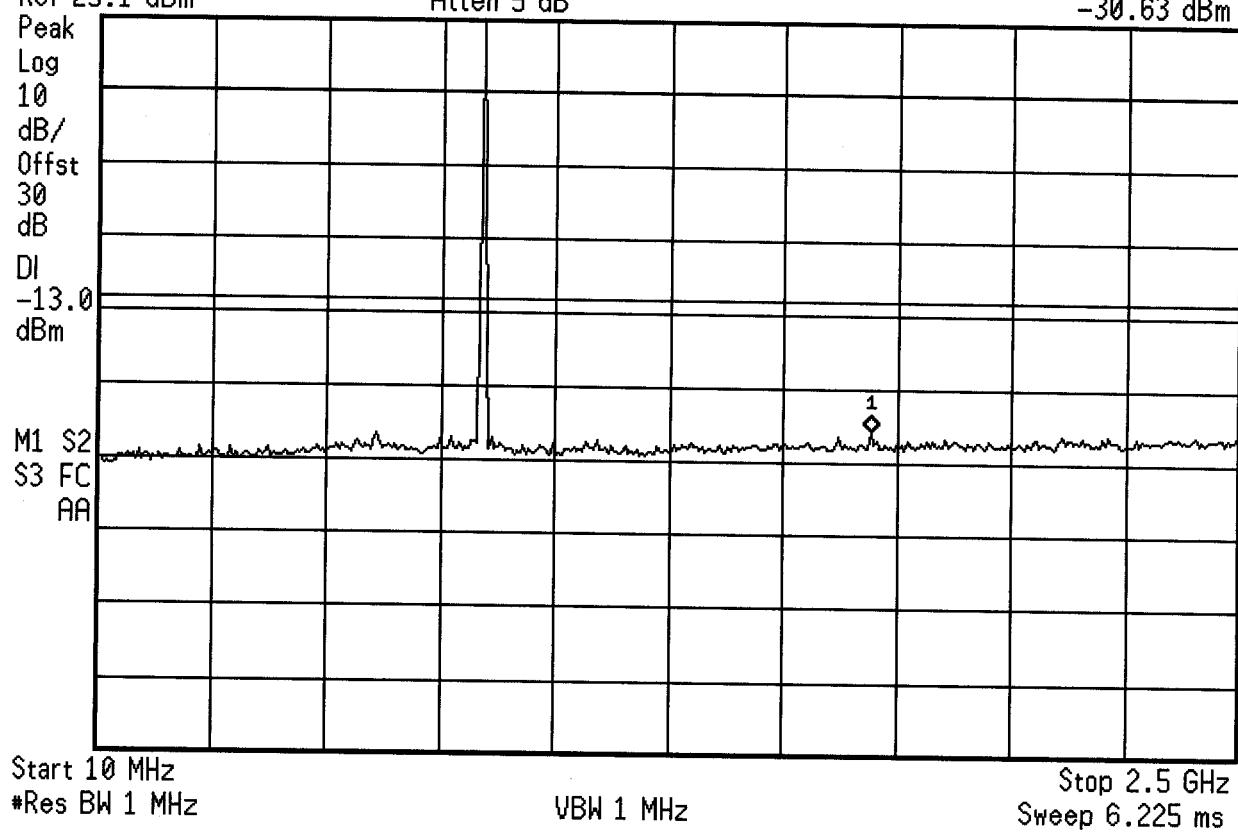

hp 10:46:13 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 777
Ref 25.1 dBm Atten 5 dB


Mkr1 2.538 GHz
-26.53 dBm

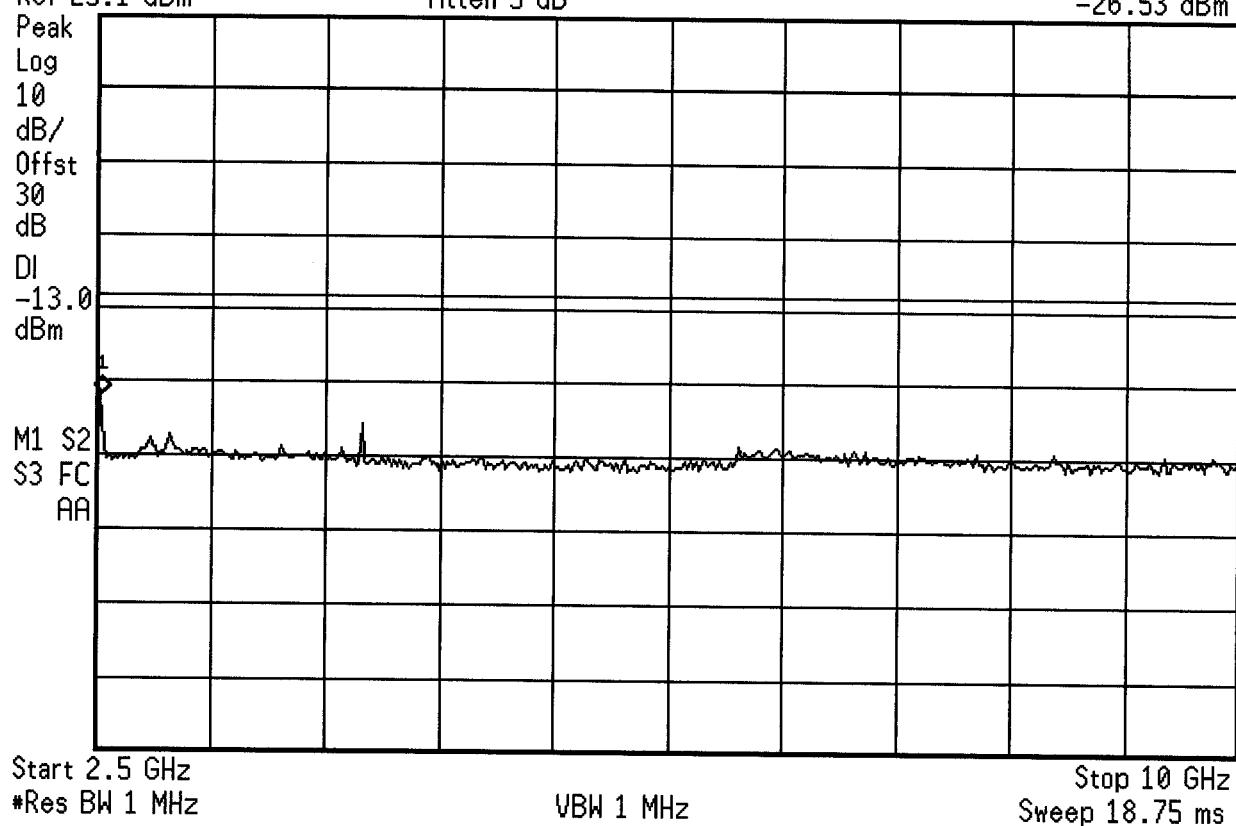

[hp] 10:46:54 Feb 12, 2002

WITHUS IT WCE-210 COND SPURS CH 777
Ref 25.1 dBm Atten 5 dB


Mkr1 13.25 GHz
-31.48 dBm

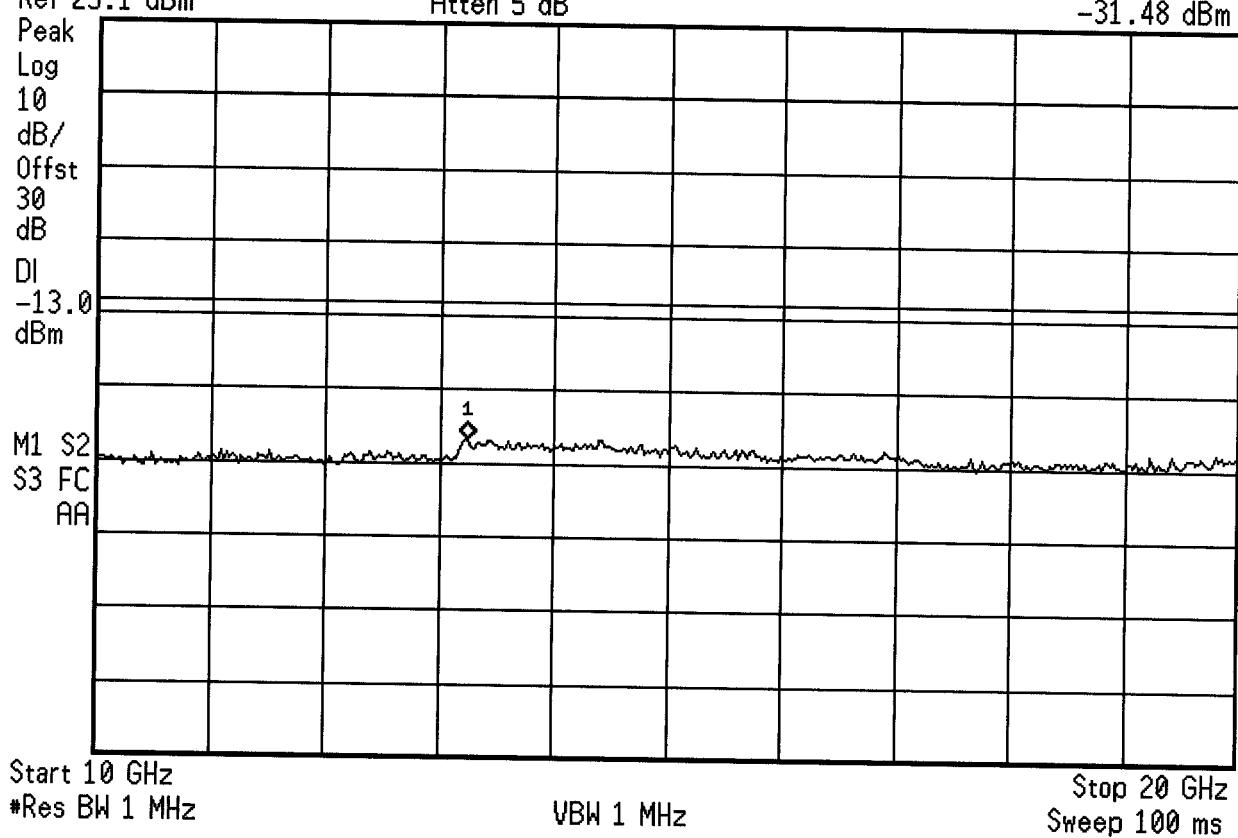

[hp] 08:59:21 Feb 12, 2002

WITHUS WCE-210 RECEIVER SPURS CDMA MODE
Ref -78 dBm Atten 5 dB

Mkr1 882.80 MHz
-86.87 dBm

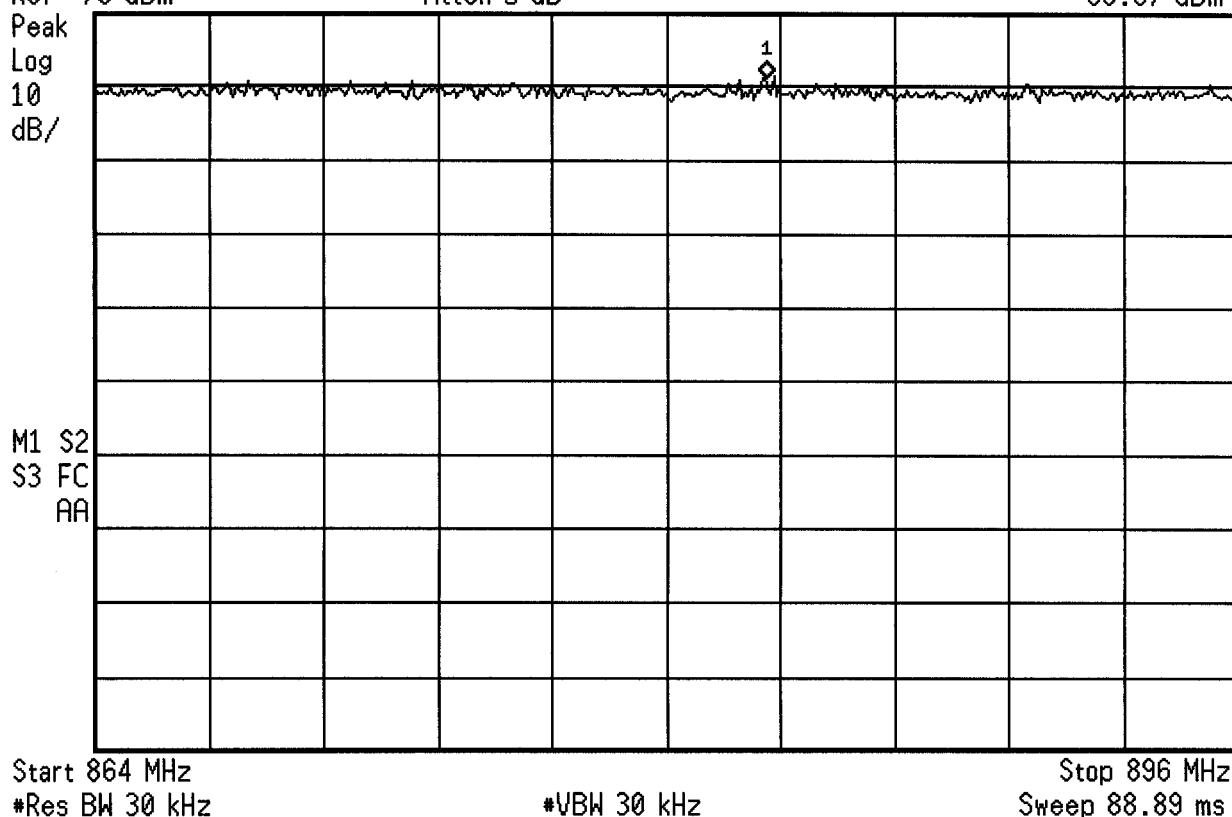

hp 10:55:54 Feb 12, 2002

WITHUS IT WCE-210 CH 1013

Ref 25.1 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 M2

S3 FC

AA


Center 824.6 MHz

*Res BW 30 kHz

VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms

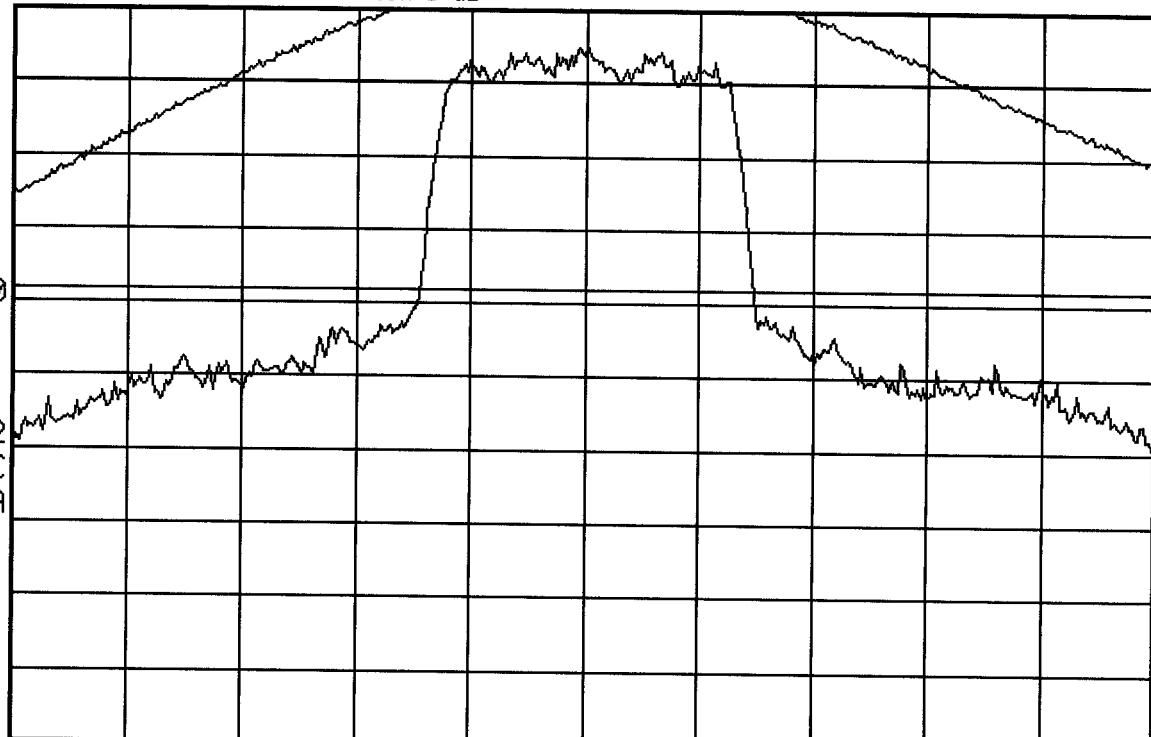


hp 10:59:11 Feb 12, 2002

WITHUS IT WCE-210 CH 363

Ref 25.1 dBm

Atten 5 dB

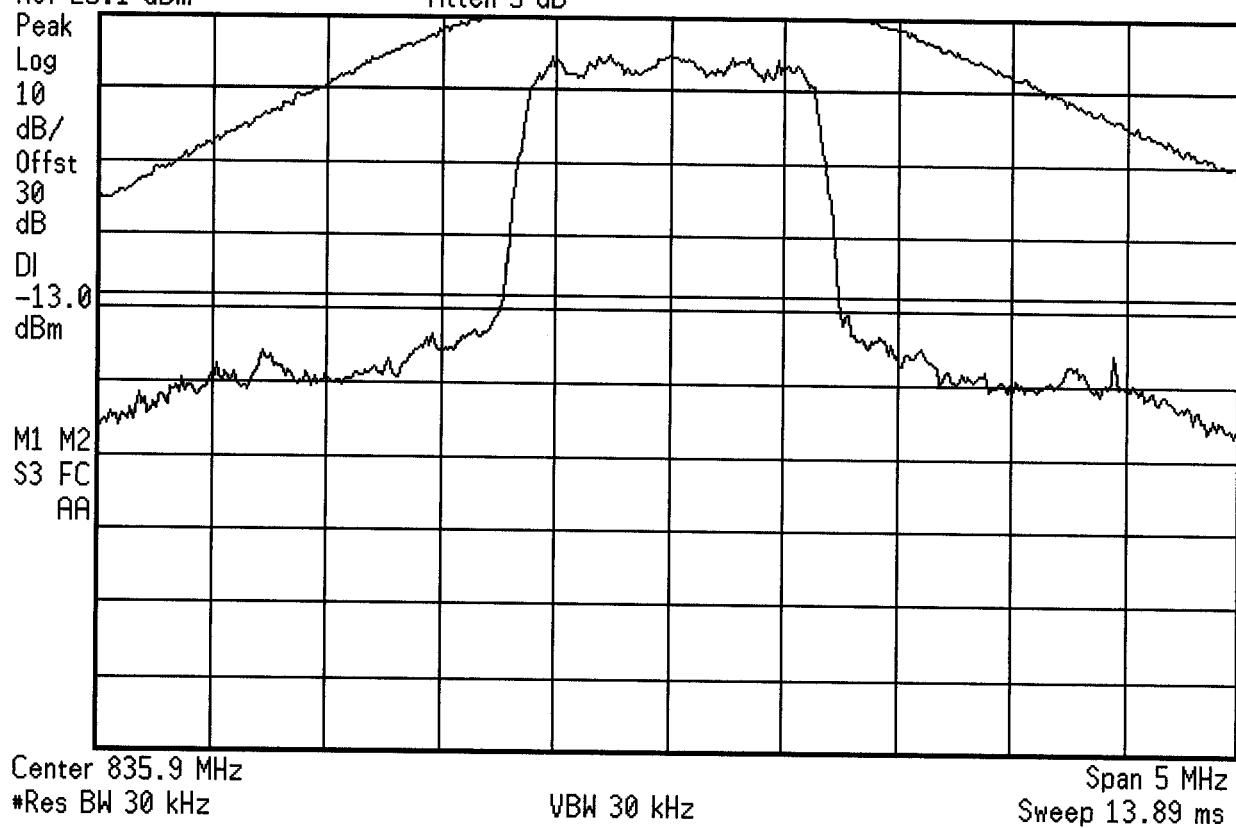


hp 10:51:56 Feb 12, 2002

WITHUS IT WCE-210 CH 777

Ref 25.1 dBm

Atten 5 dB

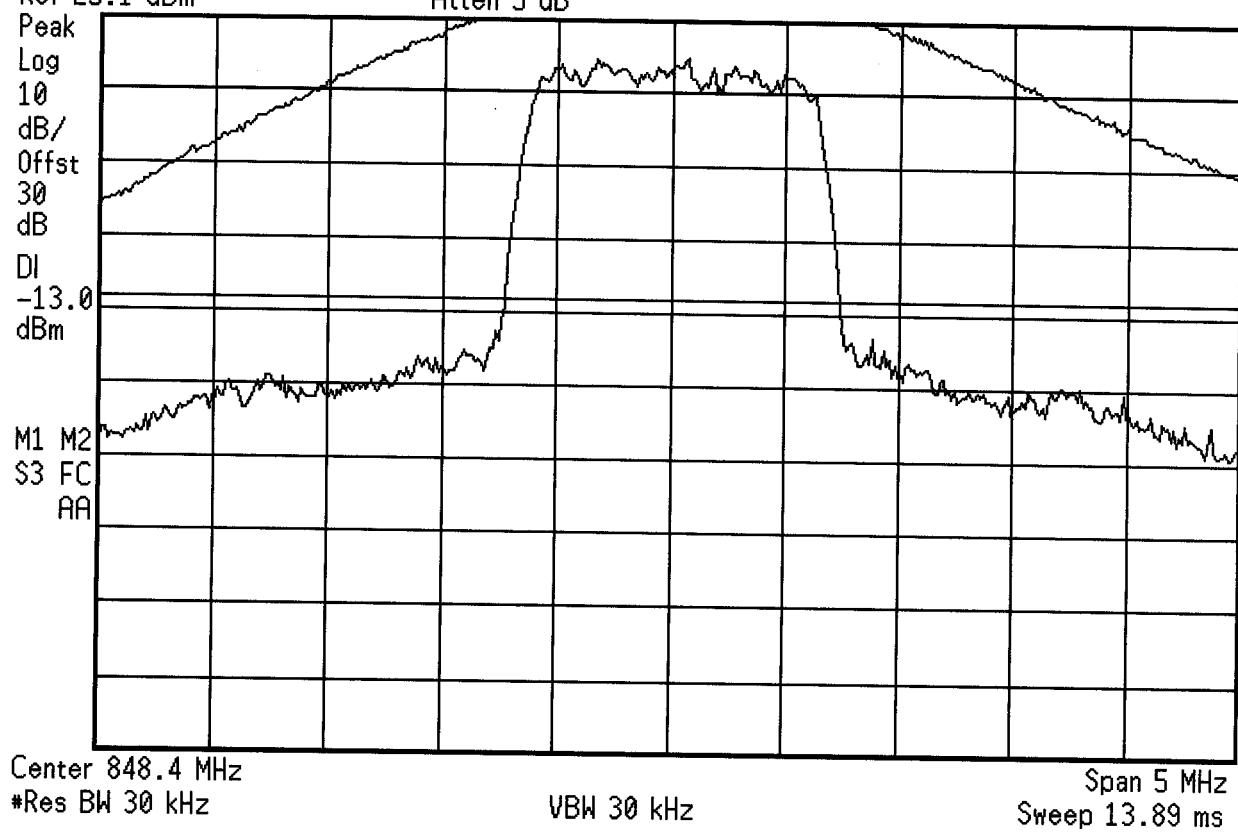


hp 11:11:08 Feb 12, 2002

WITHUS IT WCE-210 99% BAND WIDTH

Ref 25.1 dBm

Atten 5 dB

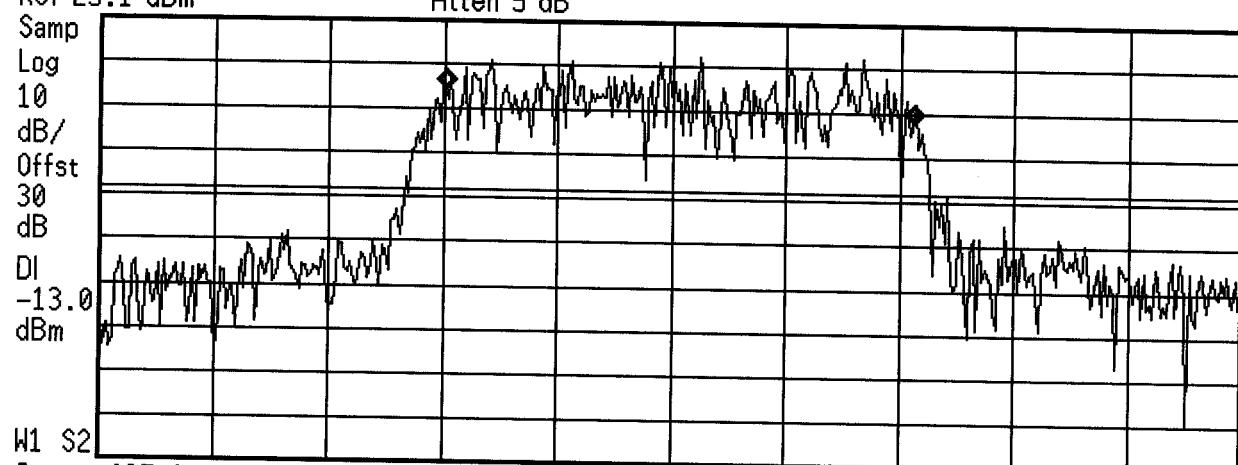

Occupied Bandwidth Results (measuring...)

Occupied Bandwidth
1.233 MHz

Occ BW % Pwr 99.00 %


Transmit Freq Error 22.65 kHz

hp 11:04:20 Feb 12, 2002

WITHUS IT WCE-210 BAND EDGE CDMA LOW CH

Ref 25.1 dBm

Atten 5 dB

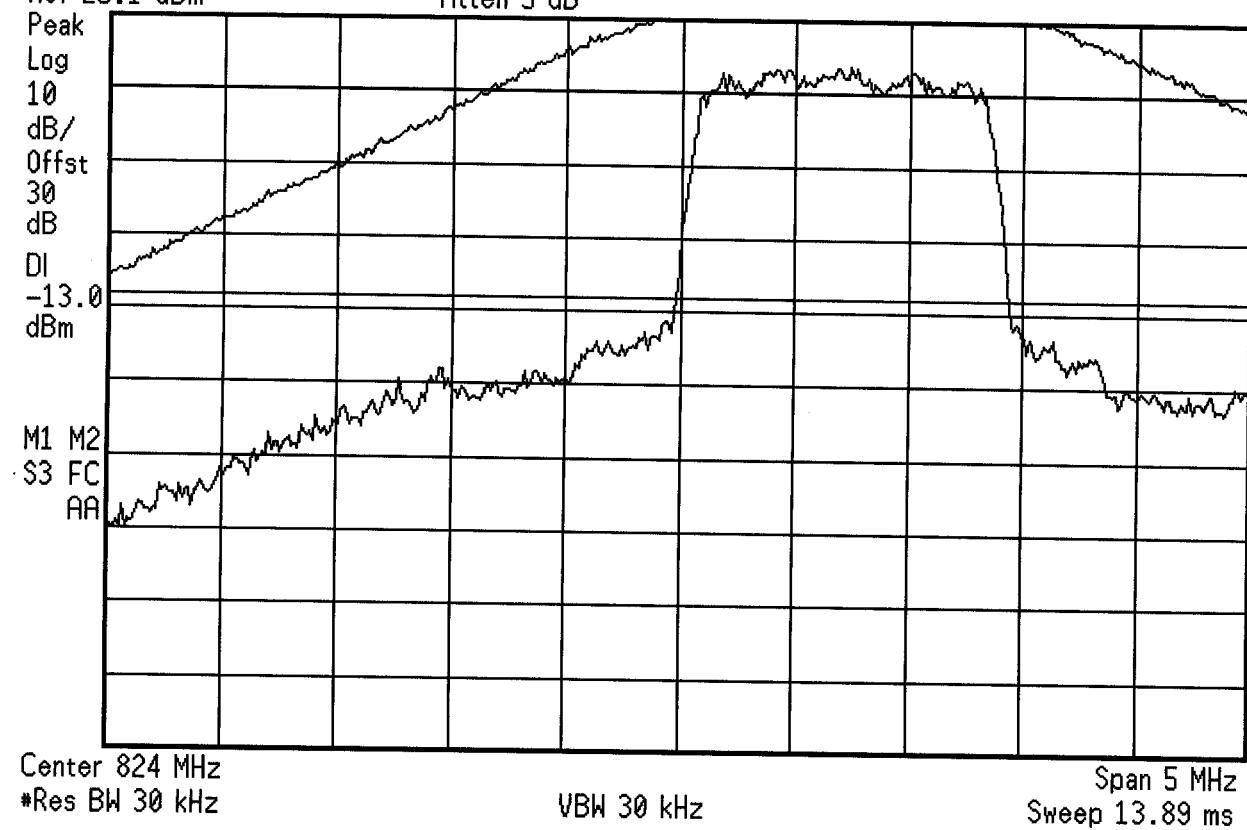

hp 11:08:25 Feb 12, 2002

WITHUS IT WCE-210 BAND EDGE CDMA HIGH CH

Ref 25.1 dBm

Atten 5 dB

