



FCC Radio Test Report

FCC ID: POVBTM40X

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Issued Date : Sep. 30, 2013
Project No. : 1309185
Equipment : PAFERS-BTM-40X
Model Name : XSPIN; T-KIT
Applicant : PAFERS Tech Co., Ltd.
Address : No. 208-18, Zhongqing Rd., Xitun Dist.,
Taichung City 407, Taiwan (R.O.C.)

Tested by: Neutron Engineering Inc. EMC Laboratory
Date of Receipt: Sep. 24, 2013
Date of Test: Sep. 24, 2013 ~ Sep. 28, 2013

Testing Engineer: Gary Chou
(Gary Chou)

Technical Manager: Jeff Yang
(Jeff Yang)

Authorized Signatory: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.,
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331



**Neutron Engineering Inc.****Declaration**

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C, or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 RADIATED EMISSION MEASUREMENT	14
4.1.1 RADIATED EMISSION LIMITS	14
4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING	15
4.1.3 TEST PROCEDURE	16
4.1.4 DEVIATION FROM TEST STANDARD	16
4.1.5 TEST SETUP	17
4.1.6 EUT OPERATING CONDITIONS	18
4.2.8 TEST RESULTS-BETWEEN 30MHZ AND 1000MHZ	19
4.1.7 TEST RESULTS (ABOVE 1000 MHZ)	21
5 . BANDWIDTH TEST	33
5.1 APPLIED PROCESURES / LIMIT	33
5.2 MEASUREMENT INSTRUMENTS LIST	33
5.3 TEST PROCEDURE	33
5.4 DEVIATION FROM STANDARD	33
5.5 TEST SETUP	33
5.6 EUT OPERATION CONDITIONS	33
5.7 TEST RESULTS	34
6 . MAXIMUM OUTPUT POWER TEST	36
6.1 APPLIED PROCEDURES / LIMIT	36
6.2 MEASUREMENT INSTRUMENTS LIST	36
6.3 TEST PROCEDURE	36
6.4 DEVIATION FROM STANDARD	36
6.5 TEST SETUP	36
6.6 EUT OPERATION CONDITIONS	36
6.7 TEST RESULTS	37
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	38

**Neutron Engineering Inc.**

Table of Contents	Page
7.1 APPLIED PROCEDURES / LIMIT	38
7.2 MEASUREMENT INSTRUMENTS LIST	38
7.3 TEST PROCEDURE	38
7.4 DEVIATION FROM STANDARD	38
7.5 TEST SETUP	38
7.6 EUT OPERATION CONDITIONS	38
7.7 TEST RESULTS	39
8 . POWER SPECTRAL DENSITY TEST	43
8.1 APPLIED PROCEDURES / LIMIT	43
8.2 MEASUREMENT INSTRUMENTS LIST	43
8.3 TEST PROCEDURE	43
8.4 DEVIATION FROM STANDARD	43
8.5 TEST SETUP	43
8.6 EUT OPERATION CONDITIONS	43
8.7 TEST RESULTS	44
9 . RF EXPOSURE COMPLIANCE	46
9.1 LIMIT	46
9.2 MEASUREMENT INSTRUMENTS LIST	46
9.3 MPE CALCULATION METHOD	46
9.4 TEST SETUP LAYOUT	47
9.5 DEVIATION FROM TEST STANDARD	47
9.6 EUT OPERATING CONDITIONS	47
9.7 TEST RESULTS	48
10 . EUT TEST PHOTO	49

**1. CERTIFICATION**

Equipment : PAFERS-BTM-40X
Brand Name : PAFERS
Model Name : XSPIN; T-KIT
Applicant : PAFERS Tech Co., Ltd.
Date of Test : Sep. 24, 2013 ~ Sep. 28, 2013
Standard(s) : FCC Part 15, Subpart C: 2012 (15.247)
ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1309185) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**2. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standard(s):

FCC Part 15, Subpart C: 2012 (15.247)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	-	N/A
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.209/15.205	Radiated Spurious Emission	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r01 (Measurement Guidelines of DTS)

**2.1 TEST FACILITY****Radiated emission Test (Below 1 GHz):**

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

Radiated emission test:

Test Site	Item	Measurement	Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB	
			200 - 1000MHz	3.11 dB	
			1 - 18GHz	3.97 dB	
			18 - 40GHz	4.01 dB	
		Vertical Polarization	30 - 200MHz	3.22 dB	
			200 - 1000MHz	3.24 dB	
			1 - 18GHz	4.05 dB	
			18 - 40GHz	4.04 dB	

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

**3. GENERAL INFORMATION****3.1 GENERAL DESCRIPTION OF EUT**

Equipment	PAFERS-BTM-40X	
Brand Name	PAFERS	
Model Name	XSPIN; T-KIT	
Model Difference	Models' differences between each other only the changes of model name and battery cover which do not affect the EMI performance.	
Product Description	Operation Frequency	2402 MHz ~2480 MHz
	Modulation Technology	GFSK
	Bit Rate of Transmitter	1 Mbps
	Number of Channel	40CH
	Antenna Designation	Please see note 3.(Page 9)
	Antenna Gain(Peak)	
	Output Power	1.36 dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	Battery supplied.	
Power Rating	I/P: DC 3V (1 * CR2032)	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



Neutron Engineering Inc.

2.

Channel List			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	-0.52

**3.2 DESCRIPTION OF TEST MODES**

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:

(1) The measurements are performed at the high, middle, low available channels.




3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	CSR BlueSuite 2.4.8		
Frequency	2402 MHz	2440 MHz	2480 MHz
GFSK	DEF	DEF	DEF



3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

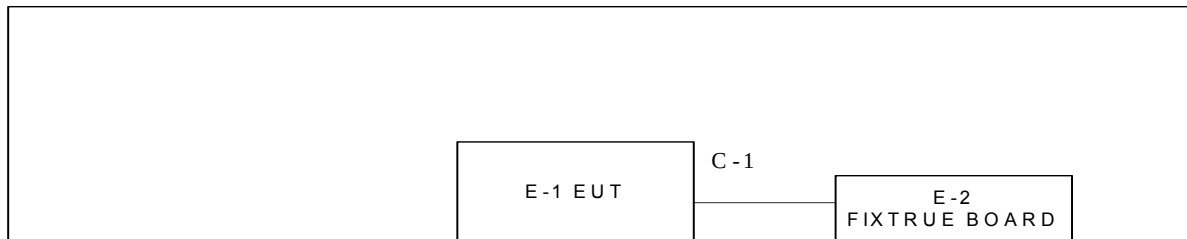

**3.5 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	PAFERS-BTM-40X	PAFERS	XSPIN; T-KIT	POVBTM40X	N/A	EUT
E-2	FIXTURE	nFortec	N/A	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.1M	DATA CABLE

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.



4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower



4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre-amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	27478LL142	1m	May. 14, 2014
5	Microflex Cable	AISI	S104-SMAP-1	8m	May. 14, 2014
6	Microflex Cable	N/A	27478LL142	3m	May. 14, 2014
7	Test Cable	N/A	LMR-400	966_12m	May. 14, 2014
8	Test Cable	N/A	LMR-400	966_3m	May. 14, 2014
9	Pre-Amplifier	EMC	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 18, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz for PK/AVG detector
Start ~ Stop Frequency	90kHz~110kHz for QP detector
Start ~ Stop Frequency	110kHz~490kHz for PK/AVG detector
Start ~ Stop Frequency	490kHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

**4.1.3 TEST PROCEDURE**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

NOTE (Between 30 MHz and 1000 MHz):

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

NOTE (Above 1000 MHz):


- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation

4.1.5 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

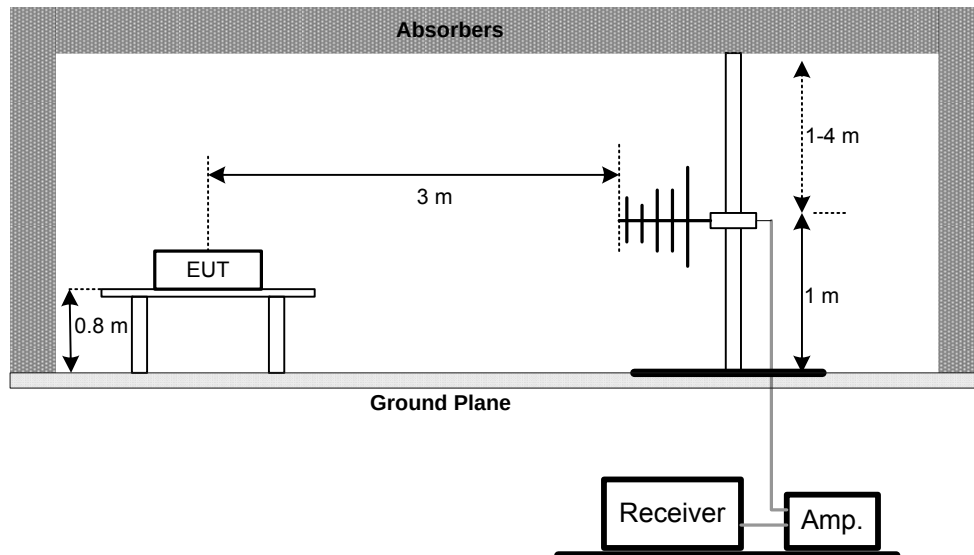

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

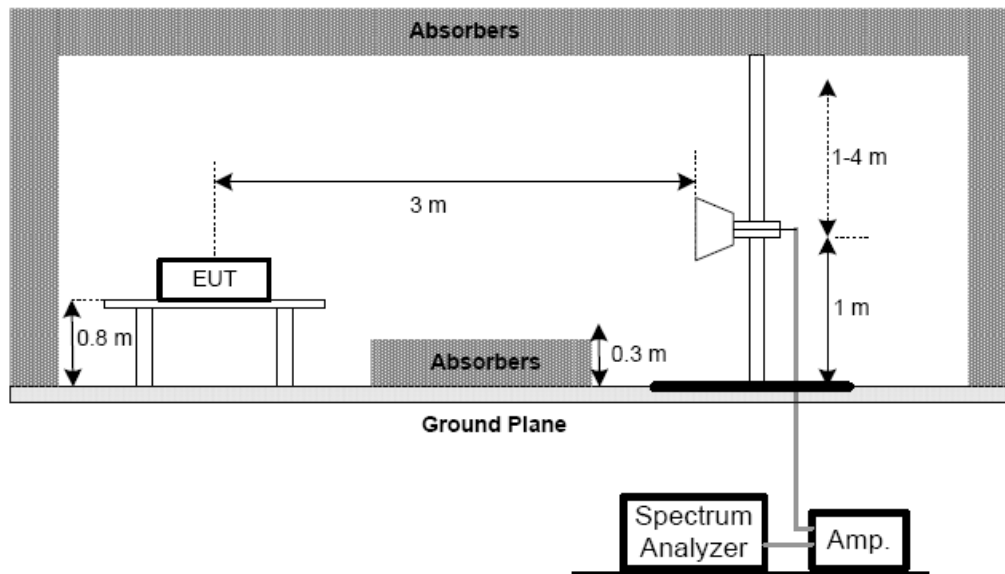

(C) For radiated emissions below 30MHz

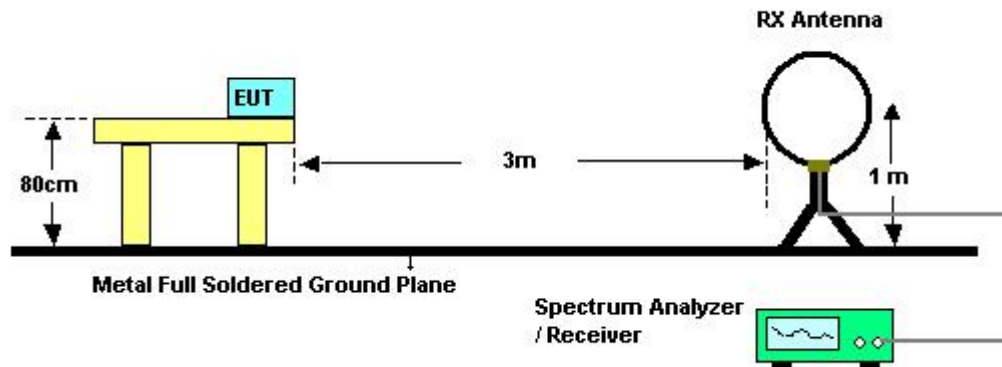

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


The EUT was programmed to be in continuously transmitting mode.



4.2.8 TEST RESULTS-BETWEEN 30MHZ AND 1000MHZ

EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2440 MHz –CH19-1 Mbps		

Polarization: Vertical

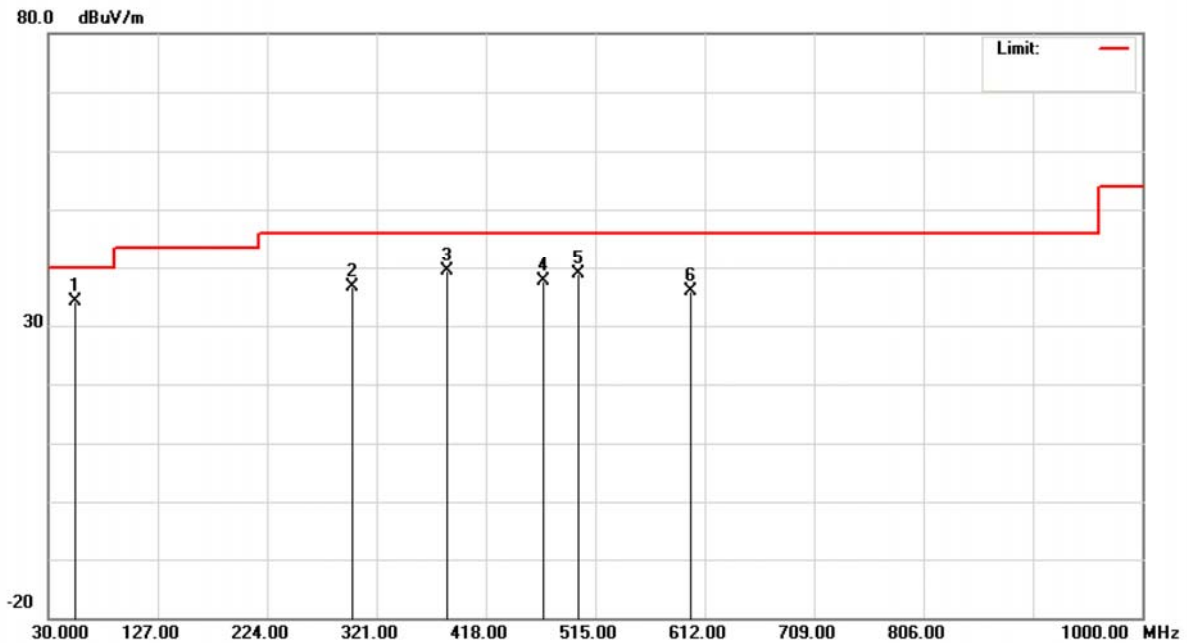


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	54.2500	48.02	-13.82	34.20	40.00	-5.80	peak	
2		299.1748	50.53	-13.97	36.56	46.00	-9.44	peak	
3		384.0498	51.02	-11.75	39.27	46.00	-6.73	peak	
4		468.9248	47.21	-9.66	37.55	46.00	-8.45	peak	
5		500.4500	48.26	-9.48	38.78	46.00	-7.22	peak	
6		599.8750	42.60	-6.76	35.84	46.00	-10.16	peak	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2440 MHz –CH19-1 Mbps		

Polarization: Horizontal

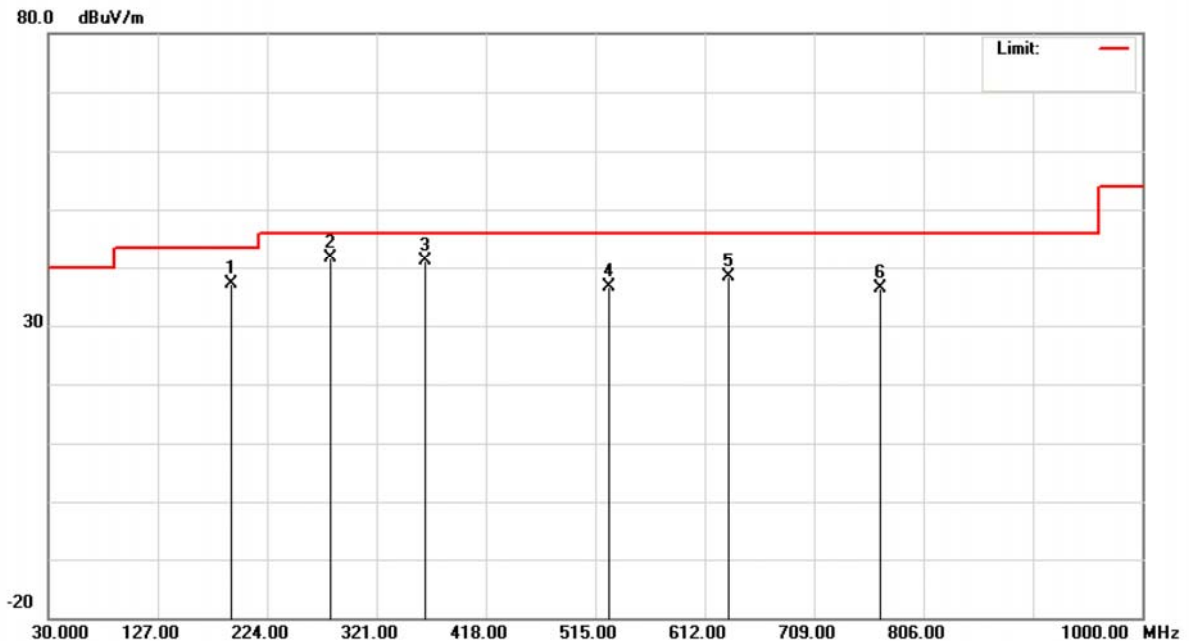


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	192.4750	53.96	-16.78	37.18	43.50	-6.32	peak	
2 *	279.7749	55.85	-14.33	41.52	46.00	-4.48	peak	
3	364.6499	53.42	-12.26	41.16	46.00	-4.84	peak	
4	527.1250	45.42	-8.80	36.62	46.00	-9.38	peak	
5	633.8250	45.33	-6.85	38.48	46.00	-7.52	peak	
6	767.2000	41.43	-5.17	36.26	46.00	-9.74	peak	



4.1.7 TEST RESULTS (ABOVE 1000 MHZ)

EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2402 MHz –CH00-1 Mbps		

Polarization: Vertical

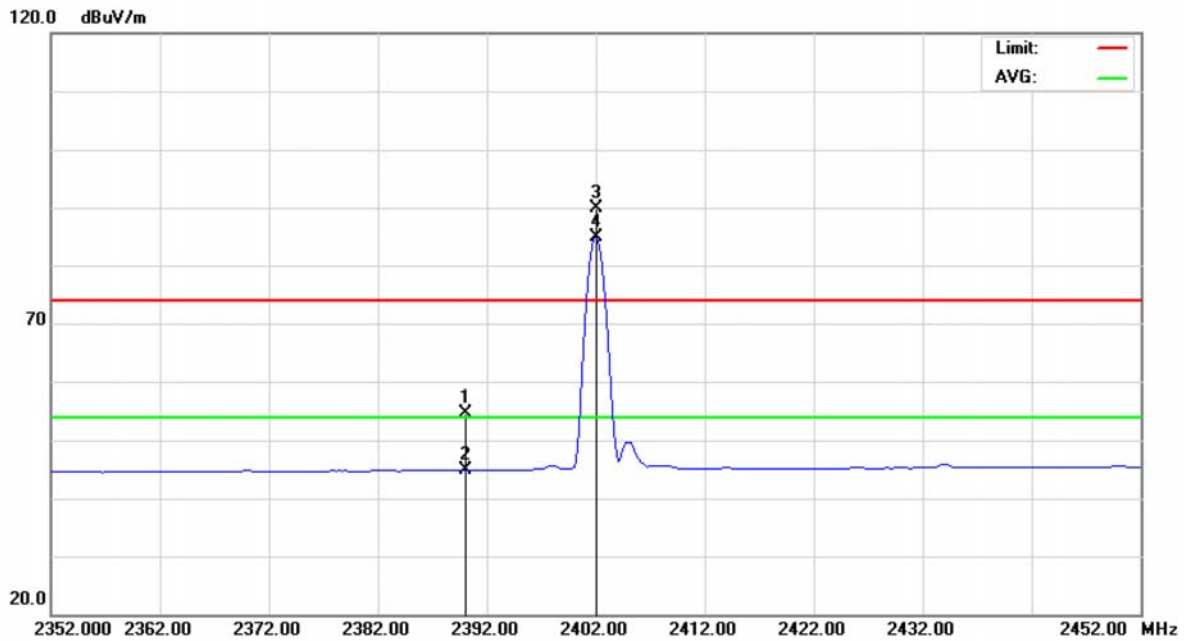


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	23.04	31.67	54.71	74.00	-19.29	peak	
2		2390.000	13.24	31.67	44.91	54.00	-9.09	AVG	
3	X	2402.000	58.08	31.72	89.80	74.00	15.80	peak	
4	*	2402.000	53.08	31.72	84.80	54.00	30.80	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2402 MHz –CH00-1 Mbps		

Polarization: Vertical

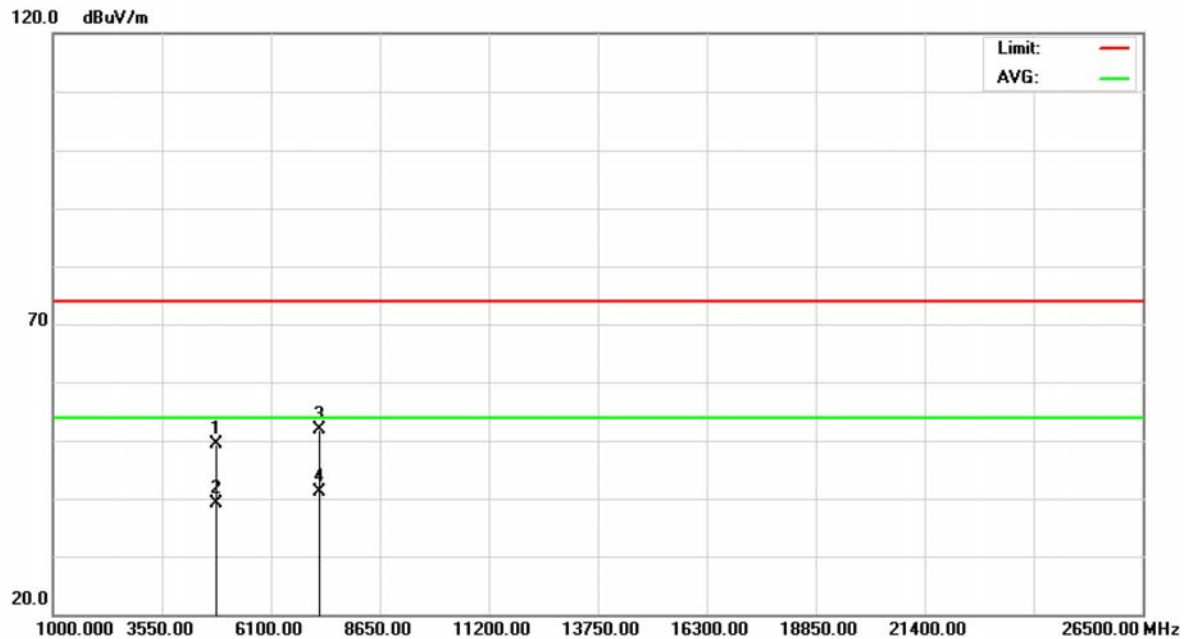


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.100	44.17	5.21	49.38	74.00	-24.62	peak	
2		4804.100	33.96	5.21	39.17	54.00	-14.83	AVG	
3		7206.013	40.68	11.11	51.79	74.00	-22.21	peak	
4	*	7206.013	29.96	11.11	41.07	54.00	-12.93	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2402 MHz –CH00-1 Mbps		

Polarization: Horizontal

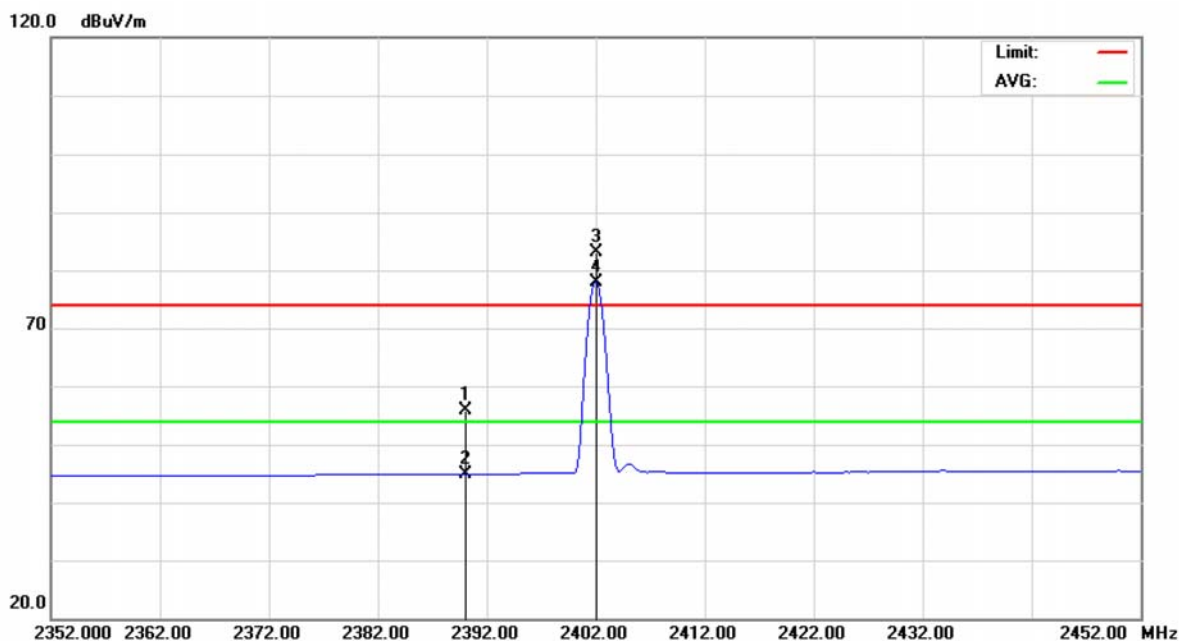


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	24.20	31.67	55.87	74.00	-18.13	peak	
2		2390.000	13.23	31.67	44.90	54.00	-9.10	AVG	
3	X	2402.000	51.33	31.72	83.05	74.00	9.05	peak	
4	*	2402.000	46.18	31.72	77.90	54.00	23.90	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2402 MHz –CH00-1 Mbps		

Polarization: Horizontal

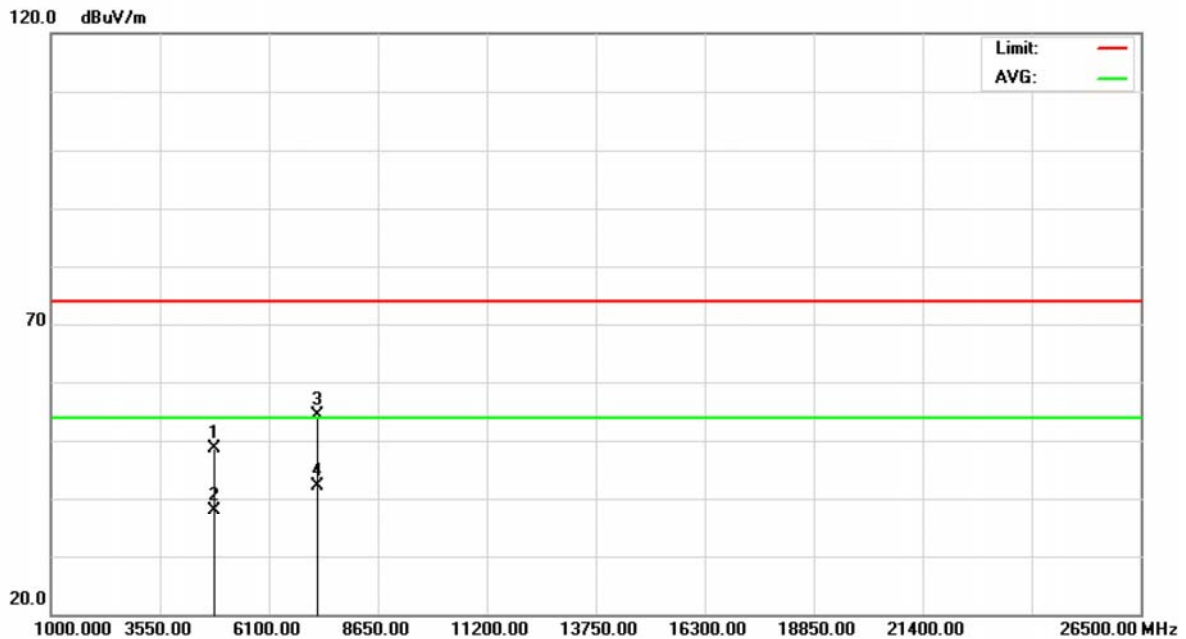


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.025	42.99	5.69	48.68	74.00	-25.32	peak	
2		4804.025	32.08	5.69	37.77	54.00	-16.23	AVG	
3		7206.013	42.16	12.18	54.34	74.00	-19.66	peak	
4	*	7206.013	29.89	12.18	42.07	54.00	-11.93	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2440 MHz –CH19-1 Mbps		

Polarization: Vertical

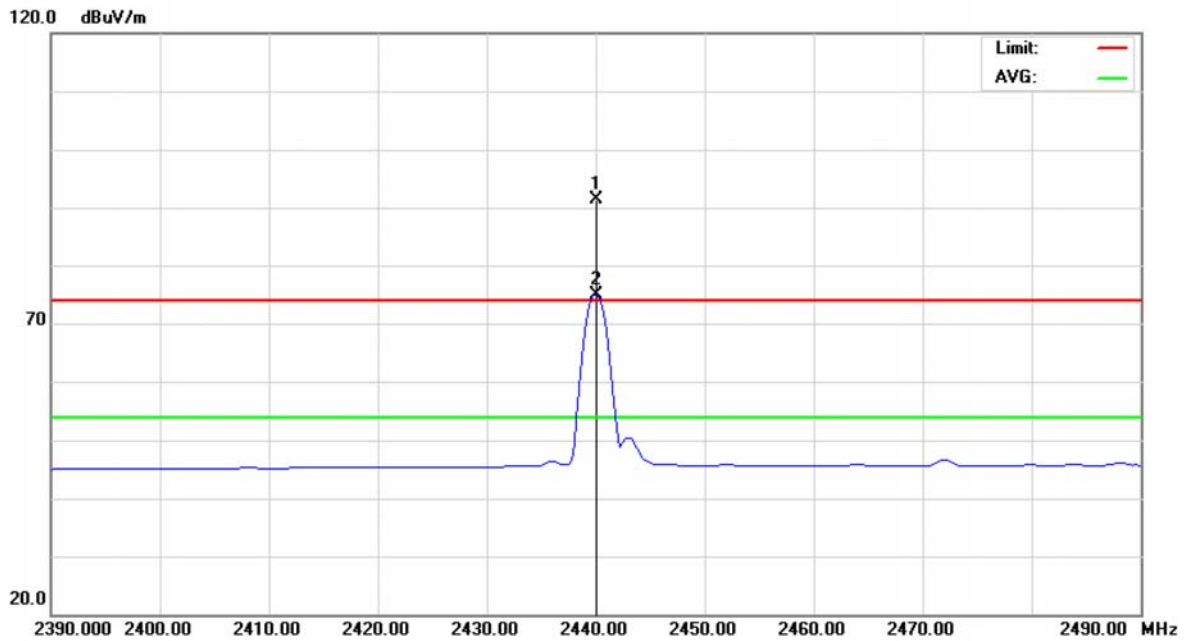


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2440.000	59.37	31.89	91.26	74.00	17.26	peak	
2	*	2440.000	43.07	31.89	74.96	54.00	20.96	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2440 MHz –CH19-1 Mbps		

Polarization: Vertical

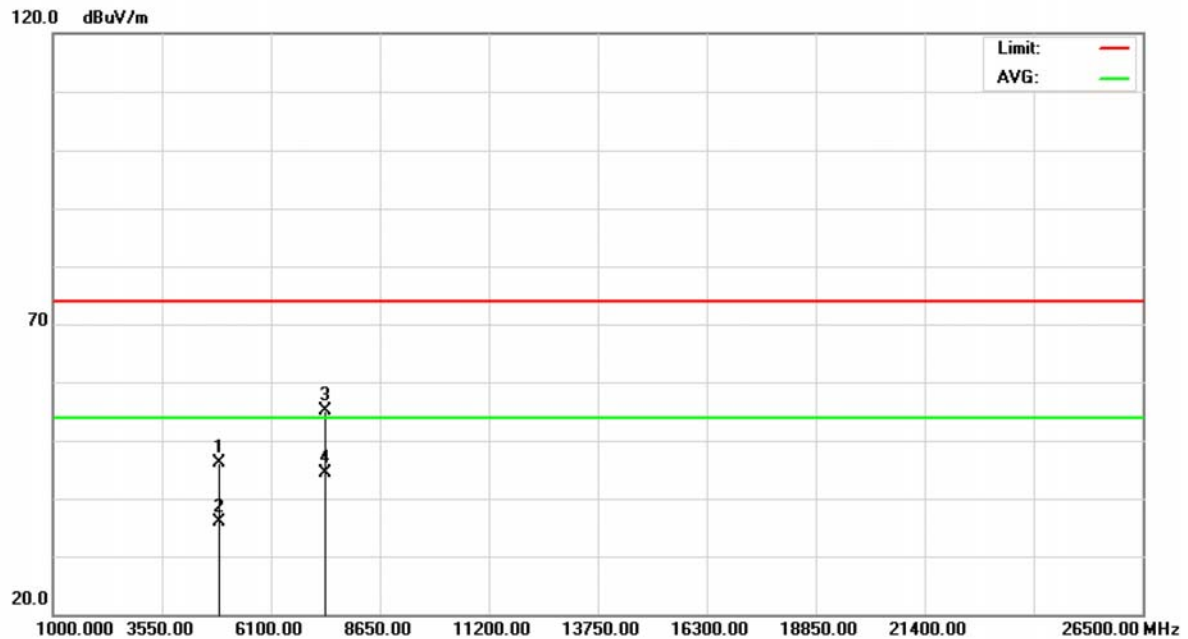


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.950	40.24	5.79	46.03	74.00	-27.97	peak	
2		4880.950	30.16	5.79	35.95	54.00	-18.05	AVG	
3		7320.462	42.58	12.60	55.18	74.00	-18.82	peak	
4	*	7320.462	31.67	12.60	44.27	54.00	-9.73	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2440 MHz –CH19-1 Mbps		

Polarization: Horizontal

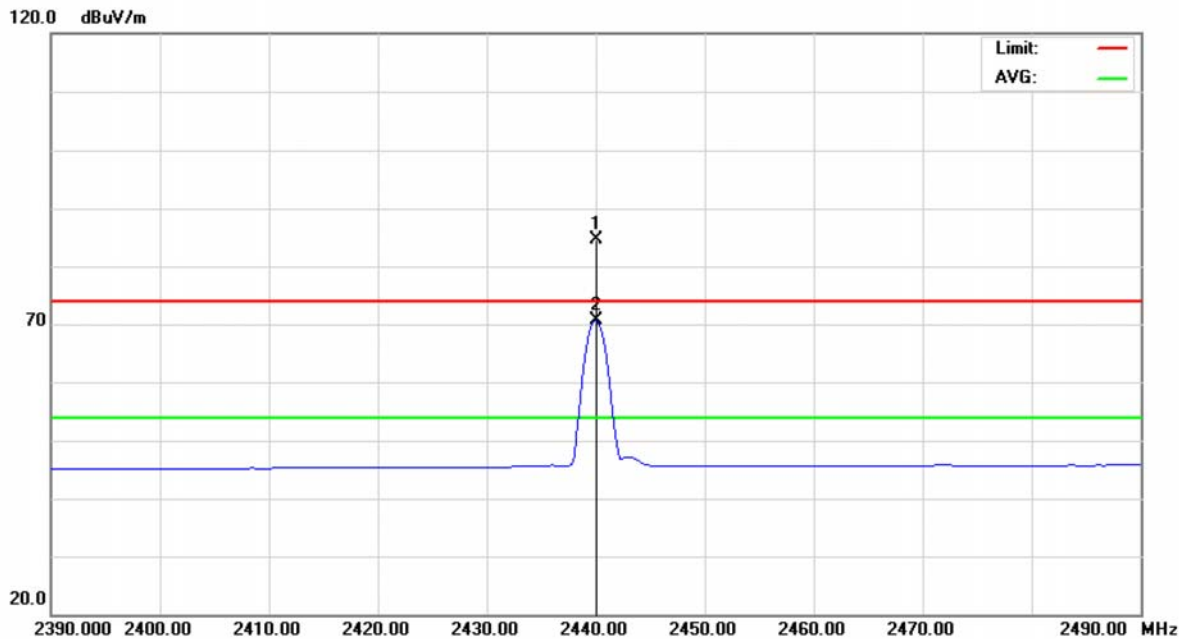


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2440.000	52.79	31.89	84.68	74.00	10.68	peak	
2	*	2440.000	38.65	31.89	70.54	54.00	16.54	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2440 MHz –CH19-1 Mbps		

Polarization: Horizontal

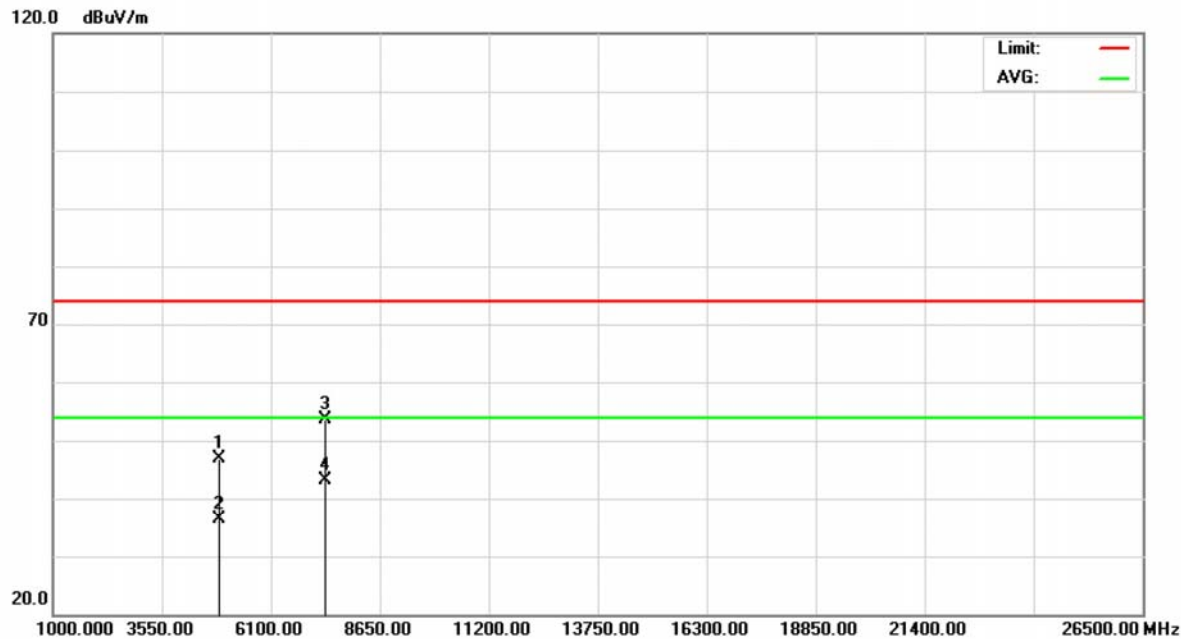


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.962	41.09	5.79	46.88	74.00	-27.12	peak	
2		4880.962	30.63	5.79	36.42	54.00	-17.58	AVG	
3		7320.462	40.92	12.60	53.52	74.00	-20.48	peak	
4	*	7320.462	30.58	12.60	43.18	54.00	-10.82	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2480 MHz –CH39-1 Mbps		

Polarization: Vertical

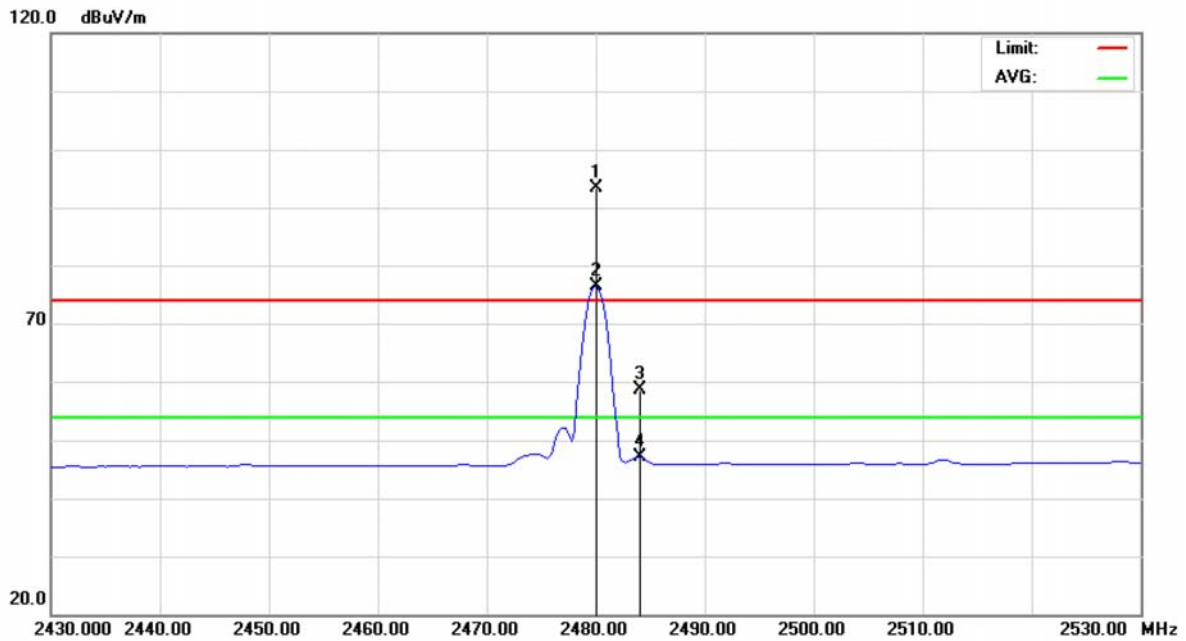


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2479.975	61.24	32.07	93.31	74.00	19.31	peak	
2	*	2479.975	44.19	32.07	76.26	54.00	22.26	AVG	
3		2484.000	26.61	32.09	58.70	74.00	-15.30	peak	
4		2484.000	14.97	32.09	47.06	54.00	-6.94	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2480 MHz –CH39-1 Mbps		

Polarization: Vertical

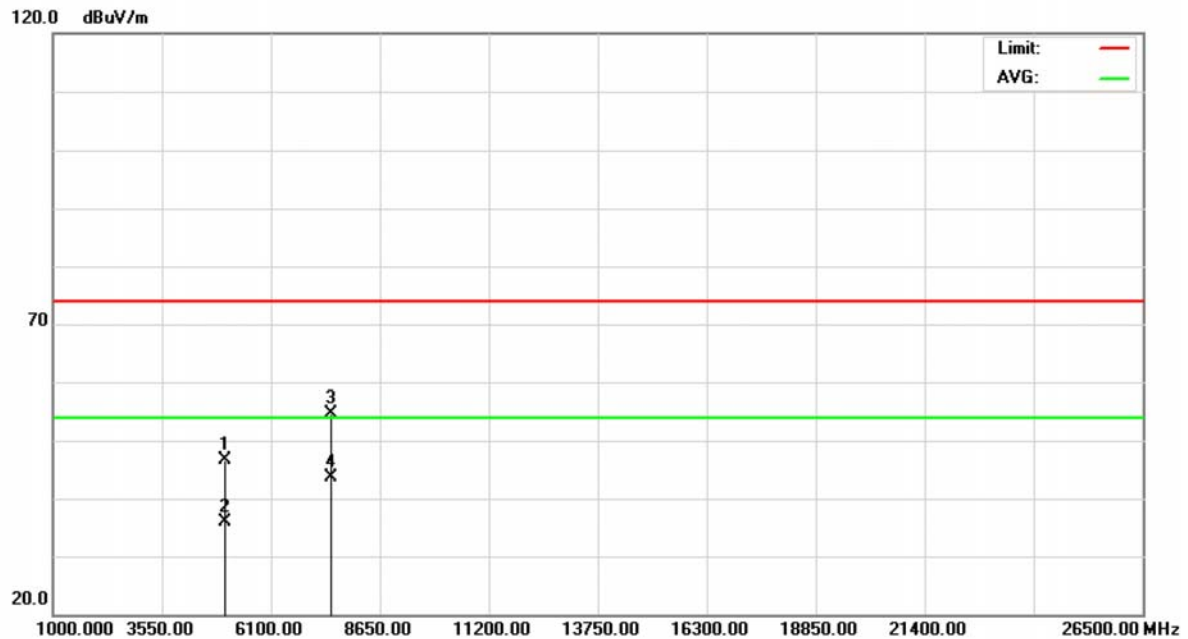


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4966.950	40.75	5.90	46.65	74.00	-27.35	peak	
2		4966.950	30.03	5.90	35.93	54.00	-18.07	AVG	
3		7450.462	41.56	13.09	54.65	74.00	-19.35	peak	
4	*	7450.462	30.56	13.09	43.65	54.00	-10.35	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2480 MHz –CH39-1 Mbps		

Polarization: Horizontal

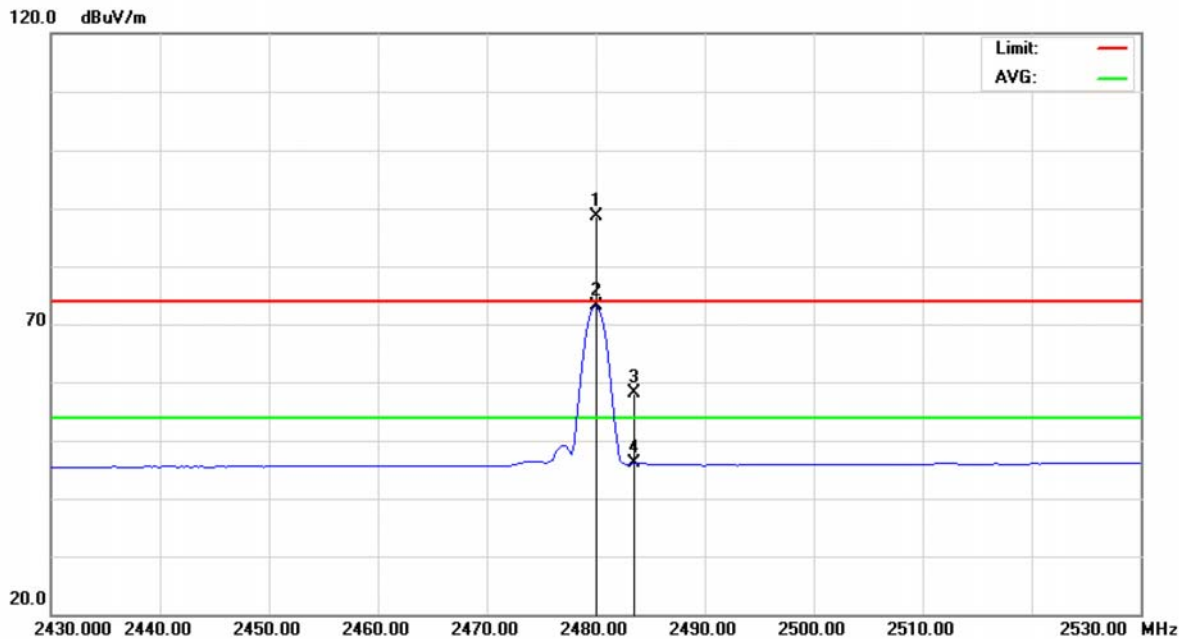


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2480.000	56.49	32.07	88.56	74.00	14.56	peak	
2	*	2480.000	41.05	32.07	73.12	54.00	19.12	AVG	
3		2483.500	26.11	32.09	58.20	74.00	-15.80	peak	
4		2483.500	14.00	32.09	46.09	54.00	-7.91	AVG	



EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	TX 2480 MHz –CH39-1 Mbps		

Polarization: Horizontal

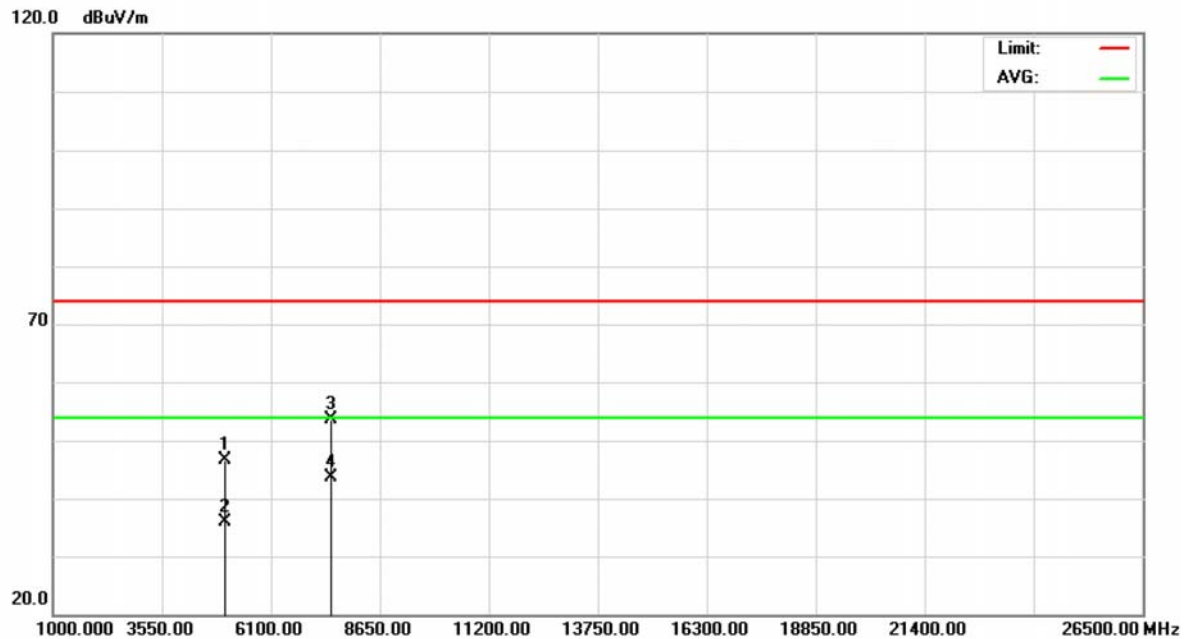

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4966.962	40.68	5.90	46.58	74.00	-27.42	peak	
2		4966.962	30.00	5.90	35.90	54.00	-18.10	AVG	
3		7450.462	40.46	13.09	53.55	74.00	-20.45	peak	
4	*	7450.462	30.56	13.09	43.65	54.00	-10.35	AVG	

**5. BANDWIDTH TEST****5.1 APPLIED PROCESURES / LIMIT**

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of Equipment List is One Year.

5.3 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.4 DEVIATION FROM STANDARD

No deviation.

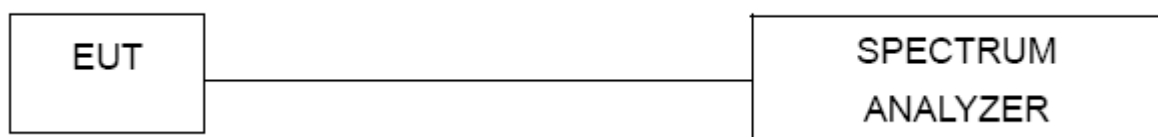5.5 TEST SETUP**5.6 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




5.7 TEST RESULTS

EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	CH00, CH19, CH39 - 1 Mbps		


Test Channel	Frequency (MHz)	Bandwidth (MHz)	Test Result
CH00	2402 MHz	0.67	Pass
CH19	2440 MHz	0.67	Pass
CH39	2480 MHz	0.70	Pass

TX CH00

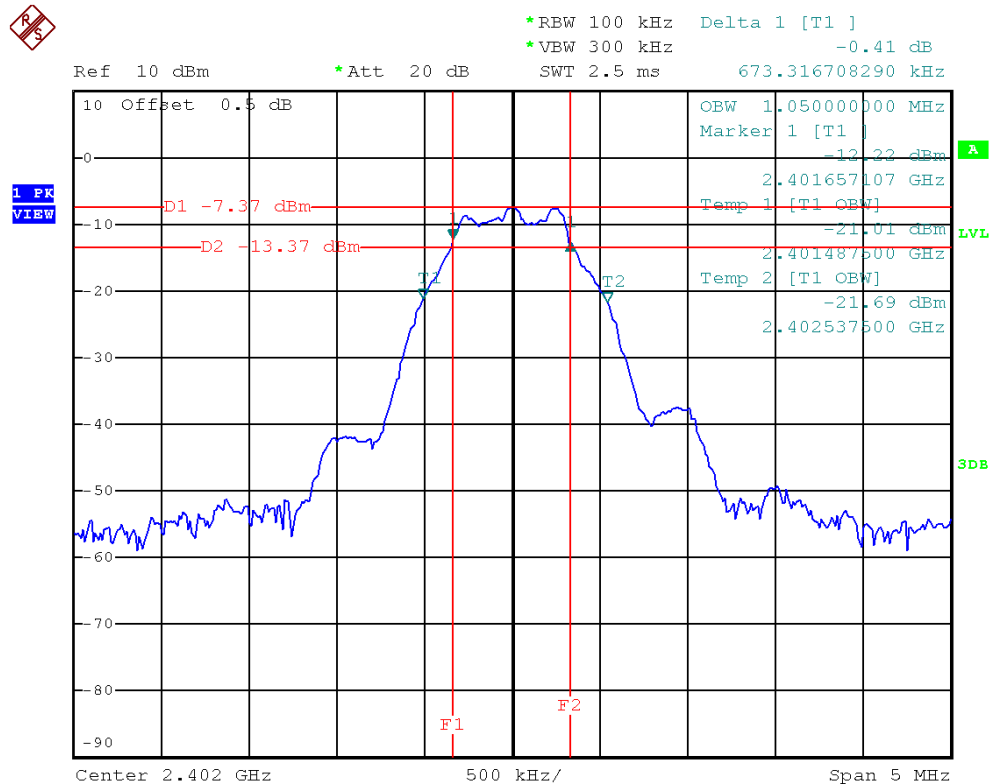




TX CH19

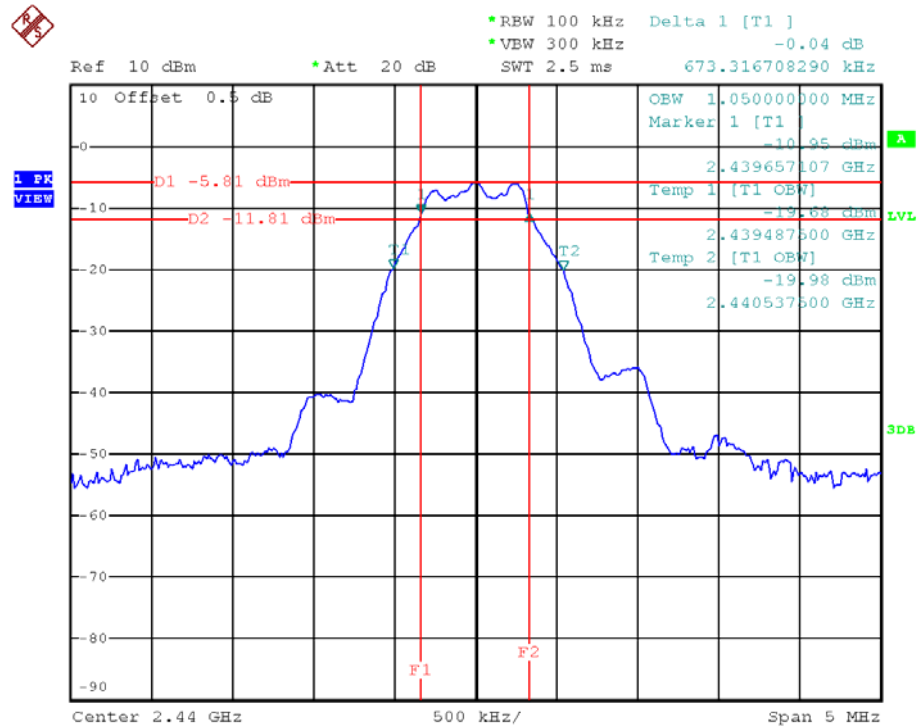

TX CH39

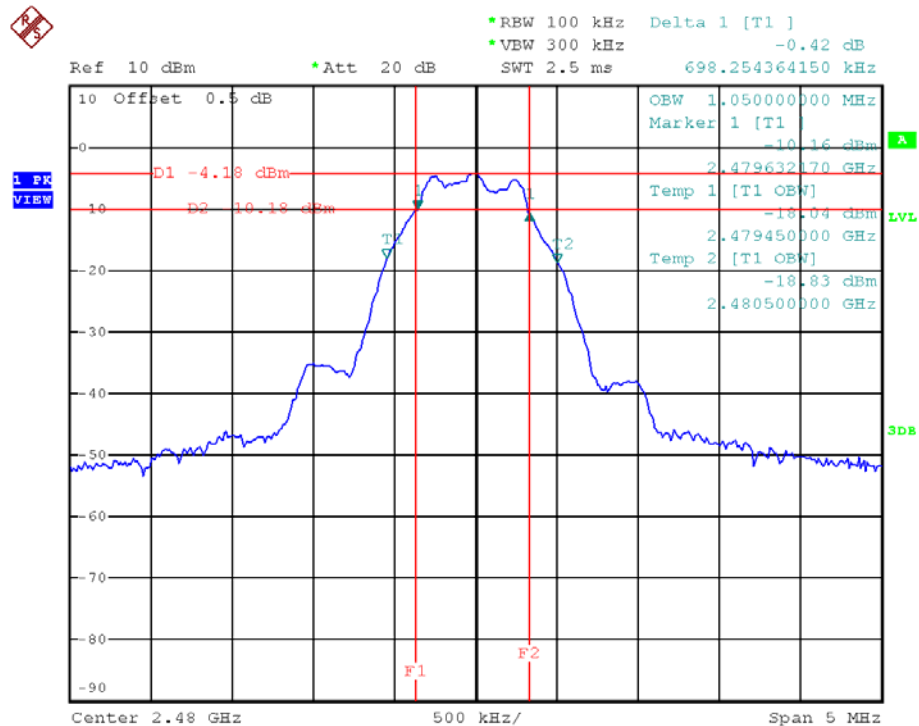

**6. MAXIMUM OUTPUT POWER TEST****6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,26,2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,26,2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of Equipment List is One Year.

6.3 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with method 9.1.3 of FCC KDB 558074

6.4 DEVIATION FROM STANDARD

No deviation.

6.5 TEST SETUP**6.6 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.7 TEST RESULTS**

EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	CH00, CH19, CH39 - 1 Mbps		

Test Channel	Frequency (MHz)	Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH00	2402 MHz	0.68	30	1
CH19	2440 MHz	1.03	30	1
CH39	2480 MHz	1.36	30	1

**Neutron Engineering Inc.****7. ANTENNA CONDUCTED SPURIOUS EMISSION****7.1 APPLIED PROCEDURES / LIMIT**

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of Equipment List is One Year.

7.3 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

7.4 DEVIATION FROM STANDARD

No deviation.

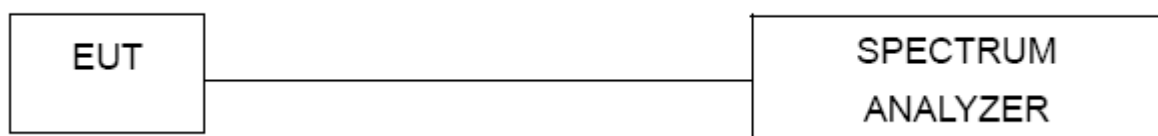7.5 TEST SETUP**7.6 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**7.7 TEST RESULTS**

EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	CH00, CH19 , CH39 - 1 Mbps		


Channel of Worst Data: CH00			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2399.40	-44.91	2485.20	-62.38
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



CH00 (Lower) - 1 Mbps

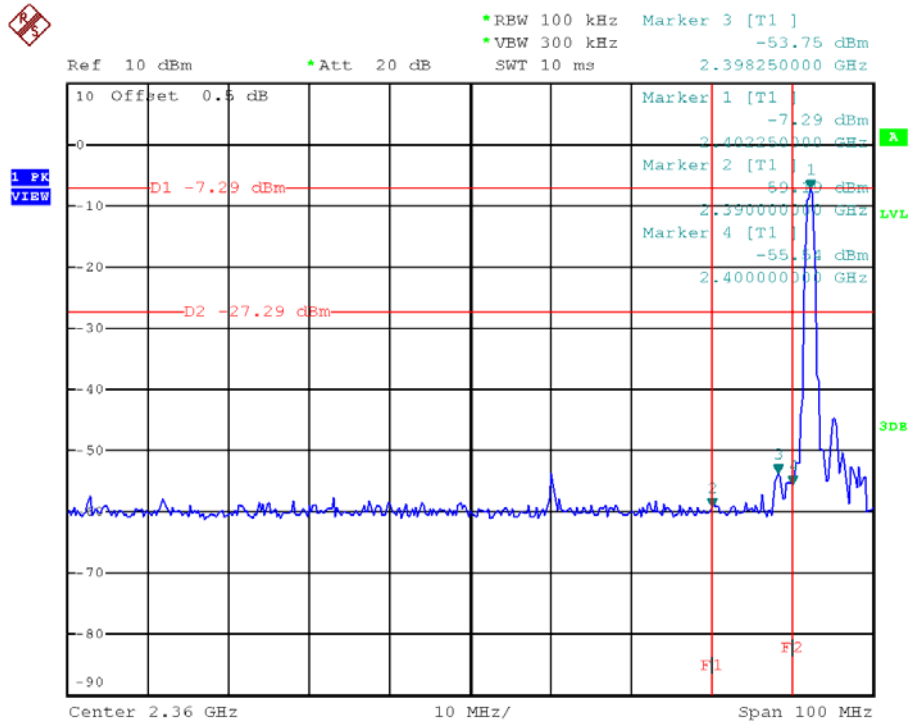


CH39 (upper) - 1 Mbps

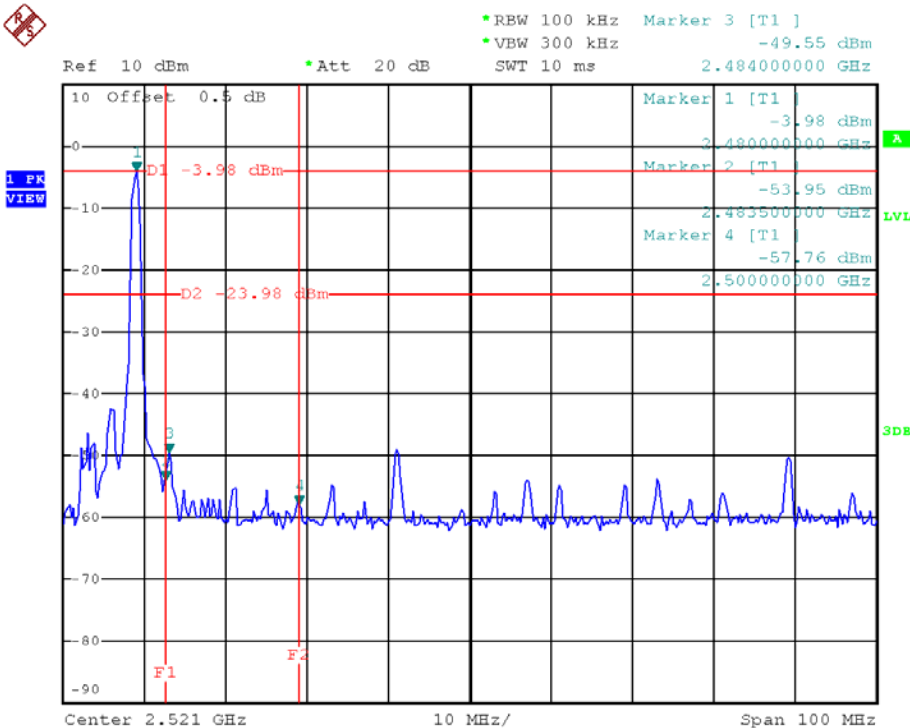




CH00 (10th Harmonic)

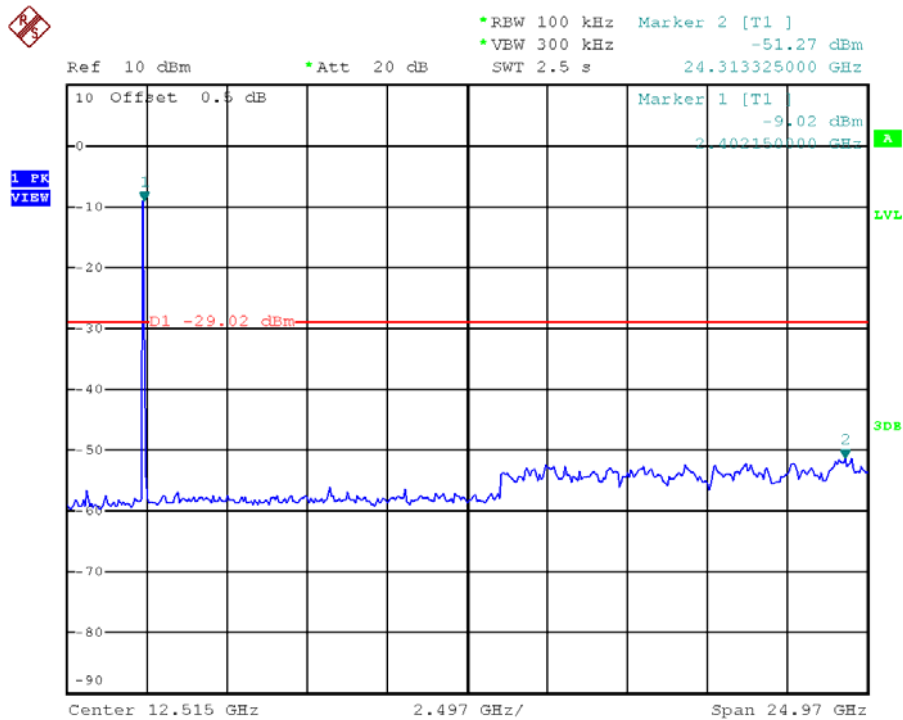


CH19 (10th Harmonic)

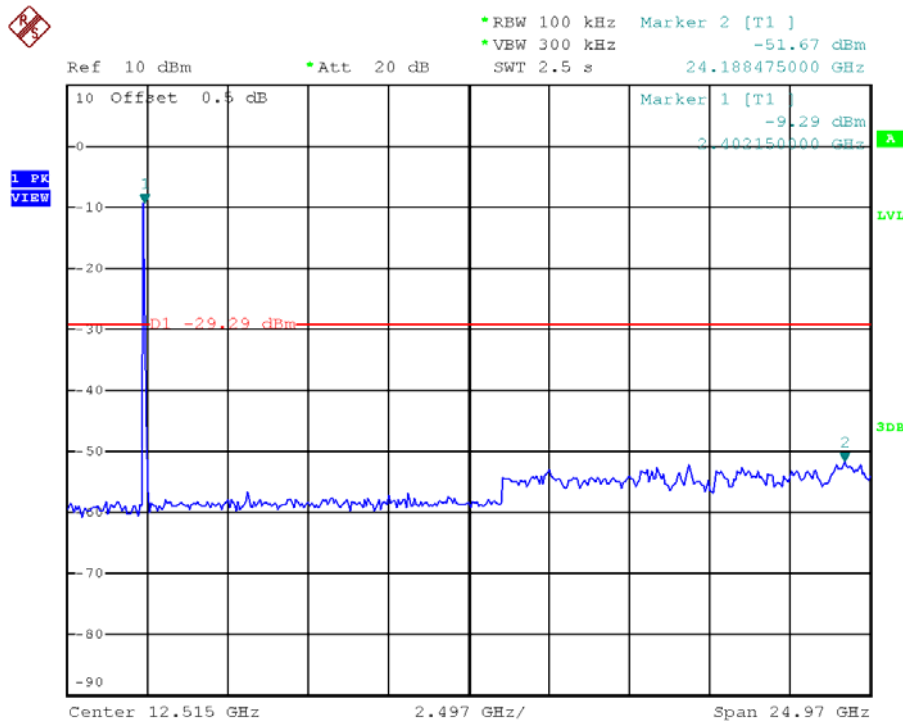



CH39 (10th Harmonic)

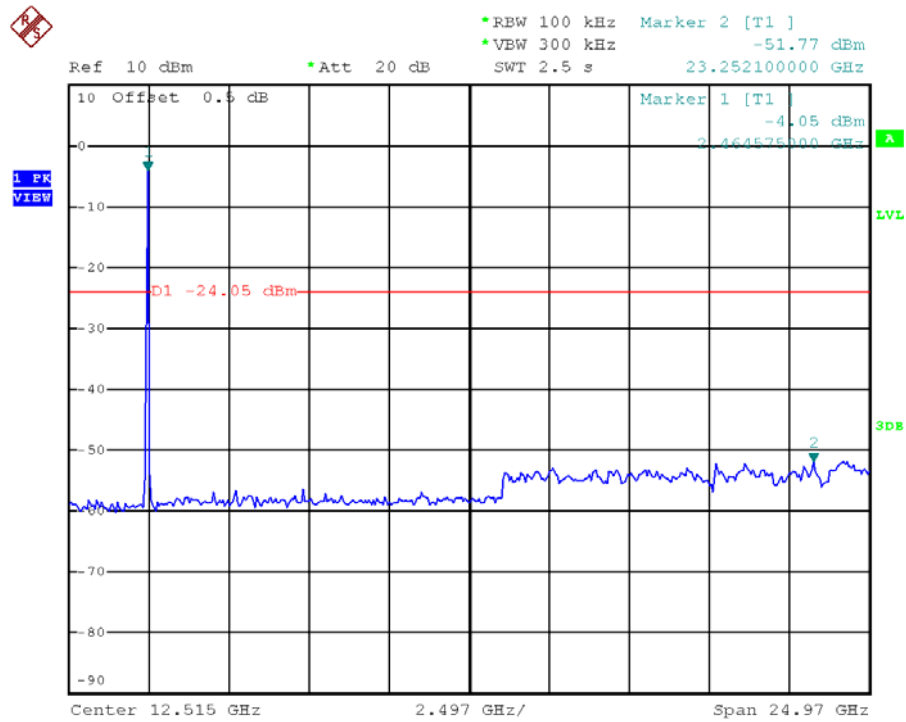

**8. POWER SPECTRAL DENSITY TEST****8.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of Equipment List is One Year.

8.3 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW=3KHz, VBW=10KHz, Sweep time = auto.

8.4 DEVIATION FROM STANDARD

No deviation.

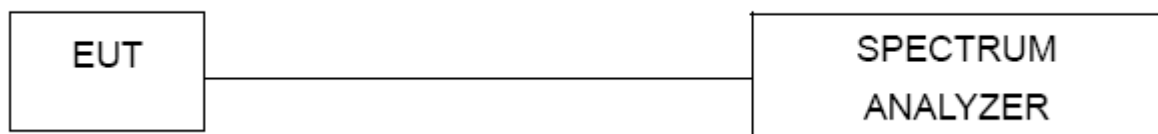8.5 TEST SETUP**8.6 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




8.7 TEST RESULTS

EUT	PAFERS-BTM-40X	Model Name	XSPIN; T-KIT
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 3V		
Test Mode	CH00, CH19, CH39 -1 Mbps		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH00	2402 MHz	-22.94	8
CH19	2440 MHz	-21.45	8
CH39	2480 MHz	-17.66	8

TX CH00

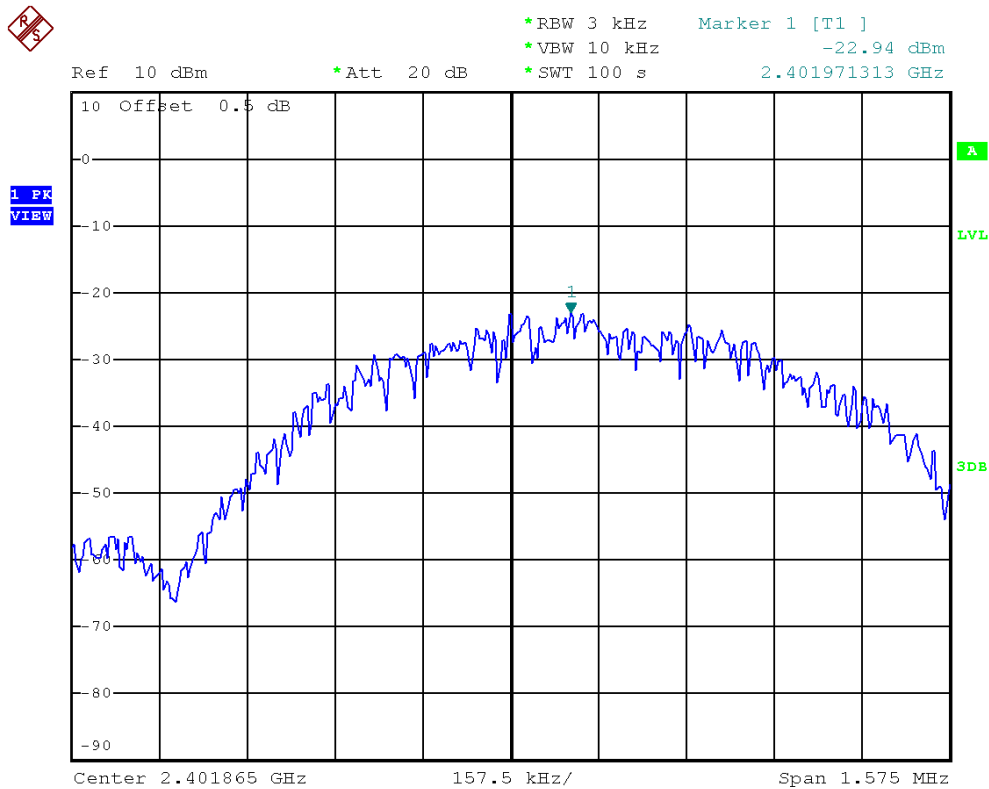




TX CH19



*RBW 3 kHz Marker 1 [T1]
*VSW 10 kHz -21.45 dBm
*SWT 100 s 2.439992125 GHz

Ref 10 dBm

*Att 20 dB

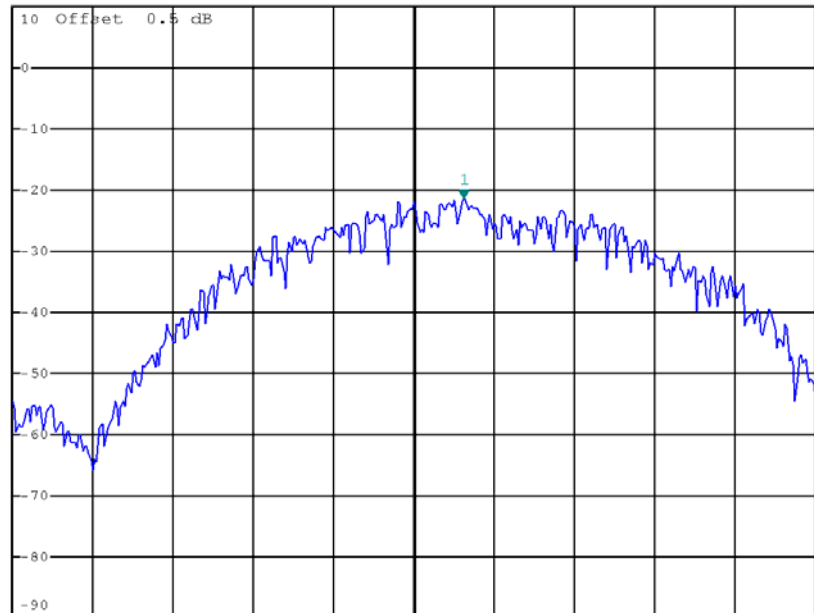

Center 2.439893688 GHz 157.5 kHz/ Span 1.575 MHz


TX CH39



*RBW 3 kHz Marker 1 [T1]
*VSW 10 kHz -17.66 dBm
*SWT 100 s 2.479972437 GHz

Ref 10 dBm

*Att 20 dB

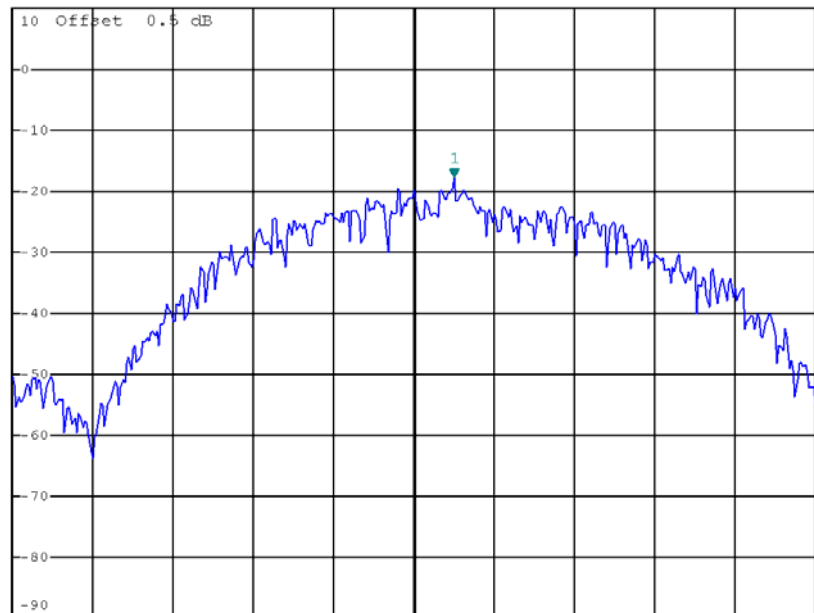

Center 2.479893687 GHz 157.5 kHz/ Span 1.575 MHz