

APPLICATION FOR CERTIFICATION
On Behalf of
U Lighting Group Co., Ltd.
Energy Saving Lamp

Model Number: SUF-15W/SUF-20W

Prepared for : U Lighting Group Co., Ltd.
3/F, Liming Bldg., No.144 ZhongXing Rd,
ShenZhen, P.R. China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6 Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F02113
Date of Test : Jul. 19, 2002
Date of Report : Jul. 25, 2002

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT).....	1-1
1.2. Test Facility	1-2
1.3. Measurement Uncertainty.....	1-2
2. POWER LINE CONDUCTED EMISSION TEST.....	2-1
2.1. Test Equipment	2-1
2.2. Block Diagram of Test Setup.....	2-1
2.3. Power Line Conducted Emission Test Limit	2-1
2.4. Configuration of EUT on Test.....	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results.....	2-3
3. MAGNETIC FIELD EMISSION TEST.....	3-5
3.1. Test Equipment	3-5
3.2. Block Diagram of Test Setup.....	3-5
3.3. Magnetic Field Emission Limit	3-6
3.4. EUT Configuration on Test	3-6
3.5. Operating Condition of EUT	3-6
3.6. Test Procedure	3-6
4. PHOTOGRAPH.....	4-1
4.1. Photos of Power Line Conducted Emission Test	4-1
4.2. Photos of Magnetic Field Emission test	4-2
APPENDIX I	(5 Pages)
APPENDIX II	(3 Pages)

TEST REPORT CERTIFICATION

Applicant : U Lighting Group Co., Ltd.
 Manufacturer : Hong Li Da Electronic Co., Ltd.
 EUT Description : Energy Saving Lamp
 (A) MODEL NO. : SUF-15W/SUF-20W
 (B) SERIAL NO. : F2002072501
 (C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 18 SUBPART C RF LIGHTING DEVICES CONSUMER (1998) AND MP-5/1986

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 18 Subpart C limits both radiated and conducted emissions. The measurement results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : Jul. 19, 2002

Prepared by :

Jane Dai / Assistant

Reviewer :

Lake Wang / Supervisor

Approved & Authorized Signer :

*For and on behalf of
AUDIX TECHNOLOGY (SHENZHEN) CO.,LTD.*

Smart Authorized Signature(s)

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Energy Saving Lamp

Model Number : SUF-15W/SUF-20W

Applicant : U Lighting Group Co., Ltd.
3/F, Liming Bldg., No.144 ZhongXing Rd,
ShenZhen, P.R. China

Manufacturer : Hong Li Da Electronic Co., Ltd.
No.10 Kangning Rd, Qishan Developing District,
Jiujiang Town, Nanhai City, Guangdong, P.R. China

AC Main : Unshielded, Undetachable 1.2m

Date of Test : Jul. 19, 2002

1.2. Test Facility

Site Description

3m Anechoic Chamber	:	Certificated by FCC, USA Aug. 24, 2000
3m & 10m Open Site	:	Certificated by FCC, USA Jan. 29, 2001
	:	Certificated by VCCI, Japan Jan. 01, 1998
EMC Lab.	:	Certificated by DATech, German Feb. 02, 1999
	:	Certificated by NVLAP, USA NVLAP Code: 200372-0 Mar. 31, 2003
	:	Certificated by Nemko, Norway December. 18, 2000
	:	Certificated by DNV, Norway May 26, 1999
Name of Firm	:	Audix Technology (Shenzhen) Co., Ltd.
Site Location	:	No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

1.3. Measurement Uncertainty

Conduction Uncertainty	=	\pm 2.66dB
Radiation Uncertainty	=	\pm 4.26dB


2. POWER LINE CONDUCTED EMISSION TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Jun. 02, 02	1 Year
2.	L.I.S.N. #1	Kyoritsu	KNW-407	8-541-4	Jun. 02, 02	1 Year
3.	L.I.S.N. #2	R&S	SH2-Z5	834066/011	Jun. 02, 02	1 Year
4.	Terminator	EMCO	50Ω	No. 1	Jun. 02, 02	1 Year
5.	Terminator	EMCO	50Ω	No. 2	Jun. 02, 02	1 Year
6.	RF Cable	FUJIKURA	RG-55/U	LISN Cable	Feb. 23, 02	1/2 Year
7.	Coaxial Switch	Anritsu	MP59B	M73989	May. 31,02	1/2 Year
8	PC	N/A	586ATXS	N/A	N/A	N/A
9	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

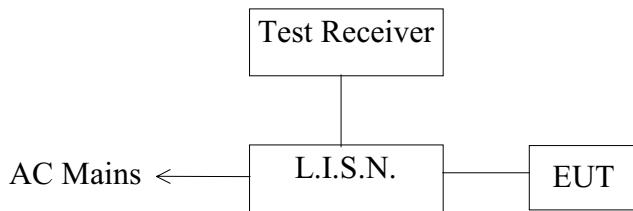

(EUT: Energy Saving Lamp)

2.3. Power Line Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage
	Quasi-Peak Level dB(µV)
450KHz ~ 30MHz	48

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Test

The following equipments are installed on Power Line Conducted Emission Test to meet the Commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. Energy Saving Lamp (EUT)

Model Number : SUF-15W/SUF-20W,
Serial Number : F2002072501
Manufacturer : Hong Li Da Electronic Co., Ltd.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on Section 2.2..

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (ON) and test it.

2.6. Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission levels. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-1992 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS20) is set at 10KHz.

The frequency range from 450KHz to 30MHz is checked.

The test result are reported on Section 2.7, all the scanning waveforms for Conducted Emission Test are attached in Appendix I.

2.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 450KHz to 30 MHz is investigated.


All emissions not reported below are too low against the prescribed limits.

Date of Test :	Jul. 19, 2002	Temperature :	25°C
EUT :	Energy Saving Lamp	Humidity :	56%
Model No. :	SUF-15W/SUF-20W	Test Mode :	ON
Test Engineer :	Chris		

Frequency MHz	Reading		Limit dB(μV)
	Phase VA dB(μV)	Phase VB dB(μV)	
0.483	34.3	36.8	48.00
0.502	*	38.4	48.00
0.627	35.8	*	48.00
0.848	*	40.6	48.00
0.983	42.1	42.0	48.00
1.177	41.9	*	48.00
1.280	40.6	41.6	48.00
4.909	22.6	*	48.00
4.910	*	24.8	48.00

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission is detected at 0.983MHz with corrected signal level of 42.1dB(μV) (limit is 48dB(μV)) when the VA side of the EUT is connected to L.I.S.N.

Reviewer :

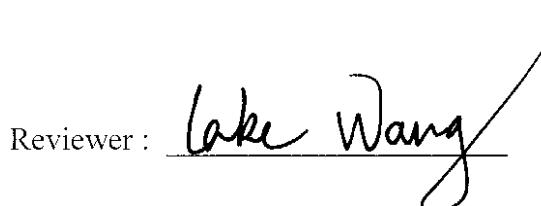


Date of Test : Jul. 19, 2002 Temperature : 25°C
 EUT : Energy Saving Lamp Humidity : 56%
 Model No. : SUF-15W/SUF-20W Test Mode : ON
 Test Engineer : Chris

Frequency MHz	Reading		Limit dB(μV)
	Phase VA dB(μV)	Phase VB dB(μV)	
0.476	44.3	*	48.00
0.477	*	43.9	48.00
0.510	*	43.1	48.00
0.544	43.7	*	48.00
0.601	42.1	*	48.00
0.643	41.7	40.8	48.00
0.817	34.8	*	48.00
1.459	*	28.7	48.00
2.659	23.6	24.7	70.00
7.792	*	18.4	48.00

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission is detected at 0.476MHz with corrected signal level of 44.3dB(μV) (limit is 48dB(μV)) when the VA side of the EUT is connected to L.I.S.N.

Reviewer : Lake Wang

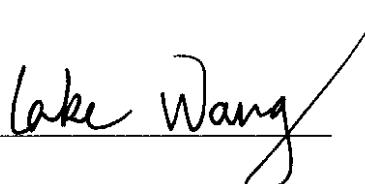

3. MAGNETIC FIELD EMISSION TEST

3.1. Test Equipment


The following test equipments are used during the radiated emission test:

3.1.1. Anechoic Chamber


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Loop Antenna	Chase	HLA6120	1062	Jun. 02, 02	1 Year
2.	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	Jun.02, 02	1 Year

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between the EUT and simulators

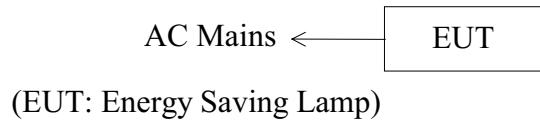

3.2.2. In Anechoic Chamber Test Setup Diagram

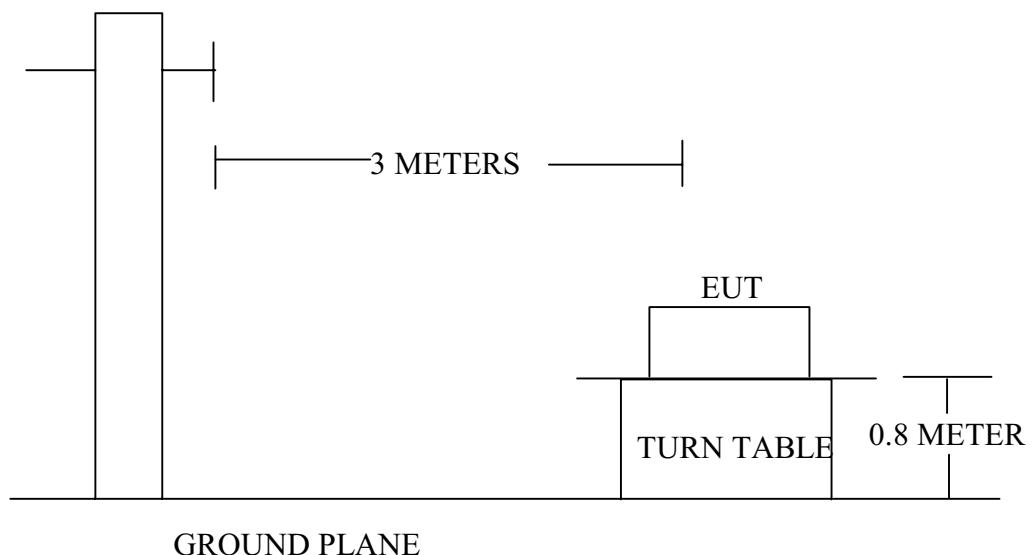

3.3. Magnetic Field Emission Limit

All emanations from Non-ISM devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Frequency band MHz	Quasi-peak Electric Field Test Distance 3m dB(μ V/m)
0.009 - 30	63.5

Note: (1) The limit shall decrease linearly with logarithm of frequency.
(2) Distance refers to the distance in meters between the test instrument antenna and the closed point of any part of the E.U.T.

3.4. EUT Configuration on Test

The FCC part 18 Class A regulations test method must be used to find the maximum emission during Radiated Emission test.

The configuration of EUT is same as used in Conducted Emission test. Please refer to Section 2.4.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT and the simulators as shown on Section 3.2.
- 3.5.2. Turn on the power of all equipments.
- 3.5.3. Let the EUT work in test mode (ON) and test it.

3.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. Measurements are performed at 3m distance with a 0.6m loop antenna as described in 15.2.1 of CISPR 16-1. The antenna shall be vertically installed, with the lower edge of the loop at 1m height above the floor.

The bandwidth setting on the test receiver (R&S TEST RECEIVER ESVS20) is 10 KHz. The EUT is tested in Chamber. All the scanning waveform are attached within Appendix II.

4. PHOTOGRAPH

4.1. Photos of Power Line Conducted Emission Test

M/N: SUF-15W



FRONT VIEW OF CONDUCTED EMISSION TEST

M/N: SUF-20W



FRONT VIEW OF CONDUCTED EMISSION TEST

4.2. Photos of Magnetic Field Emission test

M/N: SUF-15W



M/N: SUF-20W




APPENDIX I



Shenzhen Science & Ind Park
Nantou, Guangdong, China
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 156 File#: U Lighting Group.EMI Date: 2002-07-19 Time: 11:29:13

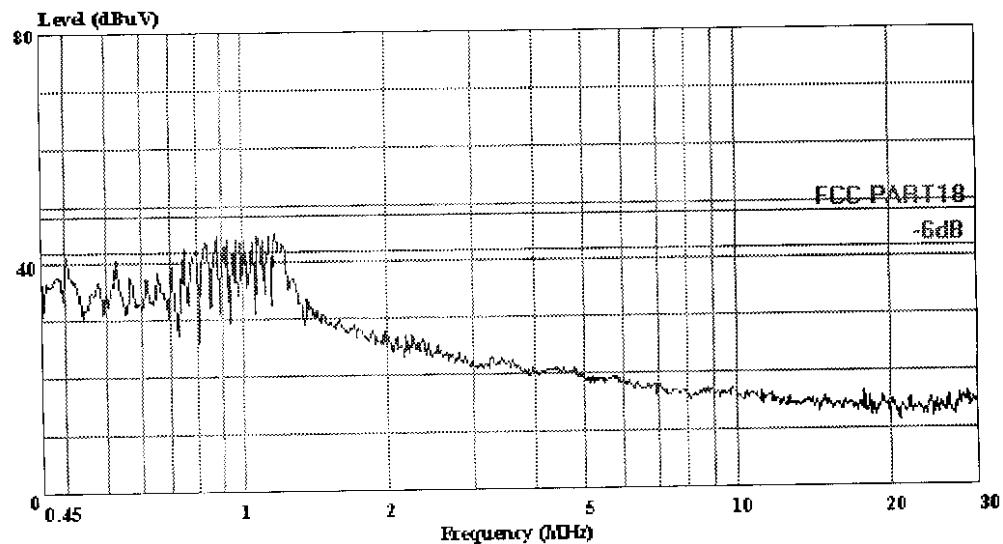

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART18 VA(KNW-407)
Eut: : Energy Saving Lamp M/N:SUF-15W
OP Cond: : ON
Operator: : Chris
Test Spec:: 120V/60Hz
Comment: : Temp:25'C
: Humi:56%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Nantou, Guangdong, China
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 155 File#: U Lighting Group.EMI
Date: 2002-07-19 Time: 11:22:08

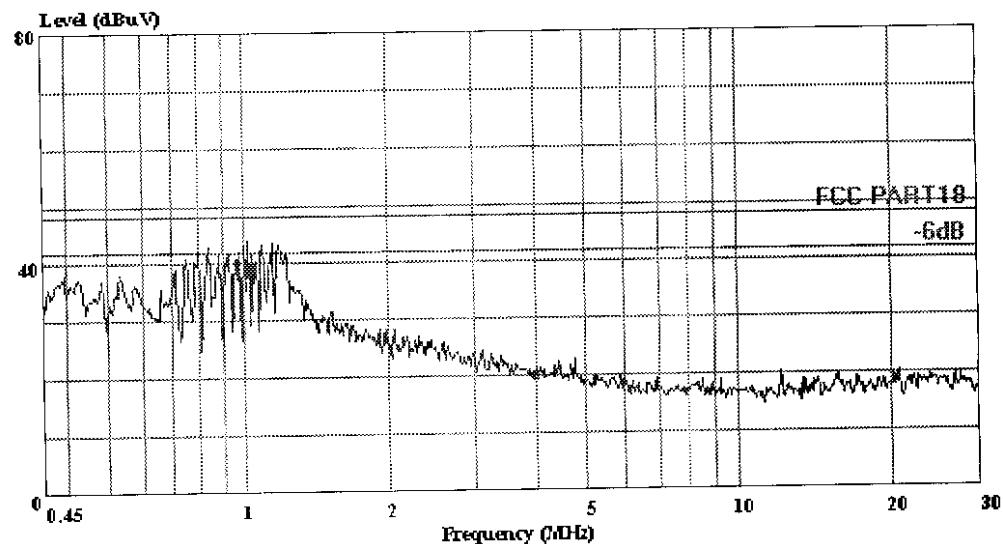

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART18 VB (KNW-407)
Eut: : Energy Saving Lamp M/N:SUF-15W
OP Cond: : ON
Operator: : Chris
Test Spec:: 120V/60Hz
Comment: : Temp:25'C
: Humi:56%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Nantou, Guangdong, China
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 154 File#: U Lighting Group.EMI

Date: 2002-07-19 Time: 11:15:31

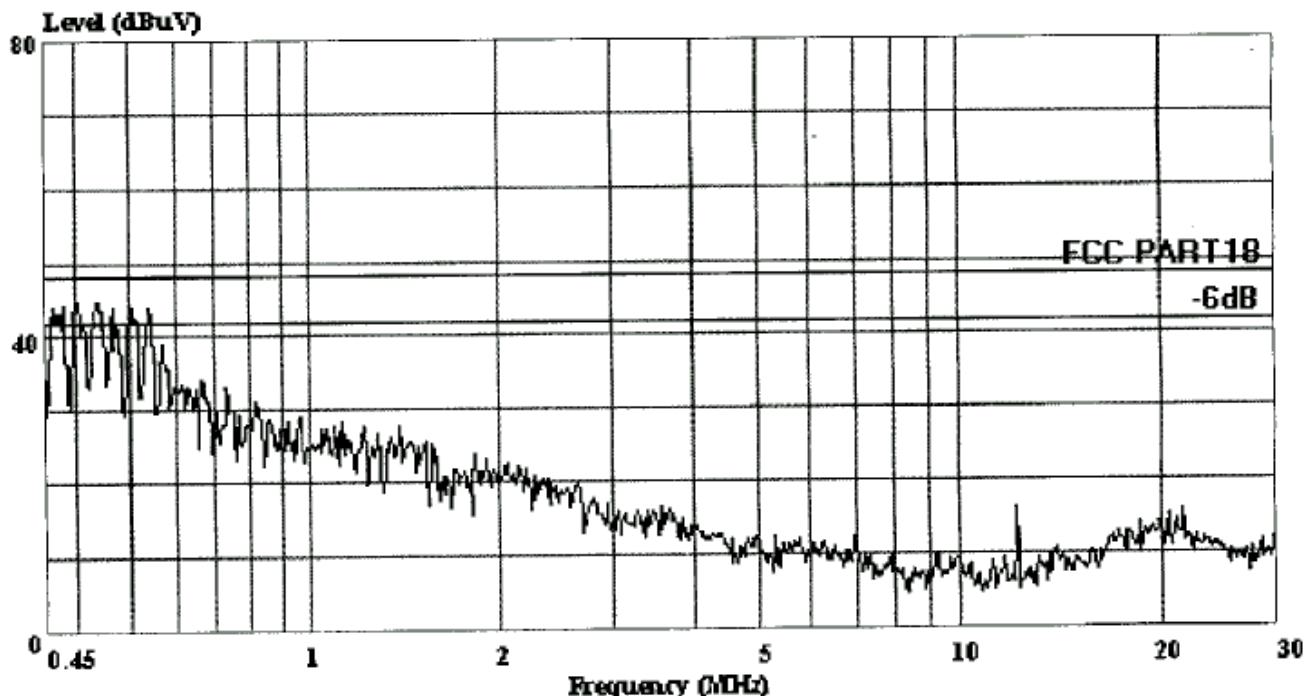

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:


Ref Trace:

Condition: FCC PART18 VA(KNW-407)
Eut: : Energy Saving Lamp M/N:SUF-20W
OP Cond: : ON
Operator: : Chris
Test Spec:: 120V/60Hz
Comment: : Temp:25'C
: Humi:56%



Shenzhen Science & Ind Park
Nantou, Guangdong, China
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 153 File#: U Lighting Group.EMI Date: 2002-07-19 Time: 11:05:31

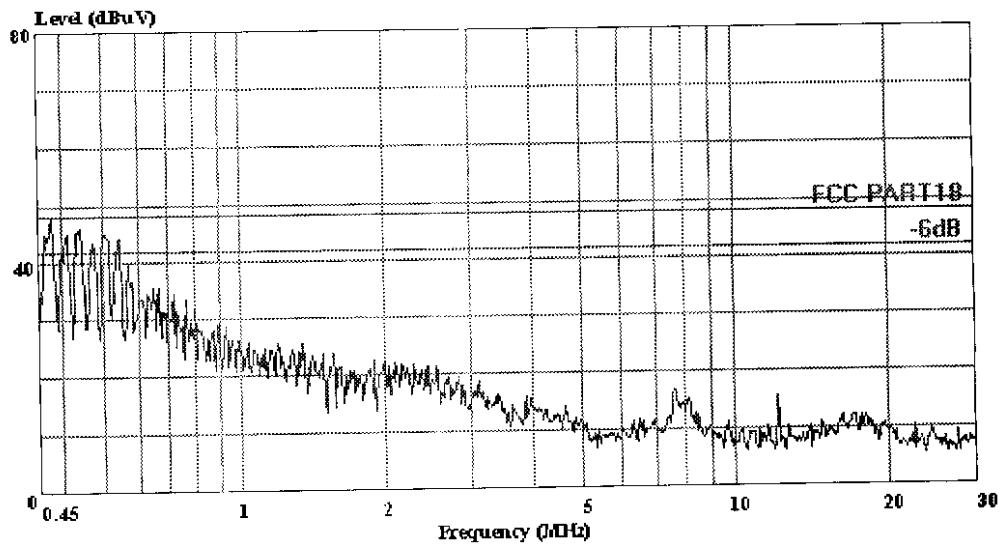

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART18 VB(KNW-407)
Eut: : Energy Saving Lamp M/N:SUF-20W
OP Cond: : ON
Operator: : Chris
Test Spec: 120V/60Hz
Comment: : Temp:25'C
: Humi:56%

APPENDIX II

Emission Test FCC PART 18

19. Jul 02 11:12


EUT: Energy Saving Lamp M/N:SUF-15W
Manuf: Hong Li Da
On Cond: On
Operator: Chris
Test Spec: AC 120V/60Hz
Comment: Temp 25.6°C
 Humi 56%

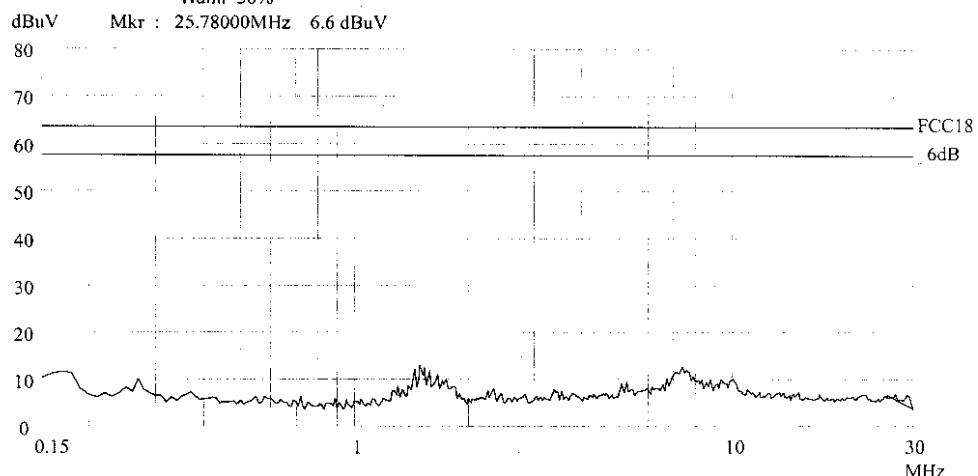

Emission Test
FCC PART 18

19. Jul 02 11:55


FUT: Energy Saving Lamp M/N:SUF-15W
Manuf: Hong Li Da
On Cond: On
Operator: Chris
Test Spec: AC 120V/60Hz
Comment: Temp 25.6°C
 Humi 56%

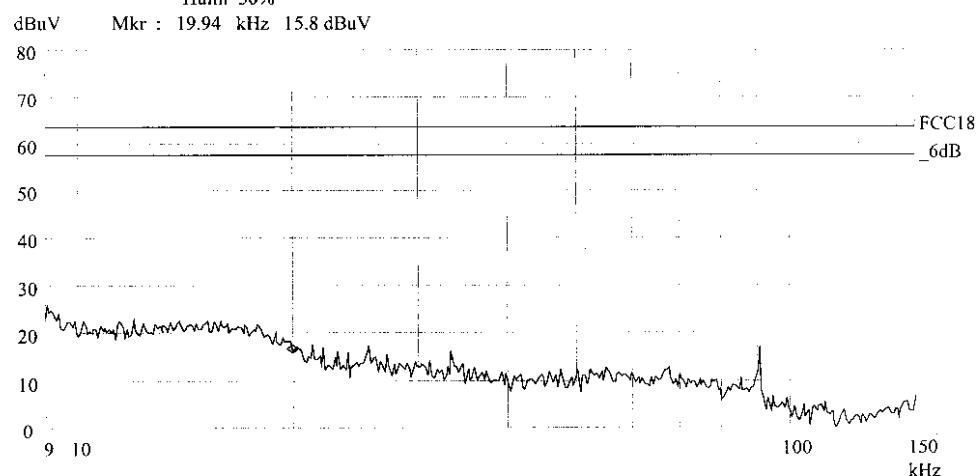

Emission Test FCC PART 18

19. Jul 02 10:19

EUT: Energy Saving Lamp M/N:SUF-20W
 Manuf: Hong Li Da
 On Cond: On
 Operator: Chris
 Test Spec: AC 120V/60Hz
 Comment: Temn 25.6'C
 Humi 56%

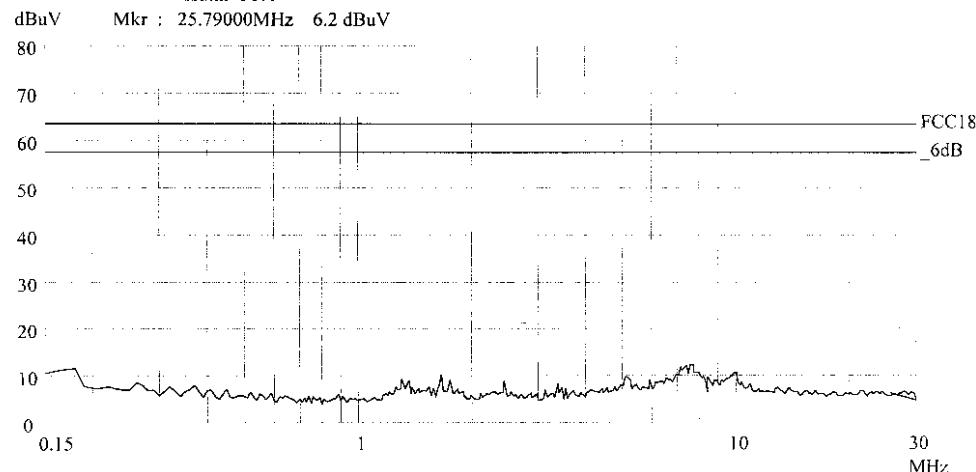

Emission Test FCC PART 18

19. Jul 02 10:34

EUT: Energy Saving Lamp M/N:SUF-20W
 Manuf: Hong Li Da
 On Cond: On
 Operator: Chris
 Test Spec: AC 120V/60Hz
 Comment: Temn 25.6'C
 Humi 56%

