

FCC PART 15.247

TEST REPORT

For

ShenZhen Rapoo Technology Co., Ltd.

22,Jinxiu Road East,Pingshan District,Shenzhen,China

FCC ID: PP26610

Report Type: Original Report	Product Type: Dual-mode Optical Mouse
Test Engineer: Leon Chen	leon chen
Report Number: R1DG121023004-00B	
Report Date: 2012-10-31	
Reviewed By: Jerry Zhang EMC Engineer	Jerry Zhang
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE.....	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSION.....	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	16
APPLICABLE STANDARD	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
TEST DATA	16
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	24

APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(d) - BAND EDGE TESTING.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ShenZhen Rapoo Technology Co., Ltd.*'s product, model number: 6610 (FCC ID: PP26610) or ("EUT") in this report is a *Dual-mode Optical Mouse*, which was measured approximately: 9.4 cm (L) x 5.8 cm (W) x 3.5 cm (H), rated input voltage: DC 1.5V from two parallel AA battery.

** All measurement and test data in this report was gathered from production sample serial number: 12001661000001 (Assigned by applicant). The EUT was received on 2012-10-23.*

Frequency range:

Bluetooth: 2402-2480 MHz

2.4G wireless: 2402-2479 MHz

Objective

This report is prepared on behalf of *ShenZhen Rapoo Technology Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the Bluetooth of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DXX submissions with FCC ID: PP26610 for 2.4G wireless.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emission measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emission measurement is ± 4.0 dB

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.


EUT Exercise Software

Boardcom Bluetool 1.4.4.9

Equipment Modifications

No modification was made to the EUT tested.

Block Diagram of Test Setup

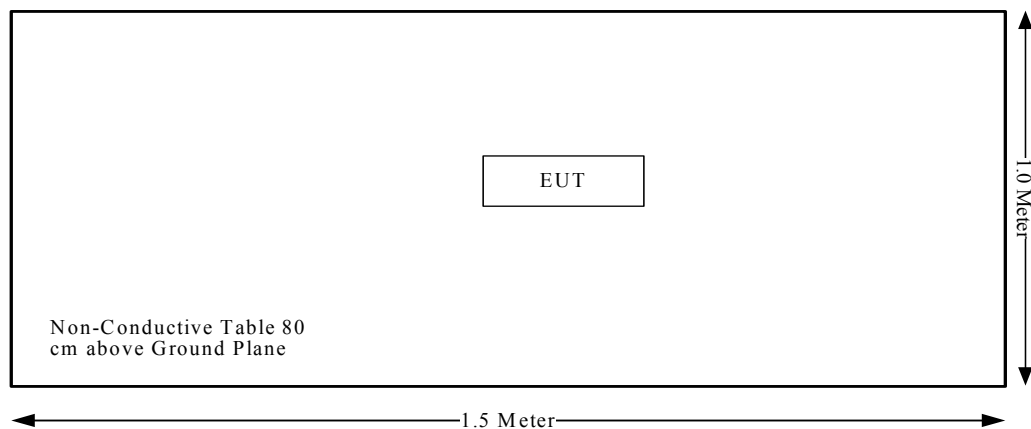

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emission	Not Applicable*
§15.205, §15.209, §15.247(d)	Radiated Emission	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edge	Compliance

Not Applicable*: The EUT is powered by DC 1.5V battery.

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 Mobile Portable RF Exposure V04, no SAR required if power is lower than the following threshold:

When routine evaluation is required for SAR and the output power is $\leq 60/f(\text{GHz})$ mW, the test reduction and test exclusion procedures given herein, or in KDB 616217 or KDB 648474, are applicable.

A device may be used in portable exposure conditions with no restrictions on host platforms when either the source-based time-averaged output power is $\leq 60/f(\text{GHz})$ mW or all measured 1-g SAR are < 0.4 W/kg. 10 When SAR evaluation is required, the most conservative exposure conditions for all expected operating configurations must be tested.

Measurement Result

Peak conducted output power = -4.65 dBm

SAR exclusion threshold = $60/f = 60/2.402 = 24.98$ mW = 13.98 dBm > -4.65 dBm

So the SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an internal printed antenna permanently soldering on the the printed circuit boards, which complied with 15.203, the maximum gain is 2.17 dBi, please refer to the internal photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSION

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emission measurement at Bay Area Compliance Laboratories Corp. (Dongguan) is 4.0 dB(k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

Below 1GHz:

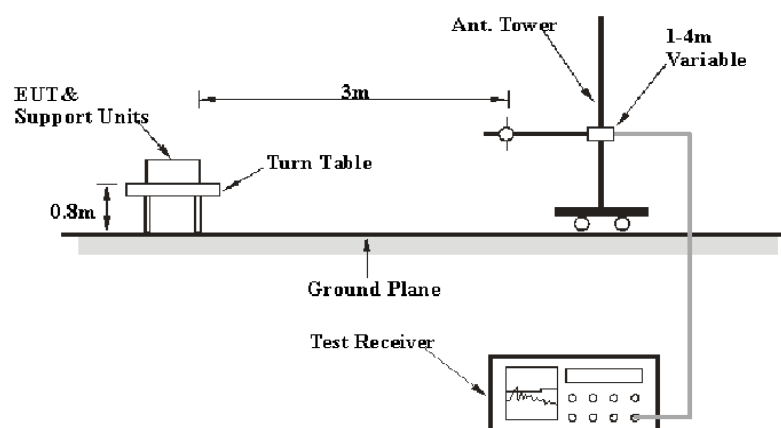

Above 1GHz:

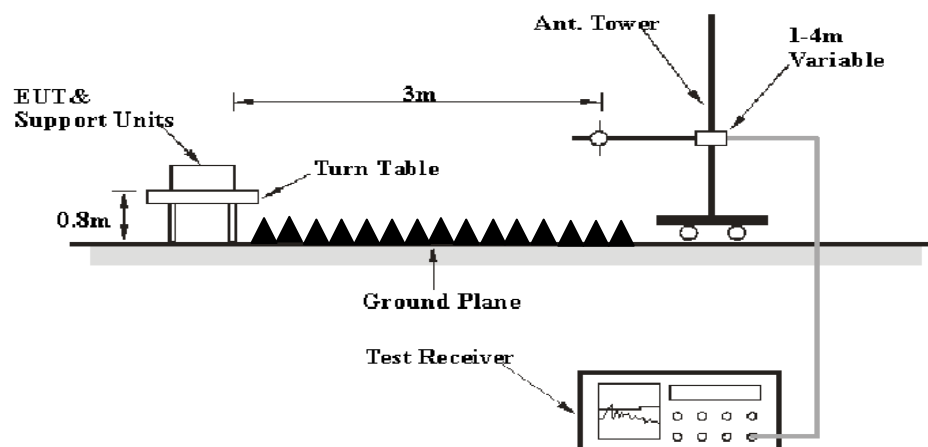

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video BW</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

Maximizing procedure was performed on the highest emission to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101121	2012-10-8	2013-10-7
Sunol Sciences	Hybrid Antennas	JB3	A060611-1	2011-9-6	2013-9-5
HP	Pre-amplifier	8447E	2434A02181	2012-10-8	2013-10-7
R&S	Spectrum Analyzer	FSEM	1079 8500	2012-10-9	2013-10-8
Dayang	Horn Antenna	OMCDH10180	10279001B	2010-7-30	2015-7-29
Mini-Circuits	Wideband Amplifier	ZVA-183-S+	96901149	2012-5-13	2013-5-12

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

4.38dB at 2483.5 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	27.1℃
Relative Humidity:	62 %
ATM Pressure:	100.5kPa


The testing was performed by Leon Chen on 2012-10-30.

Test Mode: Transmitting

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2390	14.36	AV	V	30.98	3.84	0.00	49.19	54.00	4.81
2390	28.14	PK	V	30.98	3.84	0.00	62.97	74.00	11.03
327.32	38.65	QP	V	14.64	2.16	21.59	33.85	46.00	12.15
9608	16.89	AV	V	38.52	8.75	26.39	37.76	54.00	16.24
7206	16.88	AV	V	38.67	6.50	26.54	35.51	54.00	18.49
9608	33.54	PK	V	38.52	8.75	26.39	54.41	74.00	19.59
7206	31.2	PK	V	38.67	6.50	26.54	49.83	74.00	24.17
4804	16.35	AV	V	33.17	4.67	27.34	26.85	54.00	27.15
3462.58	16.34	AV	V	31.64	5.34	27.25	26.08	54.00	27.92
4804	30.33	PK	V	33.17	4.67	27.34	40.83	74.00	33.17
3462.58	30.12	PK	V	31.64	5.34	27.25	39.86	74.00	34.14
2402	52.33	AV	H	31.05	3.90	0.00	87.29	N/A	N/A
2402	58.87	PK	H	31.05	3.90	0.00	93.83	N/A	N/A
2402	54.68	AV	V	31.05	3.90	0.00	89.64	N/A	N/A
2402	60.32	PK	V	31.05	3.90	0.00	95.28	N/A	N/A
Middle Channel: 2441(MHz)									
328.33	39.02	QP	V	14.65	2.15	21.59	34.23	46.00	11.77
9764	16.79	AV	V	38.83	8.58	26.54	37.65	54.00	16.35
7323	16.54	AV	V	38.88	6.72	26.67	35.48	54.00	18.52
9764	33.06	PK	V	38.83	8.58	26.54	53.92	74.00	20.08
7323	31.25	PK	V	38.88	6.72	26.67	50.19	74.00	23.81
4882	16.38	AV	V	33.34	4.75	27.04	27.43	54.00	26.57
3463.02	16.13	AV	V	31.64	5.34	27.25	25.86	54.00	28.14
4882	30.26	PK	V	33.34	4.75	27.04	41.31	74.00	32.69
3463.02	30.01	PK	V	31.64	5.34	27.25	39.74	74.00	34.26
2441	49.33	AV	H	31.27	3.99	0.00	84.59	N/A	N/A
2441	54.25	PK	H	31.27	3.99	0.00	89.51	N/A	N/A
2441	51.61	AV	V	31.27	3.99	0.00	86.87	N/A	N/A
2441	57.42	PK	V	31.27	3.99	0.00	92.68	N/A	N/A
High Channel: 2480(MHz)									
2483.5	14.31	AV	V	31.51	3.80	0.00	49.62	54.00	4.38
2483.5	30.25	PK	V	31.51	3.80	0.00	65.55	74.00	8.45
328.11	38.67	QP	V	14.65	2.15	21.59	33.88	46.00	12.12
9920	16.88	AV	V	39.14	8.41	26.70	37.73	54.00	16.27
7440	16.43	AV	V	39.09	6.95	26.79	35.68	54.00	18.32
9920	33.64	PK	V	39.14	8.41	26.70	54.49	74.00	19.51
7440	31.11	PK	V	39.09	6.95	26.79	50.36	74.00	23.64
4960	16.25	AV	V	33.51	4.70	27.26	27.20	54.00	26.80
3462.59	15.89	AV	V	31.64	5.34	27.25	25.63	54.00	28.37
4960	30.86	PK	V	33.51	4.70	27.26	41.81	74.00	32.19
3462.59	30.15	PK	V	31.64	5.34	27.25	39.89	74.00	34.11
2480	46.55	AV	H	31.49	3.82	0.00	81.86	N/A	N/A
2480	49.36	PK	H	31.49	3.82	0.00	84.67	N/A	N/A
2480	50.14	AV	V	31.49	3.82	0.00	85.45	N/A	N/A
2480	55.33	PK	V	31.49	3.82	0.00	90.64	N/A	N/A


Conducted Spurious Emission at Antenna Port

Low Channel

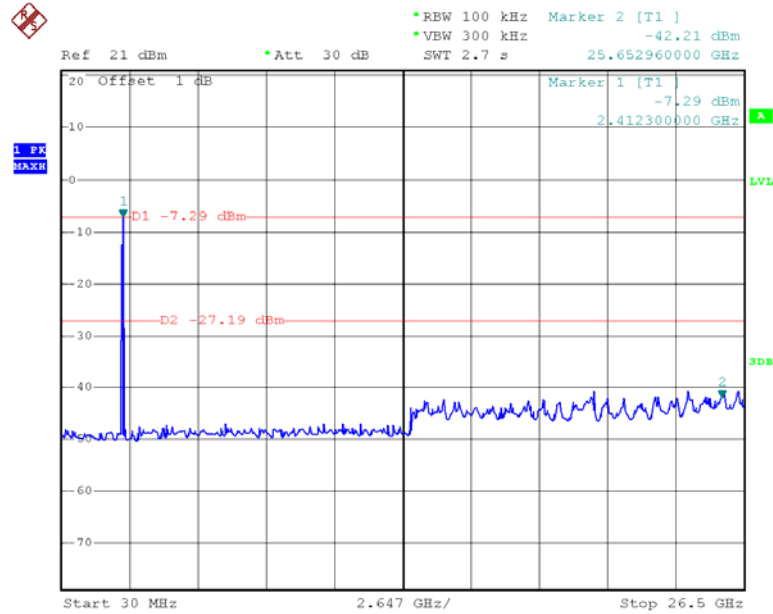


Date: 30.OCT.2012 14:31:09

Middle Channel

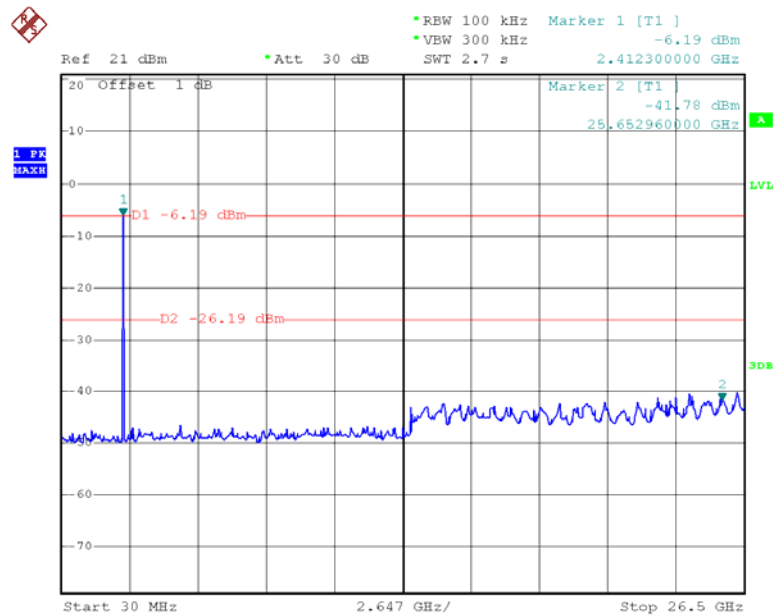

Date: 30.OCT.2012 14:30:23

High Channel

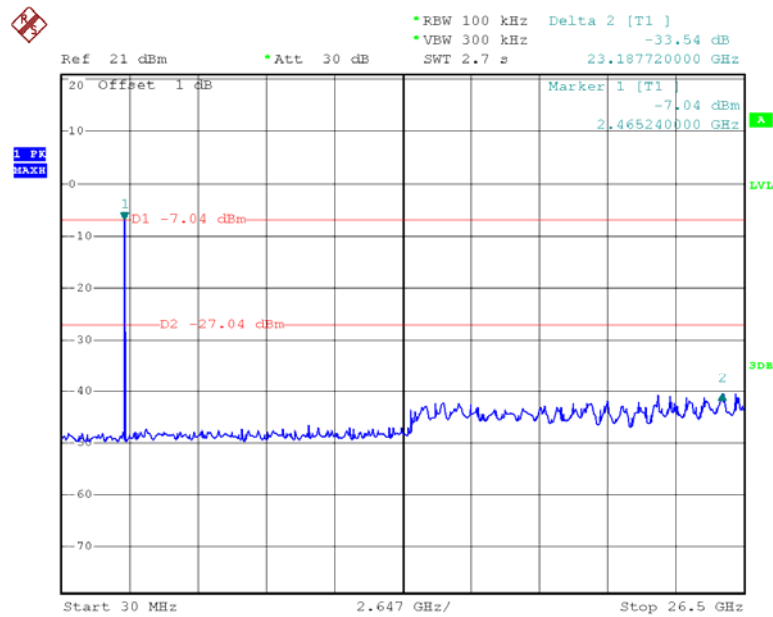

Date: 30.OCT.2012 14:29:29

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	26.3°C
Relative Humidity:	56 %
ATM Pressure:	100.7kPa

* The testing was performed by Leon Chen on 2012-10-26.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2402	1.008	0.64	Pass
Adjacent	2403			
Middle	2441	1.000	0.64	Pass
Adjacent	2442			
High	2480	1.003	0.64	Pass
Adjacent	2479			

Low Channel

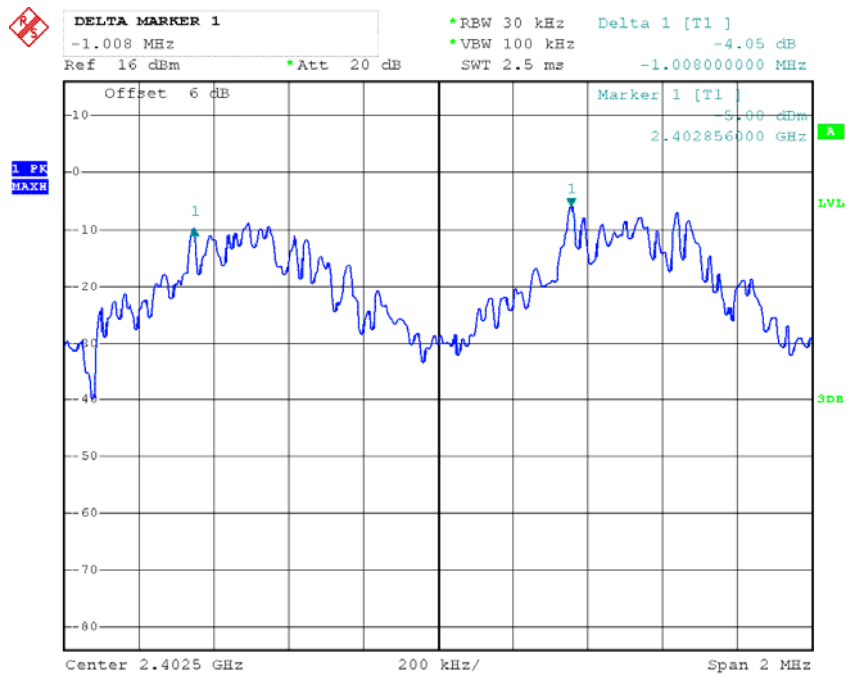

Date: 26.OCT.2012 13:11:15

Middle Channel

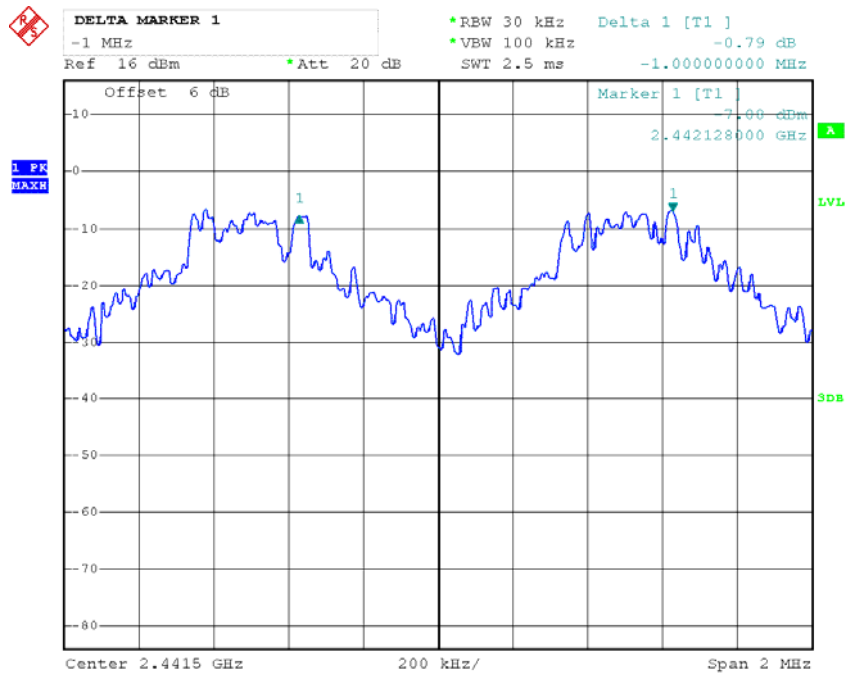

Date: 26.OCT.2012 13:12:39

High Channel



Date: 26.OCT.2012 13:16:49

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data

Environmental Conditions

Temperature:	26.3-26.4°C
Relative Humidity:	52-55 %
ATM Pressure:	100.7kPa

* The testing was performed by Leon Chen from 2012-10-24 to 2012-10-25.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.954
Middle	2441	0.954
High	2480	0.966


Please refer to the following plots.

Low Channel

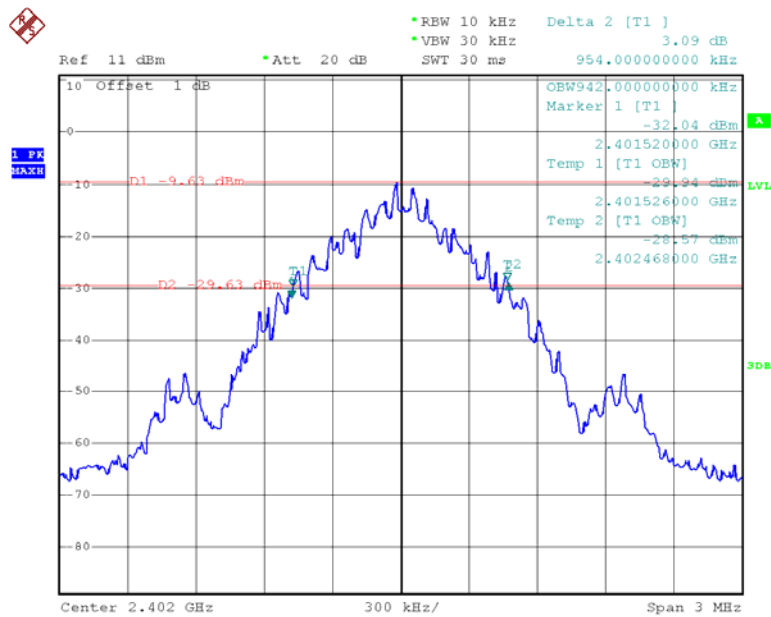


Date: 24.OCT.2012 13:50:04

Middle Channel

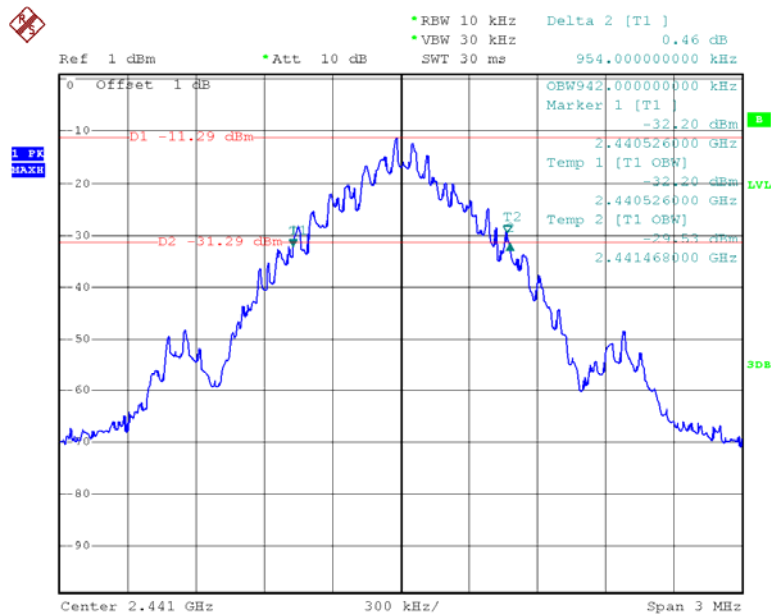

Date: 25.OCT.2012 15:06:00

High Channel

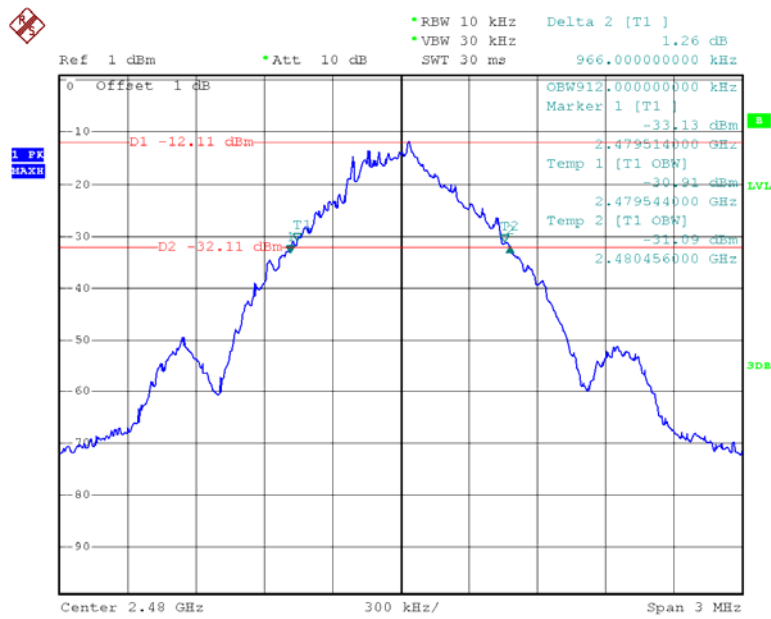

Date: 25.OCT.2012 15:08:36

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data**Environmental Conditions**

Temperature:	26.3 °C
Relative Humidity:	56 %
ATM Pressure:	100.7kPa

The testing was performed by Leon Chen on 2012-10-26.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

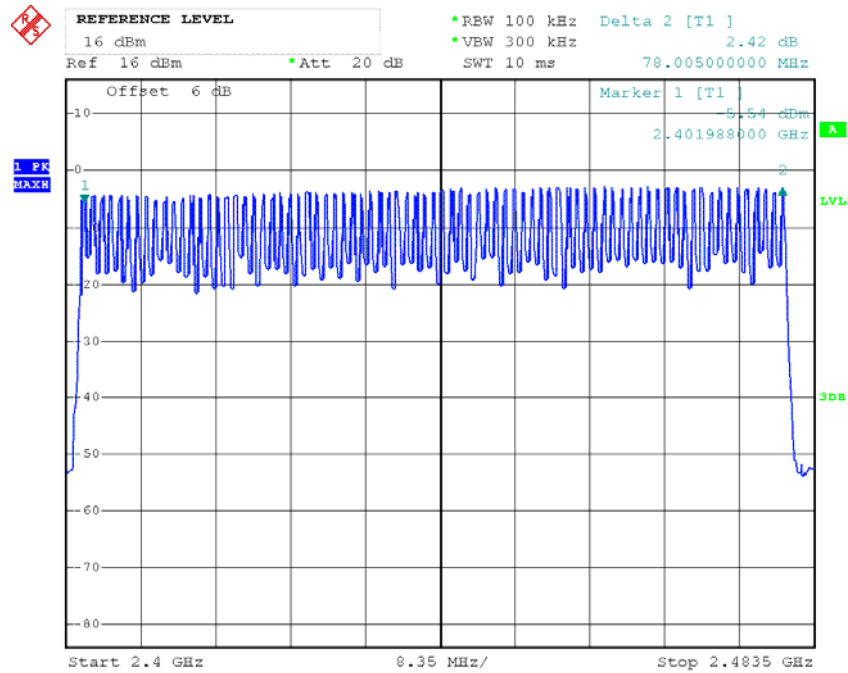

Date: 26.OCT.2012 13:08:31

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time = time slot length * hope rate / number of hopping channels * 31.6s
Hop rate = 1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data**Environmental Conditions**

Temperature:	26.3 °C
Relative Humidity:	56 %
ATM Pressure:	100.7kPa

* The testing was performed by Leon Chen on 2012-10-26.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	0.414	0.132	0.4	Pass
Middle	0.406	0.130	0.4	Pass
High	0.418	0.134	0.4	Pass
Note: Dwell time = Pulse time*(1600/2/79)*31.6S				

Delta 1 [T1]
 414 μ s
 RBW 1 MHz
 VBW 3 MHz
 SWT 1 ms
 Ref 16 dBm
 Att 20 dB
 Delta 1 [T1]
 1.88 dB
 414.000000 μ s
 Marker 1 [T1]
 66.04 dBm
 -18.000000 μ s
 TRG -17.1 dBm
 1 PK
 MAXM
 3dB
 Center 2.402 GHz
 100 μ s/


Date: 26.OCT.2012 13:18:09

Middle Channel

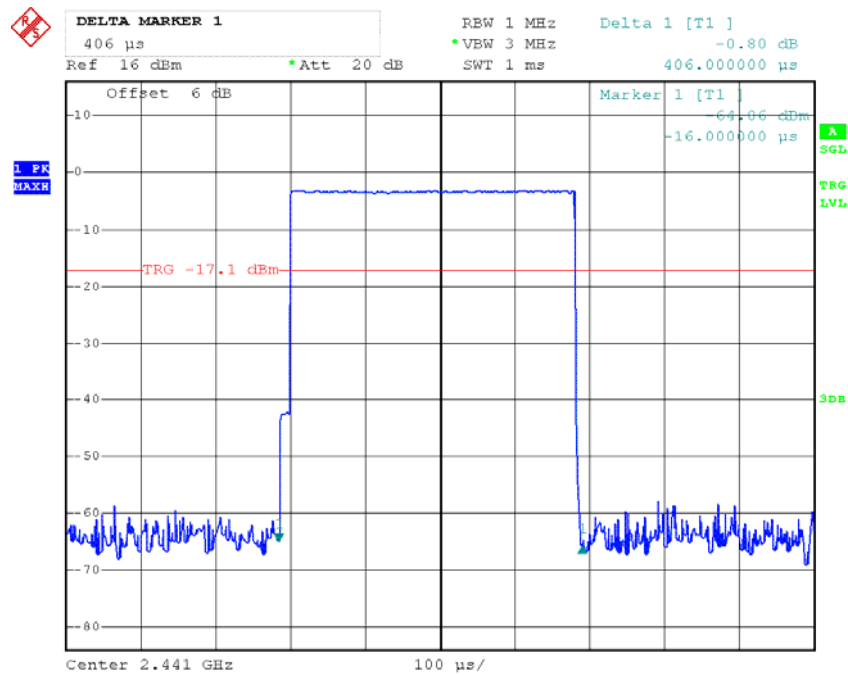

Date: 26.OCT.2012 13:18:50

High Channel

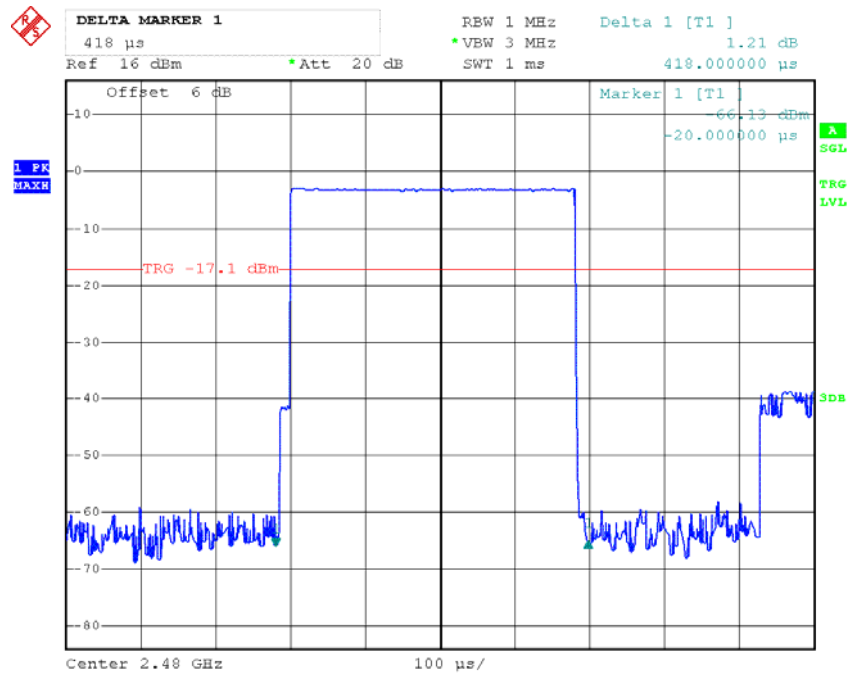


Date: 26.OCT.2012 13:19:27

DH3:


Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	1.690	0.270	0.4	Pass
Middle	1.714	0.274	0.4	Pass
High	1.696	0.271	0.4	Pass
Note: Dwell time = Pulse time*(1600/4/79)*31.6S				

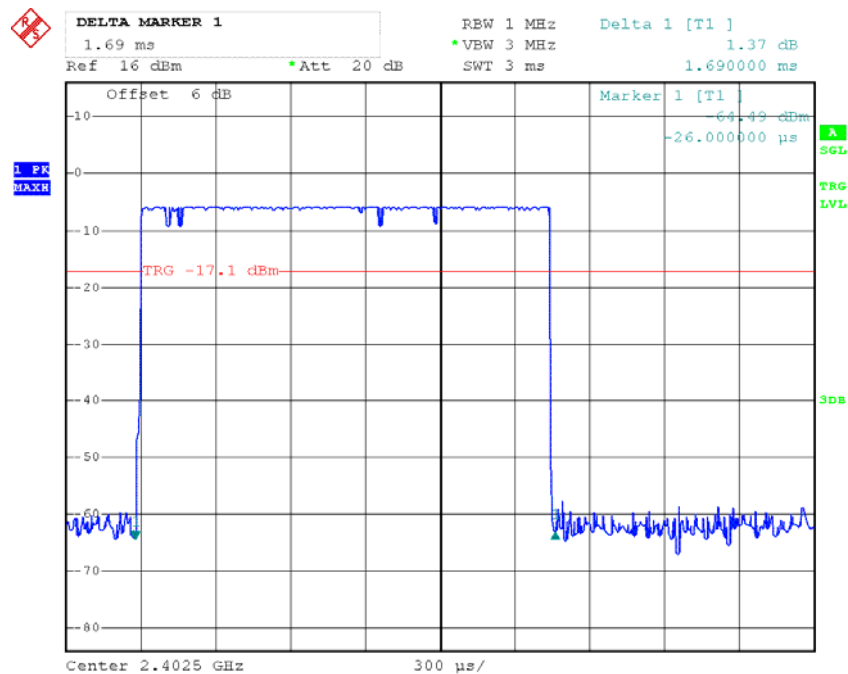Low Channel


Date: 26.OCT.2012 13:21:30

Middle Channel

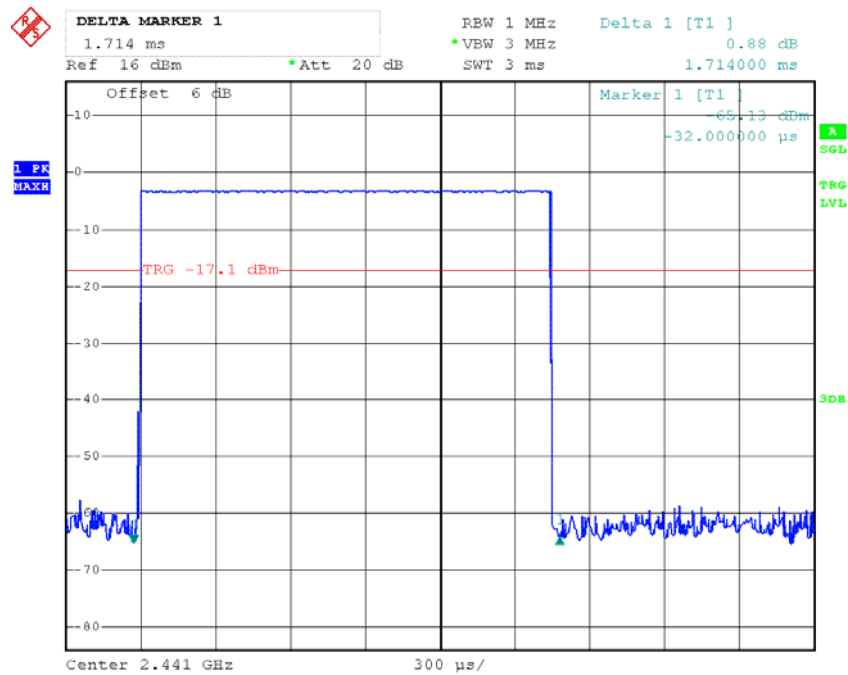

Date: 26.OCT.2012 13:20:58

High Channel

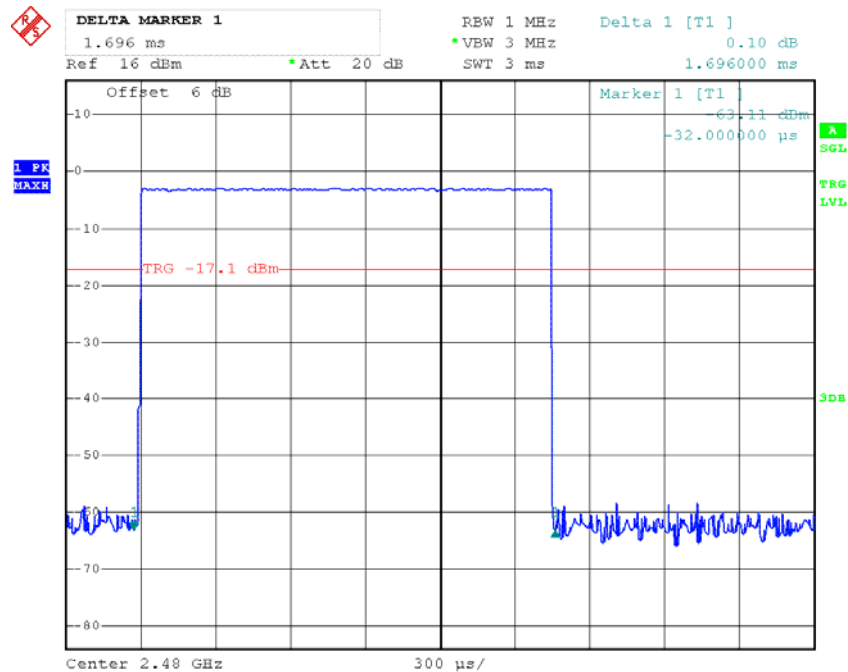


Date: 26.OCT.2012 13:20:28

DH5:


Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	2.940	0.314	0.4	Pass
Middle	2.970	0.317	0.4	Pass
High	2.950	0.315	0.4	Pass
Note: Dwell time = Pulse time*(1600/6/79)*31.6S				

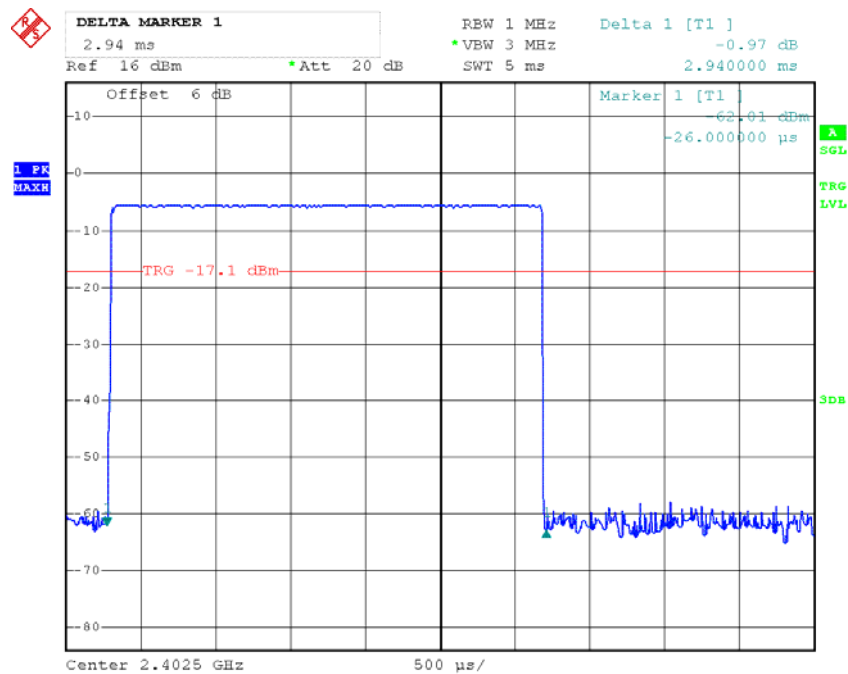Low Channel


Date: 26.OCT.2012 13:23:02

Middle Channel

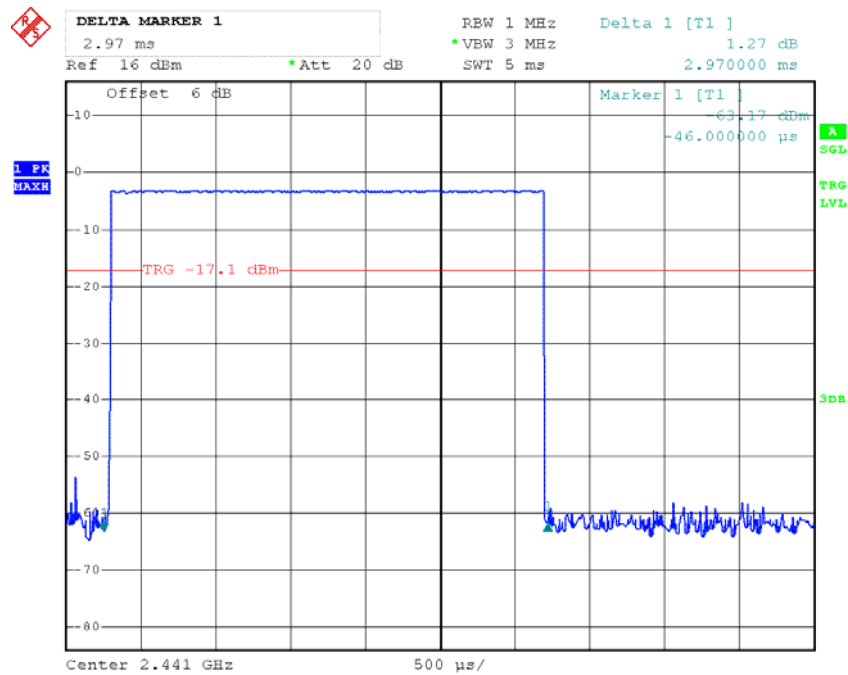

Date: 26.OCT.2012 13:23:36

High Channel

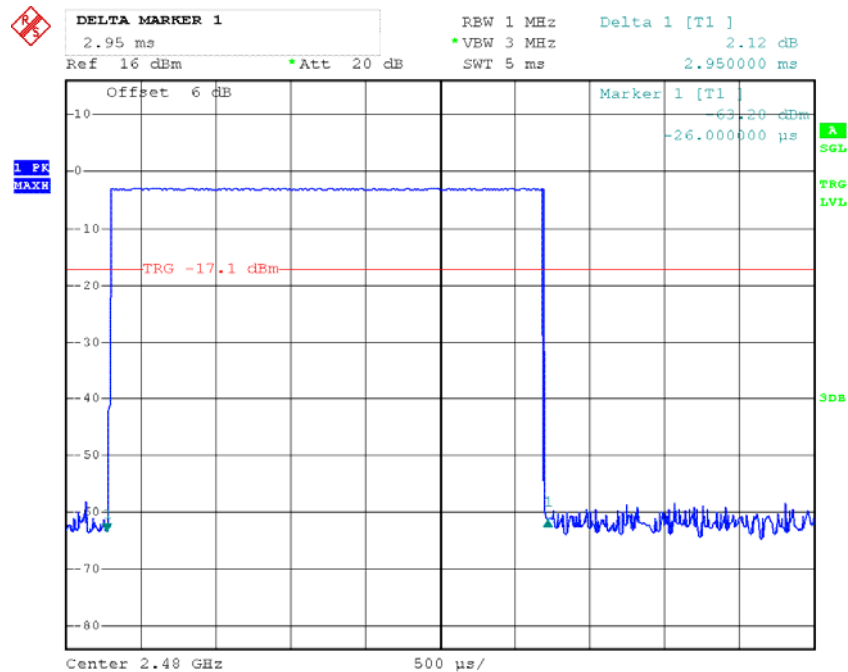

Date: 26.OCT.2012 13:24:44

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data**Environmental Conditions**

Temperature:	26.3-26.4°C
Relative Humidity:	52-55 %
ATM Pressure:	100.7kPa

* The testing was performed by Leon Chen from 2012-10-24 to 2012-10-25.


Test Result: Compliance.

Test Mode: Transmitting

Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
Low	2402	-4.65	30
Middle	2441	-6.53	30
High	2480	-6.93	30


Note: The data above was tested in conducted mode.

Output Power, Low

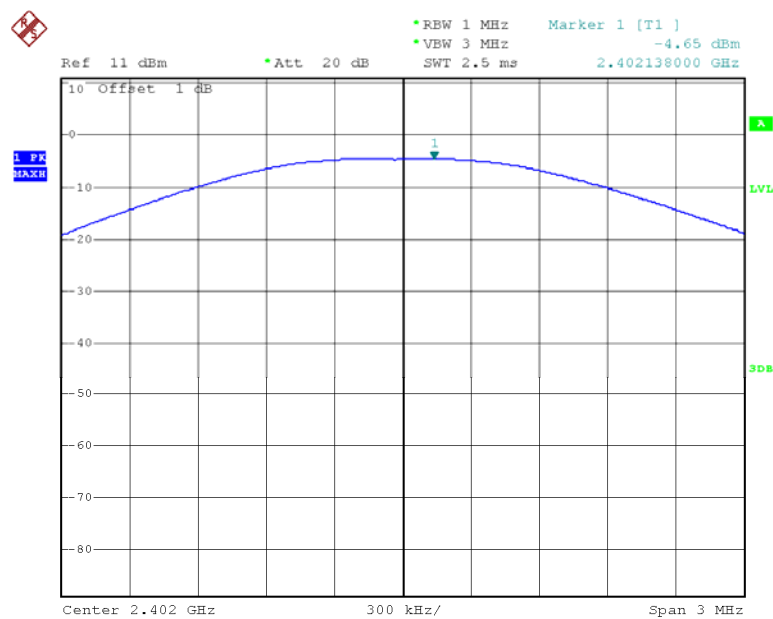


Date: 24.OCT.2012 13:32:38

Output Power, Middle

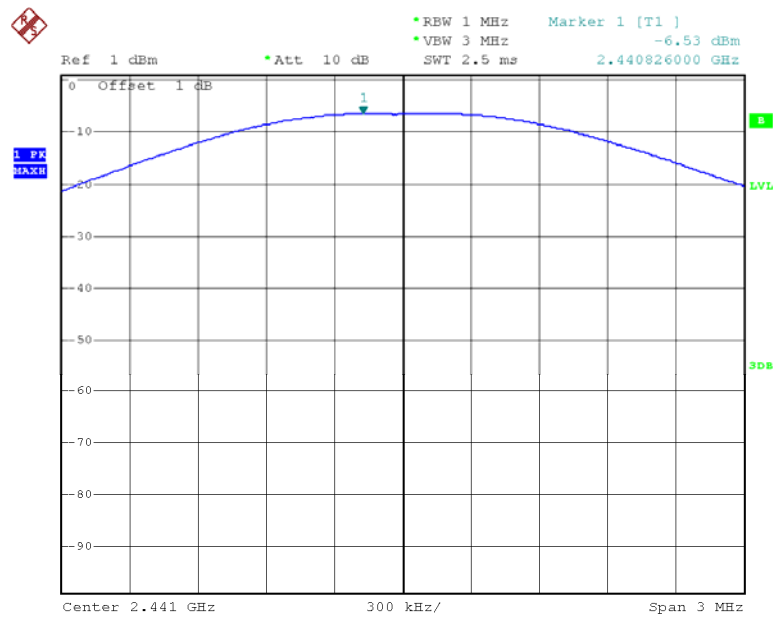

Date: 25.OCT.2012 15:04:32

Output Power, High

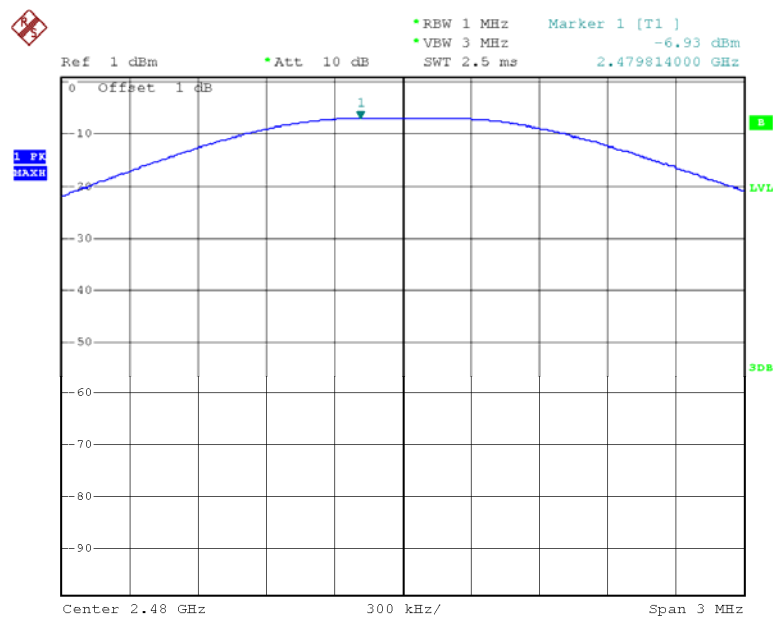

Date: 25.OCT.2012 15:09:19

FCC §15.247(d) - BAND EDGE TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data


Environmental Conditions

Temperature:	26.3-26.4°C
Relative Humidity:	52-55 %
ATM Pressure:	100.7kPa

**The testing was performed by Leon Chen from 2012-10-24 to 2012-10-25.*

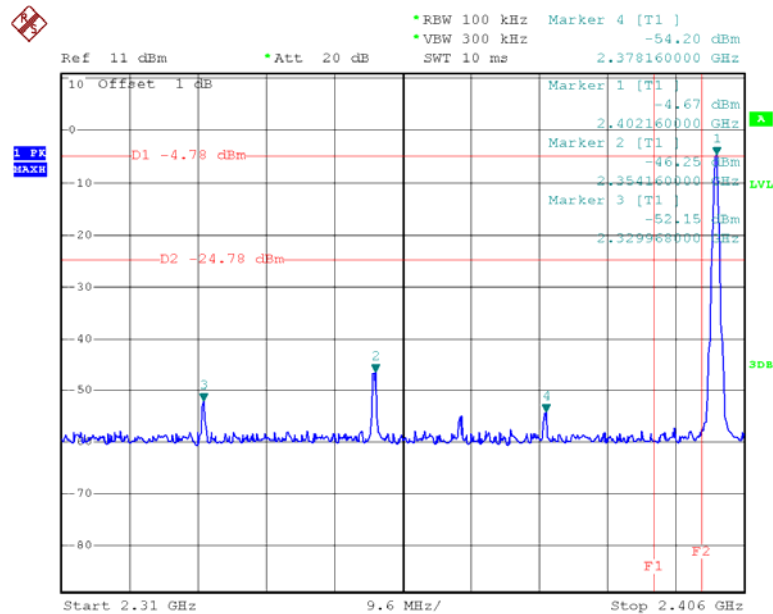Test Result: Compliance**Band Edge, Left Side**

Date: 24.OCT.2012 13:42:22

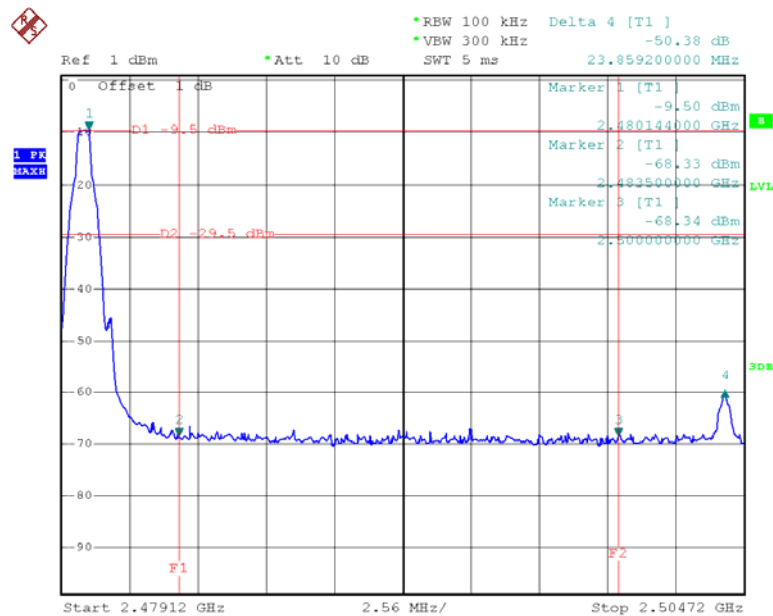Band Edge, Right Side

Date: 25.OCT.2012 15:14:46

******* END OF REPORT *******