

Appendix D

Contour Plots

DUT: CDM8950; Type: Folder, CDMA CH: 1013**Program Name: HAC_TCoil_WD_Emission**

DUT: CDM8950; Type: Folder

Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.3 dB

ABM1 comp = 6.01 dB A/m

BWC Factor = 0.152993 dB

Location: -6, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.01 dB A/m

BWC Factor = 0.152993 dB

Location: -6, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.7 dB

ABM1 comp = 5.85 dB A/m

BWC Factor = 0.152993 dB

Location: 3.5, -8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.85 dB A/m

BWC Factor = 0.152993 dB

Location: 3.5, -8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.7 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, -1.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.721 dB

BWC Factor = 10.8 dB

Location: 3.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.8 dB A/m

BWC Factor = 0.152993 dB

Location: 1.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.9 dB

ABM1 comp = 13.8 dB A/m

BWC Factor = 0.152993 dB

Location: 1.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 12.8 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

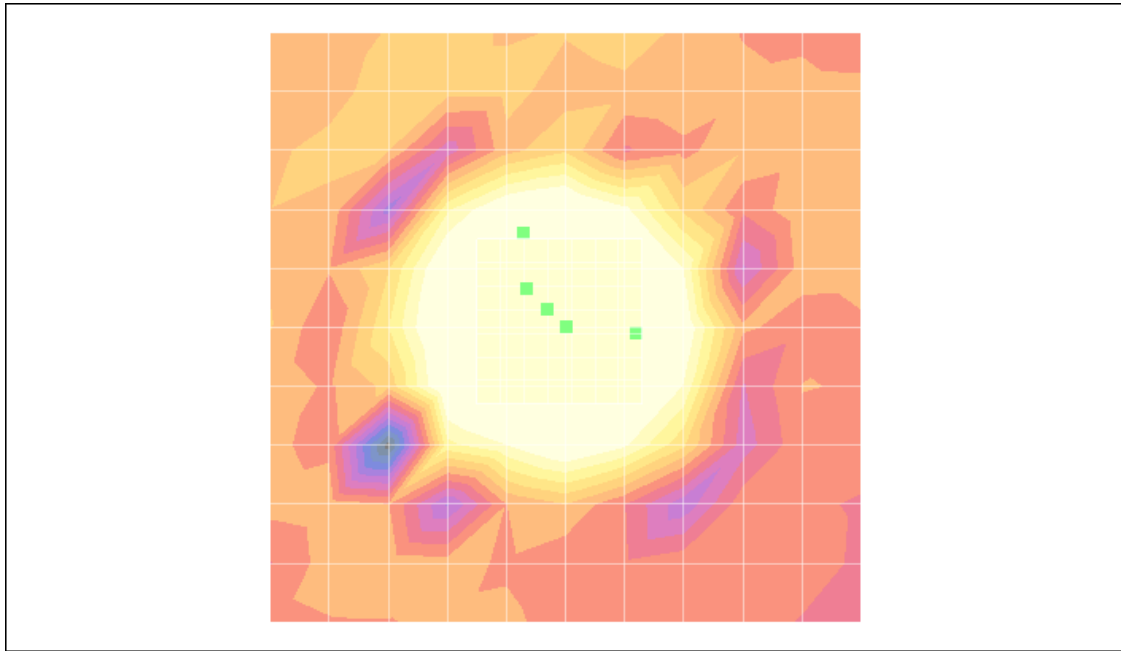

0 dB = 1.00

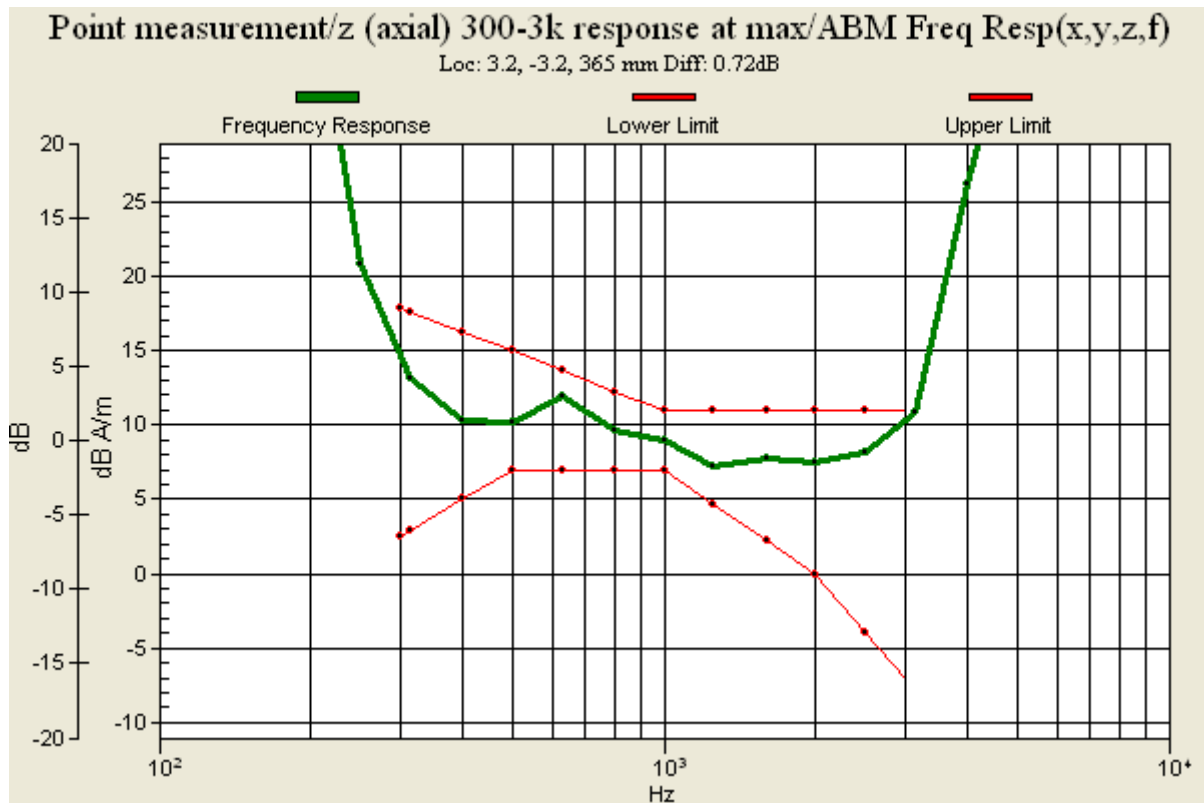

DUT: CDM8950; Type: Folder, CDMA CH: 384**Program Name: HAC_TCoil_WD_Emission**

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.5 dB

ABM1 comp = 5.21 dB A/m

BWC Factor = 0.151969 dB

Location: -6, -5.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.21 dB A/m

BWC Factor = 0.151969 dB

Location: -6, -5.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.9 dB

ABM1 comp = 6.06 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.06 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.3 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 0.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.182 dB

BWC Factor = 10.8 dB

Location: 3.2, -1.2, 364.9 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.0 dB

ABM1 comp = 13.6 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.6 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 13.1 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

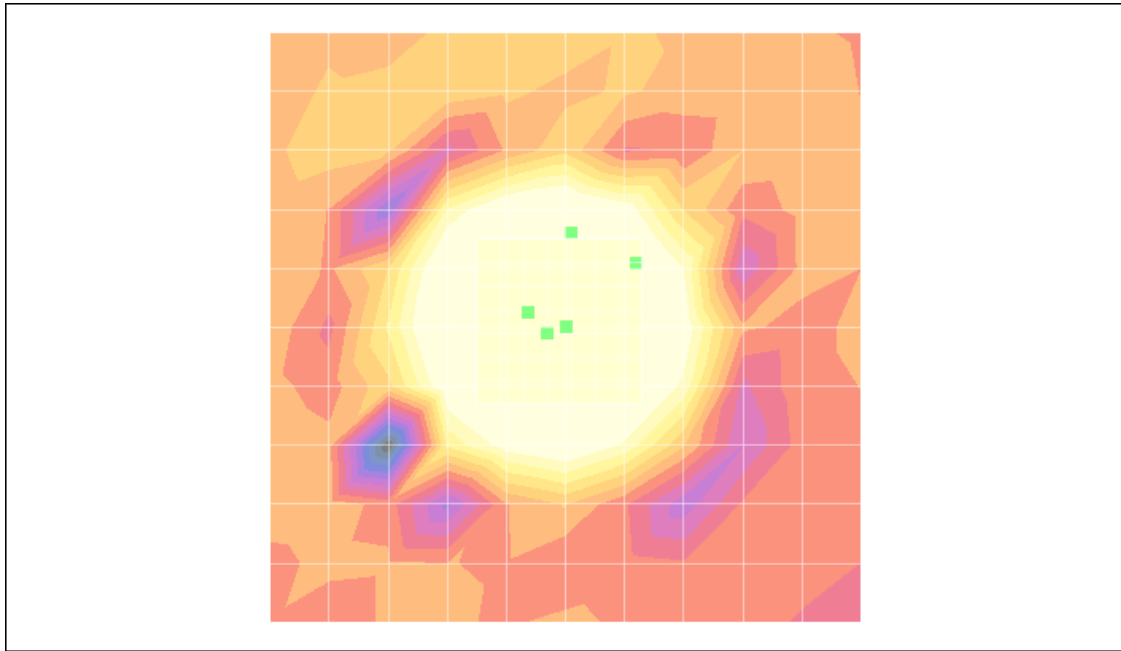

0 dB = 1.00

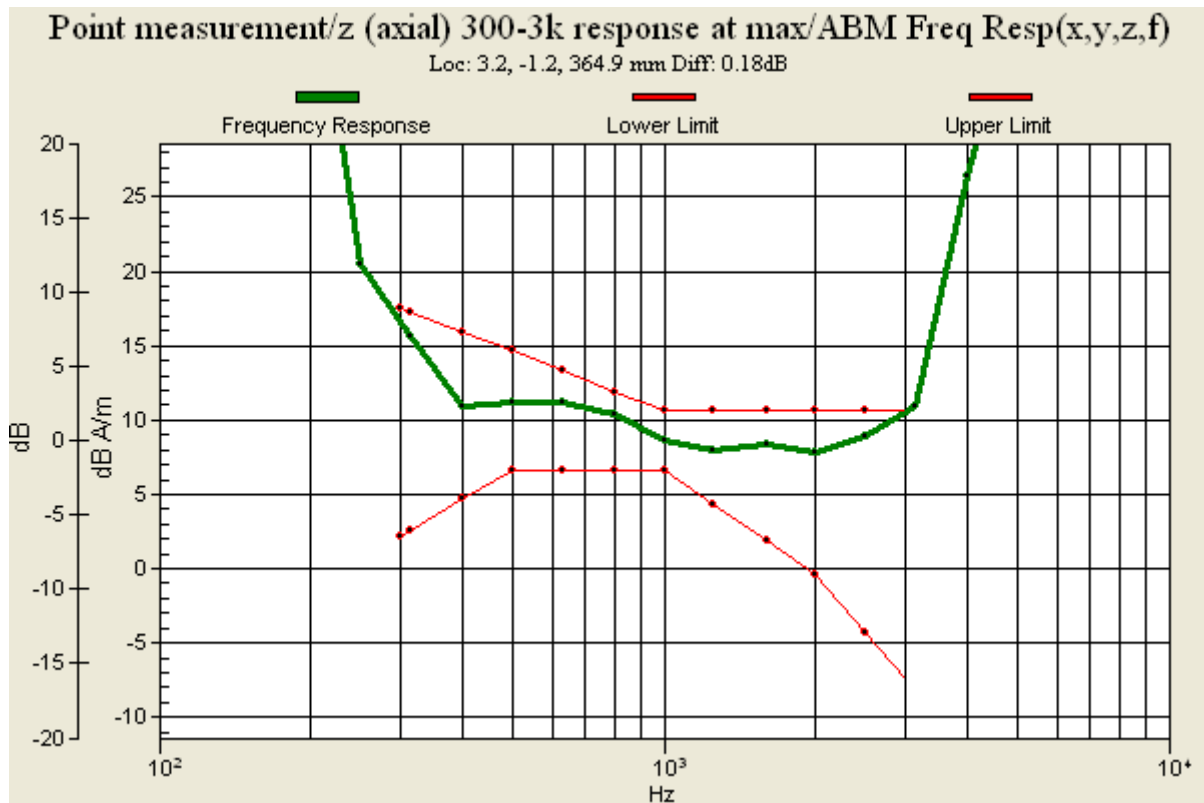

DUT: CDM8950; Type: Folder, CDMA CH: 777**Program Name: HAC_TCoil_WD_Emission**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.4 dB

ABM1 comp = 7.66 dB A/m

BWC Factor = 0.151969 dB

Location: -7, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 7.66 dB A/m

BWC Factor = 0.151969 dB

Location: -7, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 45.4 dB

ABM1 comp = 6.36 dB A/m

BWC Factor = 0.151969 dB

Location: 3.5, -8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.36 dB A/m

BWC Factor = 0.151969 dB

Location: 3.5, -8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.7 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 0.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.047 dB

BWC Factor = 10.8 dB

Location: 3.2, -1.2, 364.9 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.2 dB

ABM1 comp = 13.2 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.2 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 13.5 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

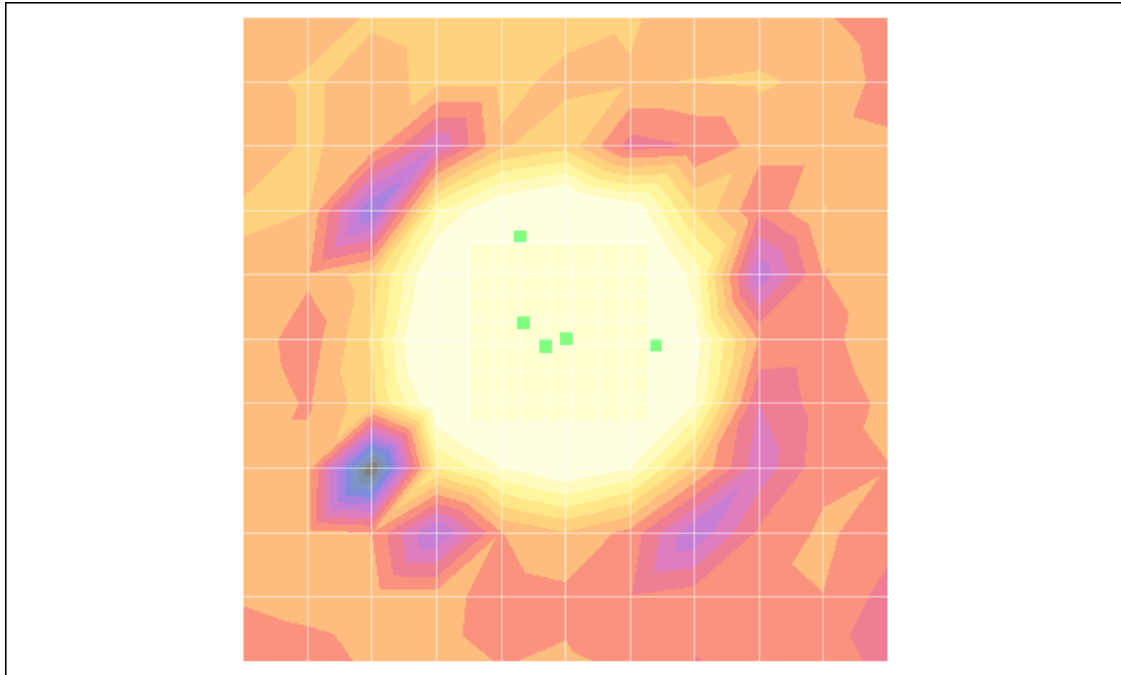

0 dB = 1.00

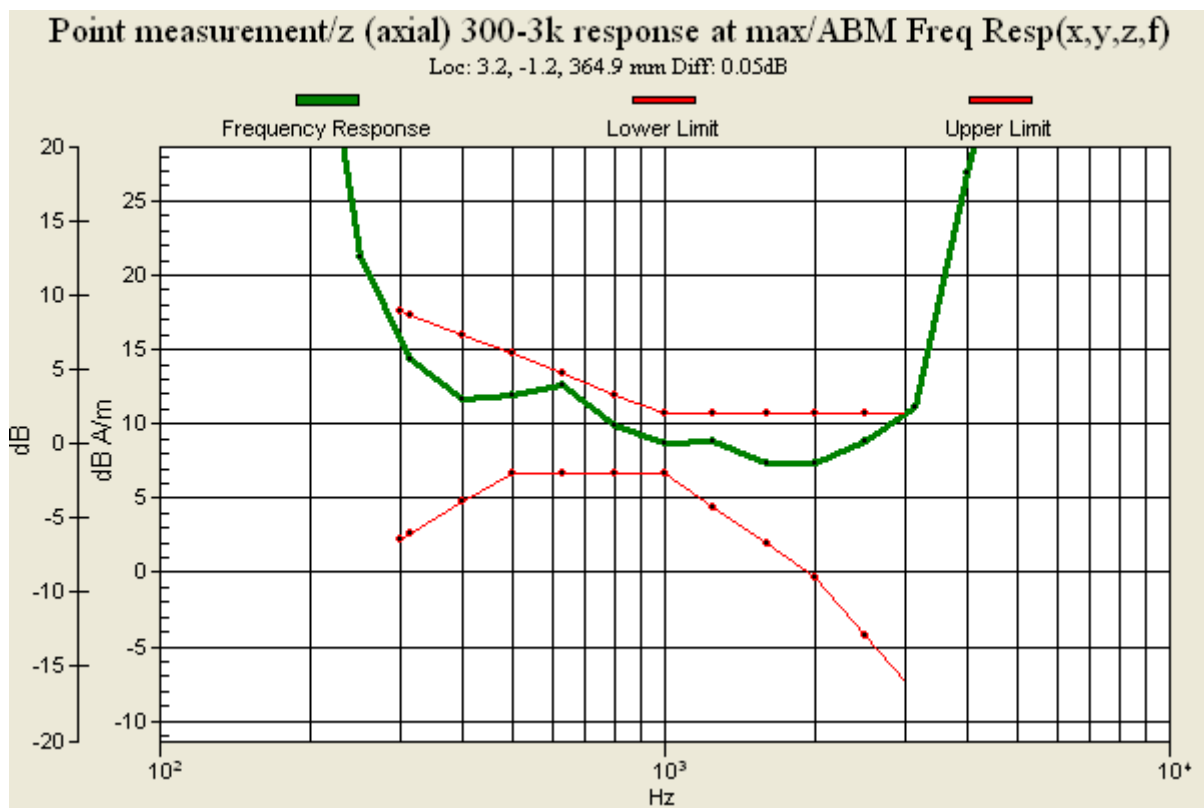

DUT: CDM8950; Type: Folder, PCS CH: 25**Program Name: HAC_TCoil_WD_Emission**

Communication System: PCS 1900MHz FCC; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.2 dB

ABM1 comp = 5.61 dB A/m

BWC Factor = 0.152993 dB

Location: -7, -1.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.61 dB A/m

BWC Factor = 0.152993 dB

Location: -7, -1.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.9 dB

ABM1 comp = 4.89 dB A/m

BWC Factor = 0.152993 dB

Location: 1.5, -6, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 4.89 dB A/m

BWC Factor = 0.152993 dB

Location: 1.5, -6, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.7 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, -1.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.411 dB

BWC Factor = 10.8 dB

Location: 3.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.3 dB

ABM1 comp = 12.8 dB A/m

BWC Factor = 0.152993 dB

Location: 1.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.8 dB A/m

BWC Factor = 0.152993 dB

Location: 1.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 13.5 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

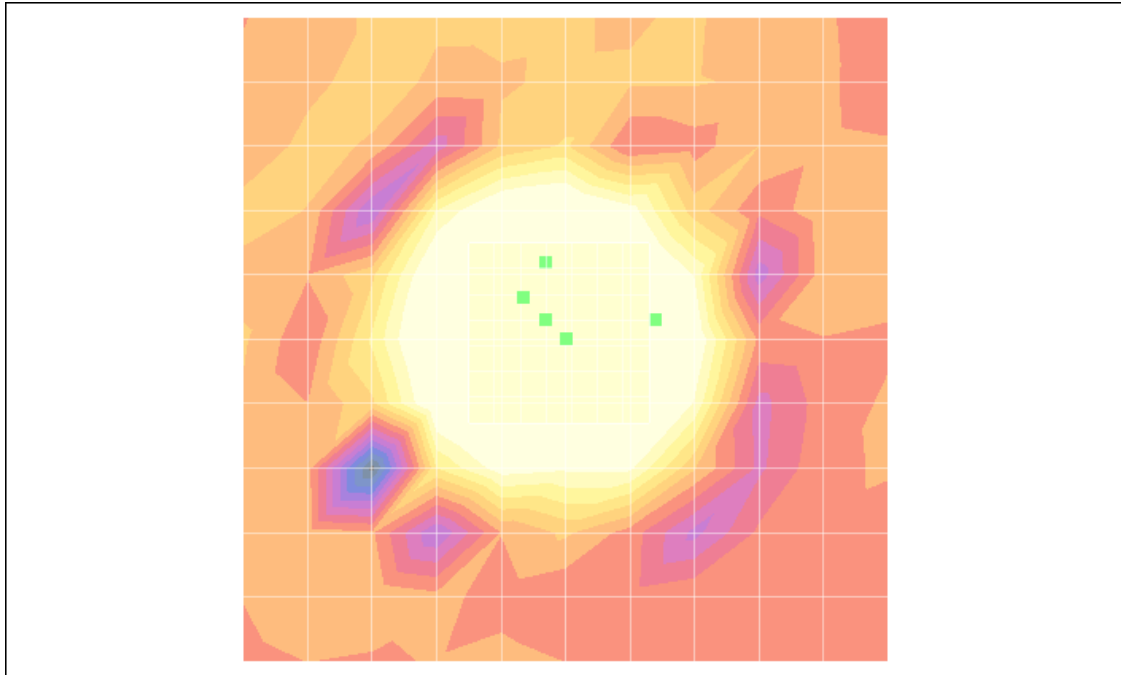

0 dB = 1.00

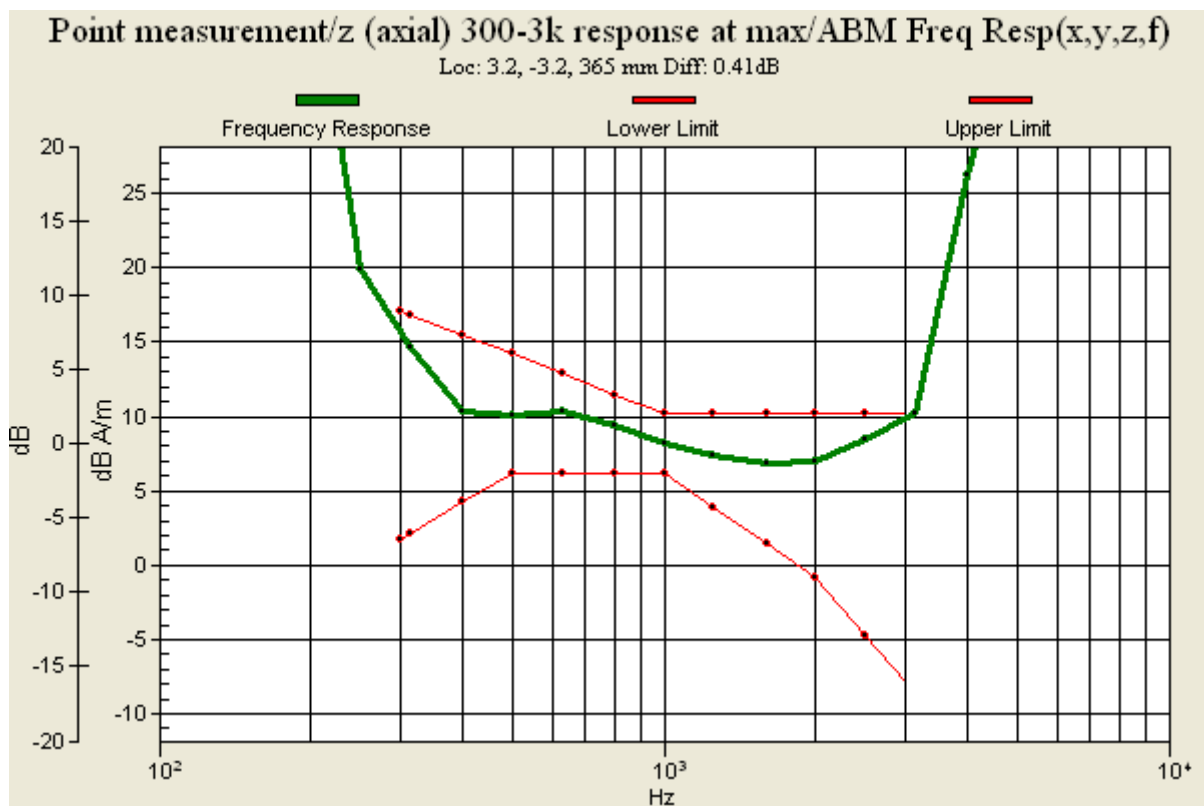

DUT: CDM8950; Type: Folder, PCS CH: 600**Program Name: HAC_TCoil_WD_Emission**

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.7 dB

ABM1 comp = 7.42 dB A/m

BWC Factor = 0.151969 dB

Location: -7, -1.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 7.42 dB A/m

BWC Factor = 0.151969 dB

Location: -7, -1.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.2 dB

ABM1 comp = 5.18 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -6, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.18 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -6, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.8 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.211 dB

BWC Factor = 10.8 dB

Location: 1.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.4 dB

ABM1 comp = 13.6 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.6 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 13.2 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

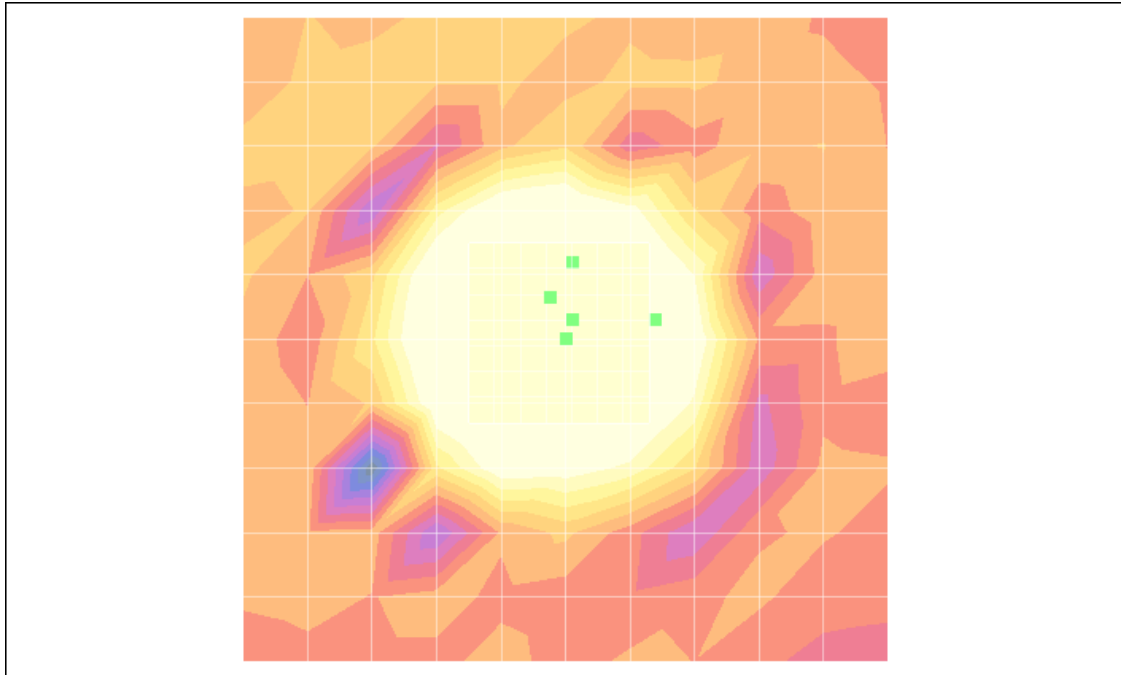

0 dB = 1.00

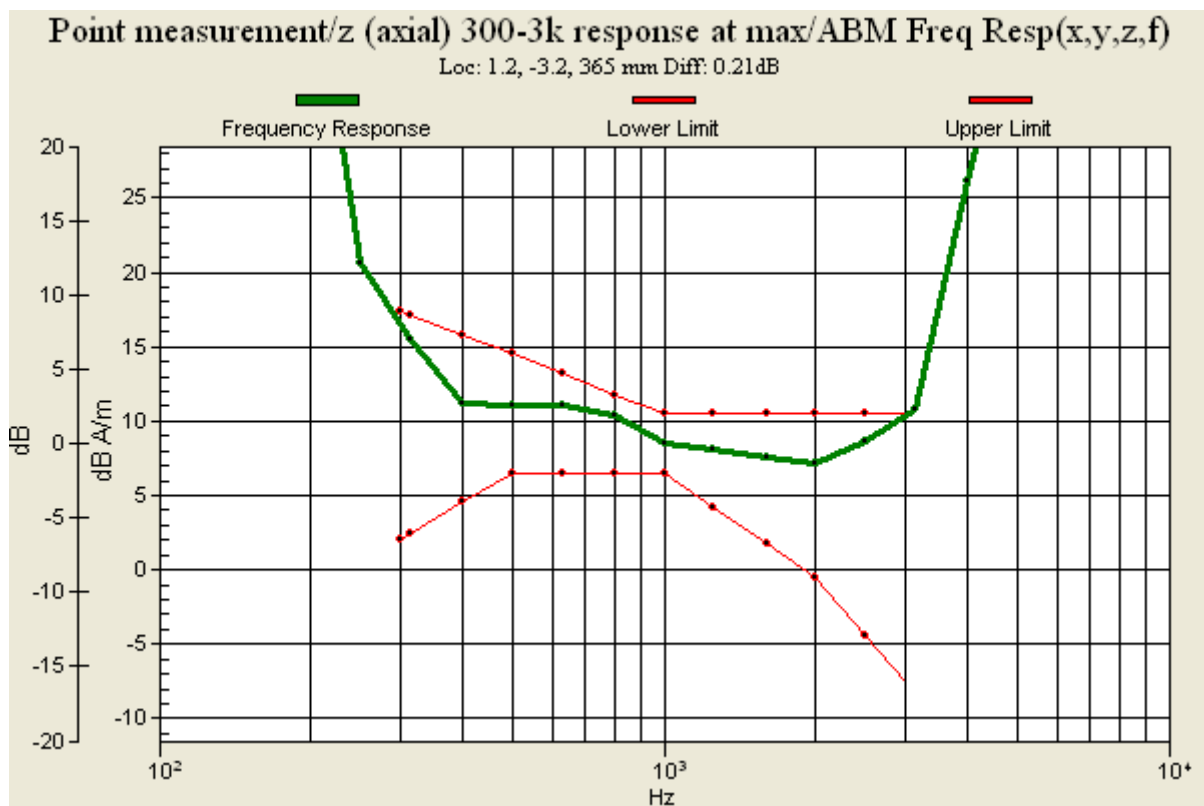

DUT: CDM8950; Type: Folder, PCS CH: 1175**Program Name: HAC_TCoil_WD_Emission**

Communication System: PCS 1900MHz FCC; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.2 dB

ABM1 comp = 5.67 dB A/m

BWC Factor = 0.151969 dB

Location: -9, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.67 dB A/m

BWC Factor = 0.151969 dB

Location: -9, 2.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.6 dB

ABM1 comp = 5.74 dB A/m

BWC Factor = 0.151969 dB

Location: 3.5, 6, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.74 dB A/m

BWC Factor = 0.151969 dB

Location: 3.5, 6, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.8 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.277 dB

BWC Factor = 10.8 dB

Location: 1.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.1 dB

ABM1 comp = 13.8 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 13.6 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

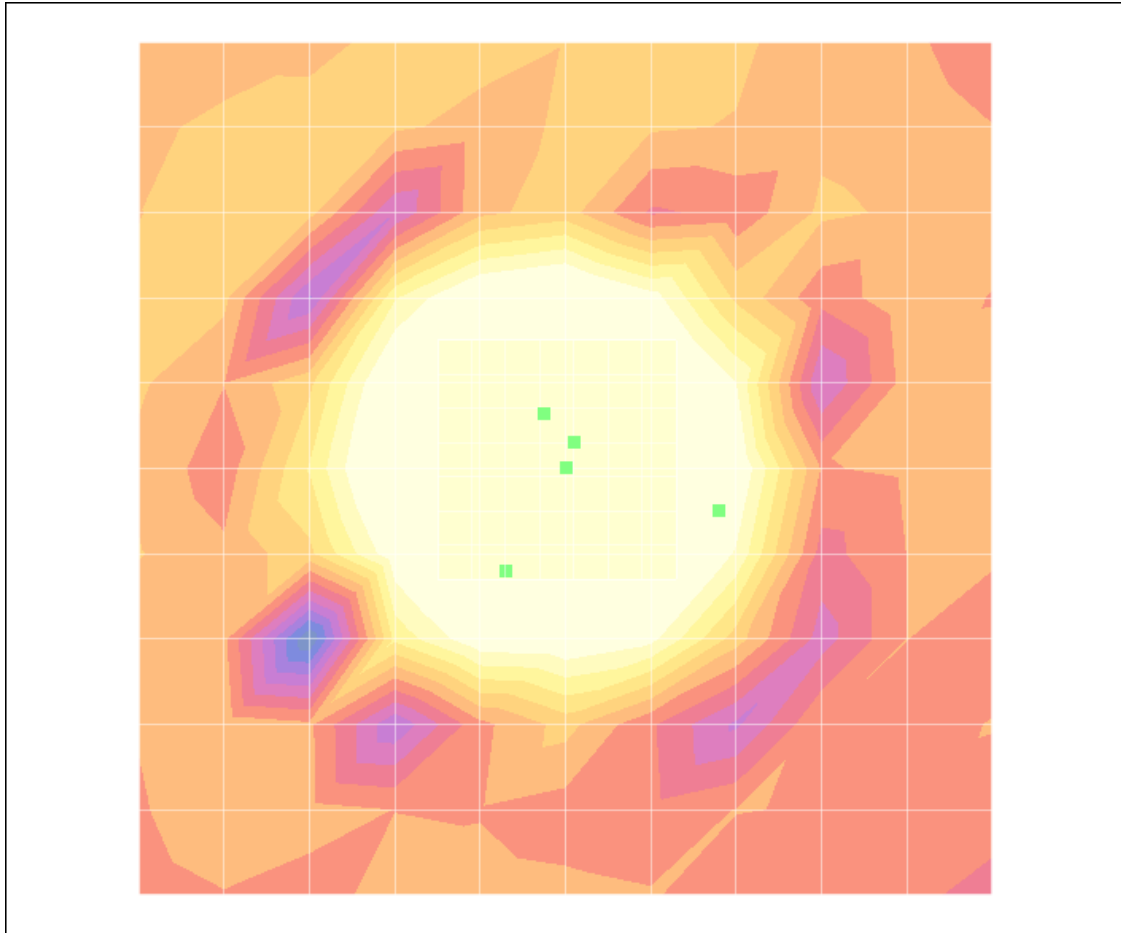

0 dB = 1.00

