

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	1/24

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	2/24

ANTENNA SPECIFICATION

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	3/24

CONTENTS

1. Approval Sheet Check List

2. Technical Specifications

- 2.1 Electrical Specifications
- 2.2 Mechanical Specifications
- 2.3 Packing Specifications

3. Test equipments

4. Electrical Demands

- 4.1 V.S.W.R.
- 4.2 Radiation Pattern
- 4.3 Gain

5. Mechanical Demands

- 5.1 Contact Part Operate Force Test.
- 5.2 Drop Test Result.

6. Environmental demands

- 6.1 Operation temperature test
- 6.2 Temperature Change test
- 6.3 High Humidity test

7. Antenna Data

- 7.1. Antenna Drawing
- 7.2. Packing Spec Drawing
- 7.3 Electrical data (V.S.W.R, GAIN & Matching Circuit Diagram)
- 7.4 Environmental Material Test Report

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	4/24

1. Approval Check List

Approval Check List				
NO	DATE	CHANGE CONTENTS	CHANGE CAUSE	REV
1	2008-04-16	-	New approval sheet	A
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	5/24

2. Technical Specifications

2.1 Electrical Specifications.

Frequency Range (MHz)	US-PCS			
	1850Mhz	1910MHz	1930MHz	1990MHz
Peak Gain (Min., E2-Plane)	-2.5dBi	-2.5dBi	-2.0dBi	-2.0dBi
V.S.W.R (Max.)	1850Mhz	1910MHz	1930MHz	1990MHz
	4.0:1	3.5:1	3.0:1	3.0:1
Input Impedance	50 ohms			
Polarization	Vertical			
Radiation Pattern	Omni-directional			
Maximum Power	1W			

2.2 Mechanical Specifications

Mechanical Spec.	
Connector	Board contact pin type
Overall length	See drawing
Operating Temperature	-30°C ~ 80°C
Weight	2.25g (Unit)

2.3 Packing Specifications

Packing Spec.		
PRODUCT	QUANTITY (Antenna)	MATERIAL
TRAY	80 EA	P.V.C
TRAY INNER PAD	2 EA	SW 2 type (B corrugated paper)
CARTON BOX	1600 EA	DW 2 type (AB corrugated paper)

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	6/24

3. Test Equipment

The equipment for antenna test is as follows,

- ◆ Network Analyzer (Agilent E5071B) to measure the V.S.W.R.,
Standing wave ratio(SWR) and impedance bandwidth of antenna
- ◆ Standard horn antennas adjustable to the US-PCS bands
- ◆ Anechoic Chamber installed the cables, connectors and equipments for measurements
- ◆ Digital Caliper to measure the dimensions
- ◆ Torque Driver to measure the torque force of the helix
- ◆ Push/Pull gauge to measure the pulling forces
- ◆ Climatic Chamber for environmental tests


ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	7/24

4. Electrical Demands

4.1 V.S.W.R

The V.S.W.R characteristics must be satisfied the electrical demands in the below table.

Frequency Range	state	US-PCS(1850MHz ~ 1990MHz)			
V.S.W.R (Max)	FREQ	1850MHz	1910MHz	1930MHz	1990MHz
	SD	4.0:1	3.5:1	3.0:1	3.0:1
	SU	3.5:1	3.0:1	3.0:1	3.0:1

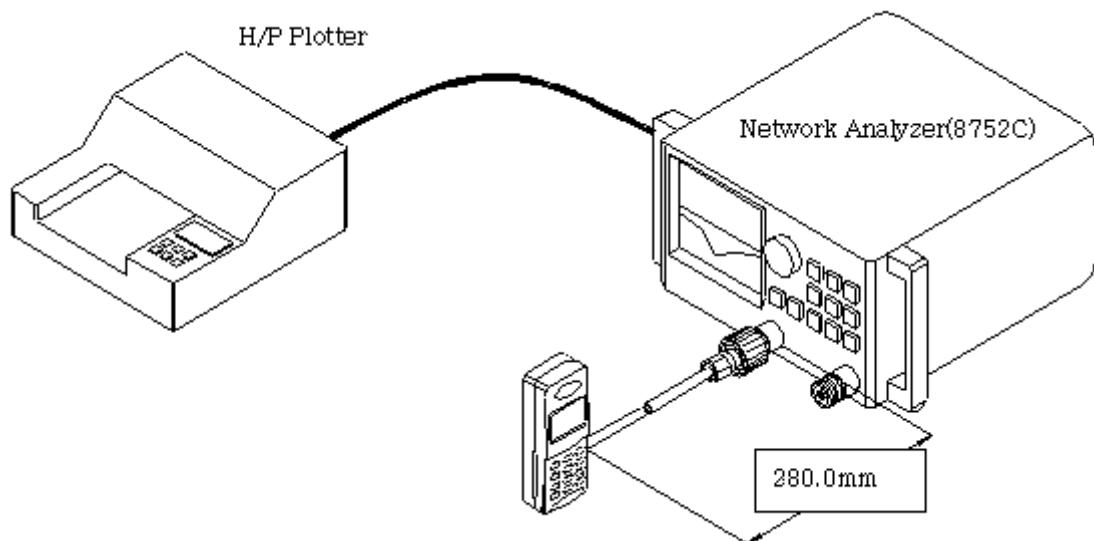

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	8/24


4.2 Radiation Pattern

The radiation pattern must have the omni-directional characteristic in US-PCS Band.

4.3 Gain

The gain is expressed as dBi. with condition (E2-Plane), the minimum Gain of antenna must be satisfied the electrical demands in the below table.

Frequency Range	state	US-PCS(1850MHz ~ 1990MHz)			
Peak GAIN		1850MHz	1910MHz	1930MHz	1990MHz
	SD	-4.5dBi	-4.5dBi	-4.0dBi	-3.0dBi
	SU	-2.5dBi	-2.5dBi	-2.0dBi	-2.0dBi

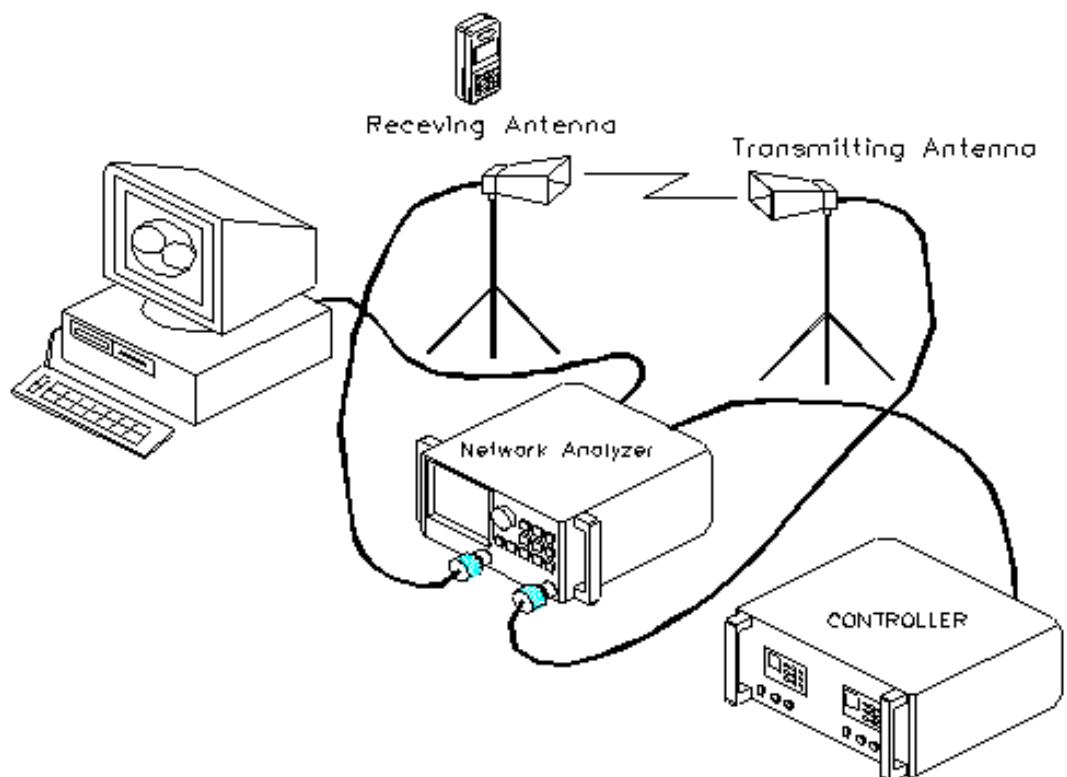


ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	9/24

5. Mechanical Demands

5.1 Contact Part Operate Force Test

The antenna Contact Pin from inside (tolerance inclusion) working distance 50~300 g/f must maintain.

(The working distance of the antenna is with the lower part plan together 0mm~1.95mm.)

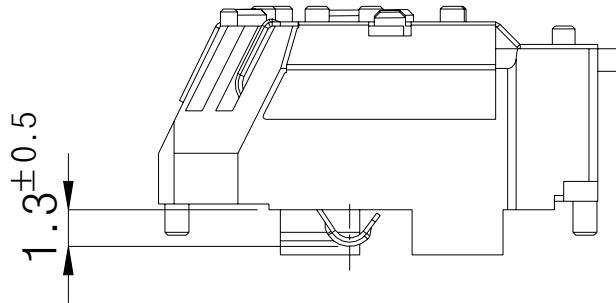

5.2 Drop Test

The antenna is attached to the handset. The handset is dropped with the antenna downward onto a concrete surface at 1.5 m height and angle D(45°). The number of drop is 2 times.

After the test, the original shape shall be possible to restore. The antenna shall satisfy the electrical demands.

5.3 Salt spray Test

In salt fog chamber, expose test antennas to a 35°C, 5% salt fog atmosphere for 48 hours. After the test, the antenna shall be continued. The antenna shall satisfy the electrical demands.

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	10/24

6. Environmental Demands

6.1 Operation Temperature Test

- Test A: Place the antennas for testing in chamber. The chamber condition should be as follows: 1hours at -20°C.
- Final measurements: The antenna shall be visually inspected and electrically and also mechanically checked as required by products standard.
- Test B: Place the antennas for testing in chamber. The chamber condition should be as follows: 1hours at 70°C.
- Final measurements: The antenna shall be visually inspected and electrically and also mechanically checked as required by products standard.

6.2 Temperature Change Test

The object of temperature test is to evaluate the reliability of antenna component at temperature change.

- Test: Temperature cycle is as follows. 2 hours at -40°C.

2 hours at +85°C.


Temperature increase/decrease time (Temperature change time) is 2 hours. 10 cycles.

- Final measurements: The antenna shall be visually inspected and electrically and mechanically checked as required by products standard.

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	11/24

6.3 High Humidity Test


- Test: Place the antennas for testing in chamber. The chamber condition should be as follows: 24hours at +55°C, Relative humidity is 95%.
- Final measurements: The antenna shall be visually inspected and electrically and also mechanically checked as required by products standard.

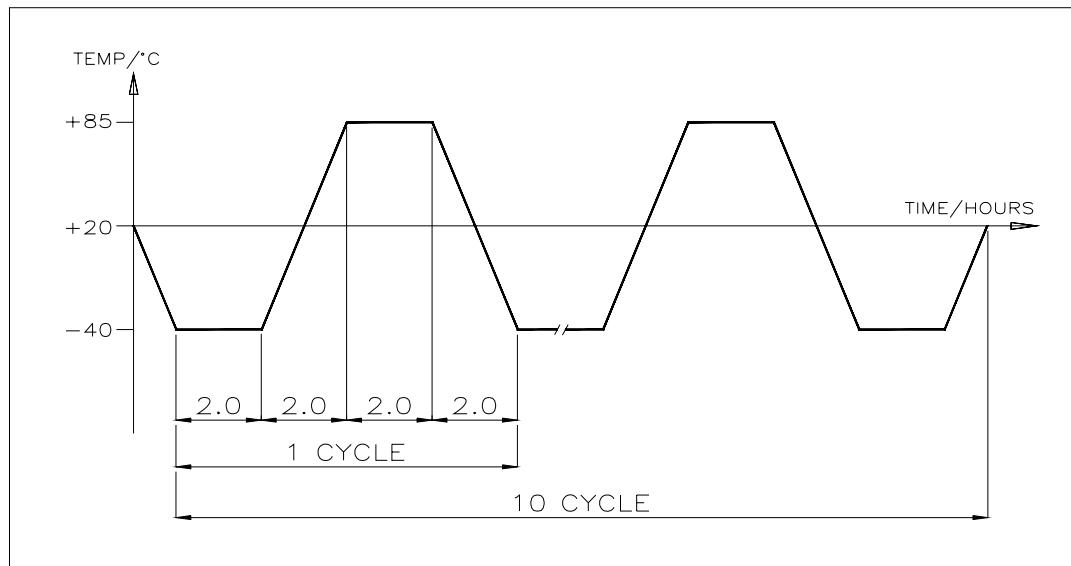

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	12/24



7. Antenna data

7.1. Antenna Drawing

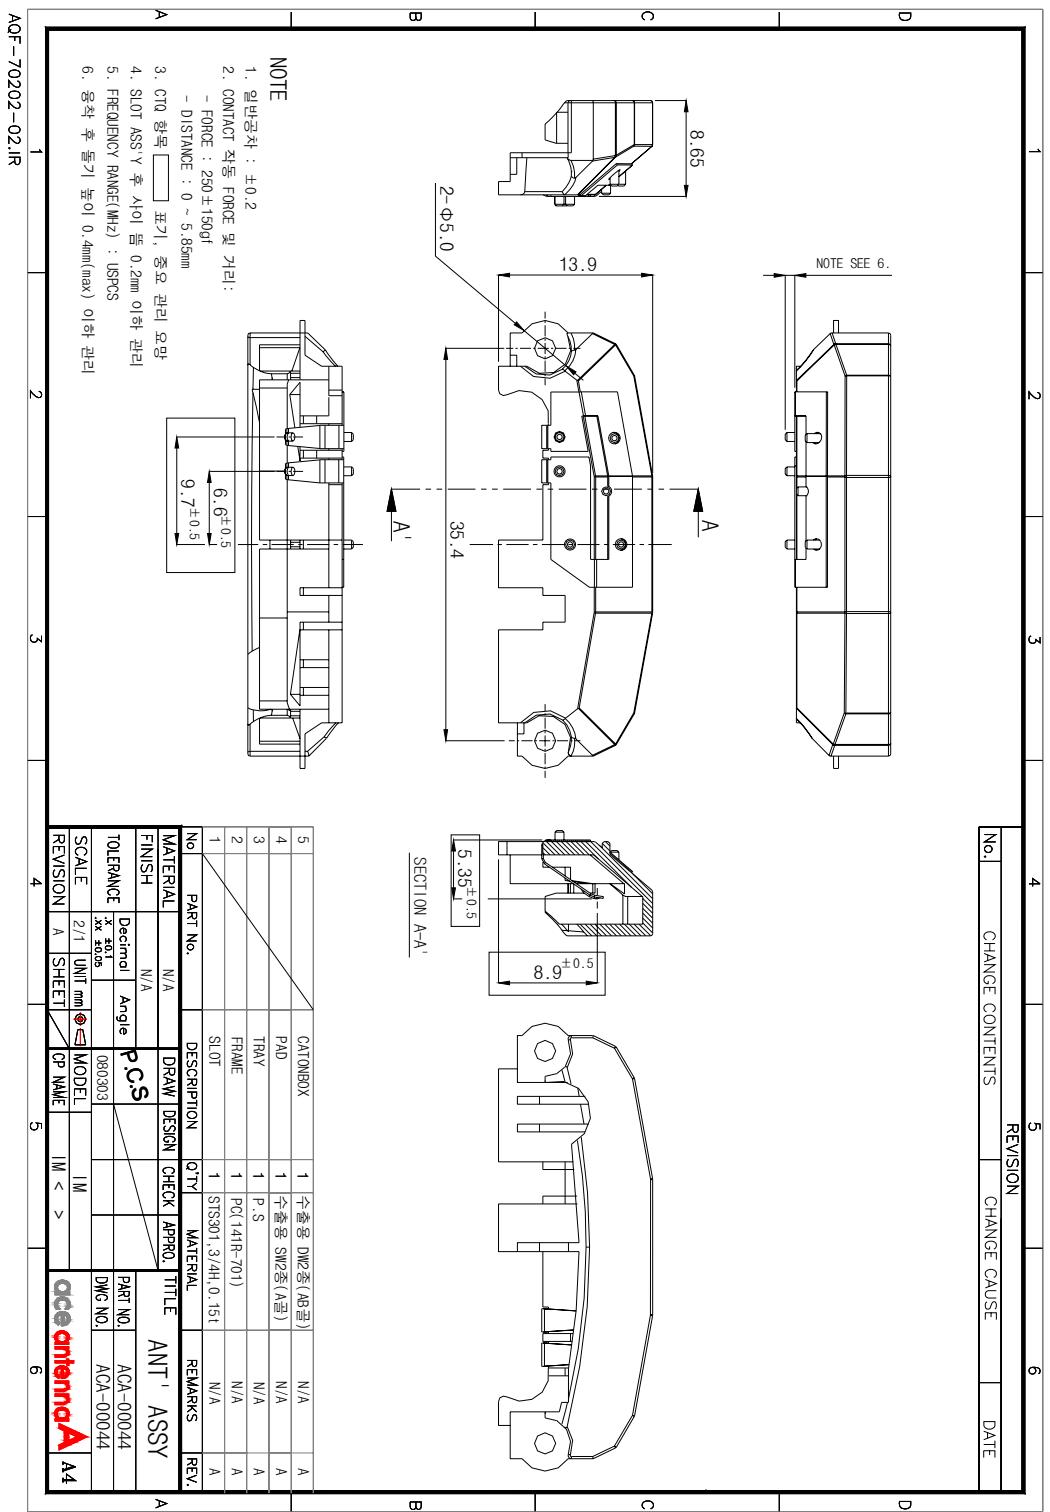

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	13/24

7.2 Packing Spec Drawing.

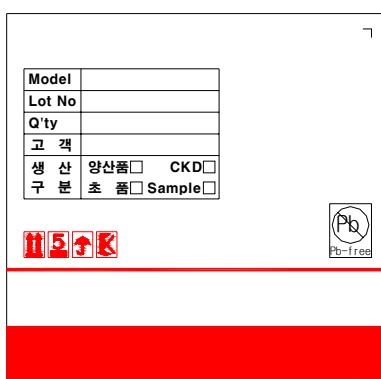
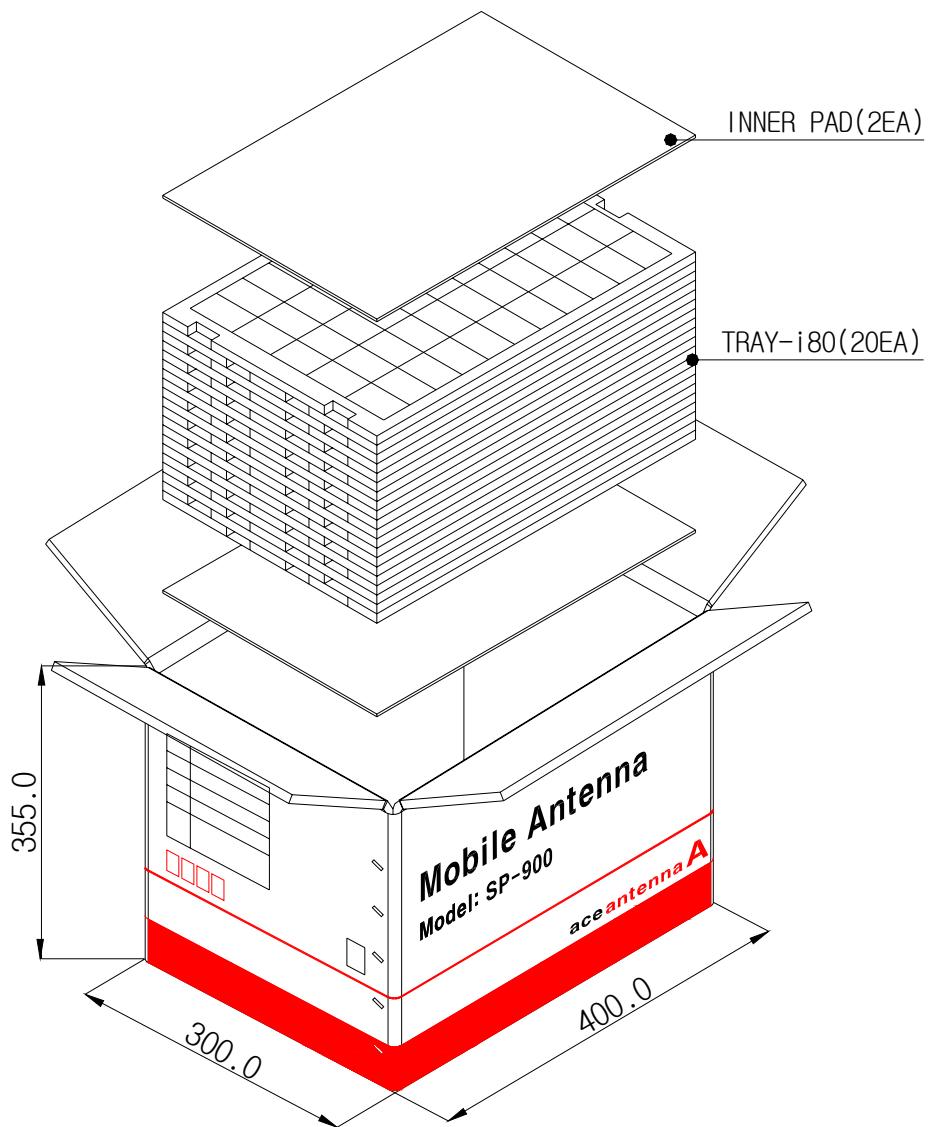


좌측면 인쇄 사양

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	14/24


7.3 Electrical data (V.S.W.R, GAIN & Matching Circuit Diagram).

7.3.1 V.S.W.R.

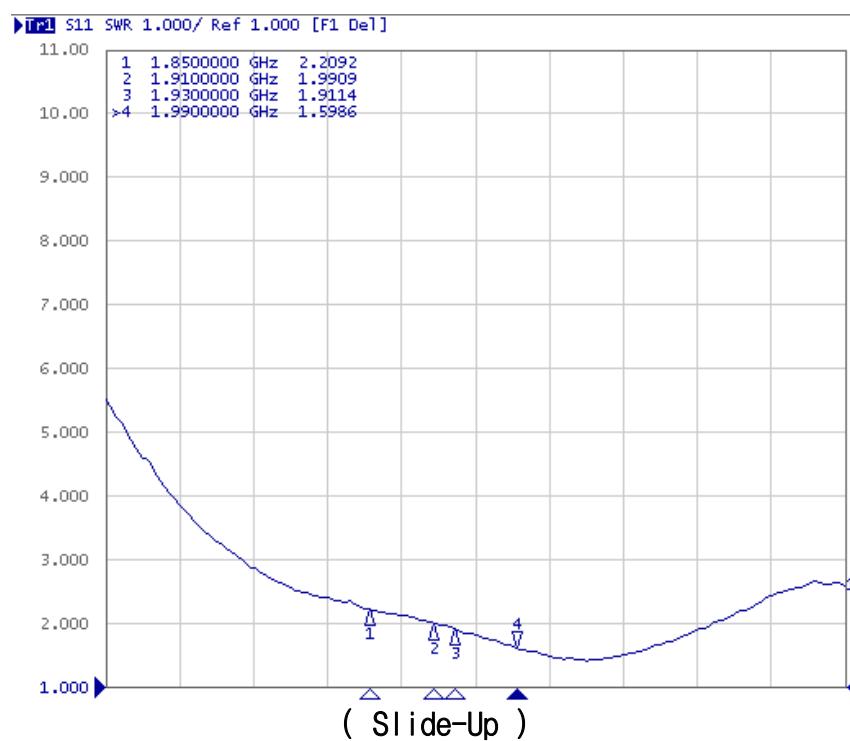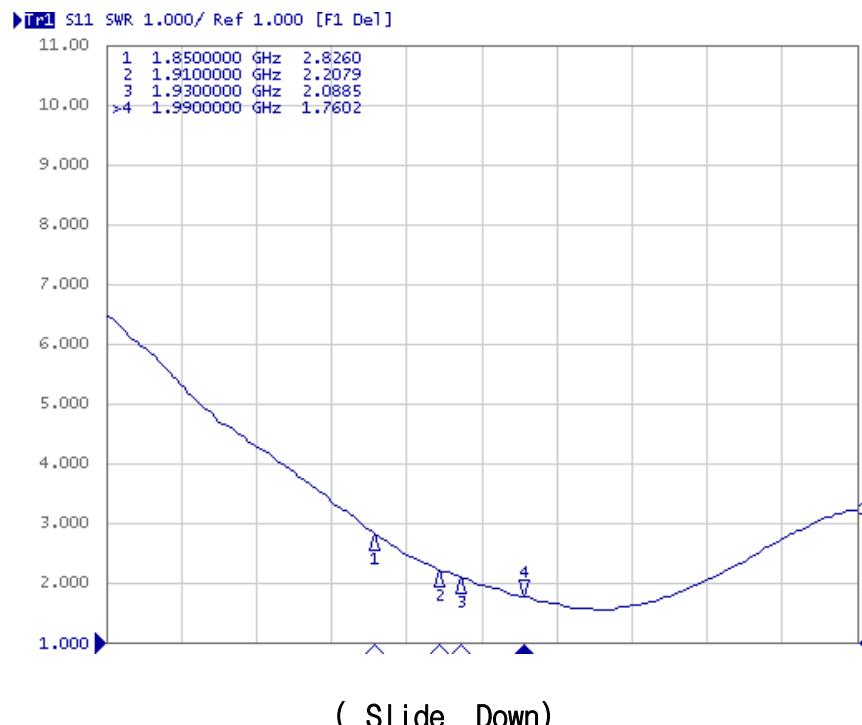



ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	15/24

7.3.2 Matching Circuit Diagram

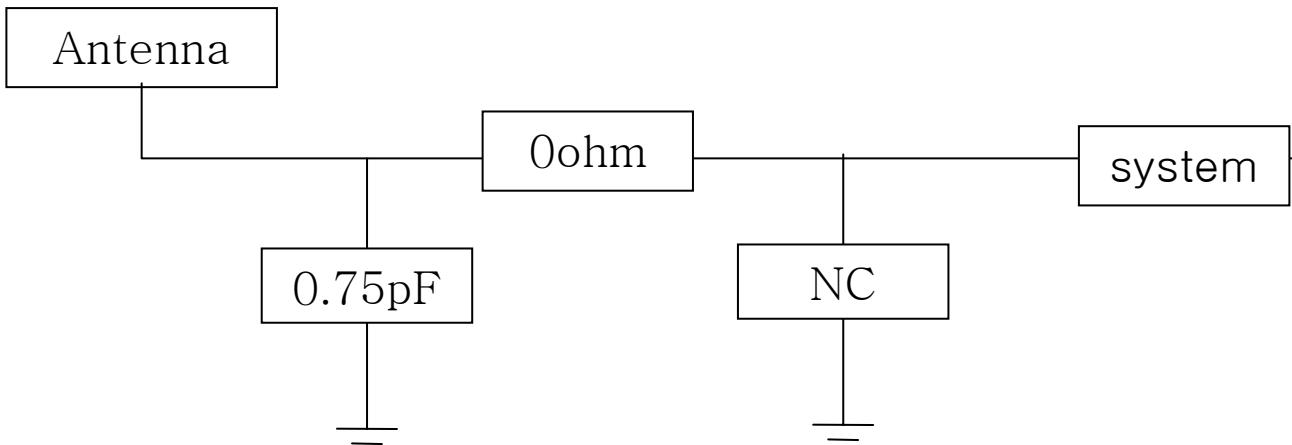



ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	16/24

7.3.3 GAIN (E2-plane) RADIATION PATTERN (E2-Plane)
 → [US-PCS]

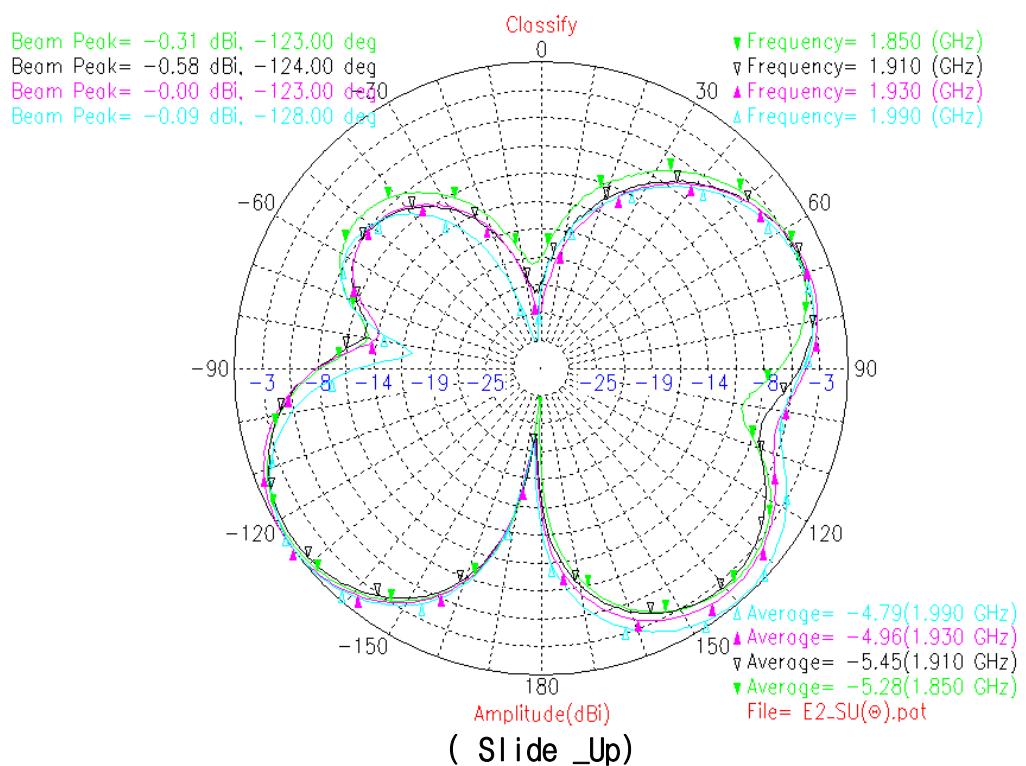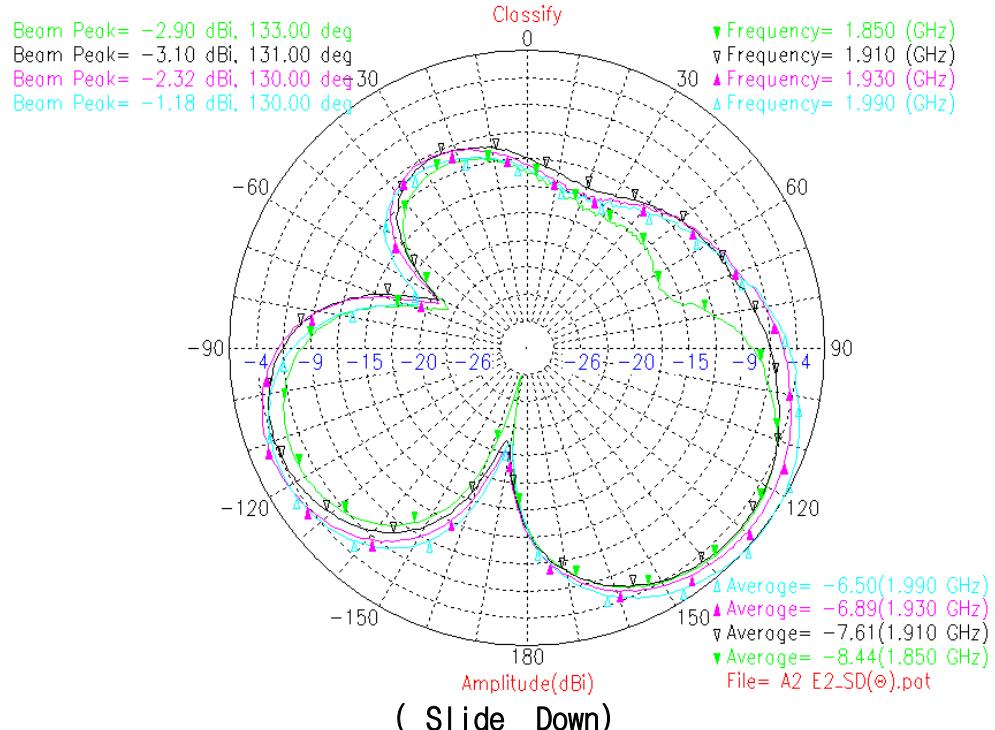

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	17/24

- H-Plane
→ [US-PCS]

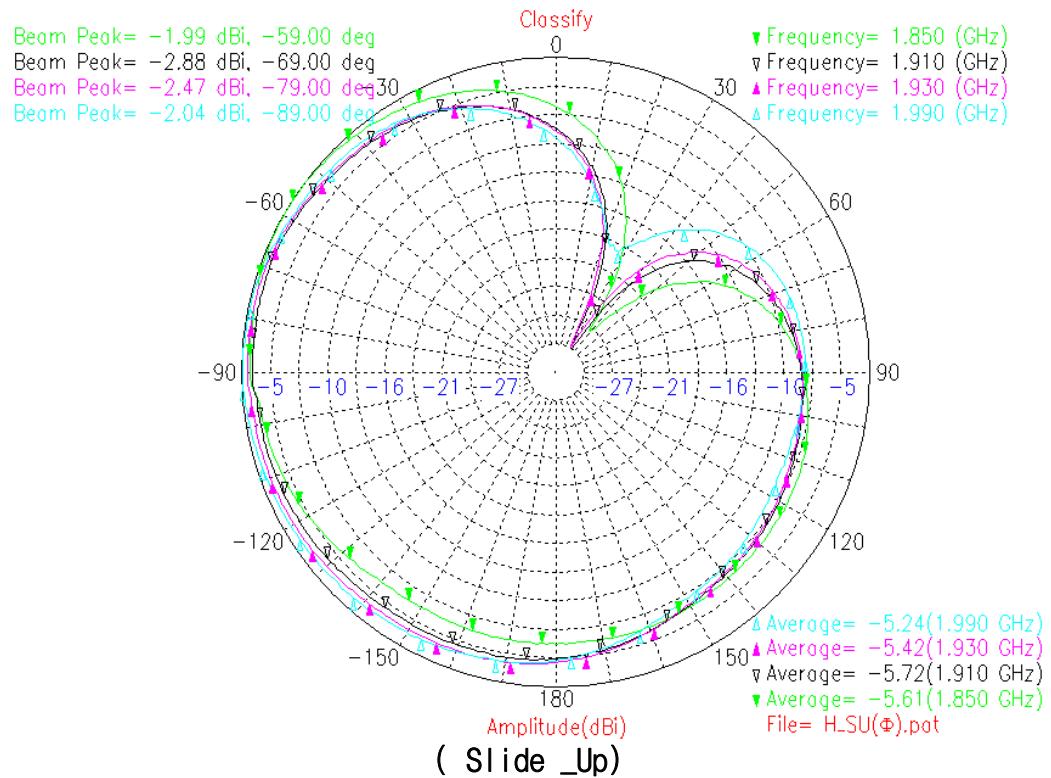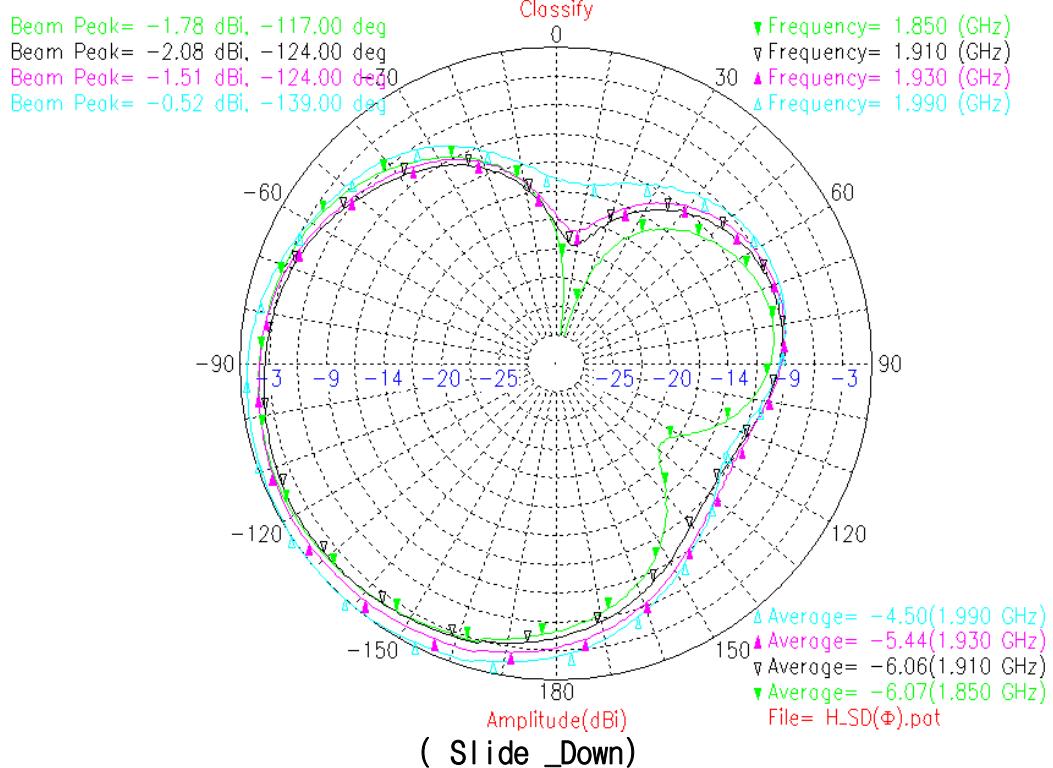

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	18/24

7.4 Environmental Material Test Report

7.4.1 FRAME [141R-701]



Intertek Caleb Brett
Testing Center
340-2, Yongam-ri, Chongryang-myun,
Ulju-gun, Ulsan, 689-865 Korea
Tel : 052 257 6752 Fax : 052 276 6792

TEST REPORT

Applicant : GE Plastics Korea
Address : 240-18, Mokhang-Dong, Chungju-Si,
Chungcheongbuk-Do, Korea

Page: 1 of 3

Report No. E06-12-134

Date: Jan. 02, 2007

Sample Description : The following submitted sample(s) said to be:-

Name/Type of Product : 141R-701
Sample ID No. : S06-12-134
Manufacturer/Vendor : GE Plastics Korea
Country of Origin : Korea

Sample received : Dec. 29, 2006
Testing Date : Dec. 29, 2006~ Jan. 02, 2007
Testing Laboratory : Intertek Caleb Brett Testing Center
Testing Environment : Temperature : 24°C Relative Humidity: 51 %

Test Method(s) : Please see the following page(s).
Test Result(s) : Please see the following page(s).

* Note 1 : The test results presented in this report relate only to the object tested.

* Note 2 : This report shall not be reproduced except in full without the written approval of the testing laboratory.

Tested by,

E.Y.Lee / Chemist

Authorized by,

H.W.Yoo / Lab Manager

Intertek Caleb Brett Testing Center

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	19/24



Intertek Caleb Brett
 Testing Center
 340-2, Yongam-ri, Chongryang-myun,
 Ulju-gun, Ulsan, 689-865 Korea
 Tel : 052 257 6752 Fax : 052 276 6792

TEST REPORT

Report No. E06-12-134

Page: 2 of 3
 Date: Jan. 02, 2007

Sample ID No. : E06-12-134
 Sample Description : 141R-701

Test Items	Unit	Test Method	MDL	Results
Cadmium (Cd)	mg/kg	With reference to BS EN 1122, by acid digestion and determined by ICP-OES	2	ND
Lead (Pb)	mg/kg	With reference to US EPA 3062, by acid digestion and determined by ICP-OES	5	ND
Mercury (Hg)	mg/kg	With reference to US EPA 3062, by acid digestion and determined by ICP-OES	2	ND
Hexavalent Chromium (Cr ⁶⁺)	mg/kg	US EPA 3060A and determined by UV-visible	2	ND
Polybrominated Biphenyl (PBBs)				
Monobromobiphenyl	mg/kg	With reference to US EPA 3640C, by solvent extraction and determined by GC/MS Analysis	5	ND
Dibromobiphenyl	mg/kg		5	ND
Tribromobiphenyl	mg/kg		5	ND
Tetrabromobiphenyl	mg/kg		5	ND
Pentabromobiphenyl	mg/kg		5	ND
Hexabromobiphenyl	mg/kg		5	ND
Heptabromobiphenyl	mg/kg		5	ND
Octabromobiphenyl	mg/kg		5	ND
Nonabromobiphenyl	mg/kg		5	ND
Decabromobiphenyl	mg/kg		5	ND
Polybrominated Diphenyl Ether (PBDEs)				
Monobromodiphenyl ether	mg/kg	With reference to US EPA 3640C, by solvent extraction and determined by GC/MS Analysis	5	ND
Dibromodiphenyl ether	mg/kg		5	ND
Tribromodiphenyl ether	mg/kg		5	ND
Tetrabromodiphenyl ether	mg/kg		5	ND
Pentabromodiphenyl ether	mg/kg		5	ND
Hexabromodiphenyl ether	mg/kg		5	ND
Heptabromodiphenyl ether	mg/kg		5	ND
Octabromodiphenyl ether	mg/kg		5	ND
Nonabromodiphenyl ether	mg/kg		5	ND
Decabromodiphenyl ether	mg/kg		5	ND

Notes : mg/kg = ppm = parts per million

< = Less than

ND = Not detected (<MDL)

MDL = Method detection limit

Intertek Caleb Brett Testing Center

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	20/24



Intertek Caleb Brett
 Testing Center
 340-2, Yongam-ri, Chongryang-myun,
 Ulju-gun, Ulsan, 689-865 Korea
 Tel : 052 257 6752 Fax : 052 276 6792

TEST REPORT

Report No. E06-12-134

Page: 3 of 3
 Date: Jan. 02, 2007

Sample ID No. : S06-12-134
 Sample Description : 141R-701

* View of sample as received:-



***** End of Report *****

Intertek Caleb Brett Testing Center

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	21/24

7.4.2 SLOT [STS301]



Test Report No. F690501LF-CTSGP06-32016

Date: December 22, 2006

Page 1 of 4

To: TAIHAN ELECTRIC WIRE CO., LTD
 603, Seongkok-dong
 Danwon-gu
 Ansan-city
 GYEONGGI-DO
 Korea

The following merchandise was submitted and identified by the client as:

Product Name : STS301
SGS File No. : GP06-32016
Received Date : December 18, 2006
Test Performing Date : December 19, 2006
Test Performed : SGS Testing Korea tested the sample(s) selected by applicant with following results
Test Results : For further details, please refer to following page(s)
Buyer(s) : SAMSUNG ELECTRONICS, LG ELECTRONICS

Jade Jang
 Patrick An
 Monet Jeong
 Jinee Song
 /Testing Person

SGS Testing Korea Co. Ltd.

Jeff Jang / Chemical Lab Mgr

This Test Report is issued by the Company subject to its General Conditions of Service printed elsewhere. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	22/24



Test Report No. F690501/LF-CTSGP06-32016

Date: December 22, 2006

Page 2 of 4

Sample No. : GP06-32016.001

Sample Description : STS301

Style/Item No. : N/A

Comments : Material is stainless.
Silver metal

Heavy Metals

Test Items	Unit	Test Method	MDL	Results
Cadmium (Cd)	mg/kg	US EPA 3050B(1996), US EPA 6010B(1996), ICP	0.5	N.D.
Lead (Pb)	mg/kg	US EPA 3050B(1996), US EPA 6010B(1996), ICP	5	N.D.
Mercury (Hg)	mg/kg	US EPA 3052(1996), US EPA 6010B(1996), ICP	2	N.D.
Hexavalent Chromium (Cr VI)	mg/kg	US EPA 3060A(1996), US EPA 7196A(1992), UV	1	N.D.

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Monobromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Dibromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tribromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tetrabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Pentabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Hexabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Heptabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Octabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Nonabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Decabromobiphenyl	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Monobromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Dibromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tribromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Tetrabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Pentabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Hexabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Heptabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Octabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Nonabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.
Decabromodiphenyl ether	mg/kg	US EPA 3540C, GC/MS	5	N.D.

NOTE: (1) N.D. = Not detected.(<MDL)

(2) ppm = mg/kg

(3) MDL = Method Detection Limit

(4) - = No regulation

(5) ** = Qualitative analysis (No Unit)

(6) Negative = Undetectable / Positive = Detectable

This Test Report is issued by the Company subject to its General Conditions of Sale as printed one year. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	23/24



Test Report No. F690501/LF-CTSGP06-32016

Date: December 22, 2006

Page 3 of 4

Picture of Sample as Received:



NOTE: (1) N.D. = Not detected.(<MDL)
 (2) ppm = mg/kg
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) Negative = Undetectable / Positive = Detectable

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this Test Report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

ANTENNA SPECIFICATION		DATE	2008-04-16	REV.	A
MODEL	IM	TYPE	Built - in	PAGE	24/24




Test Report No. F690501/LF-CTSGP06-32016

Date: December 22, 2006

Page 4 of 4

Flow Chart of Digestion

(EPA 3050B for Cd, Pb)

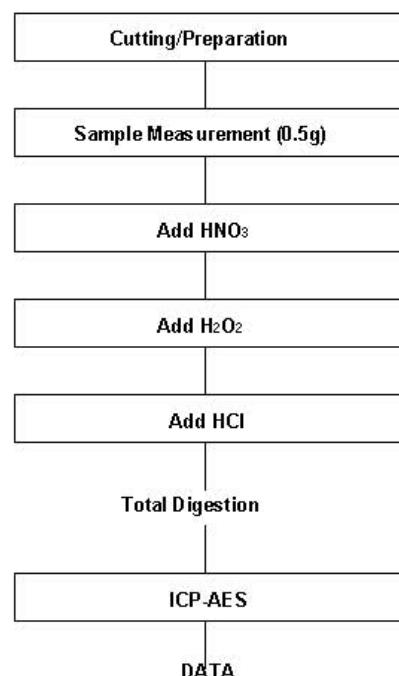

The samples were dissolved totally by pre-conditioning method according to above flow chart.

Operator Lauren Kim
 Section Chief Jeff Jang

*** End ***

NOTE: (1) N.D. = Not detected.(<MDL)
 (2) ppm = mg/kg
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) Negative = Undetectable / Positive = Detectable

This Test Report is issued by the Company subject to its General Conditions of Service printed one sheet. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.