



EMI REPORT (DoC)

PANTECH&CURITEL COMMUNICATIONS, INC.

110-1, ONGJEONG-RI, TONGJIN-EUP, GIMPO-SI,
GYOUNGGI-DO, 415-865, KOREA

Date of Issue: December 13, 2006 Test Report No.:

HCT-SAR06-1209

Test Site: HYUNDAI CALIBRATION & CERTIFICATION
TECHNOLOGIES CO., LTD.

MODEL

:

L1

Classification/ Standard(s):

FCC PART 15 CLASS B / CISPR 22 CLASS B

Equipment (EUT) Type:

Dual- Mode CDMA Phone with Bluetooth - Prototype

Trade Name/Model(s):

PANTECH&CURITEL / L1

Port/ Connector(s)

DC Input Port / Ear Phone Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a).

Report prepared by : Ki-Soo Kim
Manager of Product Compliance Team

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 Product Description	3
1.2 Related Submittal(s) / Grant(s)	3
1.2 Tested System Details	4
1.3 Test Methodology.....	4
1.4 Test Facility.....	4
2.SYSTEM TEST CONFIGURATION.....	5
2.1 Configuration of Test system	5
3. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
3.1 Conducted Emissions Tests.....	6
3.2 Radiated Emissions Tests	9
3.3.1 Conducted Radiated Emission.....	10
3.3.2 Radiated Emission.....	11
4. Field Strength Calculation	12
5. Test Equipment	13
6. Conclusion	12

1. GENERAL INFORMATION

1.1 Product Description

The PANTECH&CURITEL. L1 Dual- Band CDMA Phone with Bluetooth phone. Its basic purpose is used for communications. It transmits from CDMA (824.70~848.31), PCS CDMA (1851.25~1908.75) MHz and receives from CDMA (869.70~893.31), PCS CDMA (1931.25~1988.75) MHz. The RF power is rated at CDMA (0.282 W), PCS CDMA (0.277 W).

FCC ID	PP4L1
EUT Type	Dual- Mode CDMA Phone with Bluetooth - Prototype
Model	L1
TX Frequency	824.70 — 848.31 MHz (CDMA) 1851.25 — 1908.75 MHz (PCS CDMA)
RX Frequency	869.70 — 893.31 MHz (CDMA) 1931.25 — 1988.75 MHz (PCS CDMA)
FCC Classification	Licensed Portable Transmitter Held to Ear (PCE)
Max RF. Output Power	0.282W ERP CDMA (24.5dBm) 0.277W EIRP PCS CDMA (24.4dBm)
Modulation	CDMA/ PCS CDMA

1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

1.2 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

DEVICE TYPE	MANUFACTURER	MODEL NUMBER/ PART NUMBER	FCC ID / DoC	CONNECTED TO
Dual-Band CDMA Phone with Bluetooth	PANTECH&CURITEL	L1	PP4L1	Adaptor/ P.C
Charger	PANTECH&CURITEL	PTA-5070C4US	DoC	Adaptor/ P.C
Notebook P.C	SAMSUND Co., Ltd.	S830	DoC	N/A
Adapter	SAMSUND Co., Ltd.	AD-6019	DoC	Notebook P.C
Mouse	SAMSUND Co., Ltd.	K652VL	DoC	Notebook P.C
PRINTER	H/P	C4569A	DoC	Notebook P.C

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.4 Test Facility


The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003(Registration Number: 90661)

2.SYSTEM TEST CONFIGURATION

2.1 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were Connected to another LISN. Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worse perating condition. Final Radiated Emission tests were conducted at 3 meter open area test site.

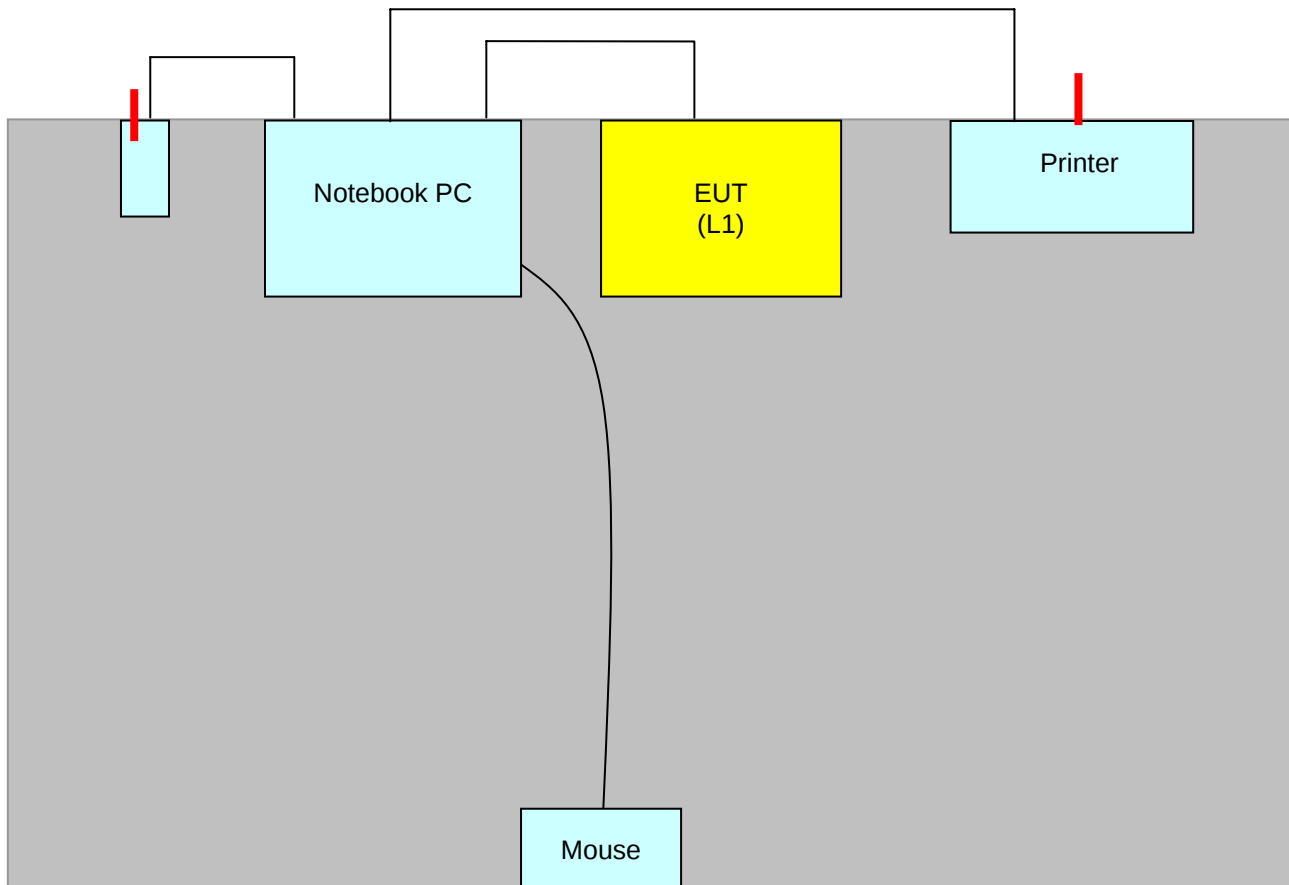

Power Line: 110V AC

[Configuration of Tested System]

3. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

3.1 Conducted Emissions Tests

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

=====

Humidity Level	: 32 %	Temperature: 21.4 °C
Limit apply to	: CISPR 22 CLASS B	
Result	: PASSED BY – 5.9 dB	
Operating Condition	: CHARGING BATTERY	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 9 KHz)	

Power Line Conducted Emissions			FCC Class B		
Frequency (MHz)	Amplitude (dBUV)	Conductor	Result	Limit (dBUV)	Margin (dB)
0.5600	50.1	HOT	Quasi-Peak	56	-5.9
0.5600	34.6	HOT	Average	46	-11.4
0.5900	47.6	NEUTRAL	Quasi-Peak	56	-8.4
0.5900	35.1	NEUTRAL	Average	46	-10.9

Line Conducted Emissions Tabulated Data

Keun Ho. Park

Measured by : Keun-Ho Park / Engineer


Date : December 19, 2006

HCT
EMC TEST LAB.

EUT: L1
 Manufacturer: PANTECH@CURITEL
 Operating Condition: CHARGING
 Test Site: SHIELD ROOM
 Operator: KEUN-HO PARK
 Test Specification: CISPR 22 CLASS B
 Comment: H

SCAN TABLE: "CISPR 22 Voltage"

Short Description:			CISPR 22 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None

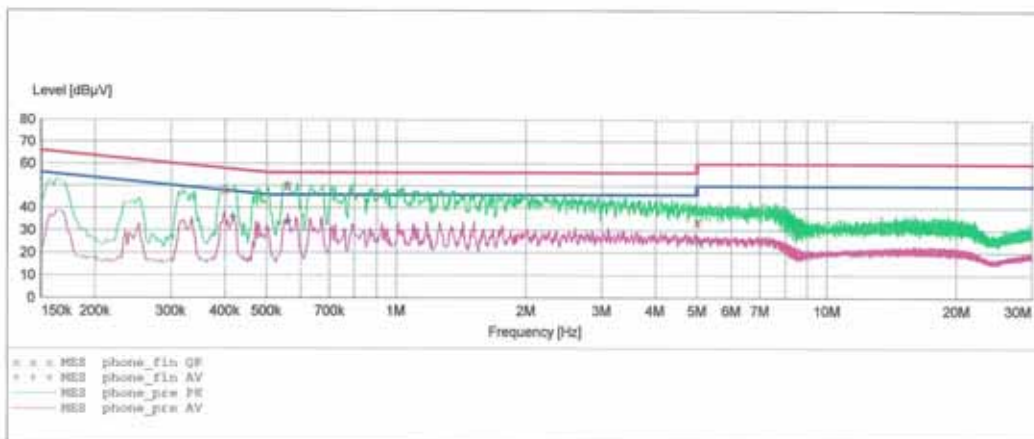
MEASUREMENT RESULT: "phone_fin QP"

12/19/2006 7:26PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.400100	48.30	10.1	58	9.6	---	---
0.560000	50.10	10.1	56	5.9	---	---
5.000000	33.80	10.3	56	22.2	---	---

MEASUREMENT RESULT: "phone_fin AV"

12/19/2006 7:26PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.417600	36.10	10.1	48	11.4	---	---
0.560000	34.60	10.1	46	11.4	---	---
5.000000	25.00	10.3	46	21.0	---	---

HCT
EMC TEST LAB.

EUT: L1
 Manufacturer: PANTECH@CURITEL
 Operating Condition: CHARGING
 Test Site: SHIELD ROOM
 Operator: KEUN-HO PARK
 Test Specification: CISPR 22 CLASS B
 Comment: N

SCAN TABLE: "CISPR 22 Voltage"

Short Description:			CISPR 22 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None

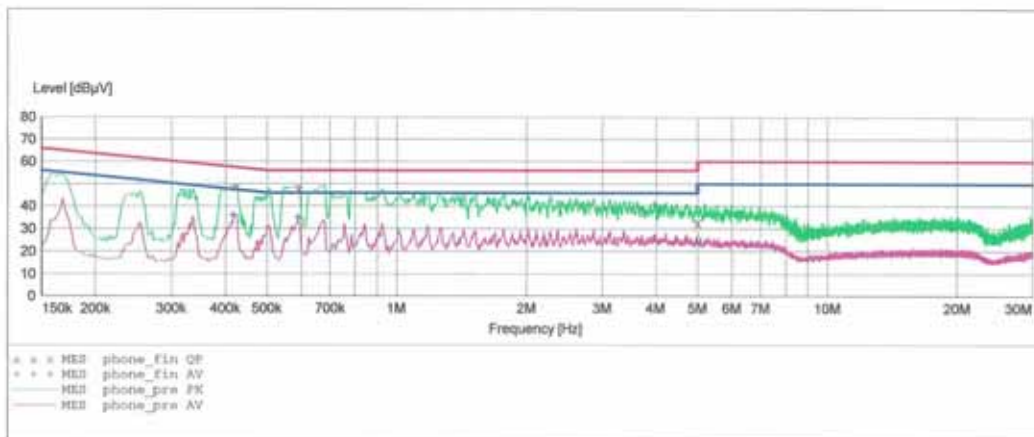
MEASUREMENT RESULT: "phone_fin QP"

12/19/2006 7:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.422600	48.60	10.1	57	8.8	---	---
0.590000	47.60	10.2	56	8.4	---	---
5.000000	32.80	10.3	56	23.2	---	---

MEASUREMENT RESULT: "phone_fin AV"

12/19/2006 7:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.417600	36.10	10.1	48	11.4	---	---
0.590000	35.10	10.2	46	10.9	---	---
5.000000	23.90	10.3	46	22.1	---	---

3.2 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to : FCC PART 15 CLASS B
Result : PASSED – 4.3 dB
Operating Condition : Idle/ USB Data Transfer
Detector : Quasi-Peak (Bandwidth: 120 KHz)


Frequency MHz	Reading dBuV	Ant. Factor dB	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
75.60	23.2	6.6	1.9	V	31.7	40	-8.3
97.00	23.8	9.7	2.2	V	35.7	43.5	-7.8
263.10	20.2	17.8	3.7	V	41.7	46	-4.3
313.90	18.5	16.3	4.1	V	38.9	46	-7.1
354.70	15.6	16.5	4.3	V	36.4	46	-9.6
395.20	17.0	16.9	4.6	V	38.5	46	-7.5
189.60	16.3	16.1	3.1	H	35.4	43.5	-8.1
296.70	11.4	19.5	4.0	H	34.8	46	-11.2
328.40	15.1	16.4	4.2	H	35.6	46	-10.4
356.90	15.6	16.5	4.3	H	36.4	46	-9.6
415.20	13.7	17.4	4.7	H	35.8	46	-10.2
439.70	13.7	18.1	4.8	H	36.6	46	-9.4

Keun Ho. Park

Measured by : Keun-Ho Park / Engineer

Date : December 19, 2006

3.3.1 Conducted Emission

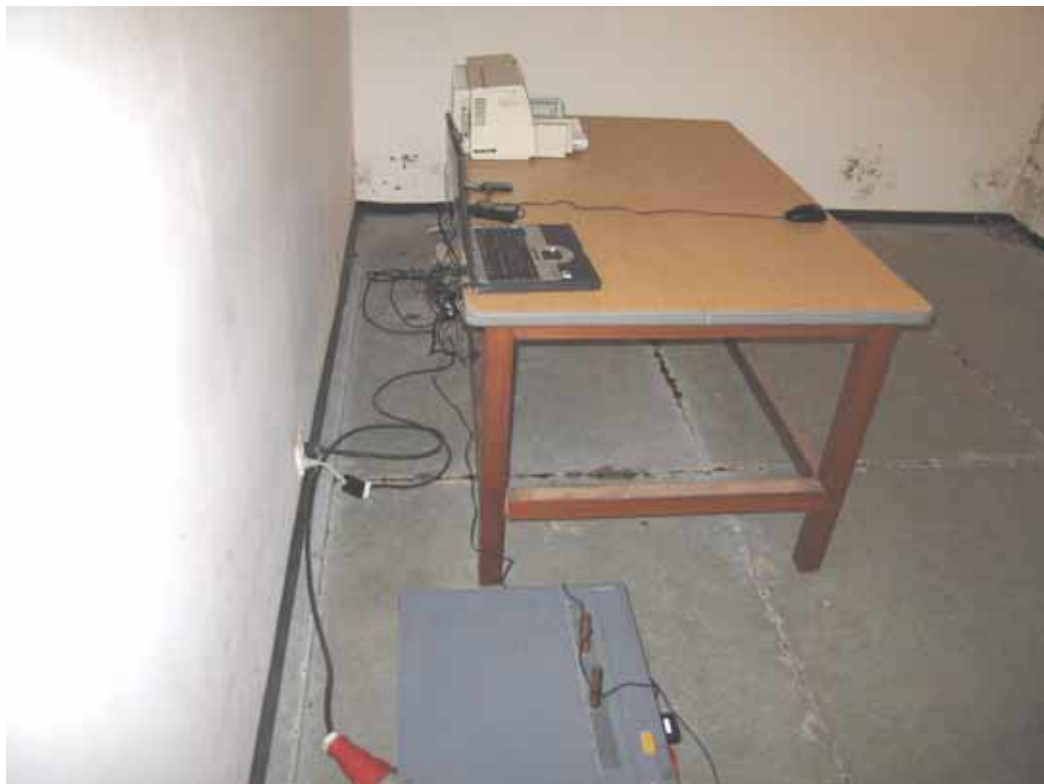

3.3.2 Radiated Emission



4.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

5.1 Test Equipment

<u>Type</u>	<u>Manufacture</u>	<u>Model Number</u>	<u>CAL Due Date</u>
EMI Test Receiver	Rohde & Schwarz	ESi40	2007.11.16
EMI Test Receiver	Rohde & Schwarz	ESCI	2007.08.24
LISN	Rohde & Schwarz	ESH2-Z5	2007.04.26
LISN	EMCO	703125	2007.04.26
Loop Antenna	Rohde & Schwarz	HFH2-Z2	2006.12.20
TRILOG Antenna	Schwarzbeck	VULB 9160	2007.04.17
Antenna Position Tower	HD	MA240	N/A
Turn Table	EMCO	1050	N/A
Power Analyzer	Voltech	PM 3300	2007.03.22
Reference Network Impedance	Voltech	IEC 555	N/A
AC Power Source	PACIFIC	Magnetic Module	N/A
AC Power Source	PACIFIC	360-AMX	2007.11.25
Controller	HD GmbH	HD 100	N/A
SlideBar	HD GmbH	KMS 560	N/A
PULSE LIMITER	Rohde & Schwarz	ESH3-Z2	2007.11.16

6.1 Conclusion

The data collected shows that the PANTECH&CURITEL COMMUNICATIONS, INC. Dual- Mode CDMA Phone. FCC ID: PP4L1. Complies with §15.107 and §15.109 of the FCC Rules.