

ATTACHMENT O – SAR TEST PLOTS (1 of 3)

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : In / Channel : 1013
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.882 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.948 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 26.5 V/m; Power Drift = -0.042 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.555 mW/g
Maximum value of SAR (measured) = 0.915 mW/g

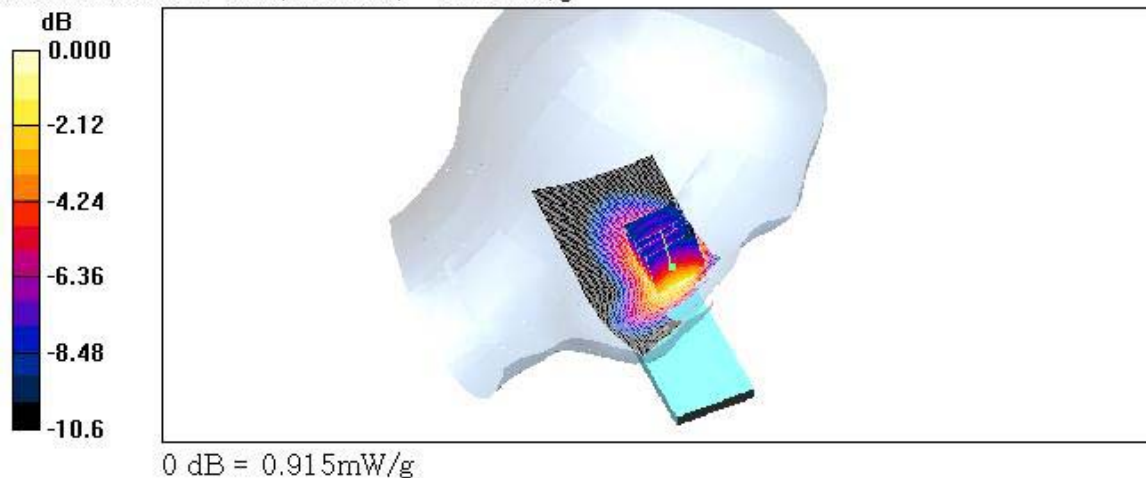

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : In / Channel : 363

Liquid Temperature : 21.7 °C

Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 835.89 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 363/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.987 mW/g

Left touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 27.0 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.901 mW/g; SAR(10 g) = 0.585 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.984 mW/g

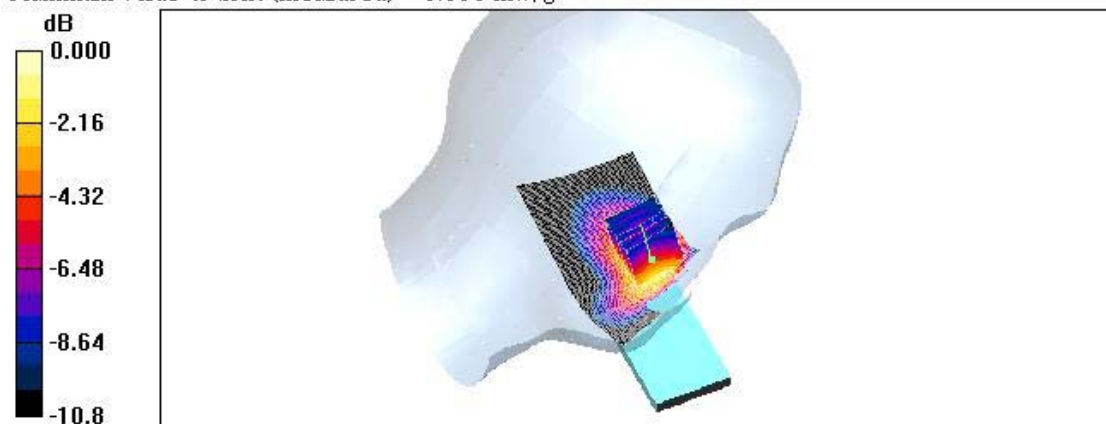

0 dB = 0.984mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : In / Channel : 777
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM


Left touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.978 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 26.7 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.580 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.964 mW/g

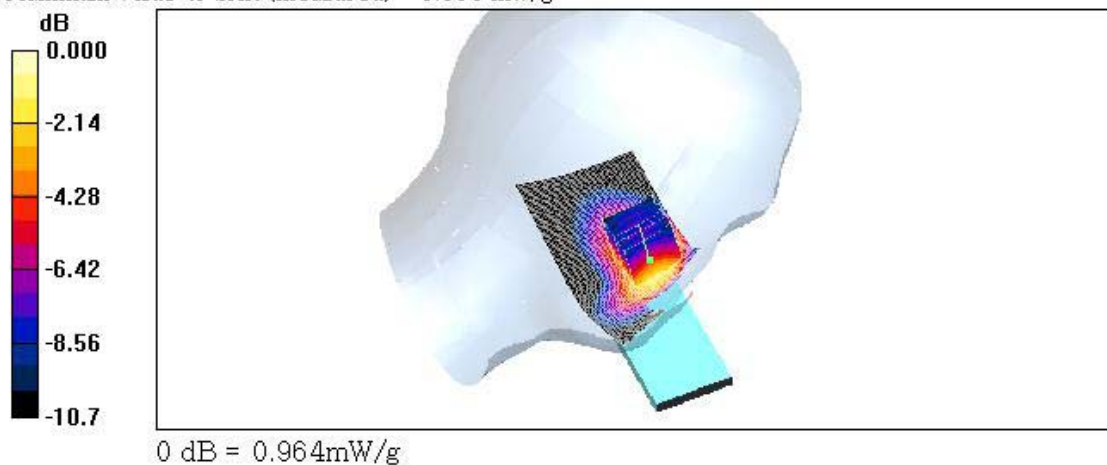

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : In / Channel : 1013

Liquid Temperature : 21.7 °C

Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 824.7 MHz, Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.882 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.04 mW/g


Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.4 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.610 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

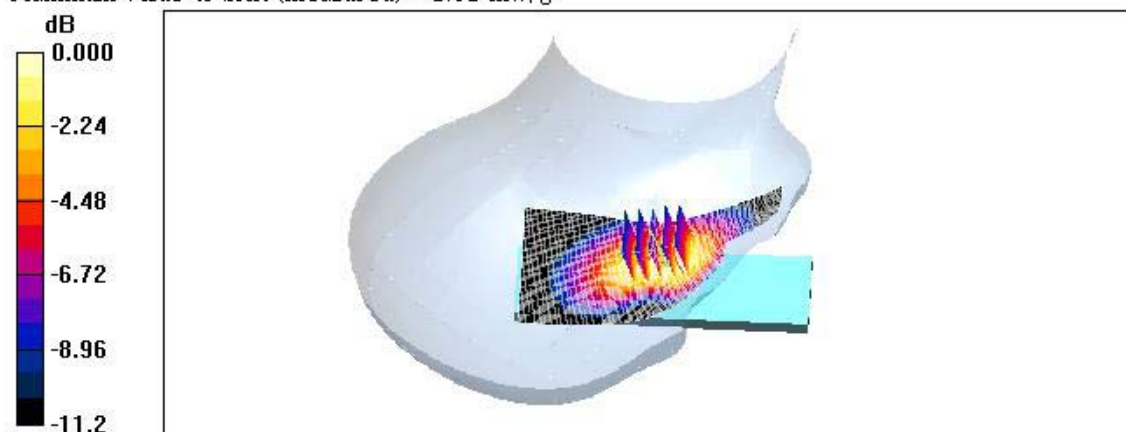

0 dB = 1.01 mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : In / Channel : 363
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.06 mW/g

Right touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 31.0 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.980 mW/g; SAR(10 g) = 0.626 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.07 mW/g

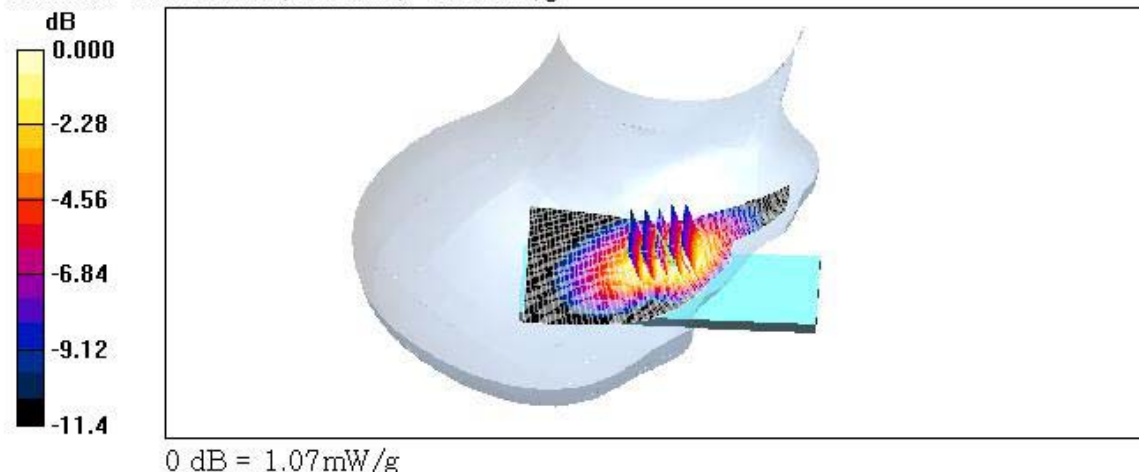

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : In / Channel : 777
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.09 mW/g


Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 31.1 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.992 mW/g; SAR(10 g) = 0.634 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.06 mW/g

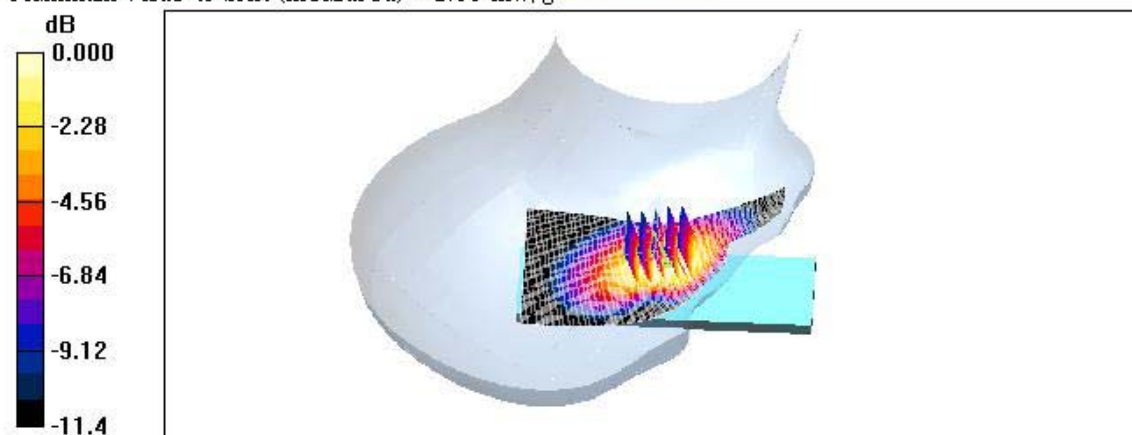

0 dB = 1.06mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : In / Channel : 777 (E-battery)
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.06 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 30.0 V/m; Power Drift = 0.089 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.960 mW/g; SAR(10 g) = 0.610 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.04 mW/g

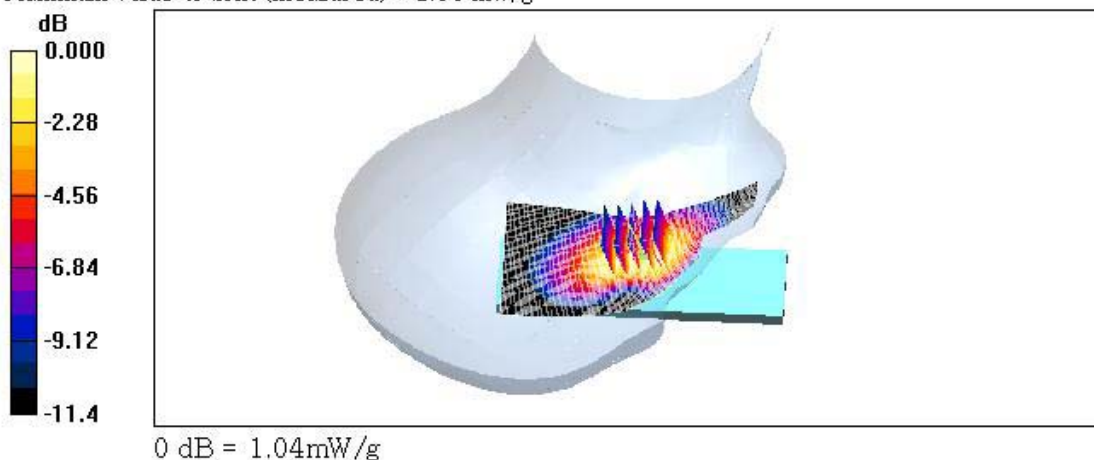

Test Laboratory: HCT

MODEL: PN-320

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Channel : 777 (Bluetooth on)

Liquid Temperature : 21.7 °C

Date Tested : April 17, 2006

DUT: PN-320; Type: Folder; Serial: #1**Program Name: PN-320**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.08 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 28.5 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.973 mW/g; SAR(10 g) = 0.625 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.07 mW/g

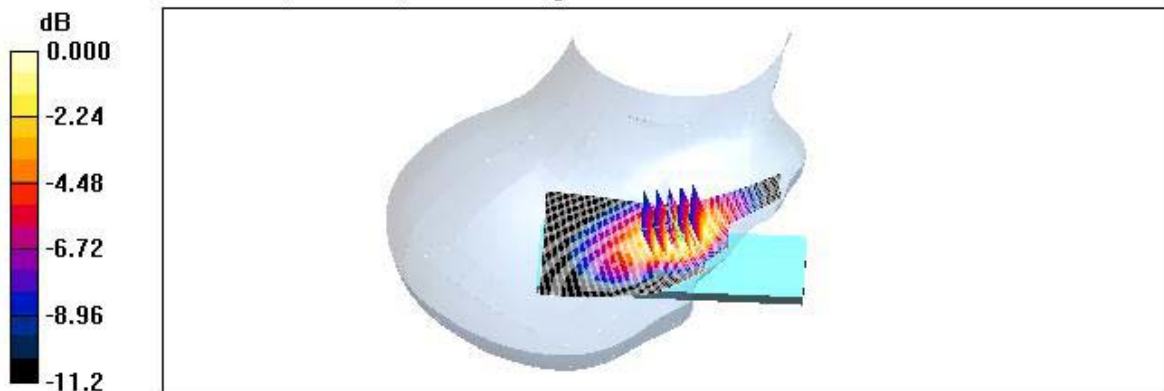

0 dB = 1.07 mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : In / Channel : 363
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.342 mW/g


Left tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.4 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.243 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.337 mW/g

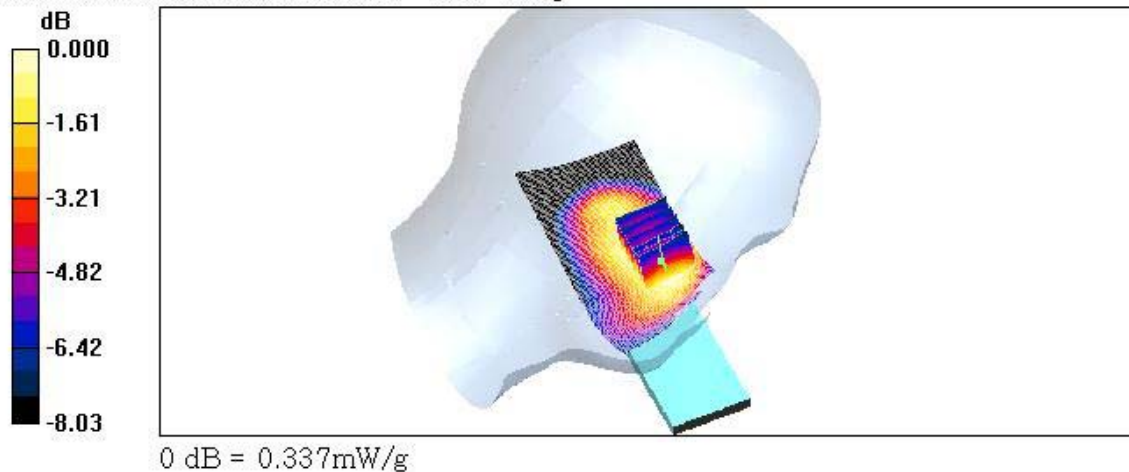

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : In / Channel : 363

Liquid Temperature : 21.7 °C

Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 363/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.367 mW/g

Right tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 18.8 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.258 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.367 mW/g

