



HCT CO., LTD.

Product Compliance Division

CERTIFICATE OF COMPLIANCE
FCC Certification

Applicant Name:

PANTECH&CURITEL COMMUNICATION, INC.

PANTECH Building, I-2, DMC, Sangam-dong, Mapo-gu, Seoul, 121-792, Korea

Date of Issue:

May 20, 2009

Location:

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si, Gyeonggi-do, Korea

Test Report No.: HCT-RF09-0518

HCT FRN: 0005866421

IC Recognition No.: IC 5944A

FCC ID : PP4PX-5000

APPLICANT : PANTECH&CURITEL COMMUNICATION, INC.

Model(s): UMW190

EUT Type: USB Modem

Tx Frequency:
824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 – 1 909.80 MHz (GSM1900)
1 852.4 – 1 907.6 MHz (WCDMA1900)
824.70 — 848.31 MHz (CDMA)
1 851.25 — 1 908.75 MHz (PCS CDMA)

Rx Frequency:
869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 (WCDMA850)
1 930.20 – 1 989.80 MHz (GSM1900)
1 932.4 – 1 987.6 MHz (WCDMA1900)
869.70 — 893.31 MHz (CDMA)
1 931.25 — 1 988.75 MHz (PCS CDMA)

Max. RF Output Power:
1.977 W ERP GSM850 (32.96 dBm) / 1.107 W EIRP GSM1900 (30.44 dBm)
0.891 W ERP EDGE850 (29.50 dBm) / 1.038 W EIRP EDGE1900 (30.16 dBm)
0.535 W ERP WCDMA850(27.28 dBm) / 0.308 W ERP WCDMA1900(24.89 dBm)
0.612 W ERP CDMA (27.87 dBm) / 0.370 W EIRP PCS CDMA (25.68 dBm) /
0.771 W ERP CDMA EVDO (28.87 dBm) / 0.427 W EIRP PCS EVDO (26.30 dBm)

Emission Designator(s):
247KGXW (GSM850) 249KGXW (GSM1900)
247KG7W (GSM850EDGE) 245KG7W (GSM1900EDGE)
4M19F9W (WCDMA850) 4M18F9W (WCDMA1900)
1M28F9W (CDMA), 1M28F9W (CDMA EVDO),
1M28F9W (PCS CDMA), 1M28F9W (PCS CDMA EVDO)

FCC Classification: PCS Licensed Transmitter (PCB)

FCC Rule Part(s): §22, §24, §2

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1988,21 U.S. C.853(a)


Jong Seok Lee

Report prepared by
: Jong Seok Lee
Test engineer of RF Part


Sang Jun Lee

Approved by
: Sang Jun Lee
Manager of RF Part

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 1 of 83

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION.....	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power.....	6
3.2 Peak- to- Average Ratio	7
3.3 Occupied bandwidth.....	8
3.4 Spurious and Harmonic Emissions at Antenna Terminal.	9
3.5 Radiated Spurious and Harmonic Emissions	10
3.6 Frequency stability / variation of ambient temperature.....	11
4. LIST OF TEST EQUIPMENT	12
5. SUMMARY OF TEST RESULTS	13
6. SAMPLE CALCULATION	14
7. TEST DATA	15
The EUT was connected to the host device using a USB Y-cable during the Test.....	15
7.1 Conducted Output Power.....	15
7.2 Peak-to-Average Ratio	16
7.3 Occupied Bandwidth.....	17
7.4 Conducted Spurious Emissions.....	18
7.4.1 Band Edge	18
7.5 Effective Radiated Power Output(GSM/WCDMA)	19
7.6 Equivalent Isotropic Radiated Power(GSM/WCDMA).....	20
7.7 Effective Radiated Power Output(CDMA)	21
7.8 Equivalent Isotropic Radiated Power(PCS CDMA).....	22
The highest power is FETAP in 1xEVDO Rev.A Mode.7.9 Radiated Spurious Emissions.....	22
7.9 Radiated Spurious Emissions	23
7.9.1 Radiated Spurious Emissions (GSM850)	23
7.9.2 Radiated Spurious Emissions (GSM1900)	24
7.9.3 Radiated Spurious Emissions (WCDMA850).....	25
7.9.4 Radiated Spurious Emissions (WCDMA1900).....	26
7.9.5 Radiated Spurious Emissions(CDMA Mode)	27
7.9.6 Radiated Spurious Emissions(PCS CDMA Mode)	28

FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 2 of 83
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	



7.10 Frequency stability / variation of ambient temperature.....	29
7.10.1 FREQUENCY STABILITY (GSM850)	29
7.10.2 FREQUENCY STABILITY (GSM1900)	30
7.10.3 FREQUENCY STABILITY (WCDMA850).....	31
7.10.4 FREQUENCY STABILITY (WCDMA1900).....	32
7.10.5 FREQUENCY STABILITY (CDMA).....	33
7.10.6 FREQUENCY STABILITY (PCS CDMA).....	34
8. TEST PLOTS	35

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 3 of 83



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	PANTECH&CURITEL COMMUNICATION, INC.
Address:	PANTECH Building, I-2, DMC, Sangam-dong, Mapo-gu, Seoul, 121-792, Korea
FCC ID:	PP4PX-5000
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§22, §24, §2
EUT Type:	USB Modem
Model(s):	UMW190
Battery	Model Name:
Power Rating:	
Type:	
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 – 1 909.80 MHz (GSM1900) 1 852.4 – 1 907.6 MHz (WCDMA1900) 824.70 — 848.31 MHz (CDMA) 1 851.25 — 1 908.75 MHz (PCS CDMA)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 (WCDMA850) 1 930.20 – 1 989.80 MHz (GSM1900) 1 932.4 – 1 987.6 MHz (WCDMA1900) 869.70 — 893.31 MHz (CDMA) 1 931.25 — 1 988.75 MHz (PCS CDMA)
Max. RF Output Power:	1.977 W ERP GSM850 (32.96 dBm) / 1.107 W EIRP GSM1900 (30.44 dBm) 0.891 W ERP EDGE850 (29.50 dBm) / 1.038 W EIRP EDGE1900 (30.16 dBm) 0.535 W ERP WCDMA850(27.28 dBm) / 0.308 W ERP WCDMA1900(24.89 dBm) 0.612 W ERP CDMA (27.87 dBm) / 0.370 W EIRP PCS CDMA (25.68 dBm) / 0.771 W ERP CDMA EVDO (28.87 dBm) / 0.427 W EIRP PCS EVDO (26.30 dBm)
Emission Designator(s):	247KGXW (GSM850) 249KGXW (GSM1900) 247KG7W (GSM850EDGE) 245KG7W (GSM1900EDGE) 4M19F9W (WCDMA850) 4M18F9W (WCDMA1900) 1M28F9W (CDMA), 1M28F9W (CDMA EVDO), 1M28F9W (PCS CDMA), 1M28F9W (PCS CDMA EVDO)
Antenna Specification	Manufacturer: DAEYOUNG KTX Antenna type: Internal Antenna Peak Gain : -1.0 dBi
Date(s) of Tests:	May 06, 2009 ~ May 19, 2009

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 4 of 83



2. INTRODUCTION

2.1. EUT DESCRIPTION

The PANTECH&CURITEL COMMUNICATION, INC. UMW190 USB Modem consists of GSM850, GSM1900, GPRS Class10, EDGE, WCDMA850, WCDMA1900, HSDPA, HSUPA, Cellular CDMA, PCS CDMA and 1xEVDO Rev.A.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 6, 2006(Registration Number: 90661)

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 5 of 83

3. DESCRIPTION OF TESTS

3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power

Test Set-up

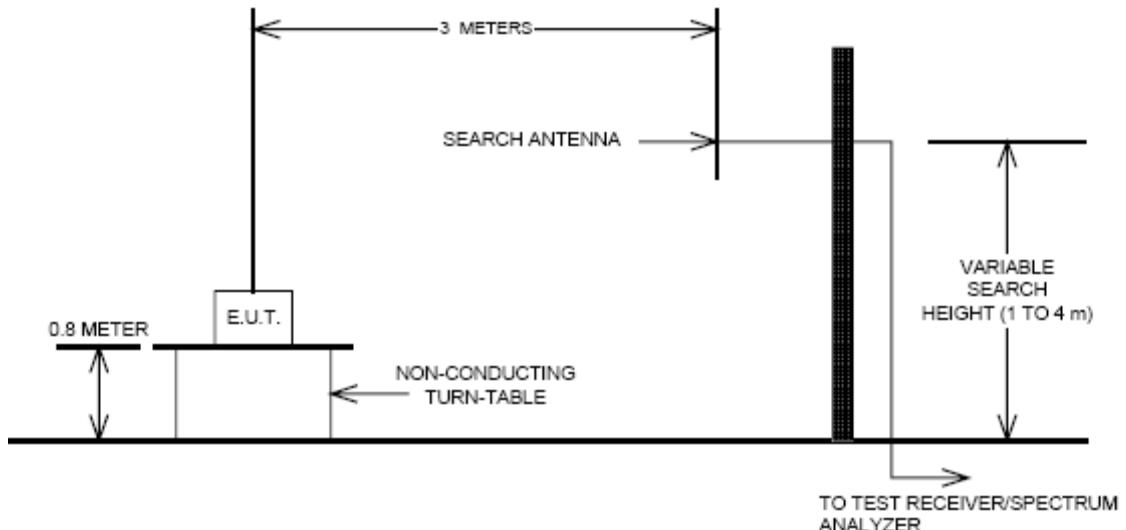

Test Procedure

Radiated emission measurements were performed at an open Site.

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 6 of 83




3.2 Peak- to- Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 7 of 83

3.3 Occupied bandwidth.

Test set-up

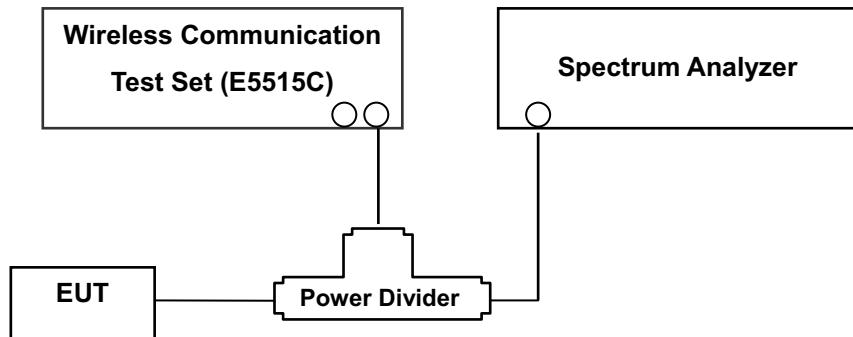

(Configuration of conducted Emission measurement)

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 8 of 83



3.4 Spurious and Harmonic Emissions at Antenna Terminal.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 9 of 83

3.5 Radiated Spurious and Harmonic Emissions

Test Set-up

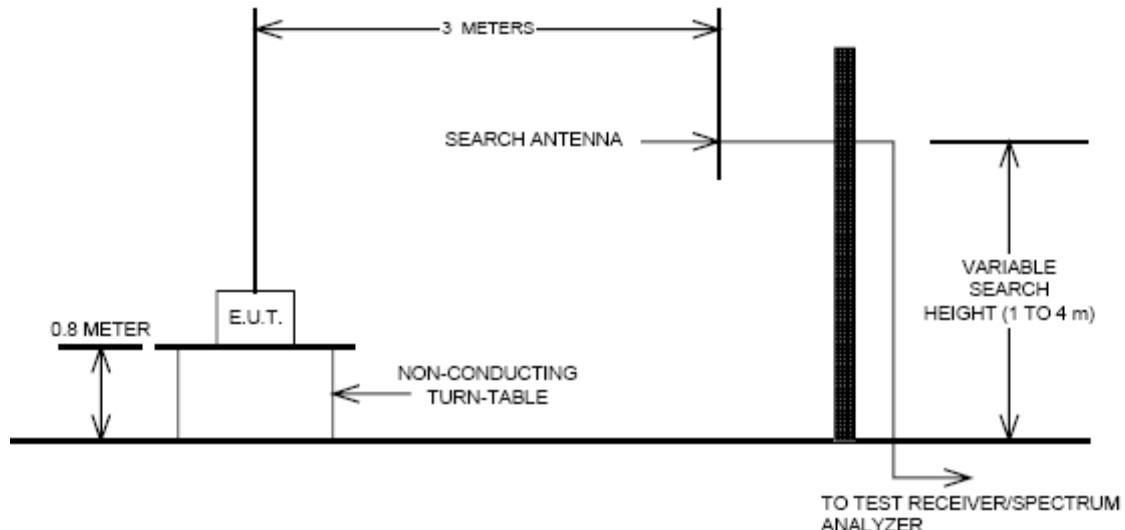

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable wooden platform mounted at three from the antenna mast.

- 1) The unit mounted on a wooden table 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.

Test Procedure

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.


A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 10 of 83

3.6 Frequency stability / variation of ambient temperature

Test Set-up

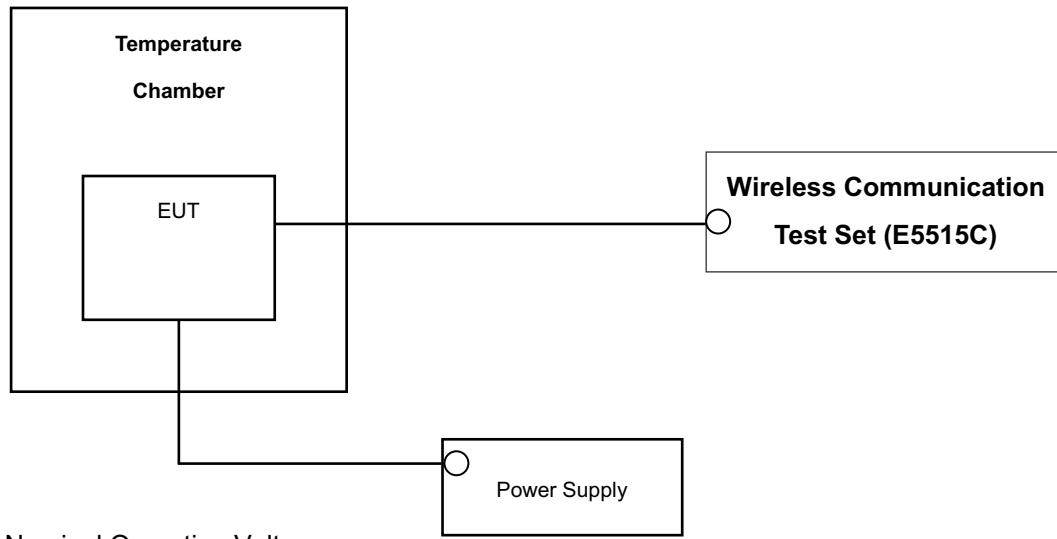

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\% (\pm 2.5\ ppm)$ of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 11 of 83



4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
R&S	ESI40/ EMI TEST Receiver	831564/003	Annual	10/31/2009
Agilent	E4416A/ Power Meter	GB41291412	Annual	01/21/2010
Agilent	E9327A/ Power Sensor	MY4442009	Annual	07/28/2009
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2010
MITEQ	AMF-60-0010 1800-35-20P / AMP	1200937	Annual	05/20/2009
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	06/28/2009
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	06/28/2009
Agilent	775D/ Dual Directional Coupler	12922	Annual	12/24/2009
Agilent	11636B/ Power Divider	11377	Annual	12/24/2009
Digital	EP-3010/ Power Supply	3110117	Annual	01/07/2010
Schwarzbeck	UHAP/ Dipole Antenna	585	Annual	02/13/2011
Schwarzbeck	UHAP/ Dipole Antenna	558	Annual	02/13/2011
Korea Engineering	KR-1005L / Chamber	KRAB07063-2CH	Annual	12/31/2009
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	03/26/2010
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	12/23/2009

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 12 of 83



5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	< 2.5 ppm		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS
	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of band emissions		PASS

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 13 of 83



6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-11.56	34.28	-8.32	1.17	H	0.30	24.79

B. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
CDMA	384	836.52	-10.96	24.81	2.50	1.19	H	0.41	26.12

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**ERP**).

C. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 14 of 83

7. TEST DATA

The EUT was connected to the host device using a USB Y-cable during the Test.

7.1 Conducted Output Power

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

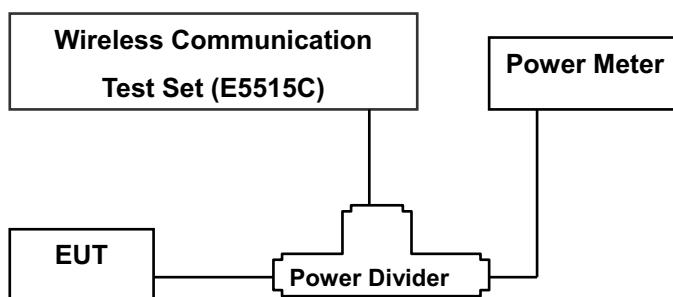

Test Result (GSM/ WCDMA)

Band	Channel	Voice	GPRS Data	
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)
GSM 850	128	32.22	32.20	30.94
	190	32.30	32.26	31.11
	251	32.29	32.25	31.23
GSM 1900	512	29.26	29.11	28.57
	661	29.55	29.41	28.83
	810	29.82	29.64	29.04

(GSM Conducted Output Powers)

Band	Channel	EDGE Data	
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)
GSM 850	128	26.14	23.66
	190	26.30	23.81
	251	26.42	23.92
GSM 1900	512	25.73	24.20
	661	25.98	24.45
	810	26.26	24.72

(GSM EDGE Conducted Output Powers)

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	Page 15 of 83



Band	Channel	HSDPA INACTIVE	HSDPA ACTIVE	HSUPA ACTIVE
		12.2kbps RMC (dBm)	12.2kbps RMC (dBm)	12.2kbps RMC (dBm)
WCDMA 850	4132	23.12	22.06	22.58
	4183	23.26	22.04	22.61
	4233	23.50	22.28	22.80
WCDMA 1900	9262	23.08	21.81	22.34
	9400	23.15	22.03	22.21
	9538	23.36	22.17	22.46

(WCDMA Conducted Output Powers)

Test Result (CDMA/ PCS)

Band	Channel	SO2	SO2	SO55	SO55	TDSO SO32	1xEvD Rev.O	1xEvD Rev.O	1xEvDO Rev.1	1xEvDO Rev.1
		RC1/1 (dBm)	RC3/3 (dBm)	RC1/1 (dBm)	RC3/3 (dBm)	RC3/3 (dBm)	(FTAP)	(RTAP)	(FETAP)	(RETAP)
CDMA	1013	23.81	23.81	23.80	23.84	23.74	23.70	23.58	23.61	23.64
	384	23.92	23.90	23.89	23.93	23.85	23.67	23.69	23.72	23.70
	777	23.96	23.92	23.93	23.85	23.90	23.73	23.83	23.77	23.72
PCS	25	23.72	23.51	23.58	23.67	23.45	23.59	23.51	23.60	23.54
	600	23.87	23.71	23.85	23.70	23.65	23.83	23.64	23.67	23.62
	1175	23.82	23.93	23.86	23.99	23.78	23.94	23.89	23.98	23.95

(Maximum Conducted Output Powers)

7.2 Peak-to-Average Ratio

(GSM/WCDMA)

- Plots of the EUT's Peak- to- Average Ratio are shown Page 40, 44.

(PCS CDMA)

- Plots of the EUT's Peak- to- Average Ratio are shown Page 69.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	Page 16 of 83



7.3 Occupied Bandwidth (GSM/ WCDMA)

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	242.7080
	190	836.60	245.1624
	251	848.80	246.7512
GSM850 EDGE	251	848.80	246.7427
GSM1900	512	1850.20	243.4237
	661	1880.00	249.4539
	810	1909.80	245.3754
GSM1900 EDGE	661	1880.00	245.3815
WCDMA850	4132	826.40	4.1716
	4183	836.60	4.1829
	4233	846.60	4.1928
WCDMA1900	9262	1852.4	4.1782
	9400	1880.0	4.1768
	9538	1907.6	4.1677

- Plots of the EUT's Occupied Bandwidth are shown Page 36 ~ 39, 41 ~ 43.

(CDMA/ PCS)

Band	Channel	Frequency(MHz)	Data (kHz)
CDMA	1013	824.70	1.2772
	384	836.52	1.2729
	777	848.31	1.2806
CDMA EVDO	777	848.31	1.2814
PCS	25	1851.25	1.2822
	600	1880.00	1.2785
	1175	1908.75	1.2840
PCS EVDO	1175	1908.75	1.2787

- Plots of the EUT's Occupied Bandwidth are shown Page 65 ~ 68.

FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 17 of 83
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	



7.4 Conducted Spurious Emissions

(GSM/ WCDMA)

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	7.8125	-30.26
	190	7.3375	-29.71
	251	6.9875	-29.60
GSM1900	512	14.7730	-26.94
	661	14.6130	-26.74
	810	13.4930	-27.46
WCDMA850	4132	7.0875	-40.18
	4183	7.2500	-40.42
	4233	7.7750	-40.17
WCDMA1900	9262	3.7090	-30.08
	9400	3.7620	-31.46
	9538	3.8150	-23.23

- Plots of the EUT's Conducted Spurious Emissions are shown Page 52 ~ 64.

(CDMA/ PCS)

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
CDMA	1013	1.648	-37.78
	384	7.700	-41.49
	777	1.697	-31.29
PCS	25	14.427	-37.12
	600	13.653	-37.25
	1175	3.815	-35.12

- Plots of the EUT's Conducted Spurious Emissions are shown Page 77 ~ 83.

7.4.1 Band Edge

(GSM/ WCDMA)

- Plots of the EUT's Band Edge are shown Page 44 ~ 52.

(CDMA/ PCS)

- Plots of the EUT's Band Edge are shown Page 69 ~ 77.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 18 of 83
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	



7.5 Effective Radiated Power Output(GSM/WCDMA)

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-4.21	41.63	-8.32	1.17	V	1.64	32.14
190	836.60	-4.41	42.08	-8.22	1.19	V	1.85	32.67
251	848.80	-4.84	42.28	-8.12	1.20	V	1.98	32.96
EDGE 190	848.80	-8.30	38.82	-8.12	1.20	V	0.89	29.50

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-11.33	34.62	-8.30	1.17	V	0.33	25.15
4183	836.60	-10.70	35.79	-8.22	1.19	V	0.43	26.38
4233	846.60	-10.39	36.62	-8.14	1.20	V	0.53	27.28

Note: This unit was tested with a notebook computer.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 19 of 83	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000		



7.6 Equivalent Isotropic Radiated Power(GSM/WCDMA)

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-10.21	21.40	10.05	1.91	H	0.90	29.53
661	1,880.00	-9.79	22.03	10.05	1.95	H	1.03	30.13
810	1,909.80	-9.55	22.35	10.06	1.97	H	1.11	30.44
EDGE 810	1,909.80	-9.83	22.07	10.06	1.97	H	1.04	30.16

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-16.48	15.13	10.05	1.91	H	0.21	23.27
9400	1,880.00	-15.03	16.79	10.05	1.95	H	0.31	24.89
9538	1,907.60	-15.22	16.70	10.06	1.97	H	0.30	24.79

Note: This unit was tested with a notebook computer.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 20 of 83	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000		



7.7 Effective Radiated Power Output(CDMA)

(CDMA Mode)

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
CDMA	1013	824.70	-10.69	35.14	-8.31	1.17	V	0.37	25.66
	384	836.52	-10.18	36.31	-8.22	1.19	V	0.49	26.90
	777	848.31	-9.93	37.20	-8.13	1.20	V	0.61	27.87
EVDO	777	848.31	-8.93	38.20	-8.13	1.20	V	0.77	28.87

Note: This unit was tested with a notebook computer.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported.

The highest power is FETAP in 1xEVDO Rev.A Mode.

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 21 of 83	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000		



7.8 Equivalent Isotropic Radiated Power(PCS CDMA)

(PCS CDMA Mode)

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
PCS	25	1,851.25	-14.72	16.89	10.05	1.91	V	0.32	25.02
	600	1,880.00	-14.61	17.21	10.05	1.95	V	0.34	25.31
	1175	1,908.75	-14.31	17.59	10.06	1.97	V	0.37	25.68
EVDO	1175	1,908.75	-13.69	18.21	10.06	1.97	V	0.43	26.30

Note: This unit was tested with a notebook computer.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported.

The highest power is FETAP in 1xEVDO Rev.A Mode.

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 22 of 83	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000		



7.9 Radiated Spurious Emissions

7.9.1 Radiated Spurious Emissions (GSM850)

MEASURED OUTPUT POWER: 32.96 dBm = 1.977 W

MODULATION SIGNAL: GSM850

DISTANCE: 3 meters

LIMIT: $-(43 + 10 \log_{10}(W))$ = -45.96 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-14.70	7.09	-25.23	1.73	H	-19.87	-52.83
	2,472.60	-28.90	8.12	-36.01	2.28	V	-30.17	-63.13
	3,296.80	-38.35	9.72	-45.93	2.57	H	-38.78	-71.74
190 (836.6)	1,673.20	-21.29	7.23	-32.05	1.79	H	-26.61	-59.57
	2,509.80	-33.94	8.14	-41.07	2.33	V	-35.26	-68.22
	3,346.40	-48.59	9.99	-56.62	2.66	H	-49.29	-82.25
251 (848.8)	1,697.60	-27.62	7.41	-38.23	1.83	H	-32.65	-65.61
	2,546.40	-33.55	8.21	-40.83	2.34	V	-34.96	-67.92
	3,395.20	-50.52	9.91	-58.15	2.85	H	-51.09	-84.05

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004;

2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 23 of 83
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	



7.9.2 Radiated Spurious Emissions (GSM1900)

MEASURED OUTPUT POWER: 30.44 dBm = 1.107 W
 MODULATION SIGNAL: GSM1900
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 log₁₀(W)) = - 43.44 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-53.55	12.46	-59.82	2.73	H	-50.09	-80.53
	5,550.60	-56.25	12.70	-57.83	3.60	V	-48.73	-79.17
	7,400.80	-56.78	11.36	-47.90	3.88	V	-40.42	-70.86
661 (1880.0)	3,760.00	-54.71	12.47	-60.68	2.73	H	-50.94	-81.38
	5,640.00	-56.11	10.60	-55.61	3.60	H	-48.61	-79.05
	7,520.00	-56.55	11.33	-47.45	3.88	H	-40.00	-70.44
810 (1909.8)	3,819.60	-54.91	12.49	-60.79	2.73	H	-51.03	-81.47
	5,729.40	-57.15	12.80	-58.46	3.60	V	-49.26	-79.70
	7,639.20	-57.04	11.30	-47.71	3.88	V	-40.29	-70.73

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004;
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 24 of 83



7.9.3 Radiated Spurious Emissions (WCDMA850)

MEASURED OUTPUT POWER: 27.28 dBm = 0.535 W

MODULATION SIGNAL: WCDMA850

DISTANCE: 3 meters

LIMIT: - (43 + 10 \log_{10} (W)) = - 40.28 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-26.35	7.09	-36.91	1.73	H	-31.55	-58.83
	2,479.20	-45.97	8.12	-53.09	2.28	H	-47.25	-74.53
	3,305.60	-54.09	9.72	-61.65	2.57	V	-54.50	-81.78
4,183 (836.6)	1,673.20	-45.24	7.23	-56.00	1.79	H	-50.56	-77.84
	2,509.80	-46.40	8.14	-53.53	2.33	H	-47.72	-75.00
	3,346.40	-54.11	9.99	-62.14	2.66	V	-54.81	-82.09
4,233 (846.6)	1,693.20	-41.33	7.41	-51.99	1.83	H	-46.41	-73.69
	2,539.80	-45.78	8.21	-53.04	2.34	H	-47.17	-74.45
	3,386.40	-54.54	9.91	-62.19	2.85	V	-55.13	-82.41

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 25 of 83
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	



7.9.4 Radiated Spurious Emissions (WCDMA1900)

MEASURED OUTPUT POWER: 24.89 dBm = 0.308 W

MODULATION SIGNAL: WCDMA850

DISTANCE: 3 meters

LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 37.89 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	ERP (dBm)	dBc
9262 (1852.4)	3,704.80	-38.05	12.46	-44.29	2.73	H	-34.56	-59.45
	5,557.20	-57.51	12.71	-59.12	3.60	H	-50.01	-74.90
	7,409.60	-56.46	11.36	-47.57	3.88	V	-40.09	-64.98
9400 (1880.0)	3,760.00	-38.22	12.47	-44.19	2.73	V	-34.45	-59.34
	5,640.00	-57.00	12.75	-58.65	3.60	V	-49.50	-74.39
	7,520.00	-56.01	11.33	-46.91	3.88	H	-39.46	-64.35
9538 (1907.6)	3,815.20	-32.56	12.46	-38.43	2.73	V	-28.70	-53.59
	5,722.80	-57.71	12.79	-59.04	3.60	H	-49.85	-74.74
	7,630.40	-56.74	11.30	-47.42	3.88	V	-40.00	-64.89

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	Page 26 of 83



7.9.5 Radiated Spurious Emissions(CDMA Mode)

- MEASURED OUTPUT POWER: 27.87 dBm = 0.612 W
- MODULATION SIGNAL: CDMA
- DISTANCE: 3 meters
- LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 40.87 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> <u>[dBm]</u>	Ant. Gain	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	ERP (dBm)	dBc
1013	1,649.40	-28.75	7.09	-39.28	1.73	V	-33.92	-61.79
	2,474.10	-44.84	8.12	-51.95	2.28	H	-46.11	-73.98
	3,298.80	-55.12	9.72	-62.70	2.57	H	-55.55	-83.42
384	1,673.04	-39.83	7.23	-50.59	1.79	V	-45.15	-73.02
	2,509.56	-48.94	8.14	-56.07	2.33	H	-50.26	-78.13
	3,346.08	-56.01	9.99	-64.04	2.66	V	-56.71	-84.58
777	1,696.62	-31.85	7.41	-42.46	1.83	V	-36.88	-64.75
	2,544.93	-49.71	8.21	-56.99	2.34	H	-51.12	-78.99
	3,393.24	-55.71	9.91	-63.34	2.85	V	-56.28	-84.15

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	Page 27 of 83



7.9.6 Radiated Spurious Emissions(PCS CDMA Mode)

MEASURED OUTPUT POWER: 25.68 dBm = 0.370 W

MODULATION SIGNAL: PCS CDMA

DISTANCE: 3 meters

LIMIT: - (43 + 10 \log_{10} (W)) = - 38.68 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
25	3,702.50	-47.05	12.46	-53.32	2.73	H	-43.59	-69.27
	5,553.75	-57.27	12.70	-58.85	3.60	H	-49.75	-75.43
	7,405.00	-56.52	11.36	-47.64	3.88	V	-40.16	-65.84
600	3,760.00	-50.33	12.47	-56.30	2.73	H	-46.56	-72.24
	5,640.00	-57.11	12.75	-58.76	3.60	V	-49.61	-75.29
	7,520.00	-56.59	11.33	-47.49	3.88	H	-40.04	-65.72
1175	3,817.50	-44.62	12.49	-50.50	2.73	H	-40.74	-66.42
	5,726.25	-57.50	12.80	-58.81	3.60	H	-49.61	-75.29
	7,635.00	-55.96	11.30	-46.63	3.88	H	-39.21	-64.89

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 28 of 83
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	

7.10 Frequency stability / variation of ambient temperature

7.10.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 599 983	-17.13	-0.000 002	-0.020
100%		-30	836 599 998	-1.84	0.000 000	-0.002
100%		-20	836 599 977	-23.14	-0.000 003	-0.028
100%		-10	836 599 989	-10.66	-0.000 001	-0.013
100%		0	836 599 976	-23.70	-0.000 003	-0.028
100%		+10	836 599 991	-8.62	-0.000 001	-0.010
100%		+20	836 599 972	-28.33	-0.000 003	-0.034
100%		+30	836 599 985	-15.28	-0.000 002	-0.018
100%		+40	836 599 993	-7.39	-0.000 001	-0.009
100%		+50	836 599 976	-23.78	-0.000 003	-0.028
115%	4.255	+20	836 599 991	-9.02	-0.000 001	-0.011
Batt. Endpoint	3.400	+20	836 599 985	-15.36	-0.000 002	-0.018

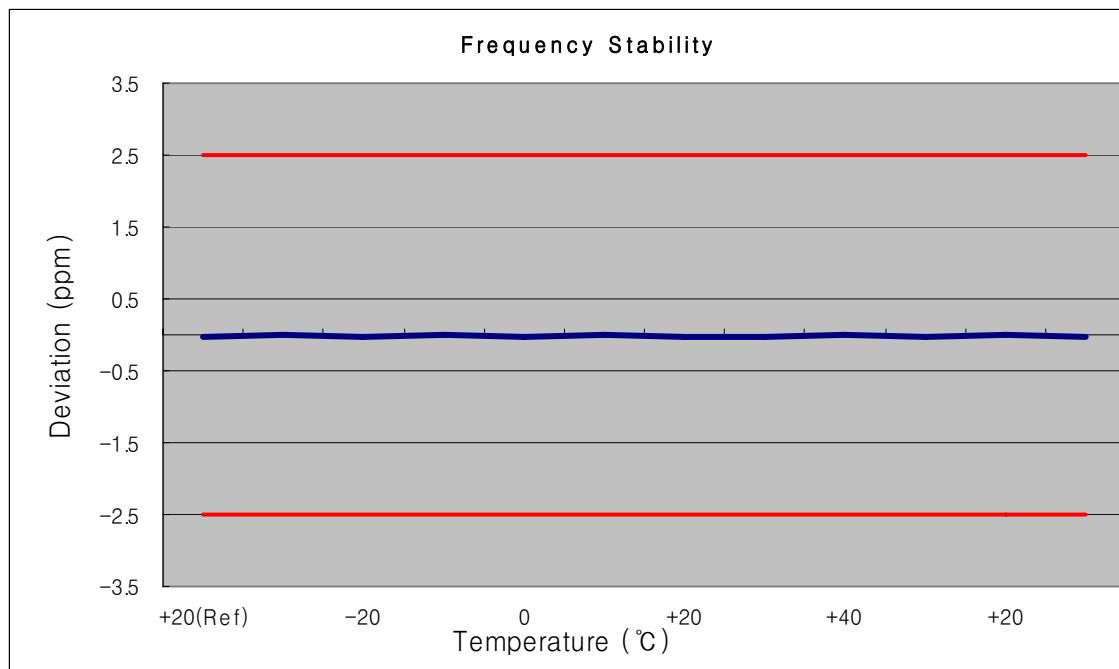


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 29 of 83

7.10.2 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1879 999 969	-31.42	-0.000 002	-0.017
100%		-30	1879 999 978	-22.34	-0.000 001	-0.012
100%		-20	1879 999 991	-9.26	0.000 000	-0.005
100%		-10	1879 999 968	-32.35	-0.000 002	-0.017
100%		0	1879 999 960	-39.62	-0.000 002	-0.021
100%		+10	1879 999 979	-20.97	-0.000 001	-0.011
100%		+20	1879 999 969	-31.16	-0.000 002	-0.017
100%		+30	1879 999 982	-17.80	-0.000 001	-0.009
100%		+40	1879 999 954	-45.88	-0.000 002	-0.024
100%		+50	1879 999 984	-15.64	-0.000 001	-0.008
115%	4.255	+20	1879 999 961	-38.85	-0.000 002	-0.021
Batt. Endpoint	3.400	+20	1879 999 953	-47.38	-0.000 003	-0.025

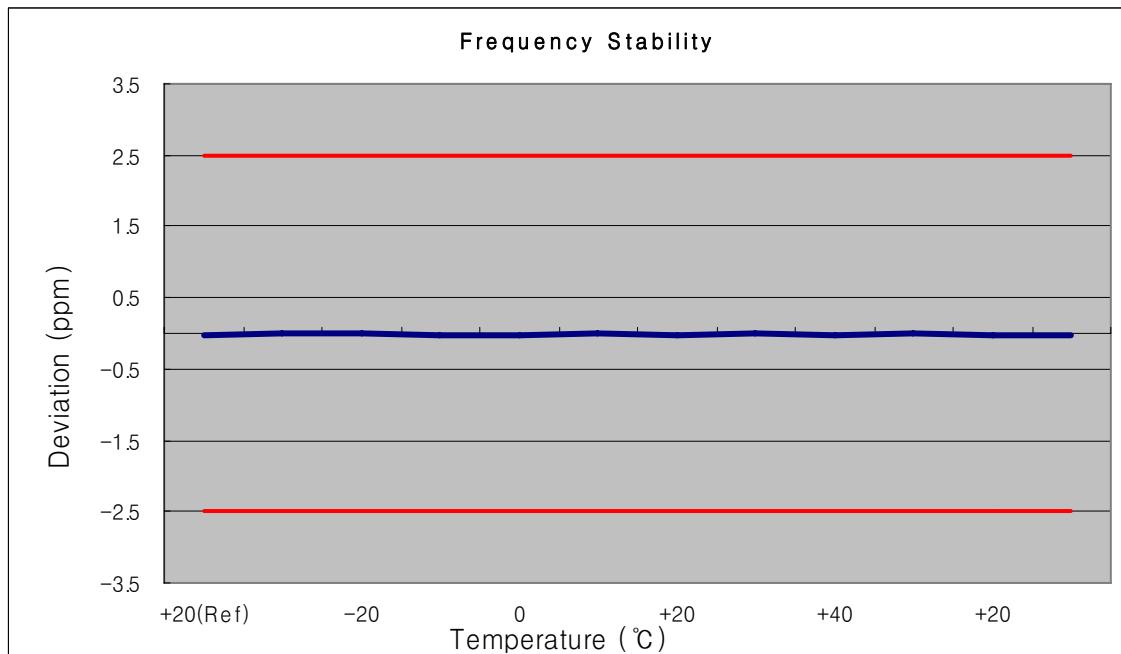

7.10.3 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 599 991	-8.60	-0.000 010	-0.010
100%		-30	836 600 005	4.64	0.000 006	0.006
100%		-20	836 599 994	-6.18	-0.000 007	-0.007
100%		-10	836 600 005	5.23	0.000 006	0.006
100%		0	836 599 989	-10.60	-0.000 013	-0.013
100%		+10	836 599 995	-4.75	-0.000 006	-0.006
100%		+20	836 600 004	3.92	0.000 005	0.005
100%		+30	836 600 005	4.64	0.000 006	0.006
100%		+40	836 599 994	-5.56	-0.000 007	-0.007
100%		+50	836 600 006	6.33	0.000 008	0.008
115%	4.255	+20	836 599 993	-7.09	-0.000 008	-0.008
Batt. Endpoint	3.400	+20	836 599 985	-14.64	-0.000 017	-0.017

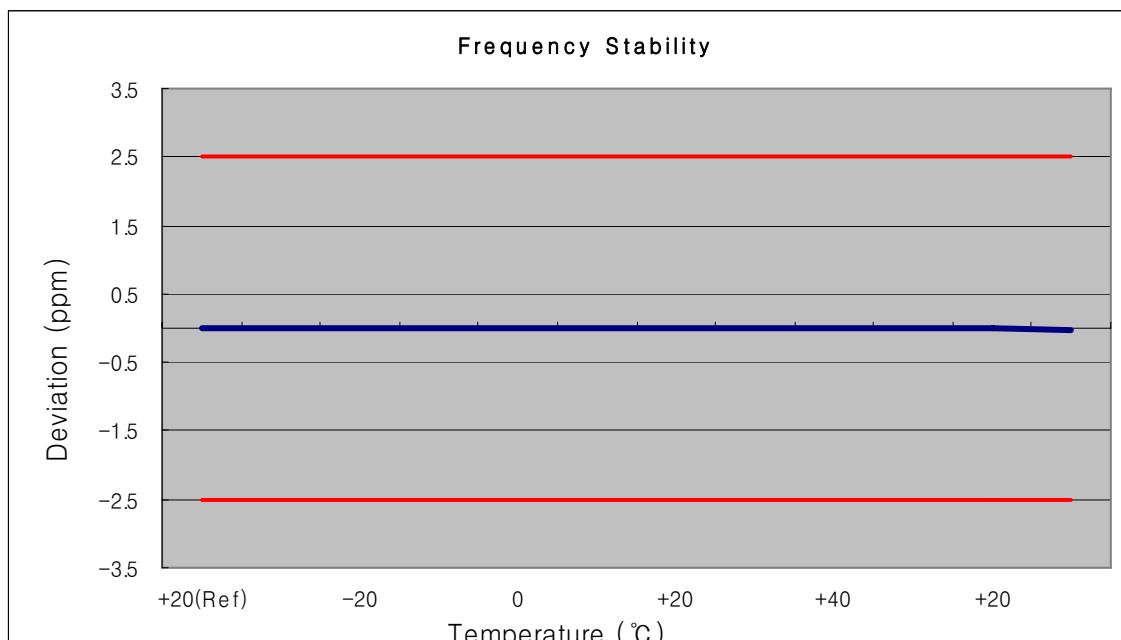


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 31 of 83

7.10.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 9400
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1,879,999,977	-22.55	-0.000001	-0.012
100%		-30	1,879,999,983	-16.63	-0.000001	-0.009
100%		-20	1,879,999,974	-26.15	-0.000001	-0.014
100%		-10	1,880,000,015	15.36	0.000001	0.008
100%		0	1,879,999,973	-27.10	-0.000001	-0.014
100%		+10	1,879,999,983	-16.70	-0.000001	-0.009
100%		+20	1,879,999,986	-13.69	-0.000001	-0.007
100%		+30	1,879,999,980	-20.48	-0.000001	-0.011
100%		+40	1,879,999,982	-17.90	-0.000001	-0.010
100%		+50	1,880,000,013	12.95	0.000001	0.007
115%	4.255	+20	1,879,999,979	-21.26	-0.000001	-0.011
Batt. Endpoint	3.400	+20	1,879,999,975	-24.86	-0.000001	-0.013

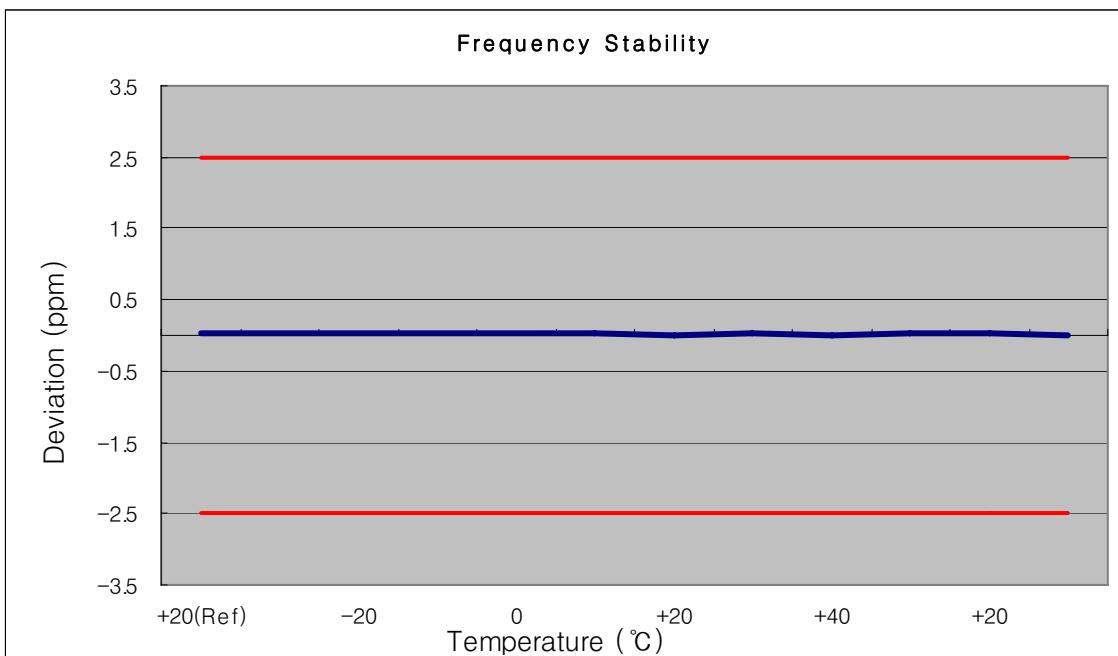


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 32 of 83

7.10.5 FREQUENCY STABILITY (CDMA)

OPERATING FREQUENCY: 836,520,000 Hz
 CHANNEL: 384
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 520 005	4.70	0.000 001	0.006
100%		-30	836 520 006	6.13	0.000 001	0.007
100%		-20	836 520 003	2.58	0.000 000	0.003
100%		-10	836 520 005	4.72	0.000 001	0.006
100%		0	836 520 003	3.18	0.000 000	0.004
100%		+10	836 520 002	1.85	0.000 000	0.002
100%		+20	836 520 004	4.49	0.000 001	0.005
100%		+30	836 520 002	2.38	0.000 000	0.003
100%		+40	836 520 004	3.86	0.000 000	0.005
100%		+50	836 520 002	2.37	0.000 000	0.003
115%	4.255	+20	836 520 005	5.10	0.000 001	0.006
Batt. Endpoint	3.400	+20	836 520 002	1.62	0.000 000	0.002

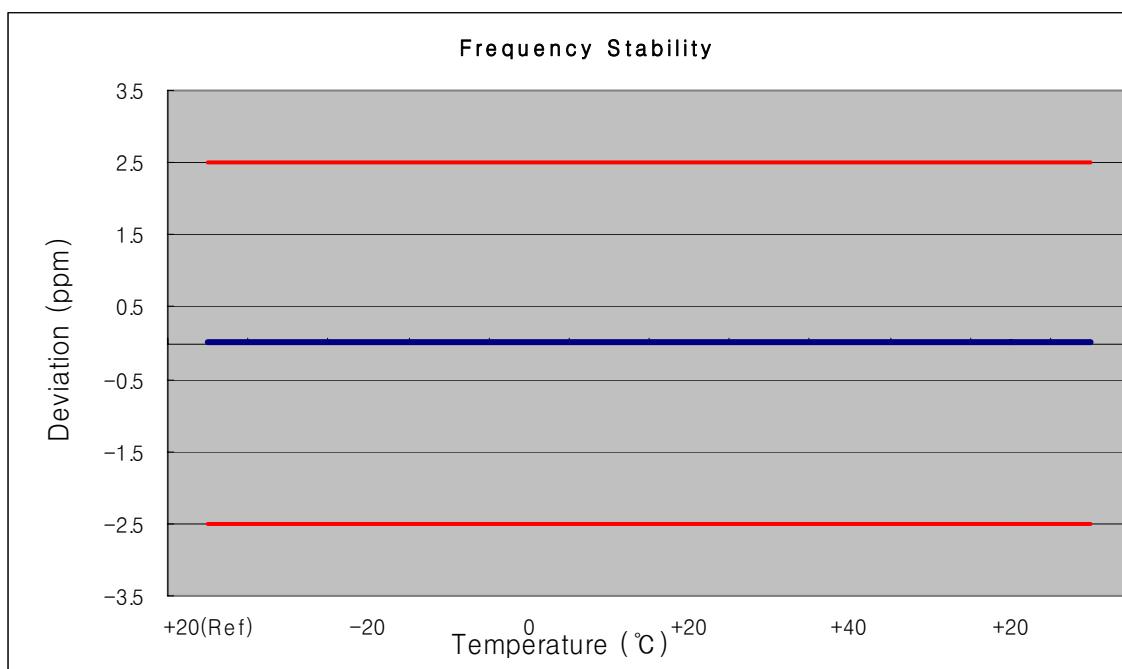


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 33 of 83

7.10.6 FREQUENCY STABILITY (PCS CDMA)

OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 600
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1880 000 004	3.55	0.000 000	0.002
100%		-30	1880 000 006	6.06	0.000 000	0.003
100%		-20	1880 000 003	2.82	0.000 000	0.002
100%		-10	1880 000 007	7.01	0.000 000	0.004
100%		0	1879 999 997	-2.71	0.000 000	-0.001
100%		+10	1880 000 009	8.87	0.000 000	0.005
100%		+20	1880 000 002	2.29	0.000 000	0.001
100%		+30	1879 999 995	-4.77	0.000 000	-0.003
100%		+40	1880 000 008	8.15	0.000 000	0.004
100%		+50	1880 000 002	1.51	0.000 000	0.001
115%	4.255	+20	1879 999 995	-4.78	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1880 000 005	5.37	0.000 000	0.003

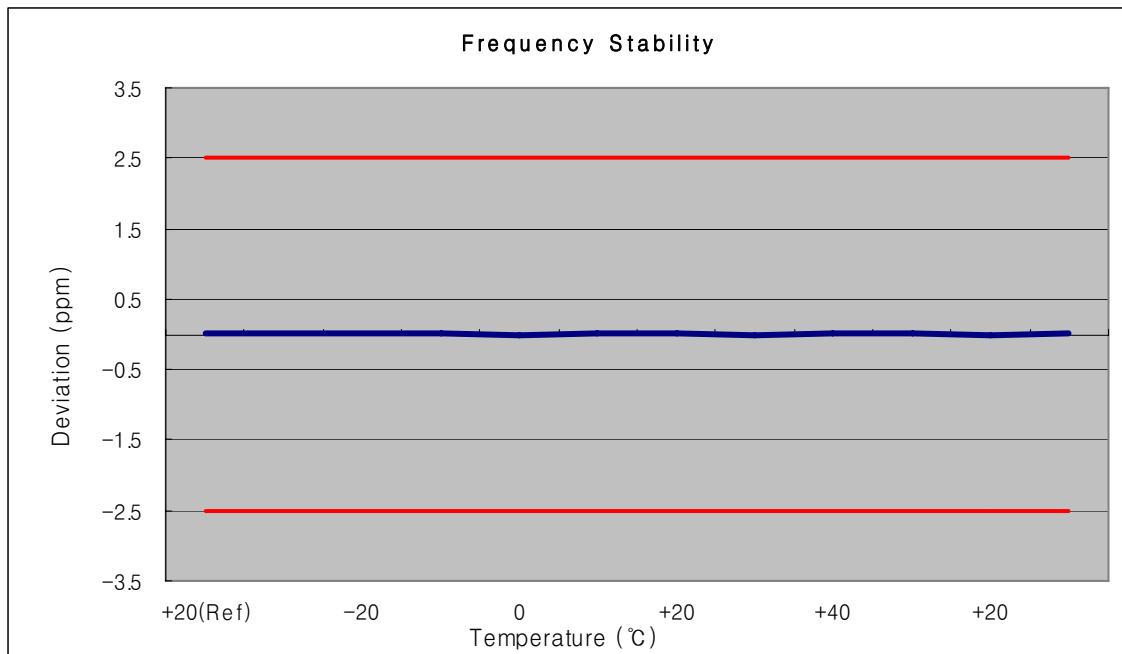

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 34 of 83



8. TEST PLOTS

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 35 of 83

GSM/ WCDMA

■ GSM850 MODE (128 CH.) Occupied Bandwidth




■ GSM850 MODE (190 CH.) Occupied Bandwidth




FCC CERTIFICATION REPORT

Test Report No.	Date of Issue:	EUT Type:	www.hct.co.kr
HCT-RF09-0518	May 20, 2009	USB Modem	FCC ID: PP4PX-5000 Page 36 of 83

■ GSM850 MODE (251 CH.) Occupied Bandwidth

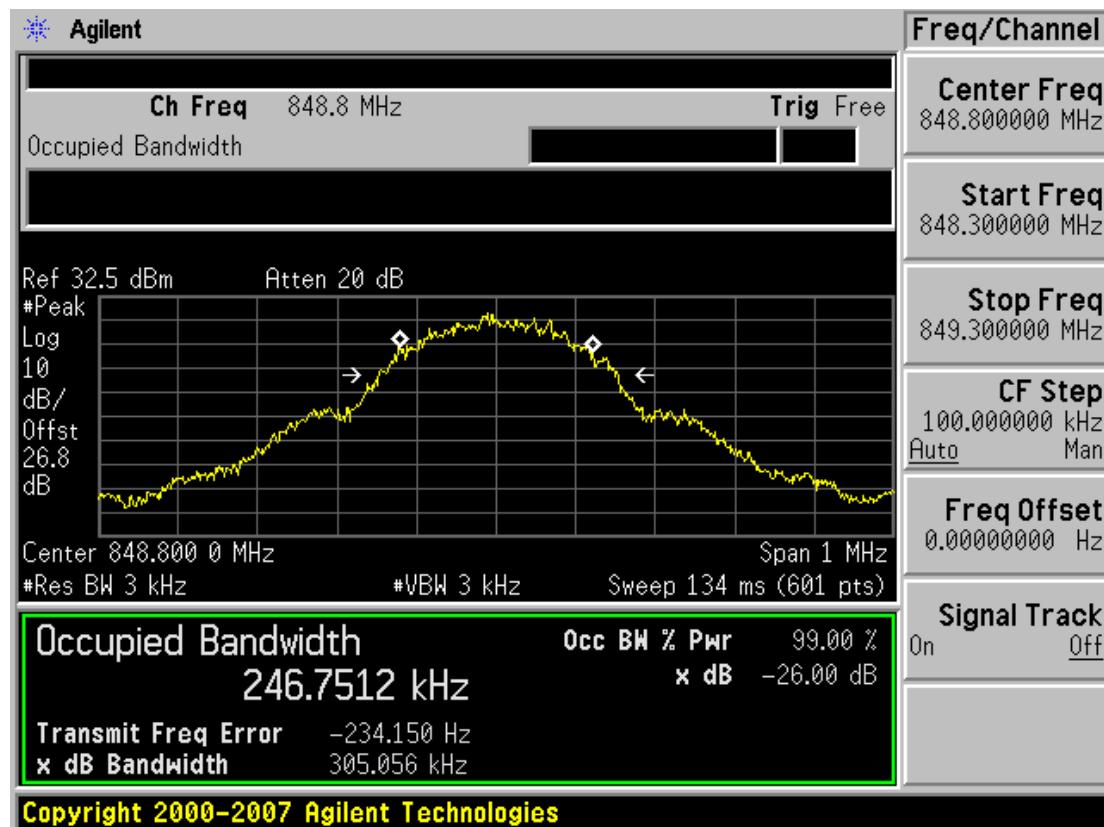


■ GSM850 EDGE (251 CH.) Occupied Bandwidth

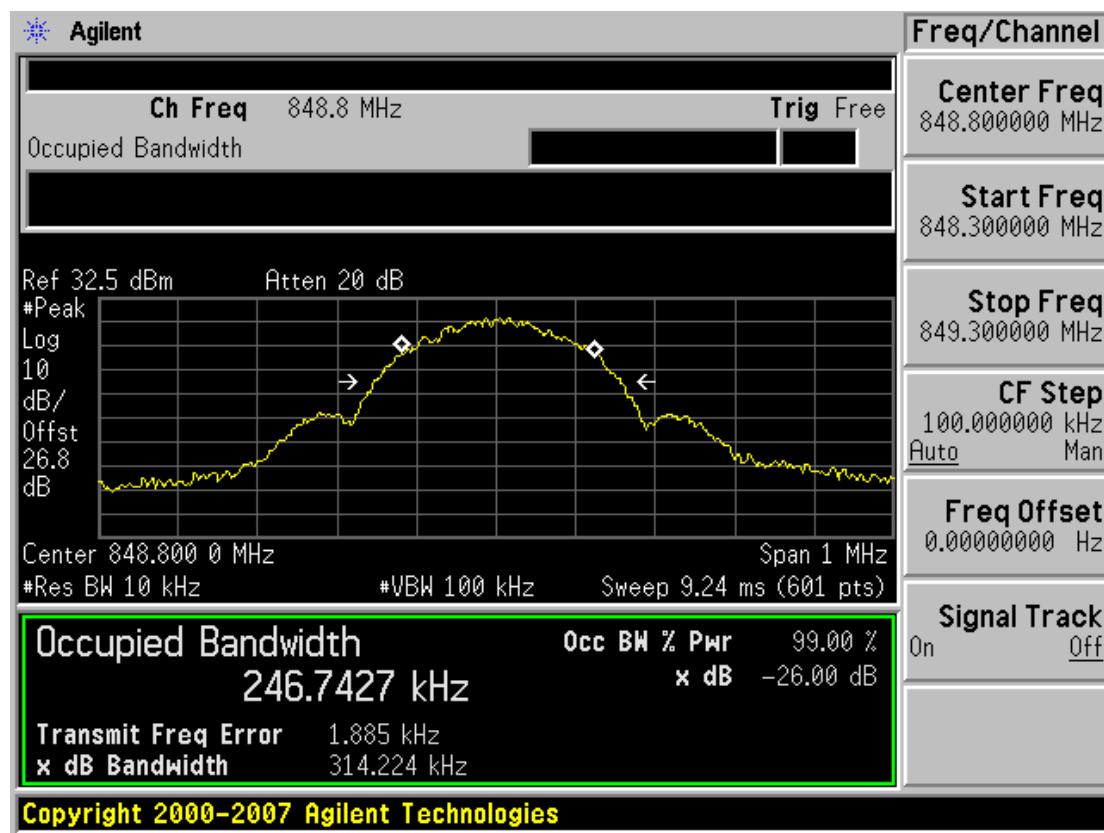


FCC CERTIFICATION REPORT

Test Report No.	Date of Issue:	EUT Type:	FCC ID:	www.hct.co.kr
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	Page 37 of 83

■ GSM1900 MODE (512 CH.) Occupied Bandwidth

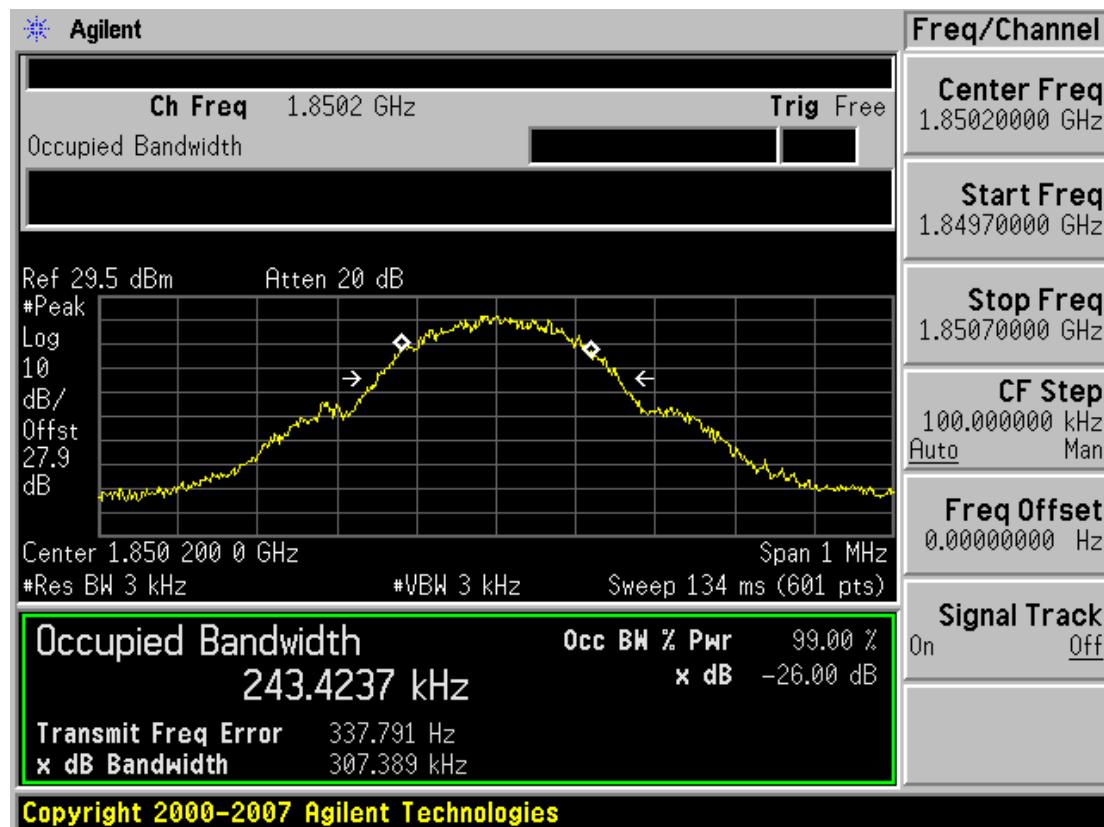

■ GSM1900 MODE (661 CH.) Occupied Bandwidth

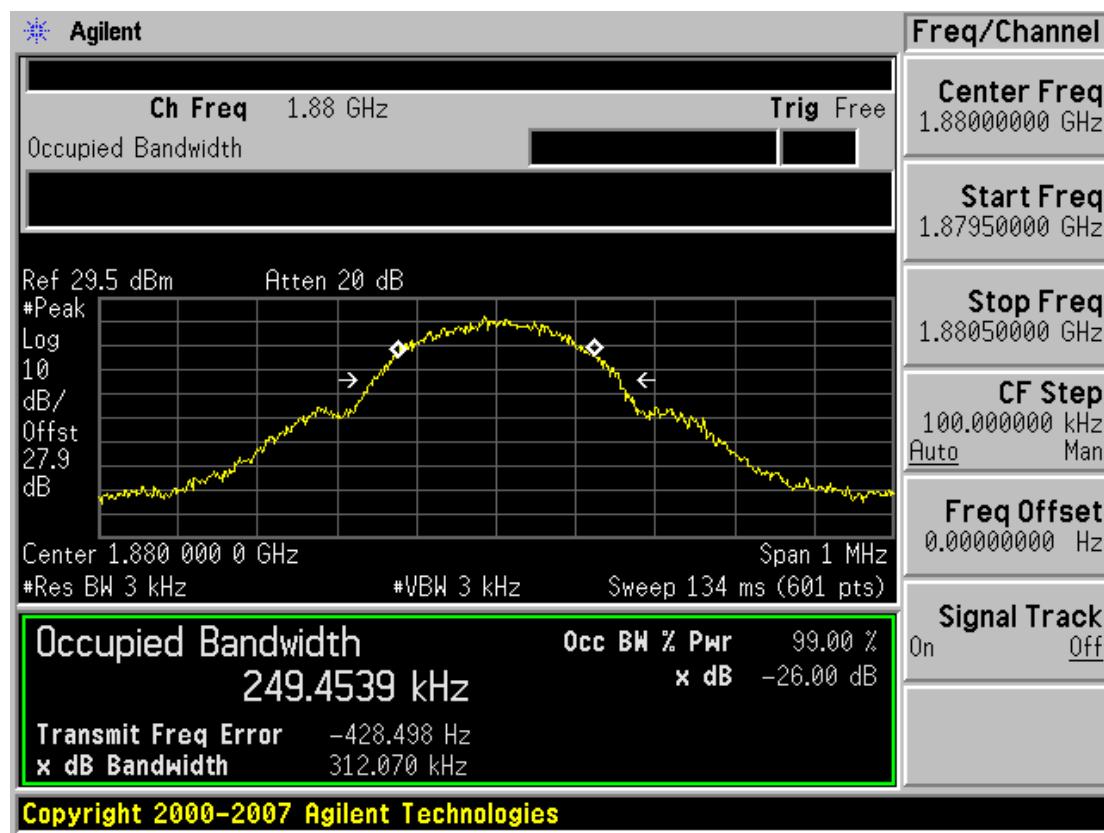


FCC CERTIFICATION REPORT

Test Report No.	Date of Issue:	EUT Type:	www.hct.co.kr
HCT-RF09-0518	May 20, 2009	USB Modem	FCC ID: PP4PX-5000


■ GSM1900 MODE (810 CH.) Occupied Bandwidth




■ GSM1900 EDGE (661 CH.) Occupied Bandwidth

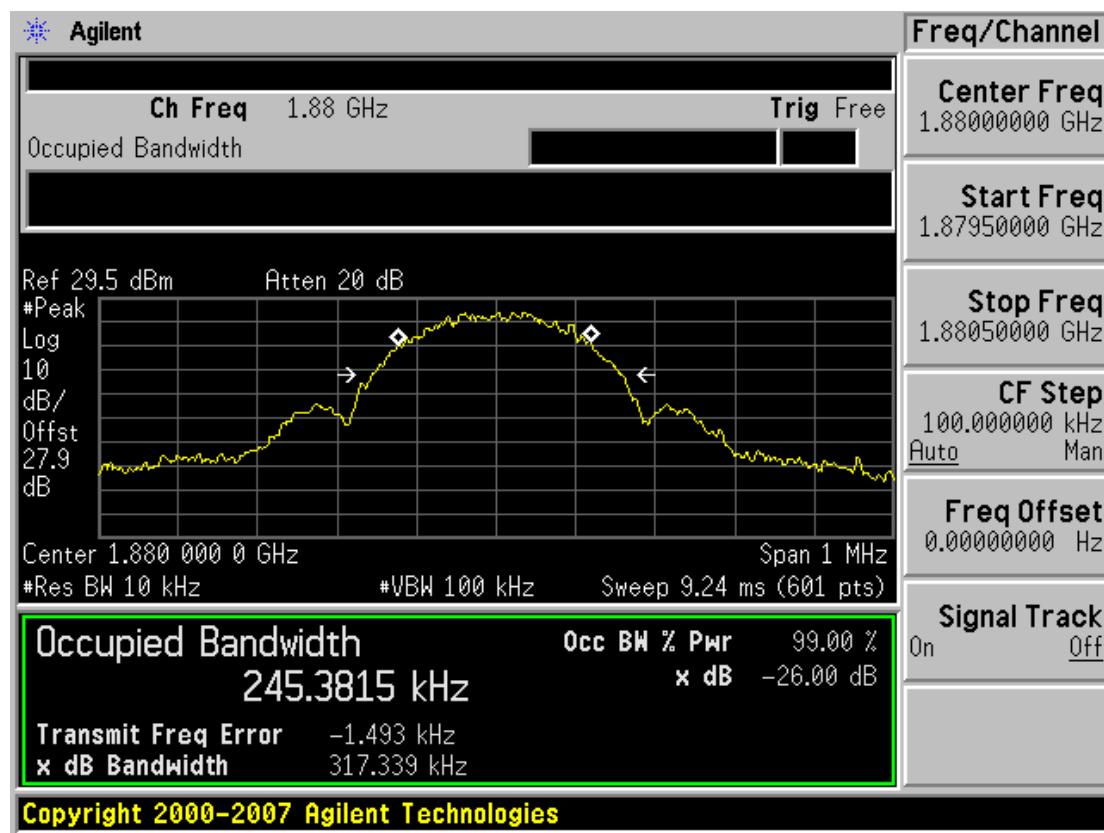

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio

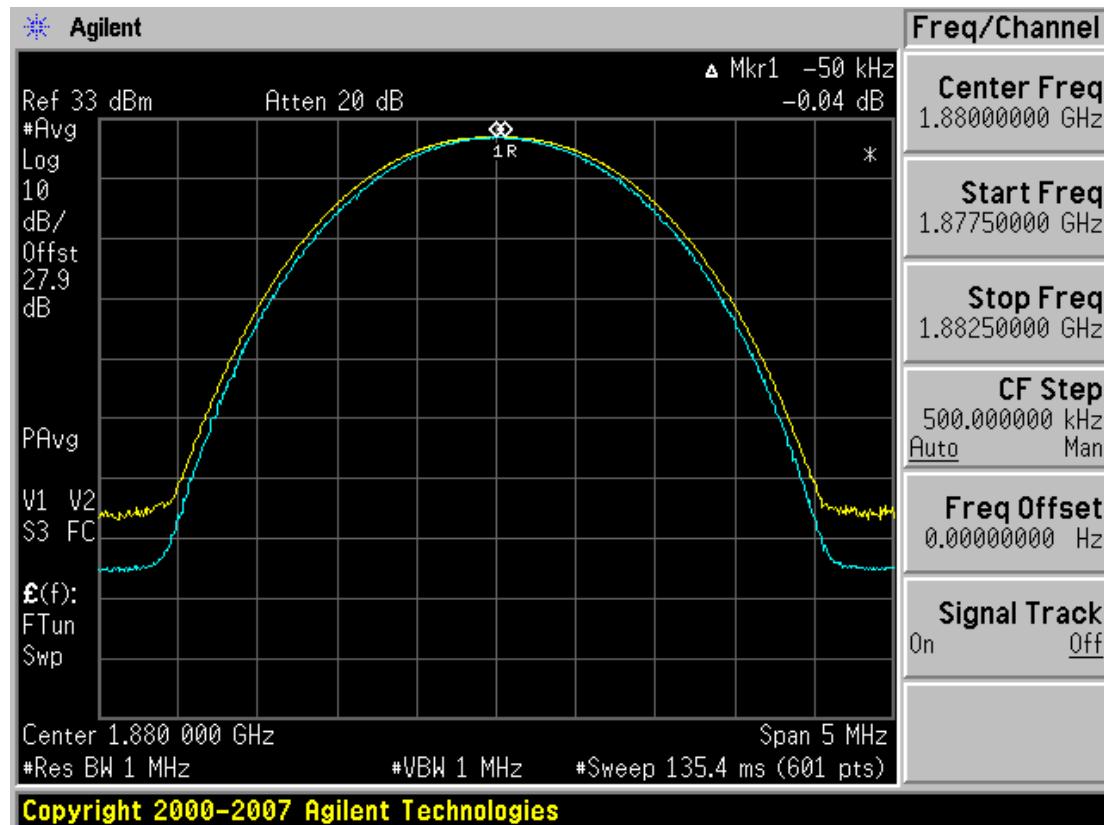


■ GSM1900 EDGE MODE (661 CH.) Peak-to-Average Ratio

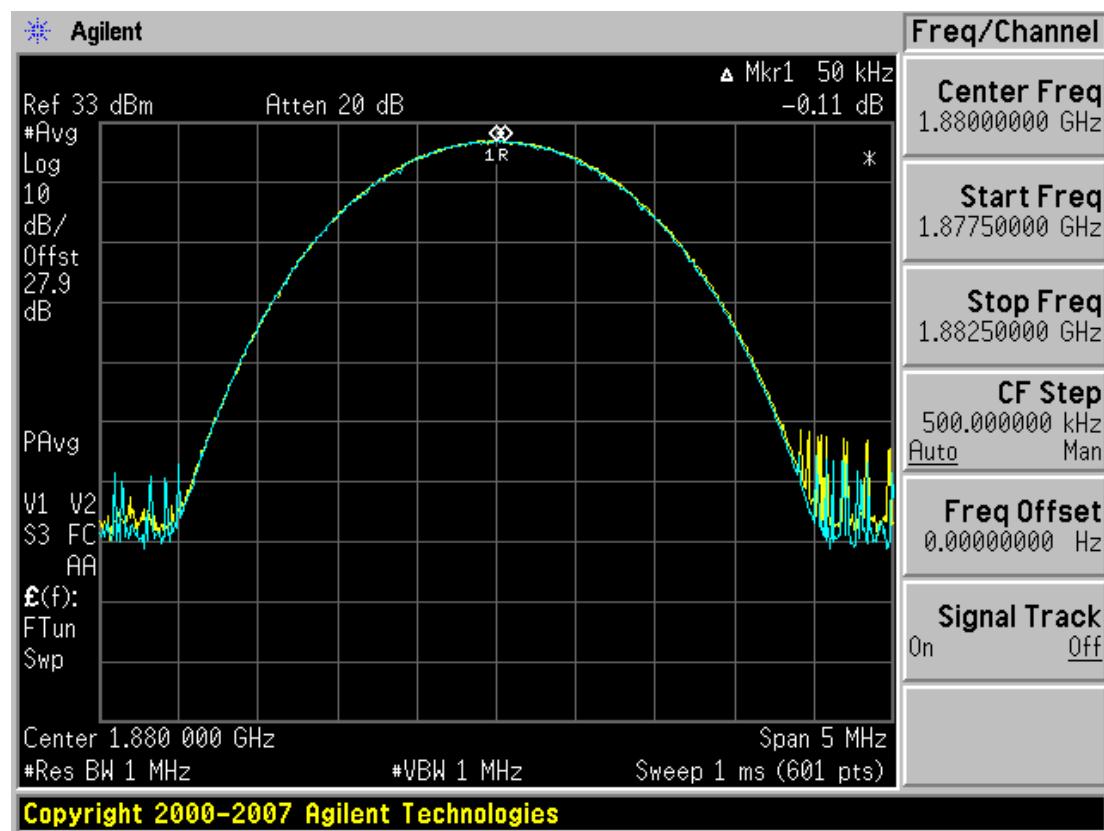


FCC CERTIFICATION REPORT

Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	www.hct.co.kr Page 40 of 83
----------------------------------	--------------------------------	------------------------	-----------------------	--------------------------------

■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

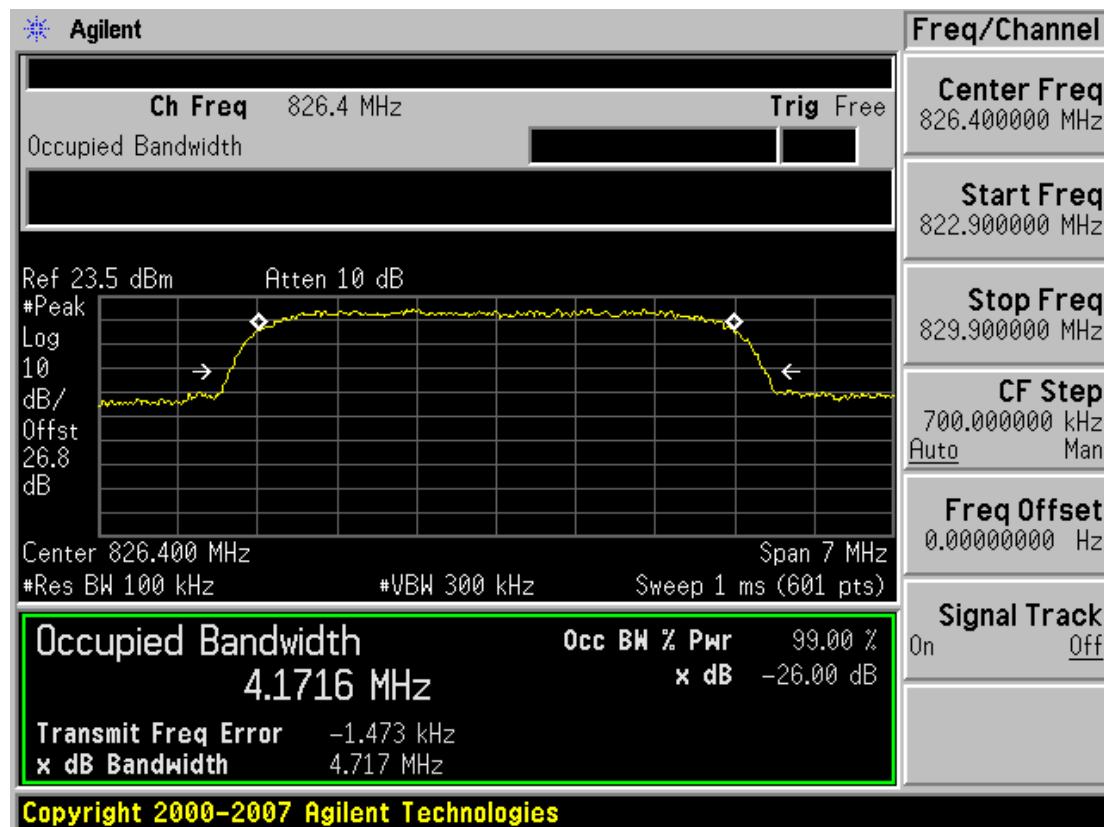


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

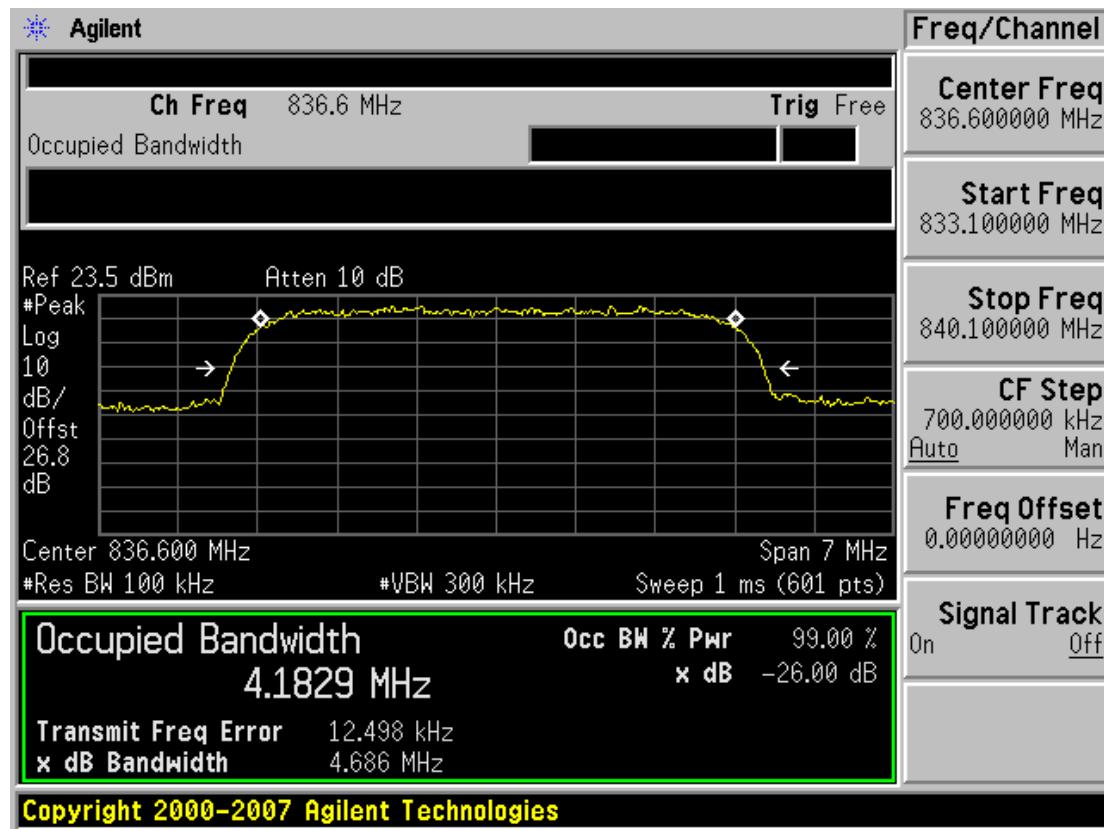


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000


■ WCDMA850 MODE (4233 CH.) Occupied Bandwidth

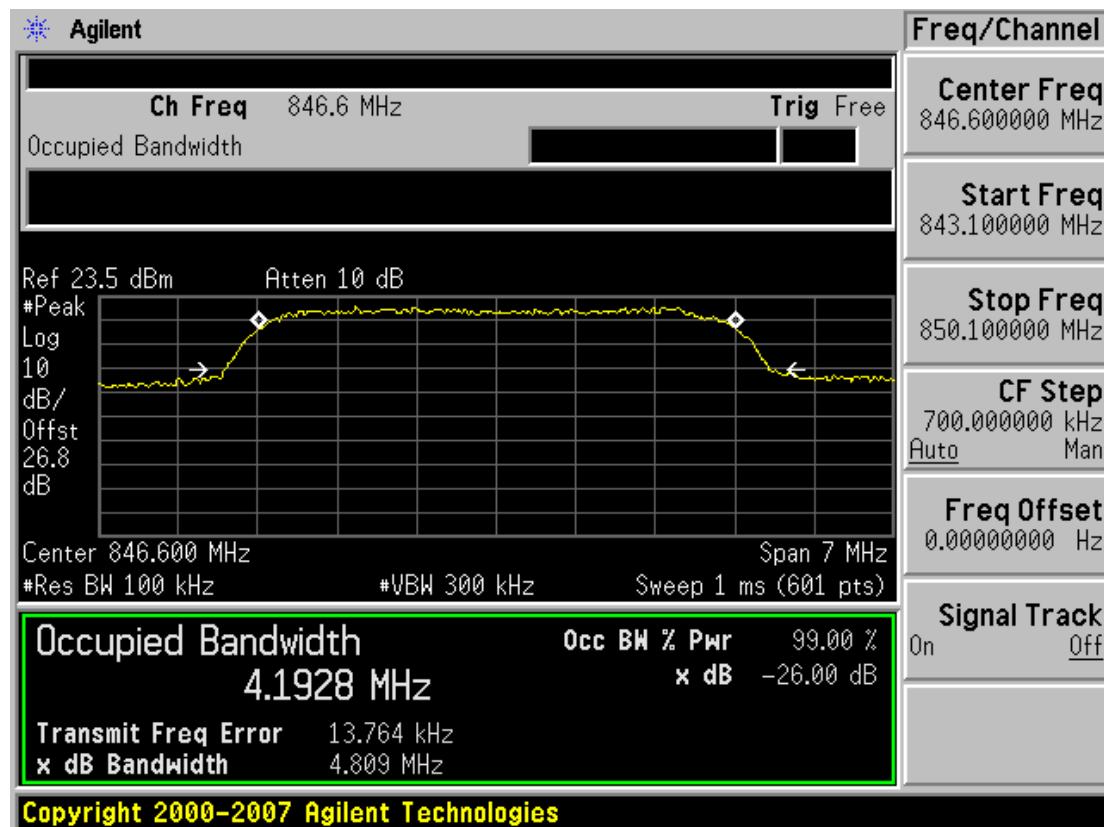


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

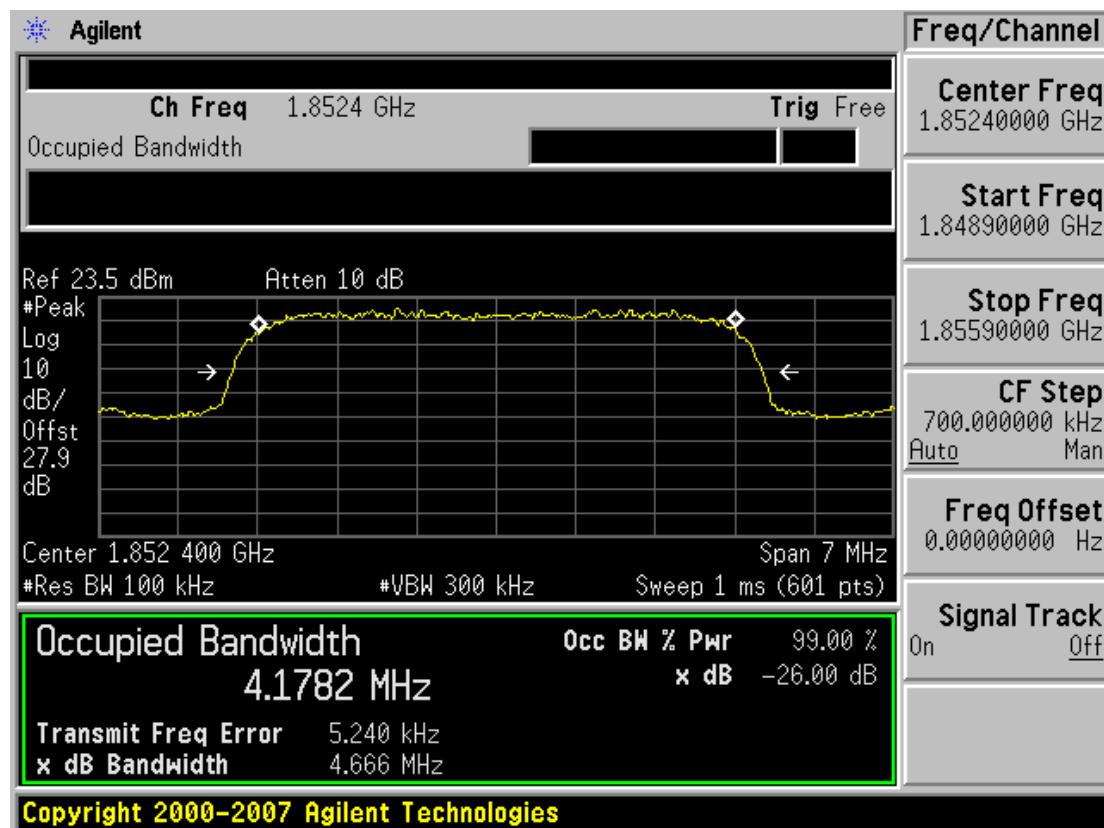


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

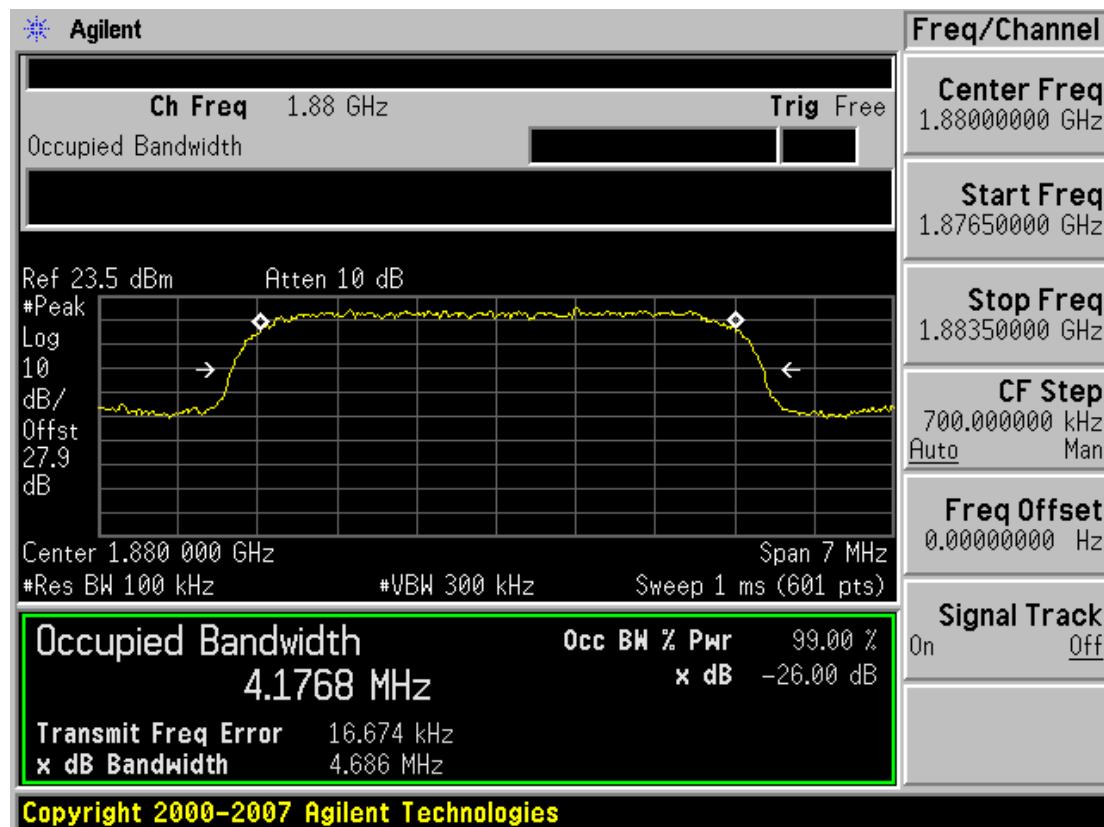


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

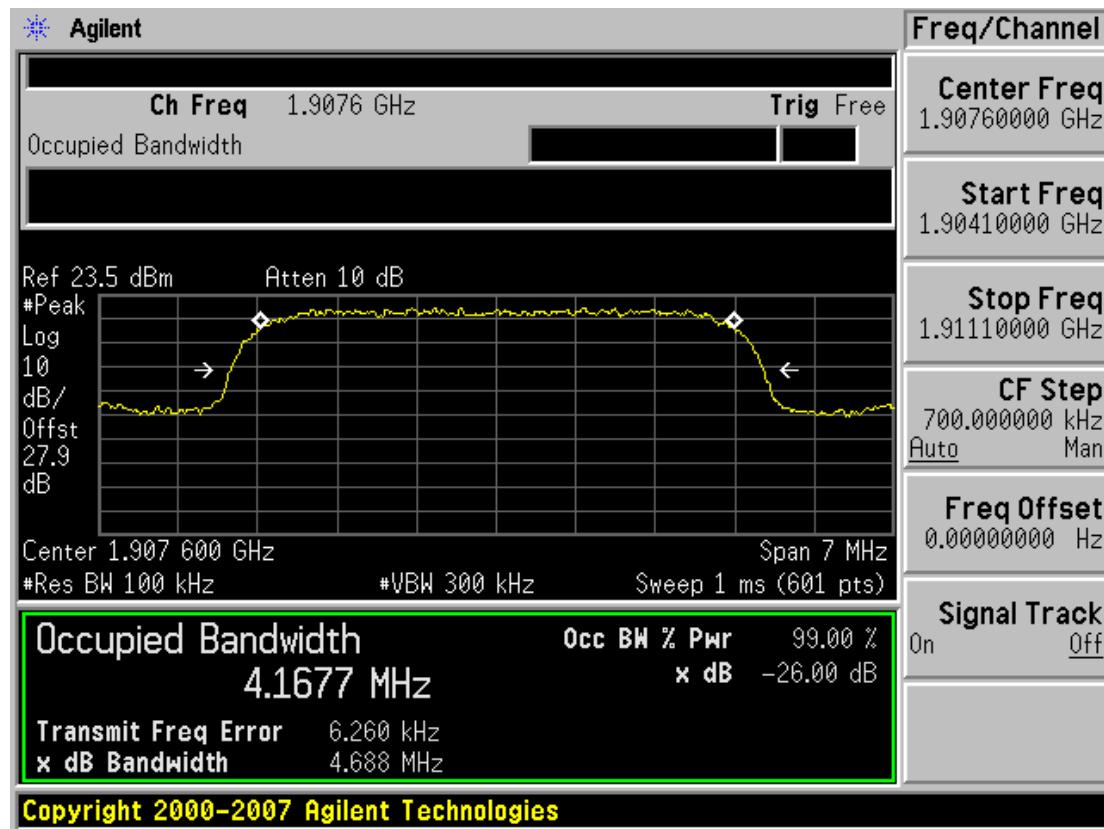


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

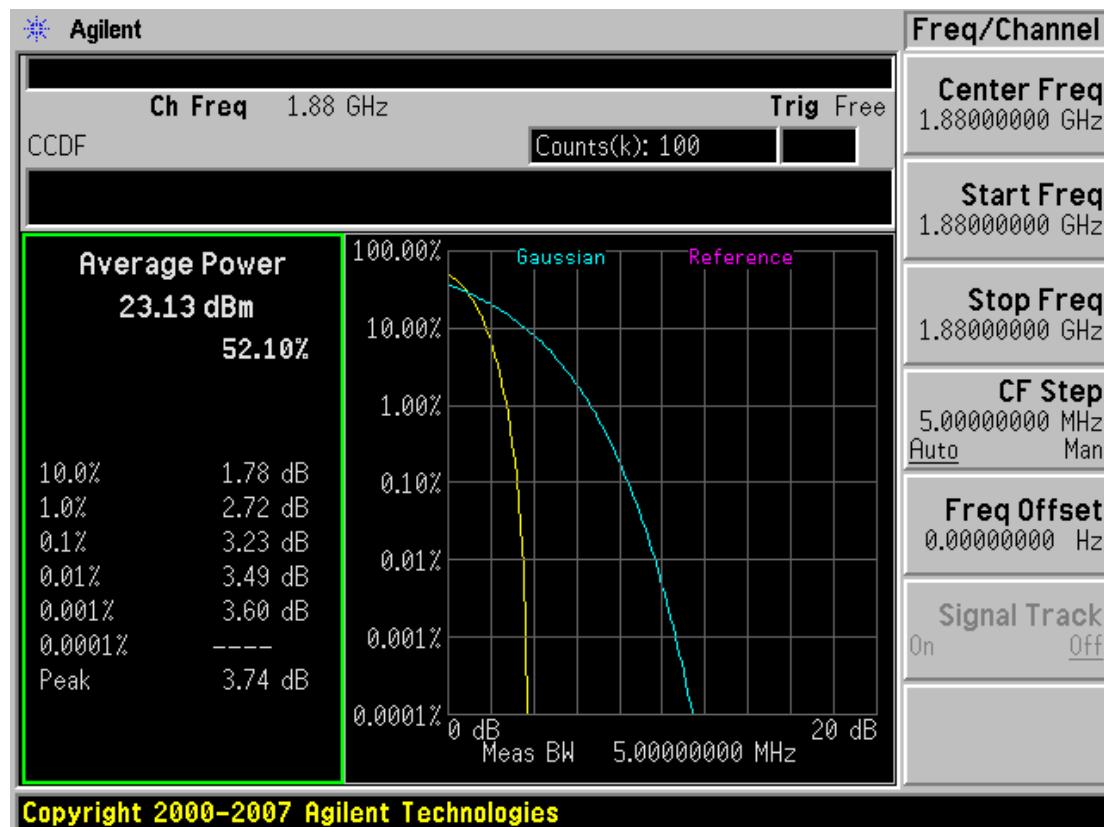


■ GSM850 MODE (128 CH.) Band Edge

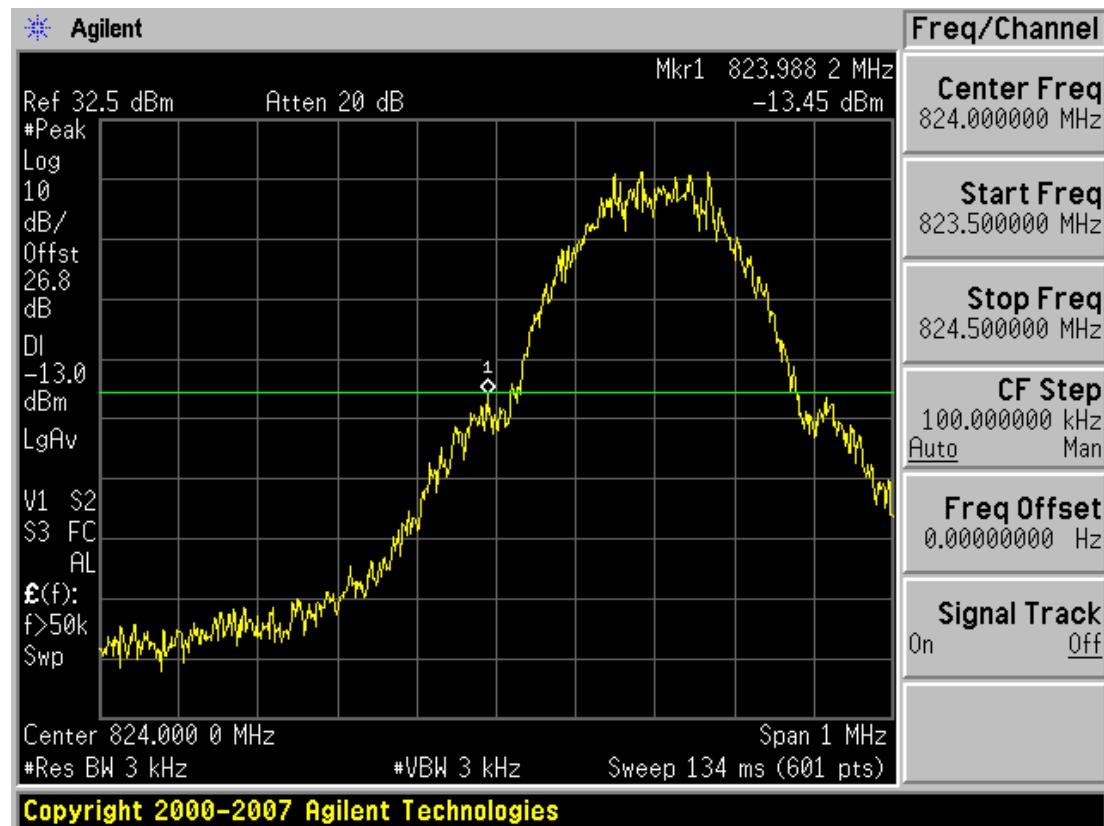


■ GSM850 MODE (251 CH.) Band Edge

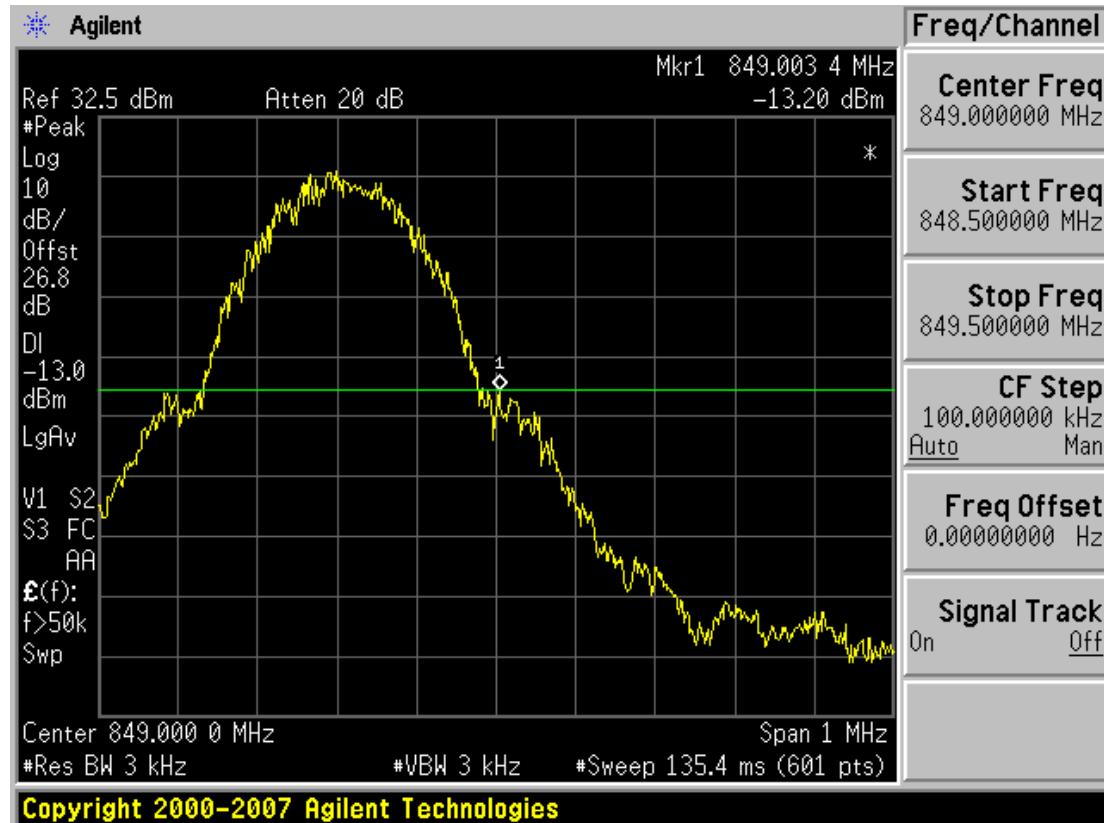


■ GSM850 EDGE MODE (128 CH.) Band Edge

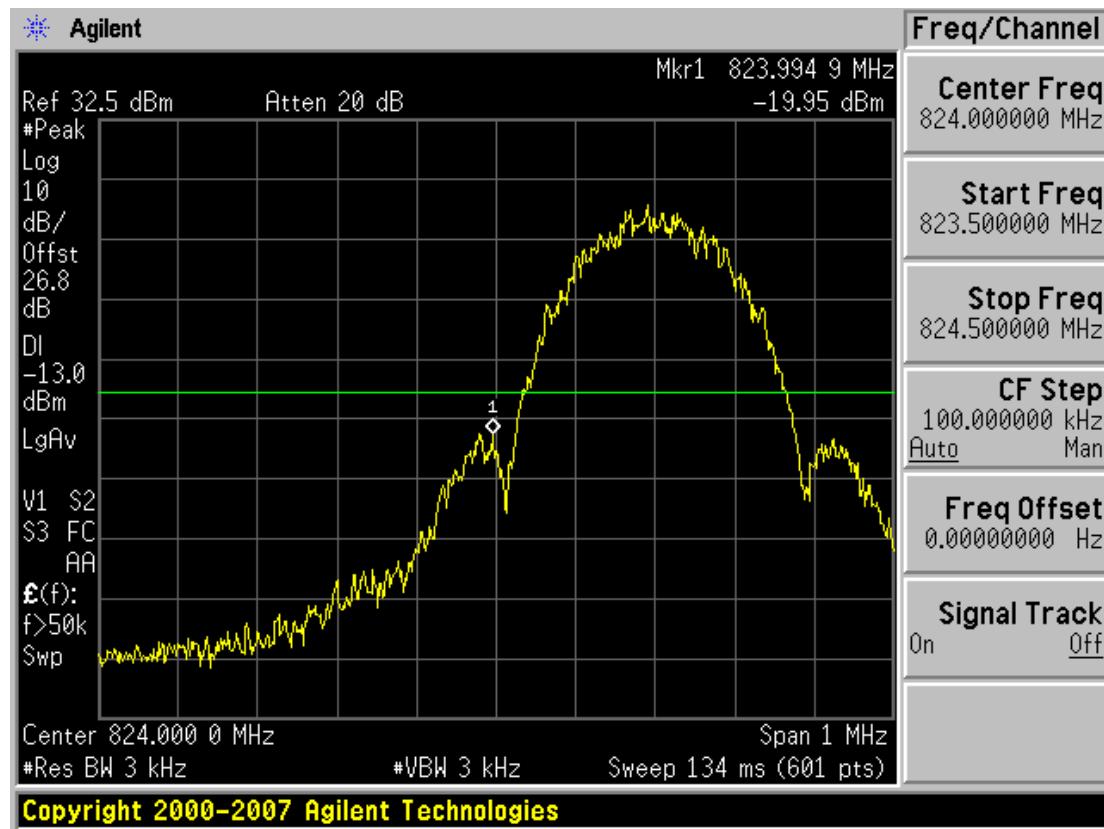


■ GSM850 EDGE MODE (251 CH.) Band Edge

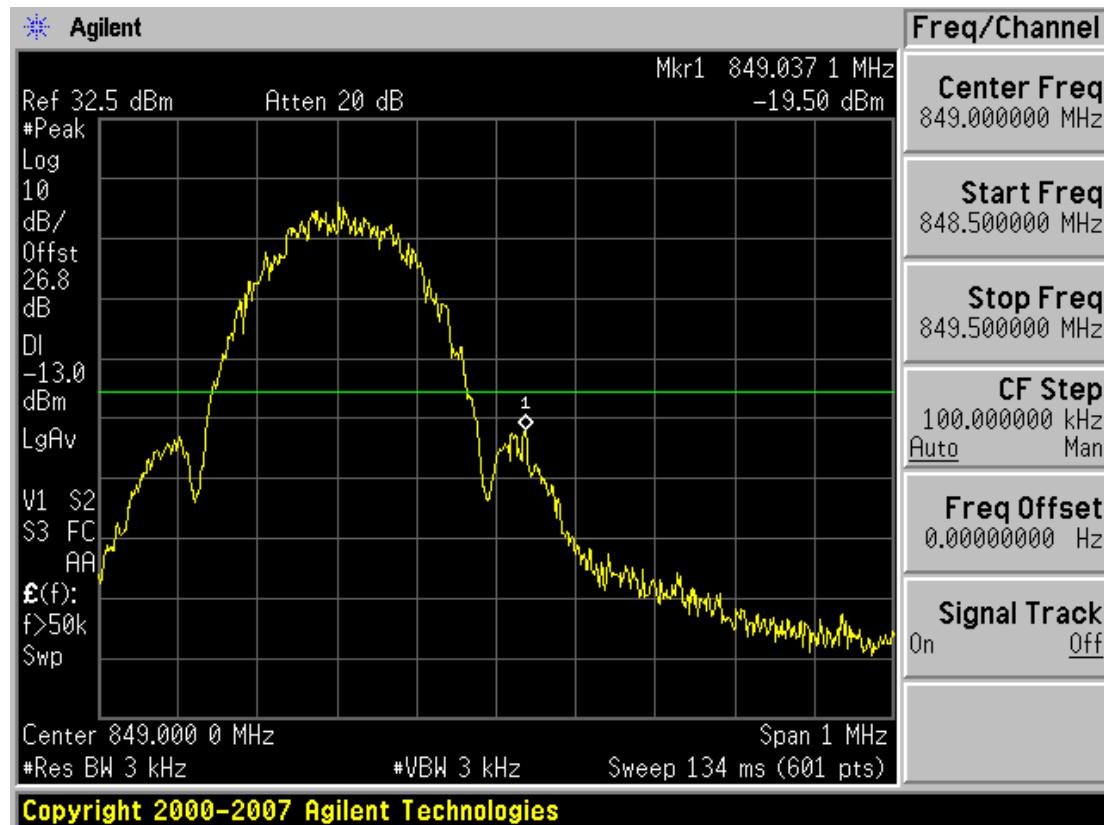


■ GSM1900 MODE (512 CH.) Band Edge

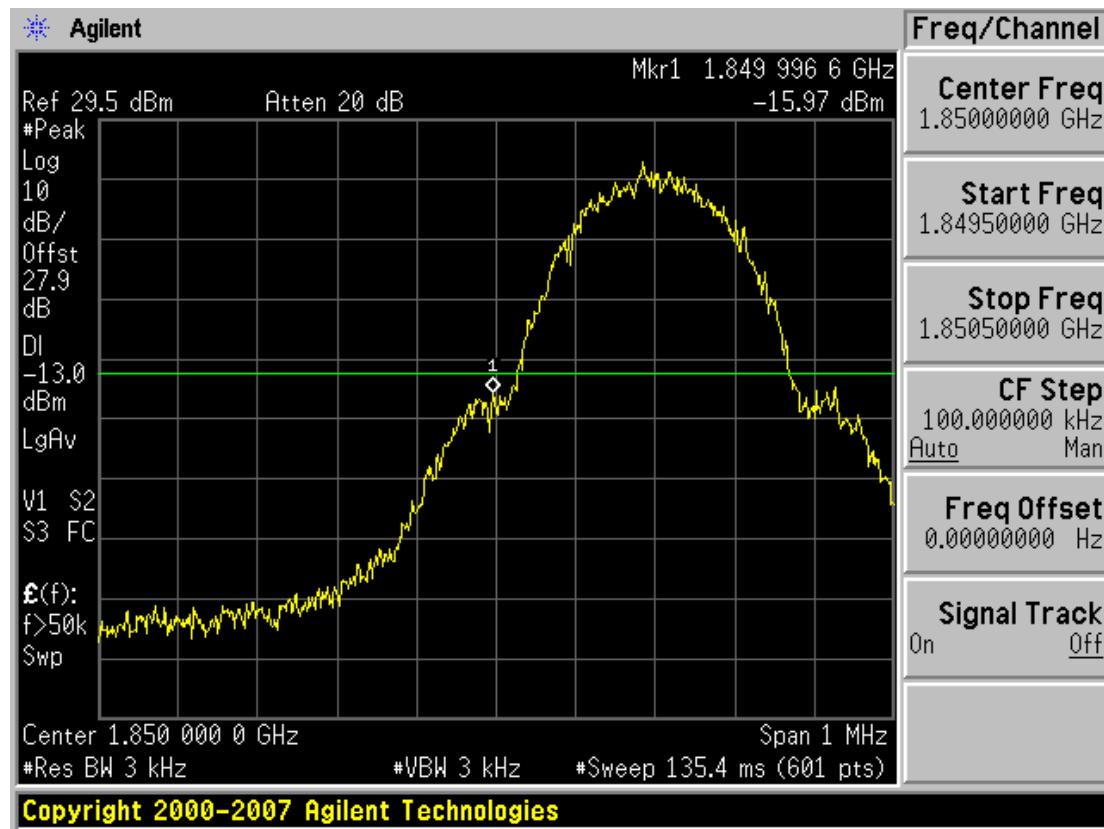


■ GSM1900 MODE (810 CH.) Band Edge

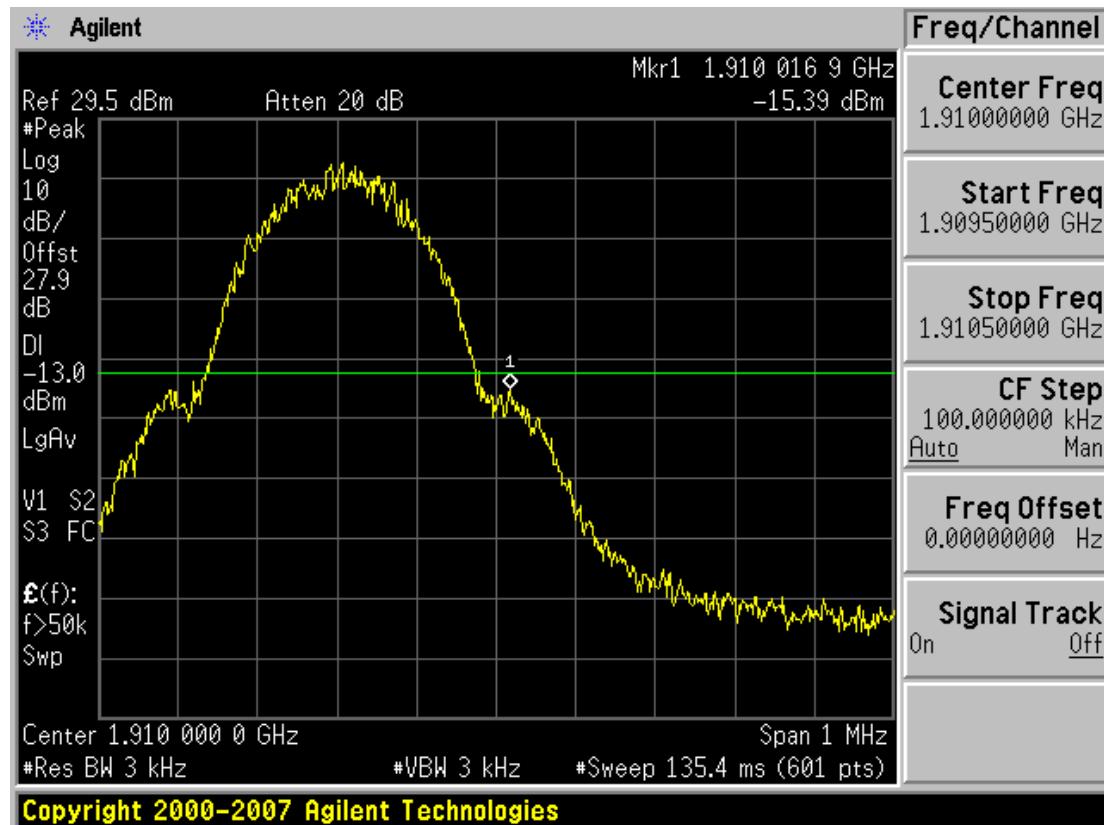


■ GSM1900 EDGE MODE (512 CH.) Band Edge

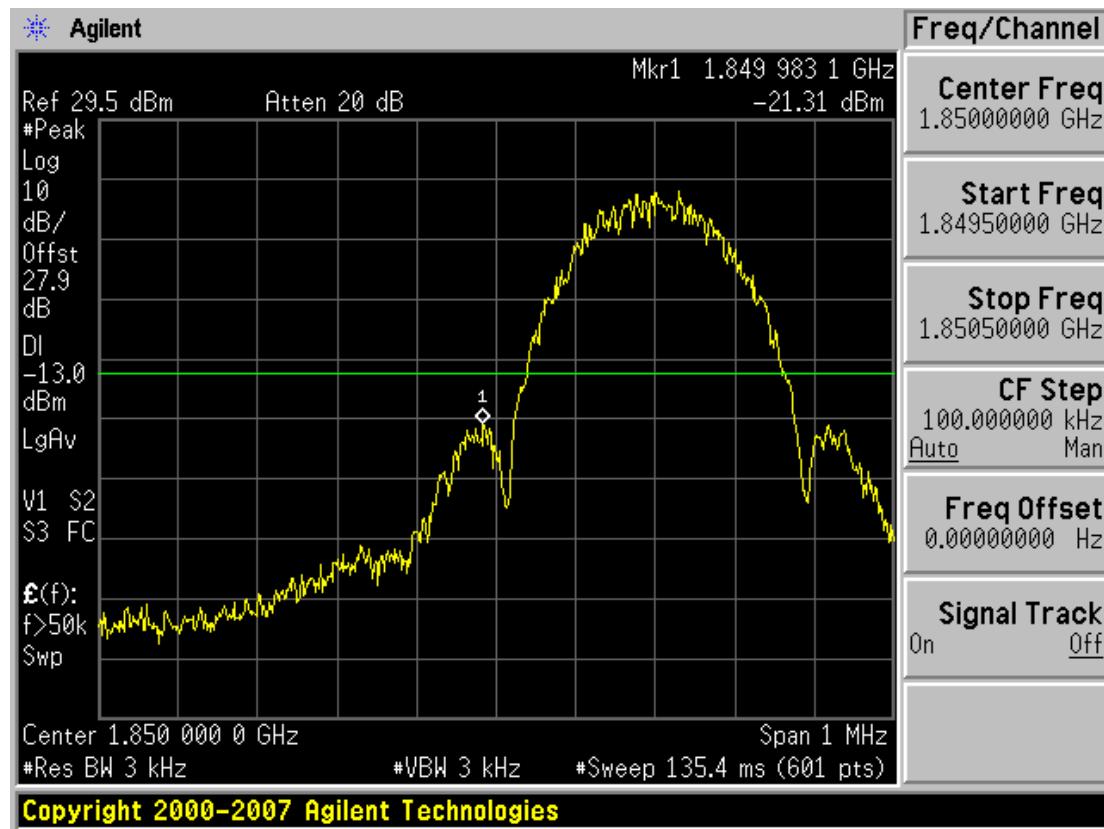


■ GSM1900 EDGE MODE (810 CH.) Band Edge

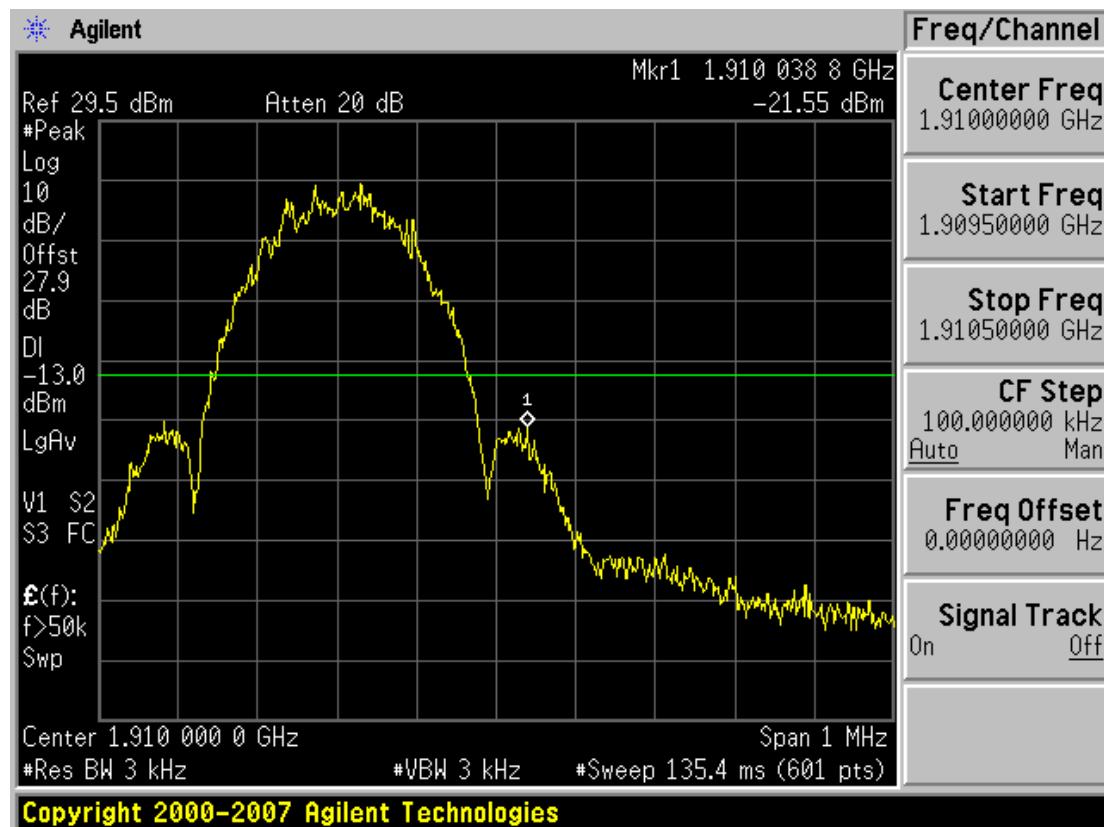


■ WCDMA850 MODE (4132 CH.) Band Edge

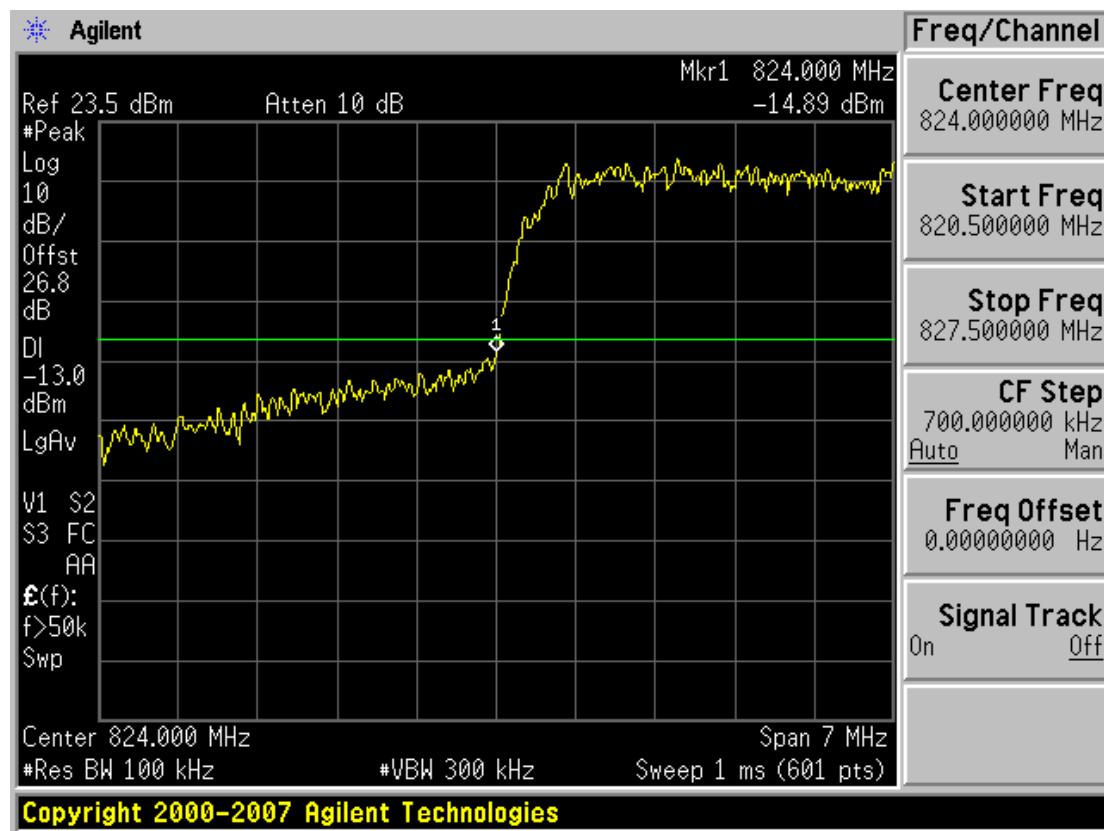


■ WCDMA850MODE (4233 CH.) Band Edge

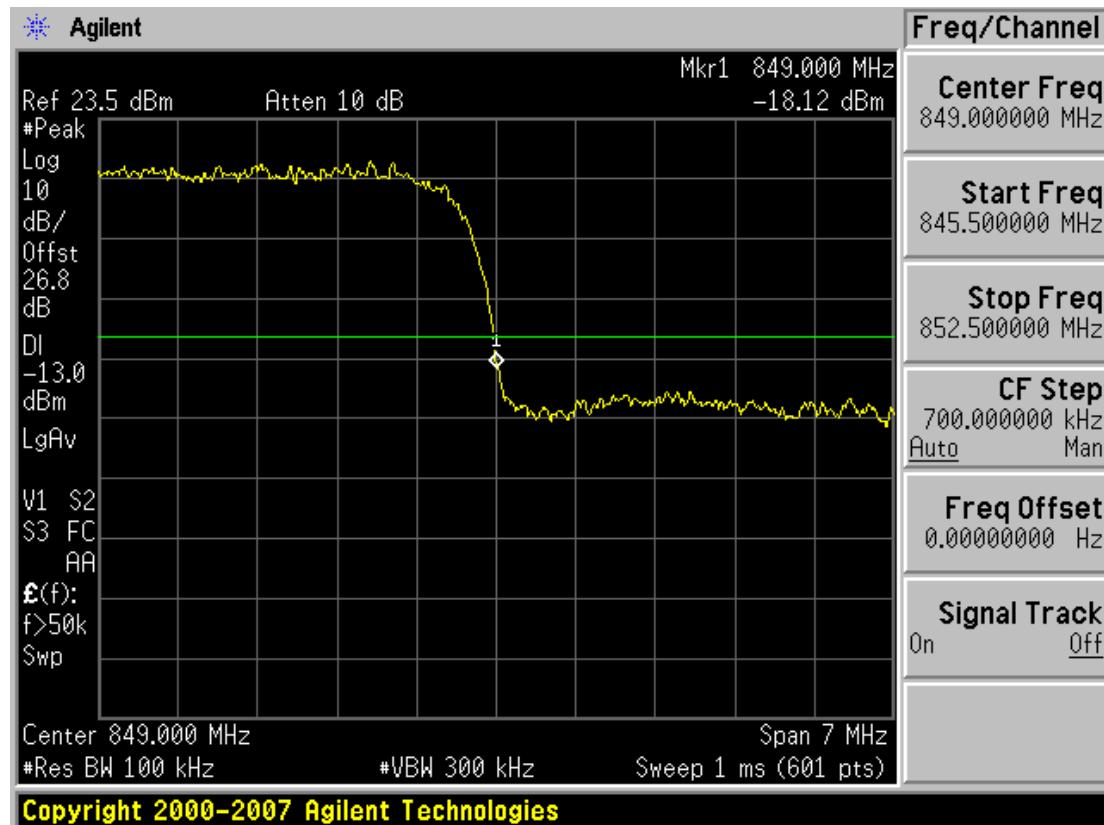


■ WCDMA850 MODE (4132 CH.) – 4 MHz span

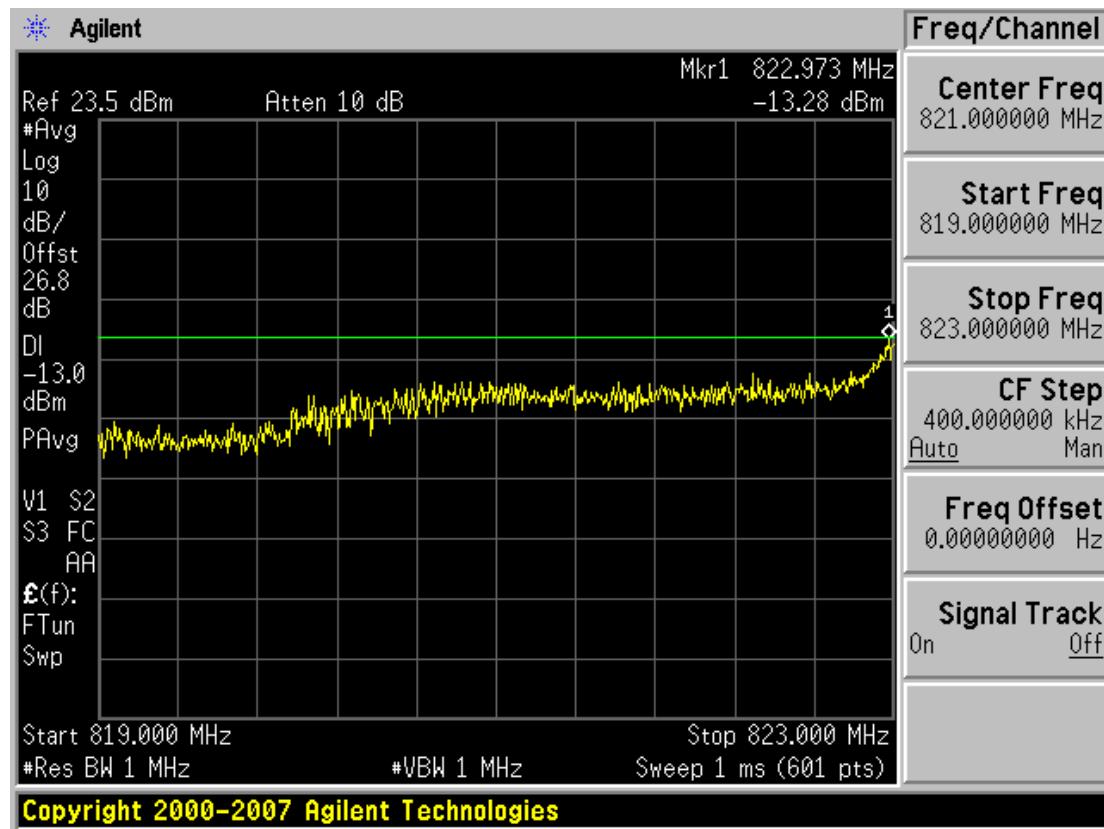


■ WCDMA850 MODE (4233 CH.) – 4 MHz span

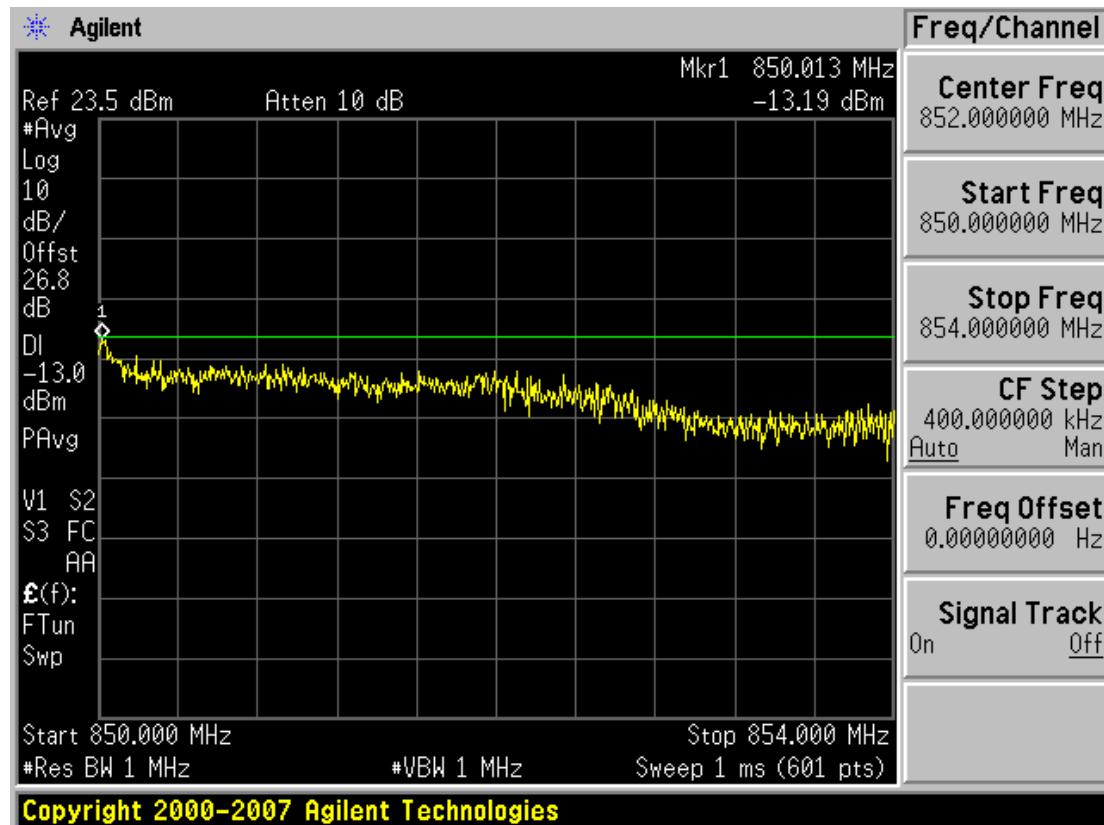


■ WCDMA1900 MODE (9262 CH.) Band Edge

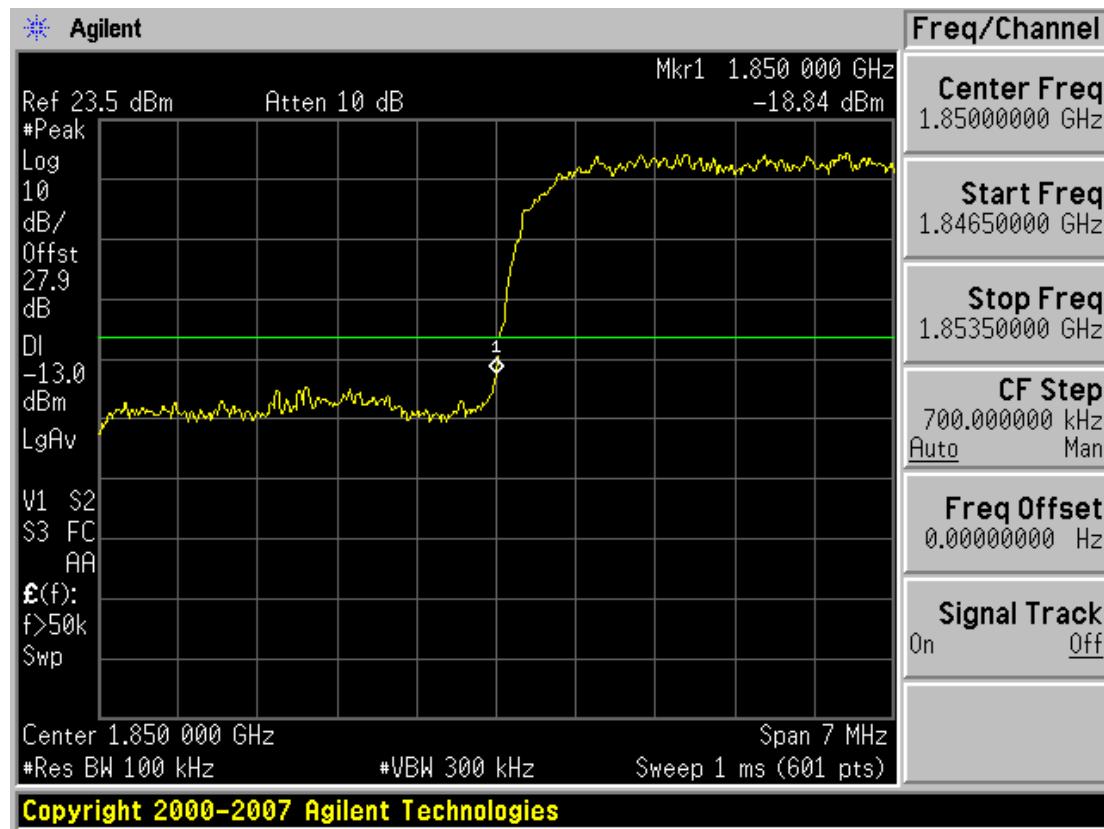

■ WCDMA1900MODE (9538 CH.) Band Edge

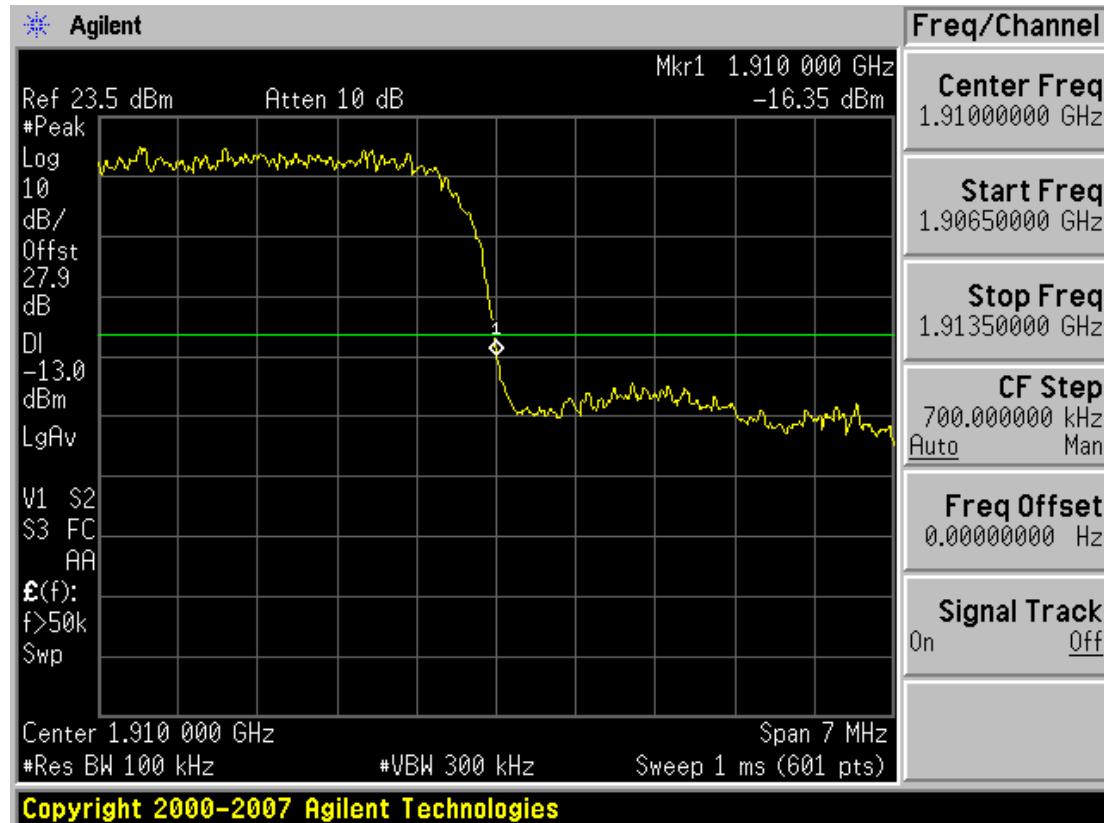


■ WCDMA1900 MODE (9262 CH.) – 4 MHz span

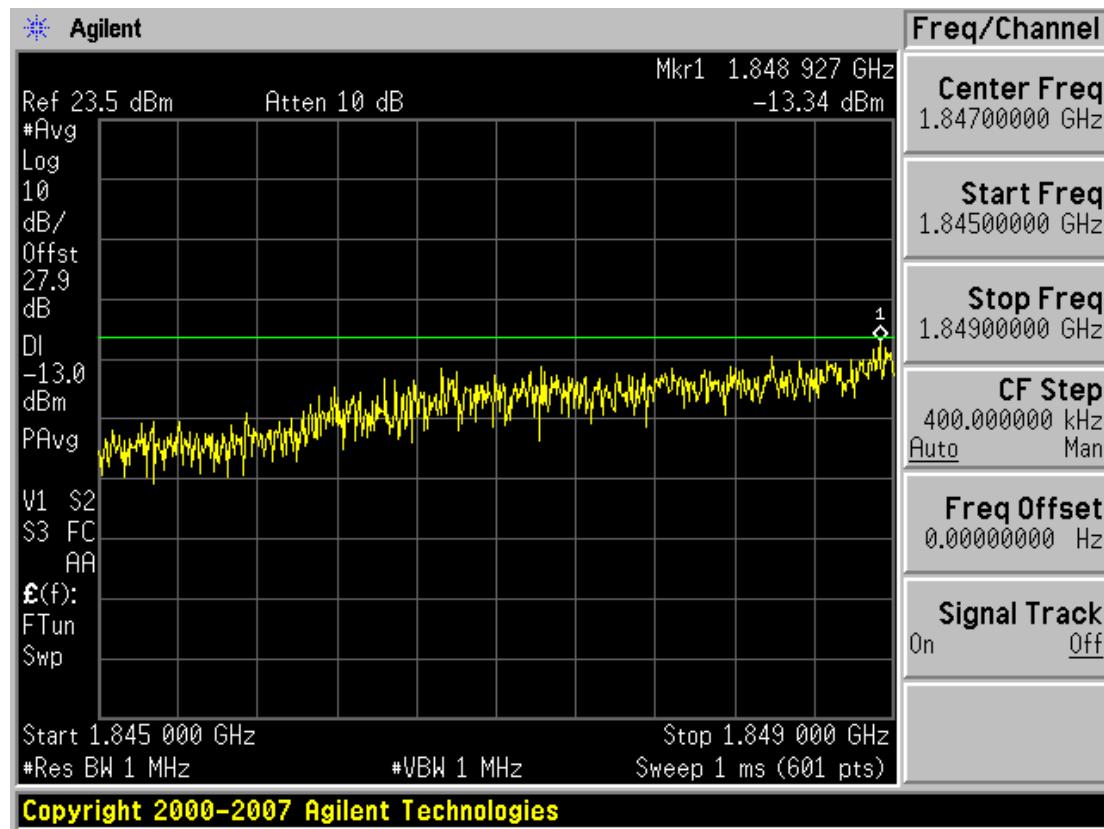


Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 51 of 83
----------------------------------	--------------------------------	------------------------	-----------------------	---------------


■ WCDMA1900MODE (9538 CH.) – 4 MHz span

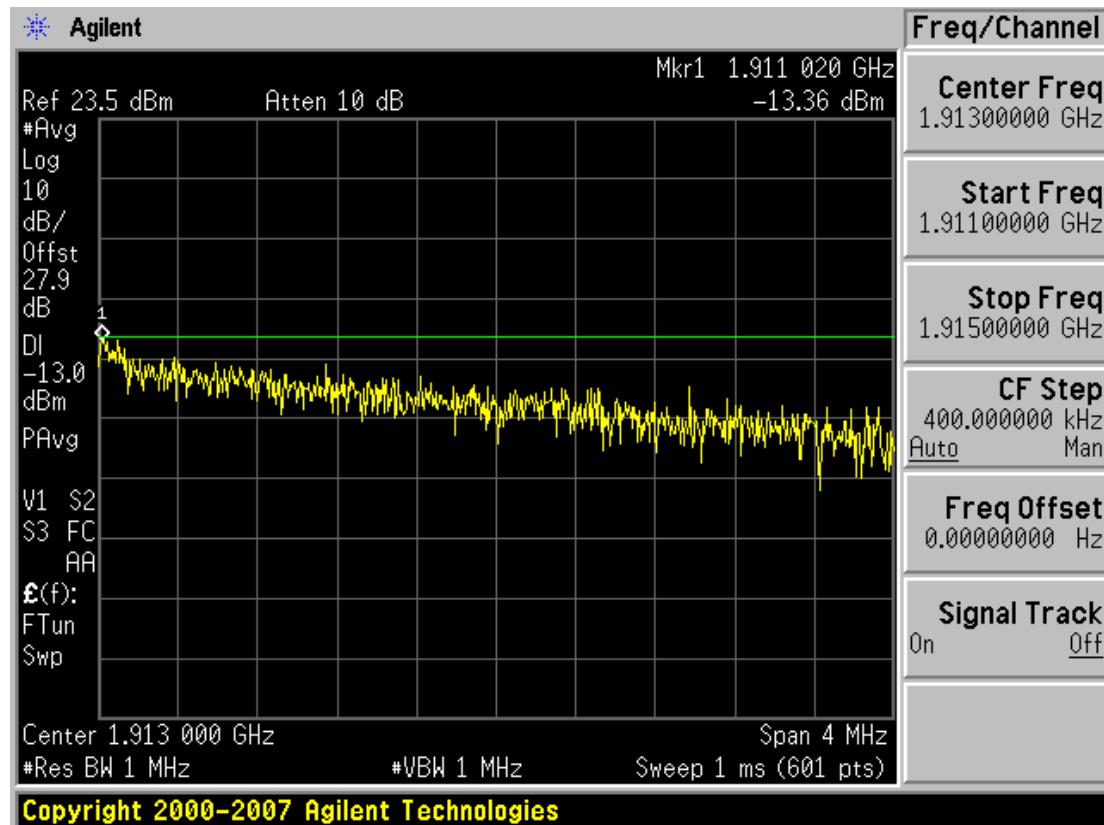


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

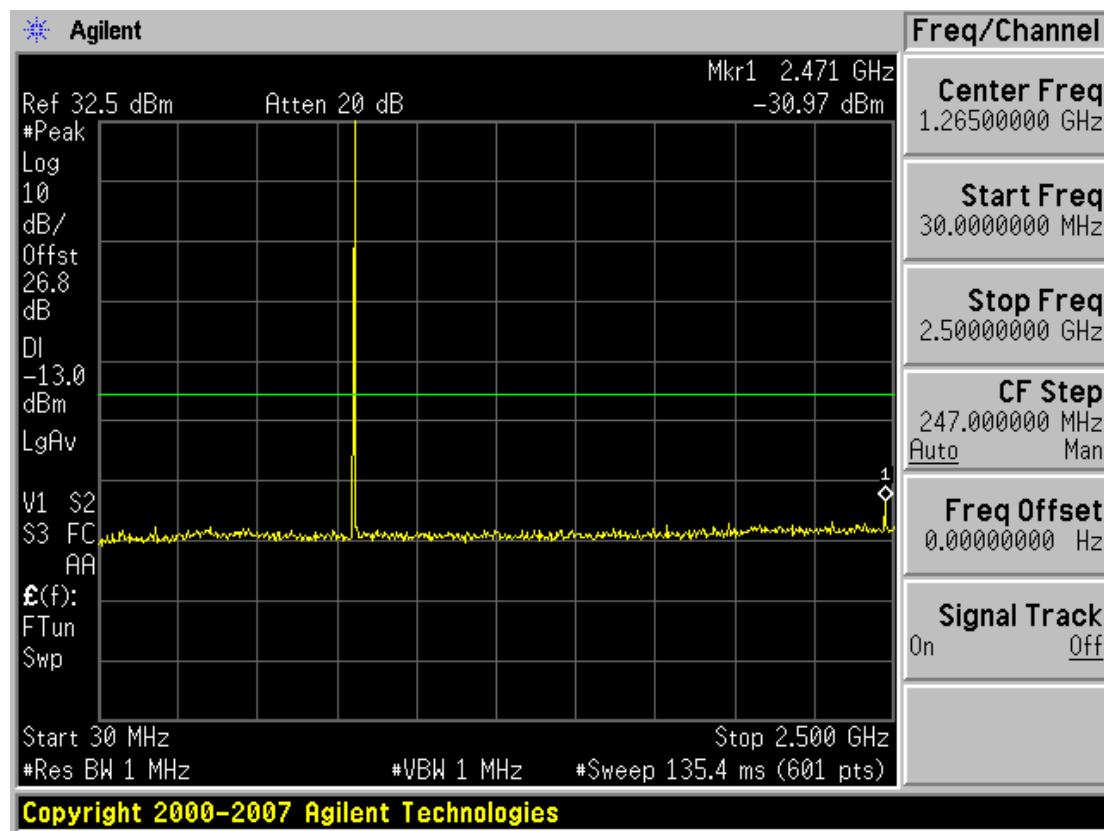

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

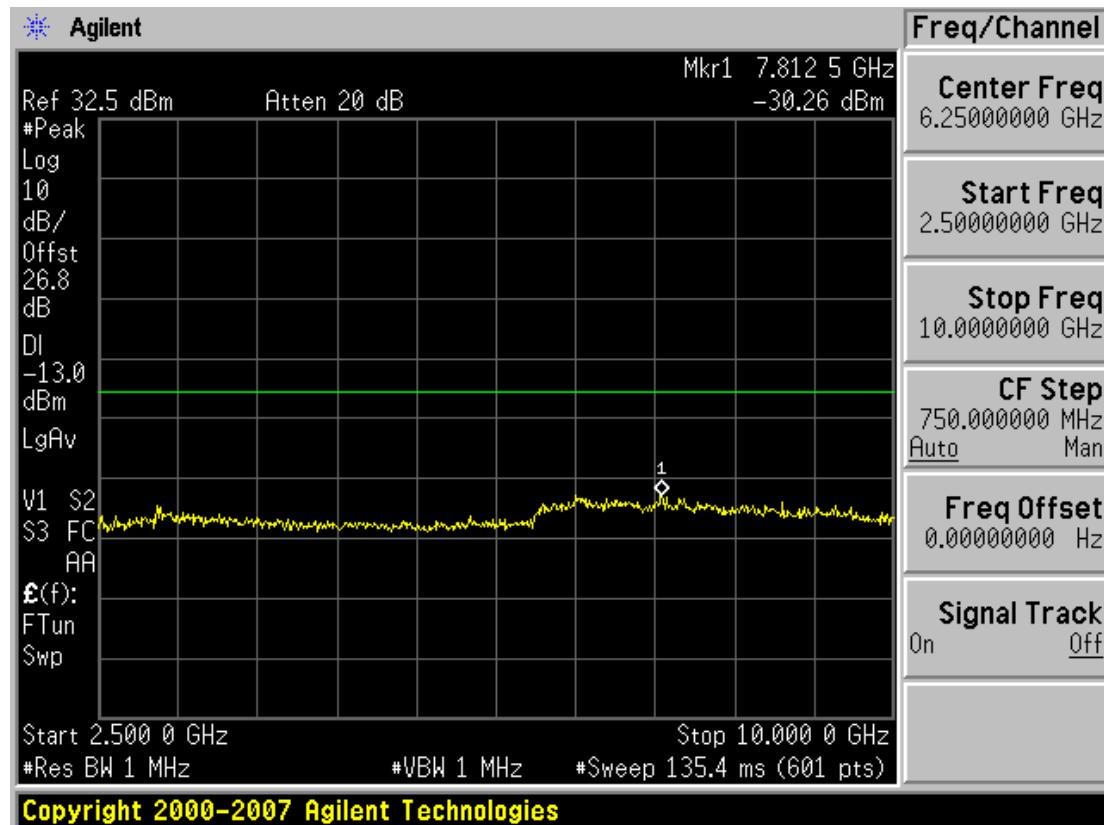


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

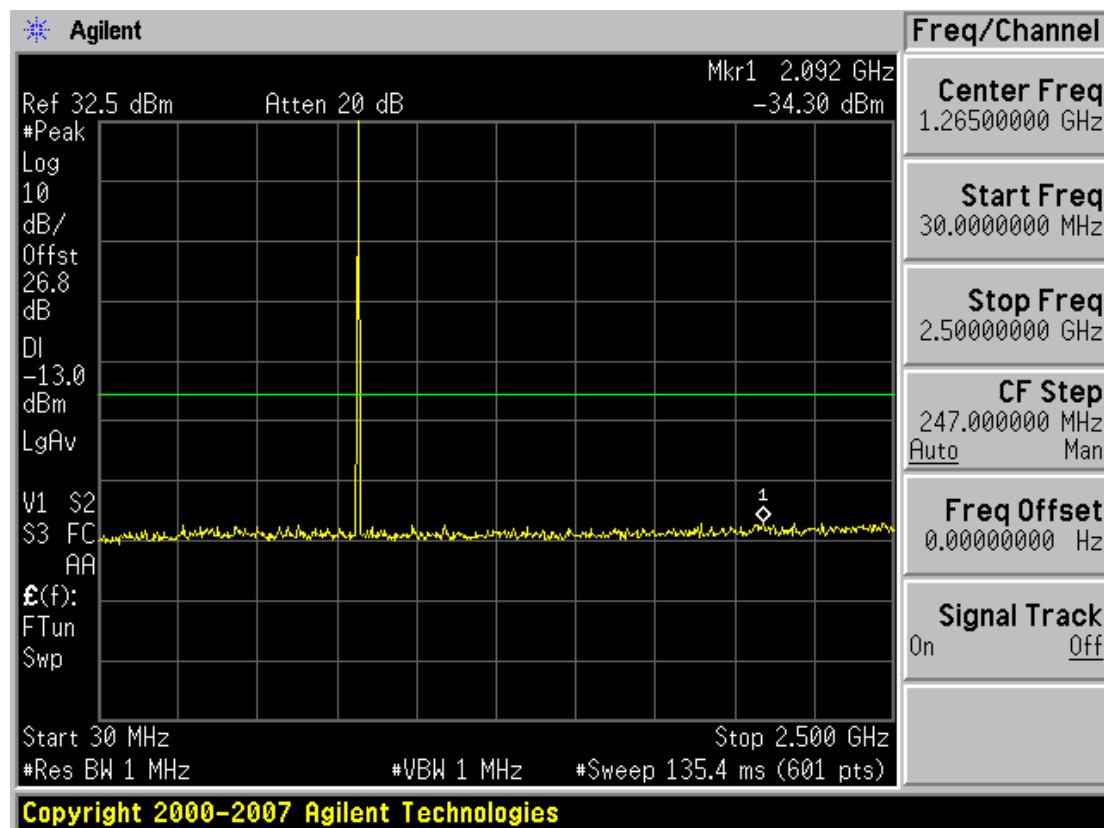


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 53 of 83

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

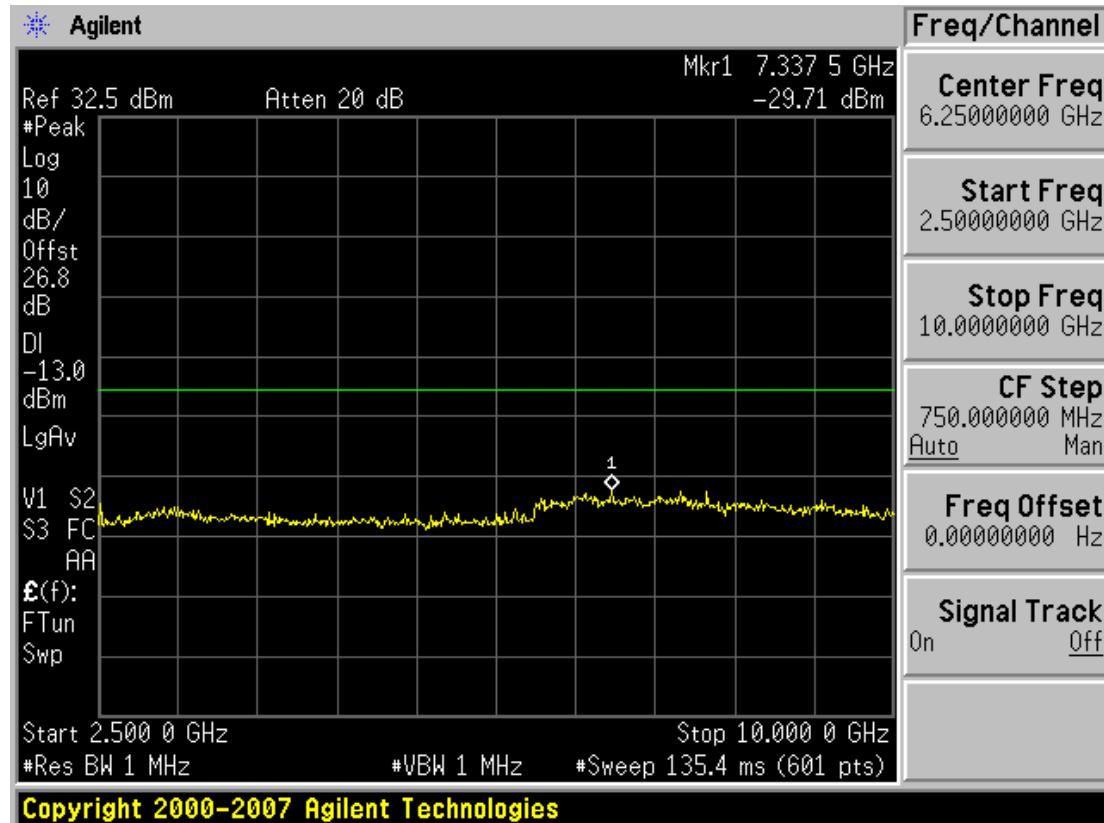

Copyright 2000-2007 Agilent Technologies


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

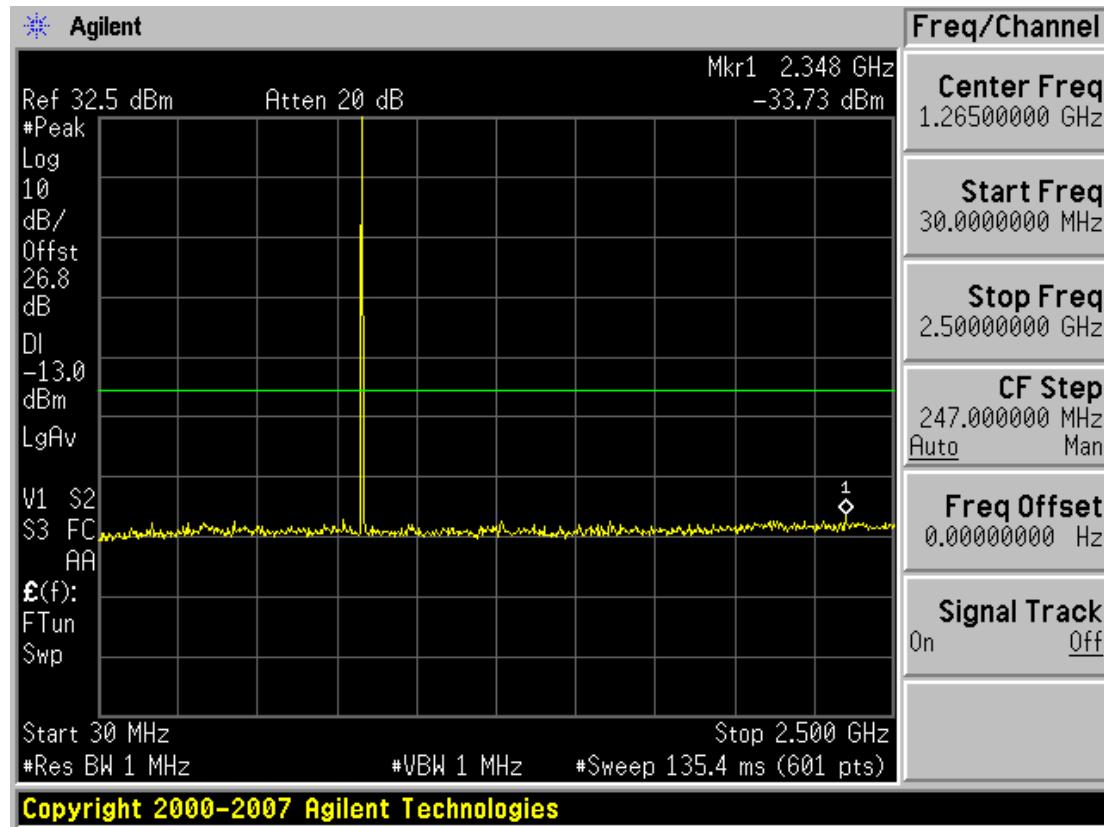


Copyright 2000-2007 Agilent Technologies

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	Page 54 of 83

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

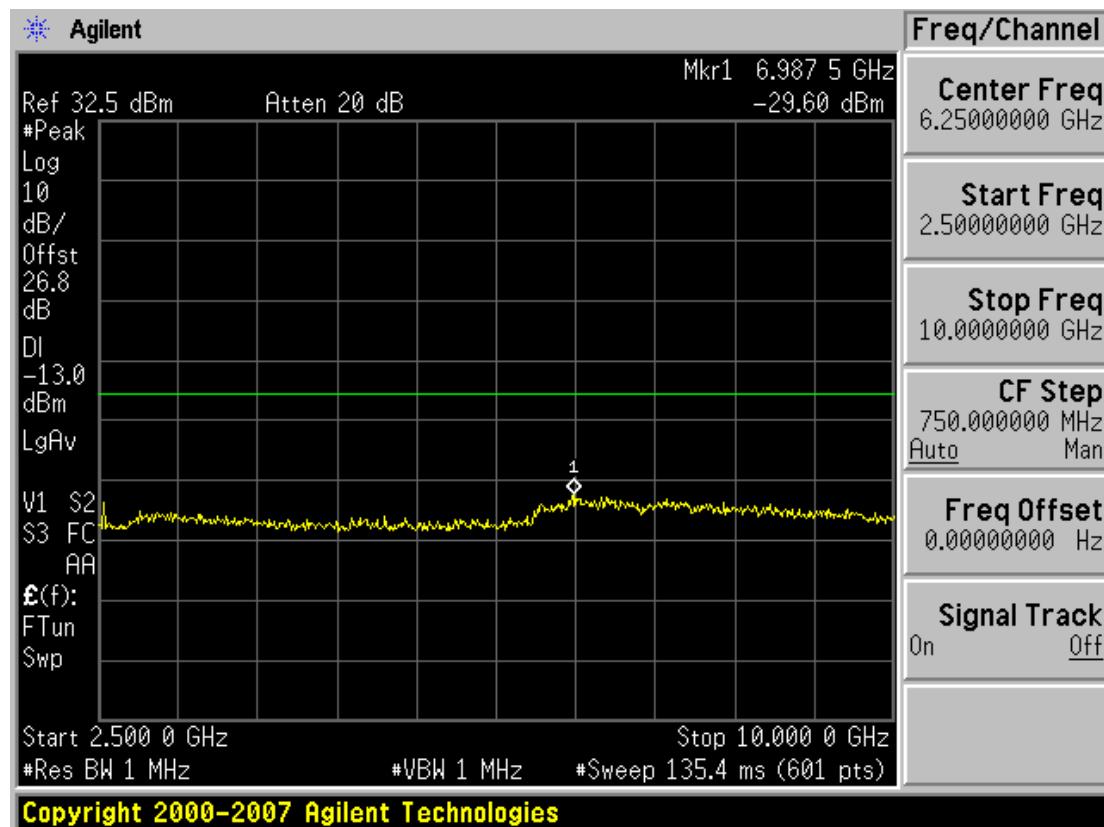


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

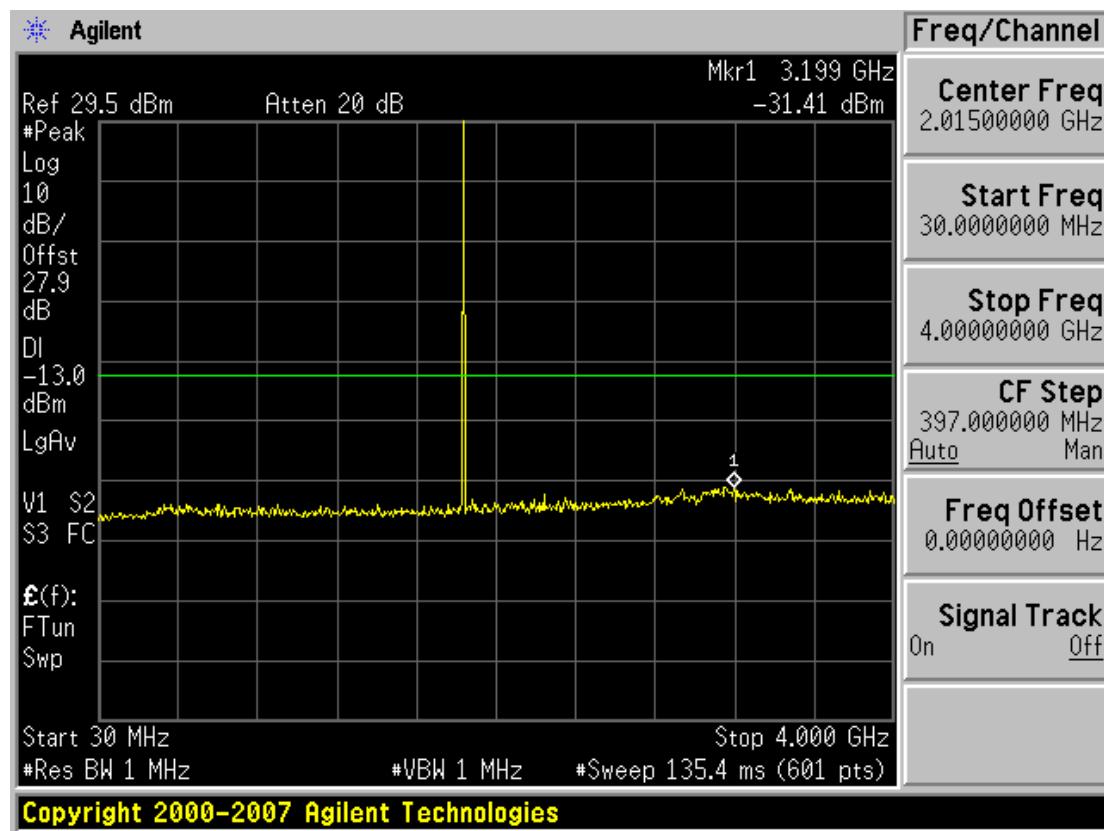


FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 55 of 83


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

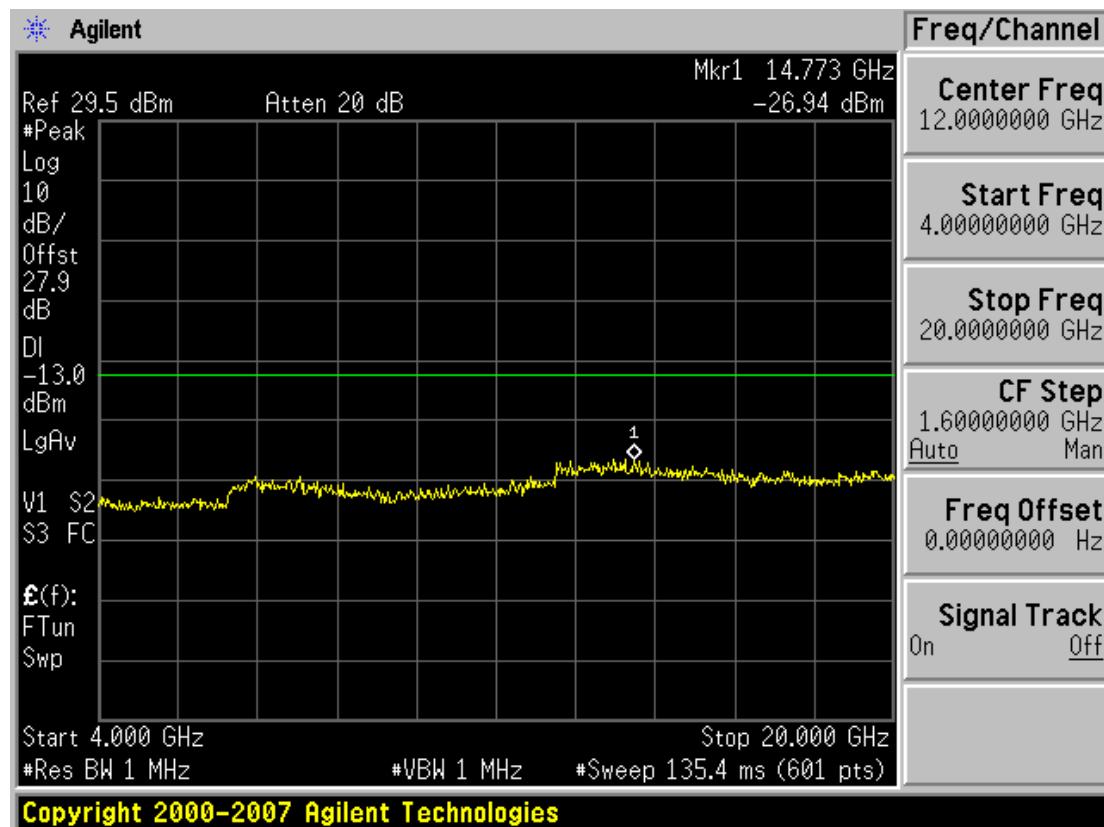


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions1

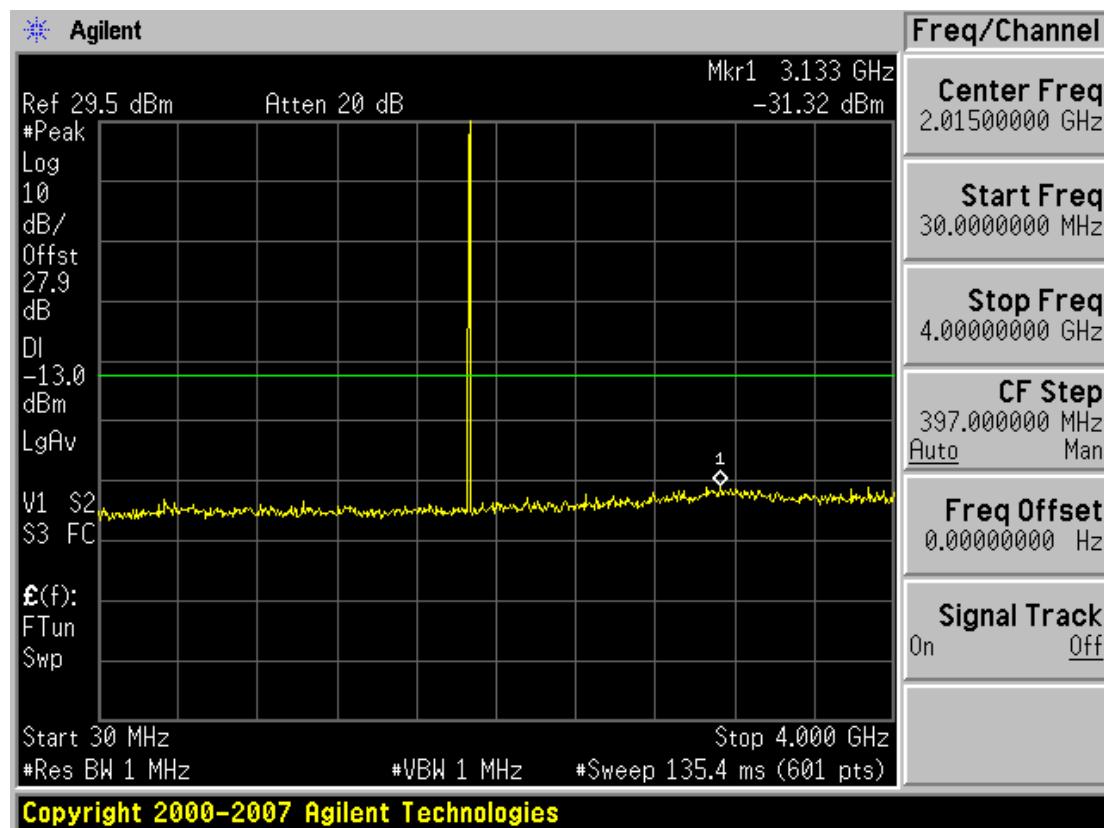


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

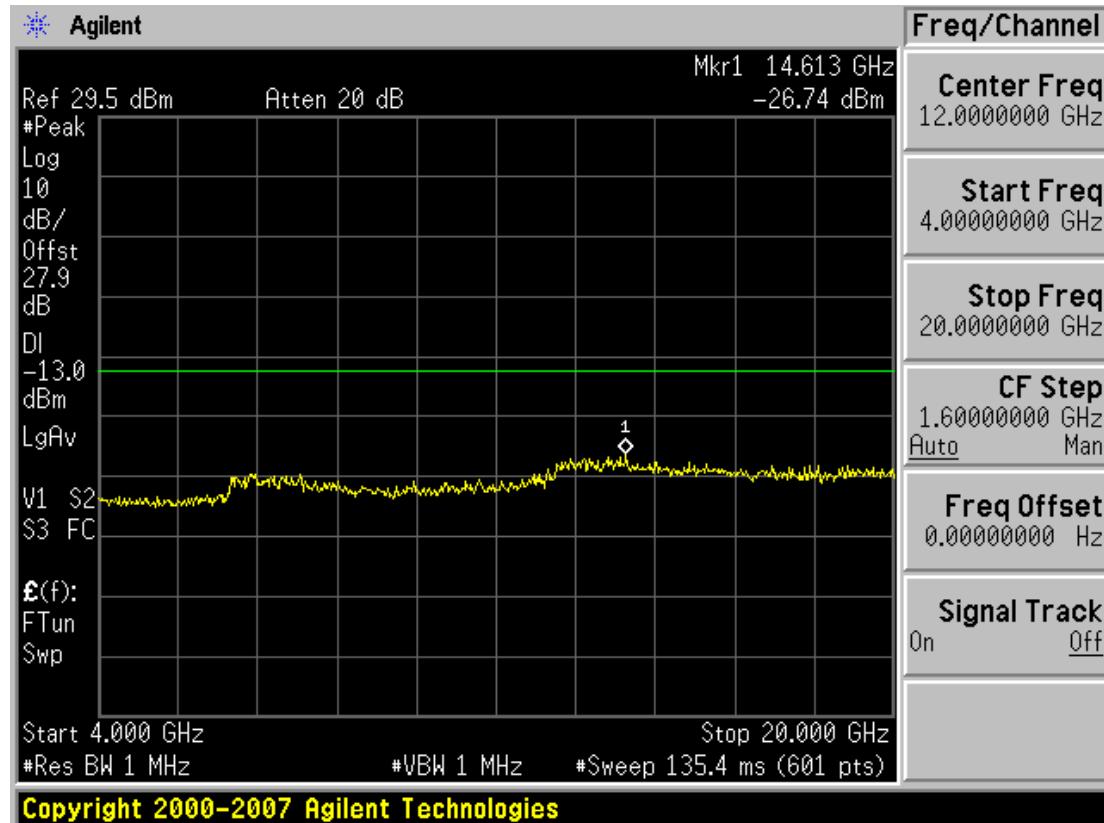


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

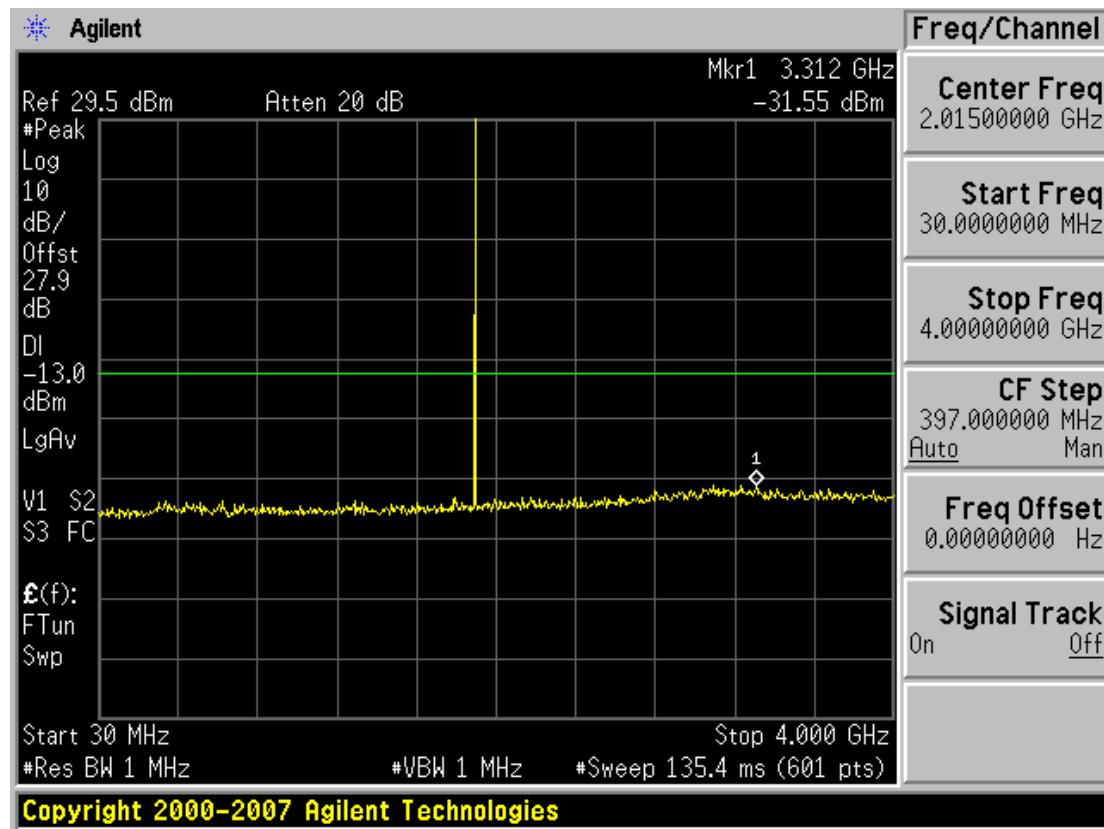


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

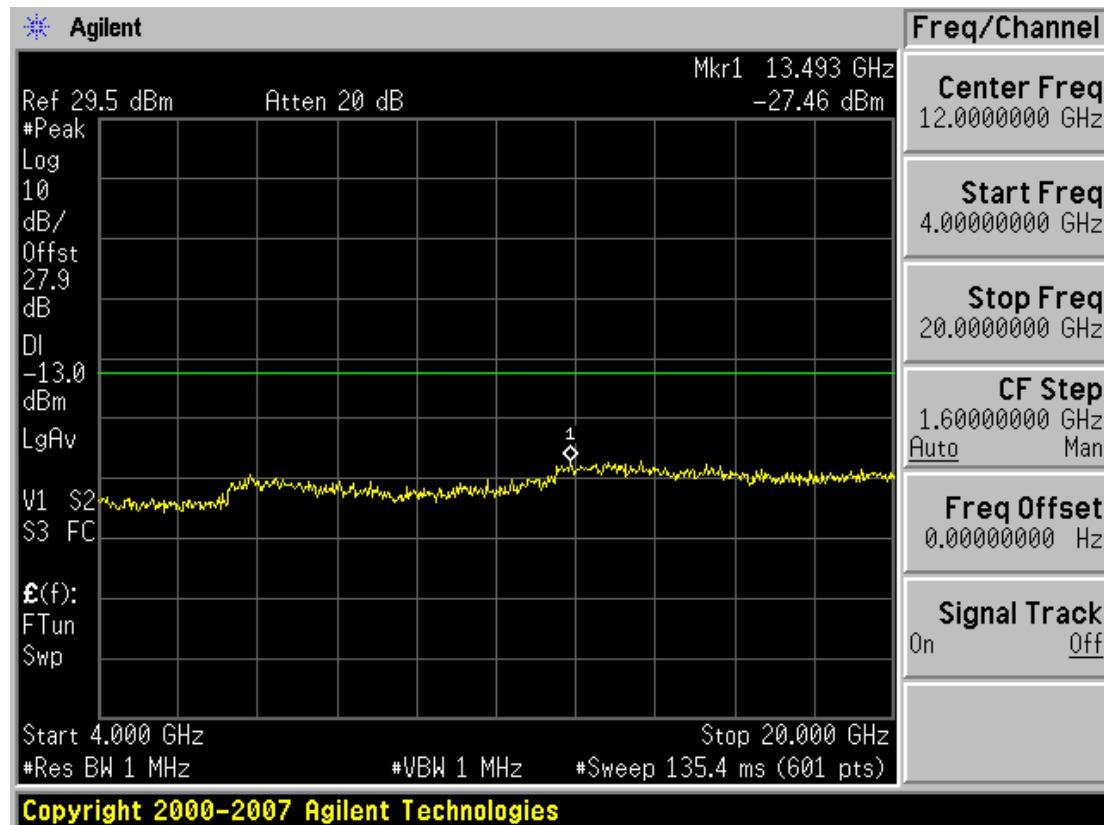


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

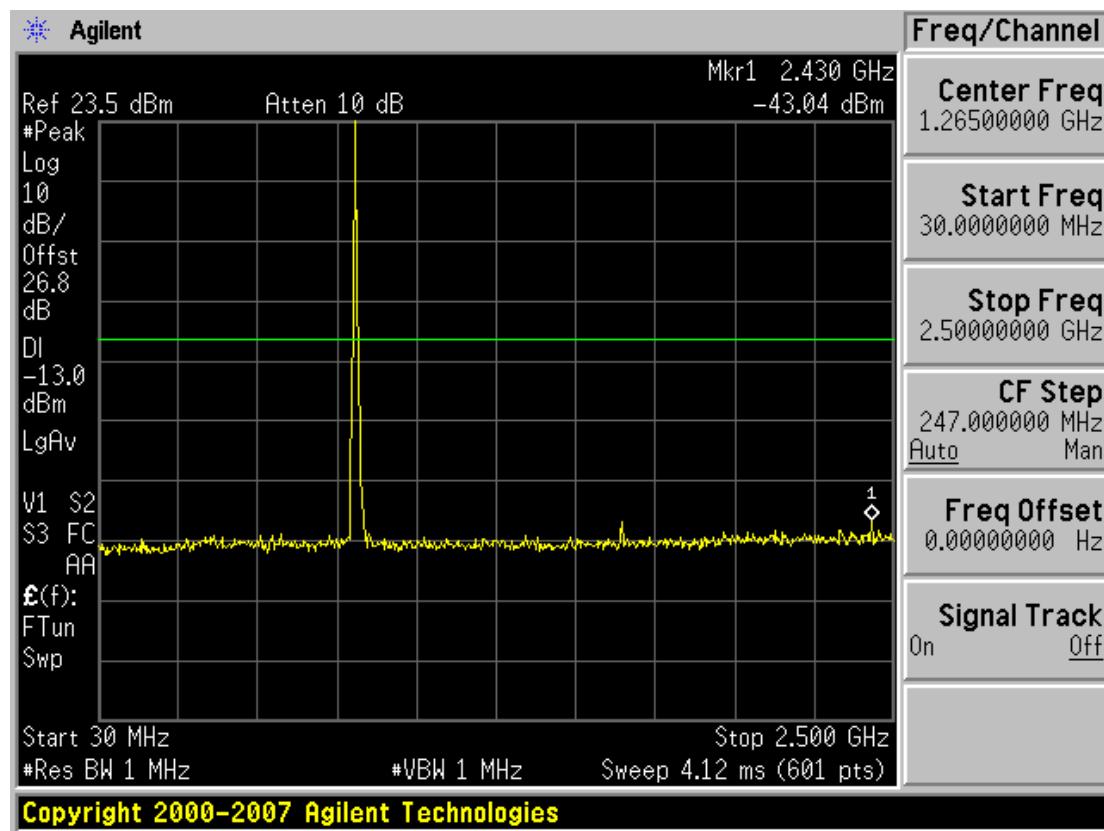


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

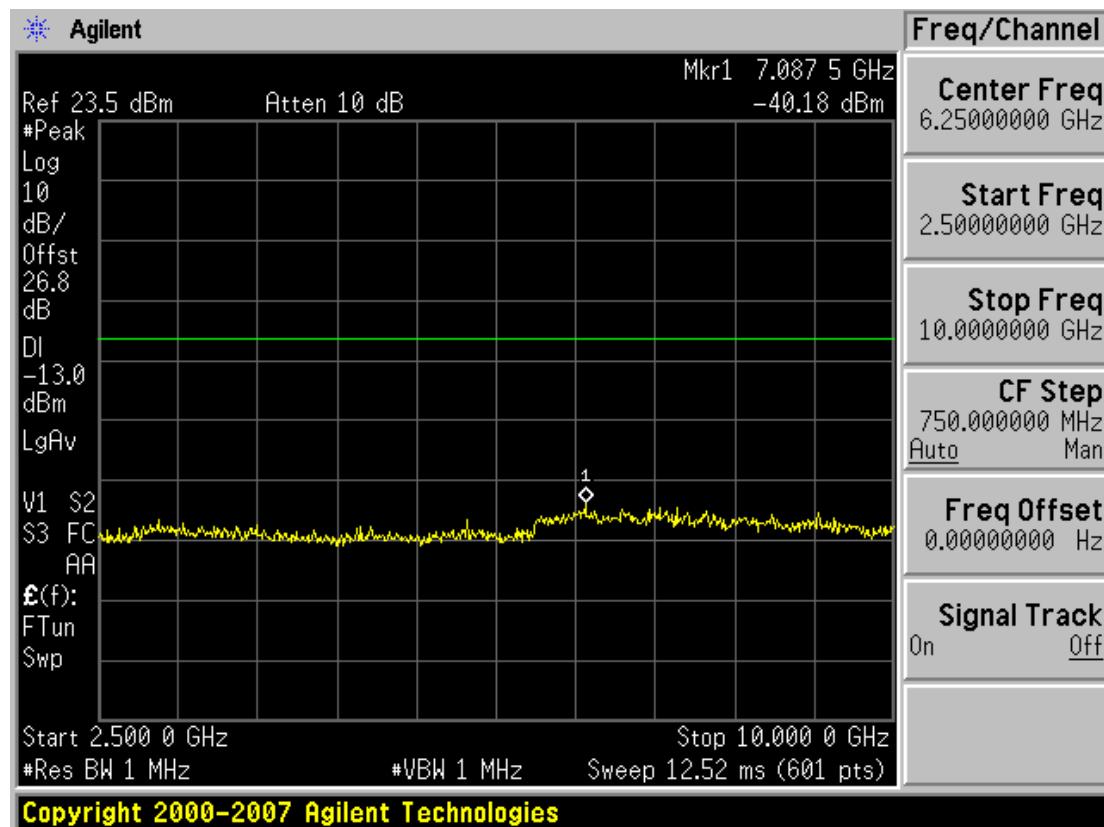


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

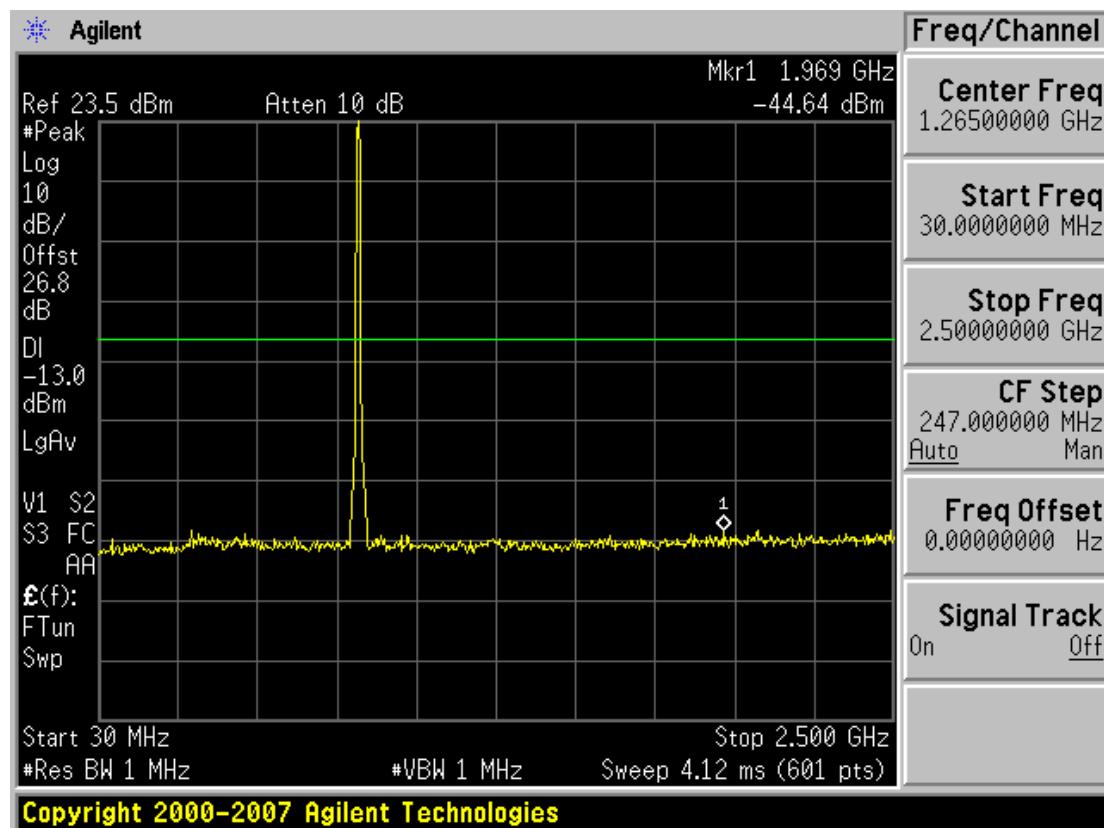


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

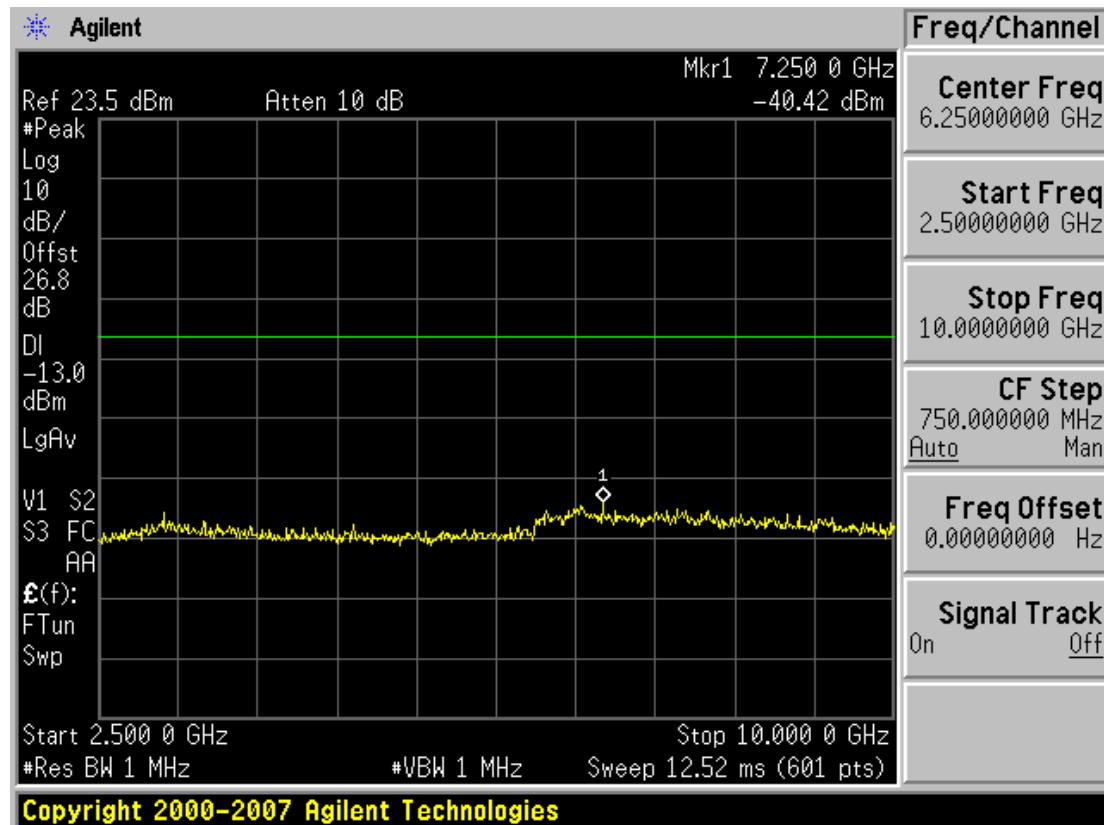


■ WCDMA850 MODE (4233 CH.) Conducted Spurious Emissions1

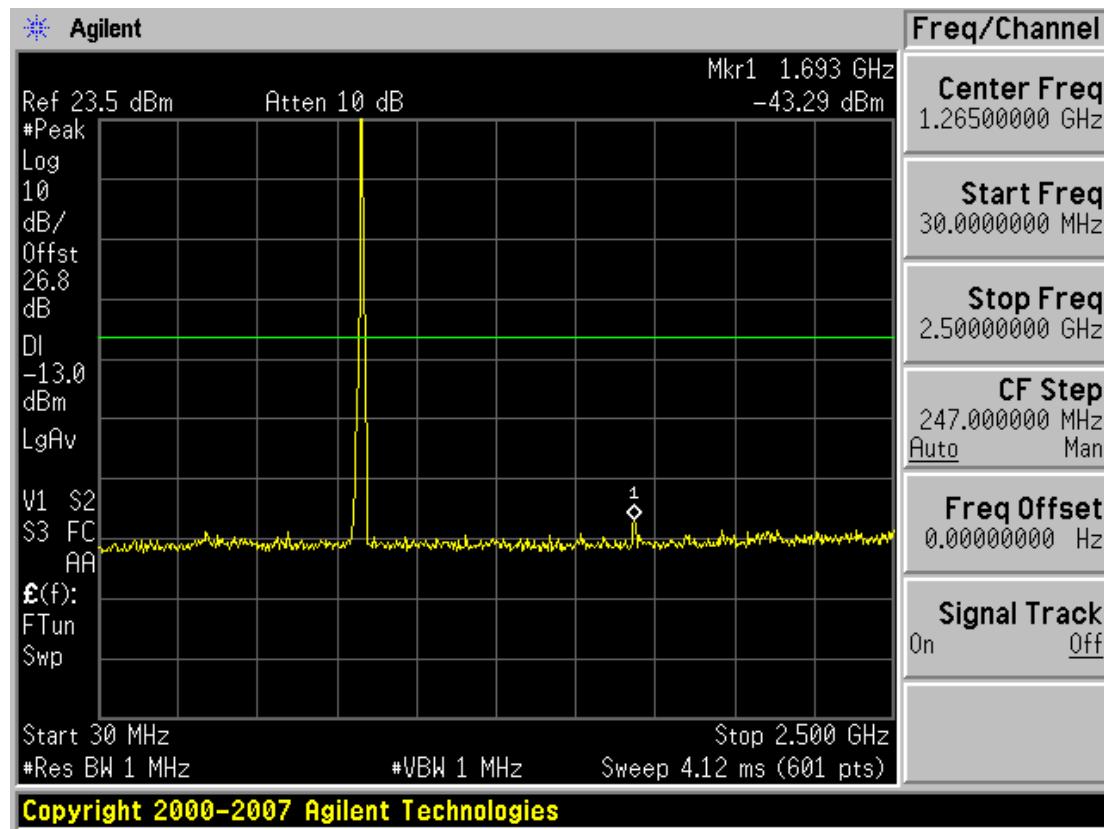


■ WCDMA850 MODE (4233 CH.) Conducted Spurious Emissions2

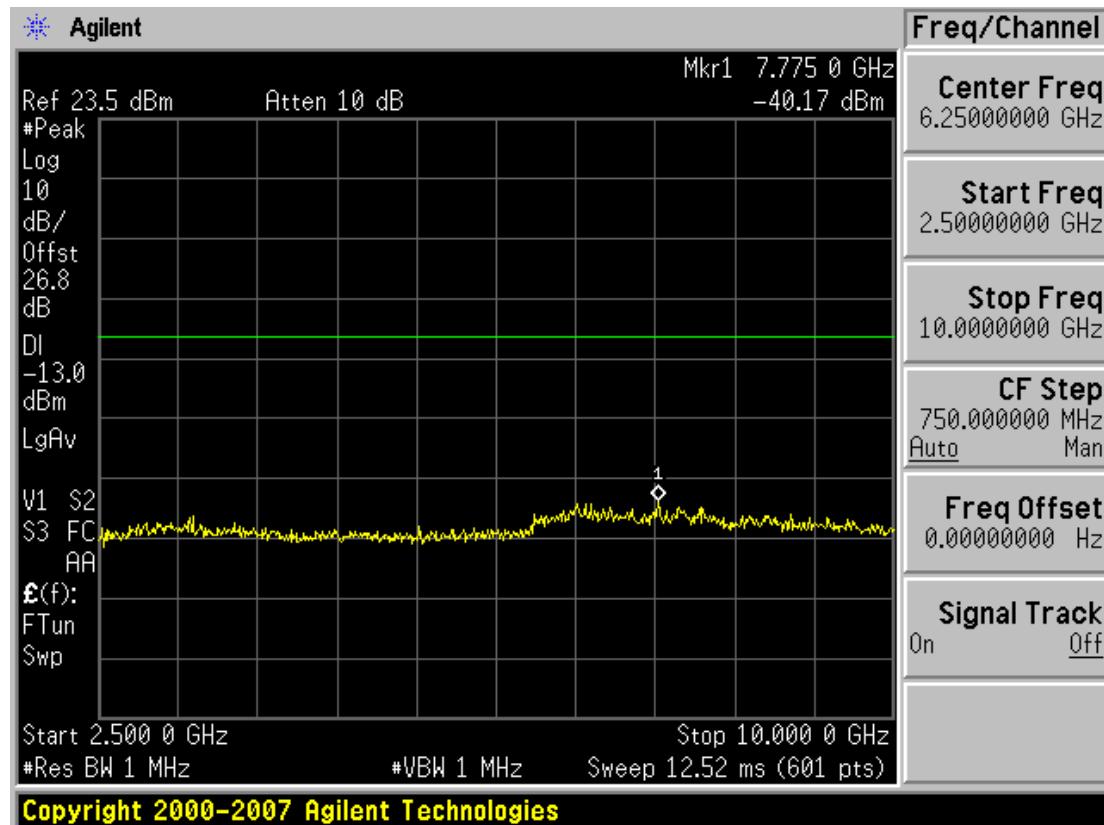


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

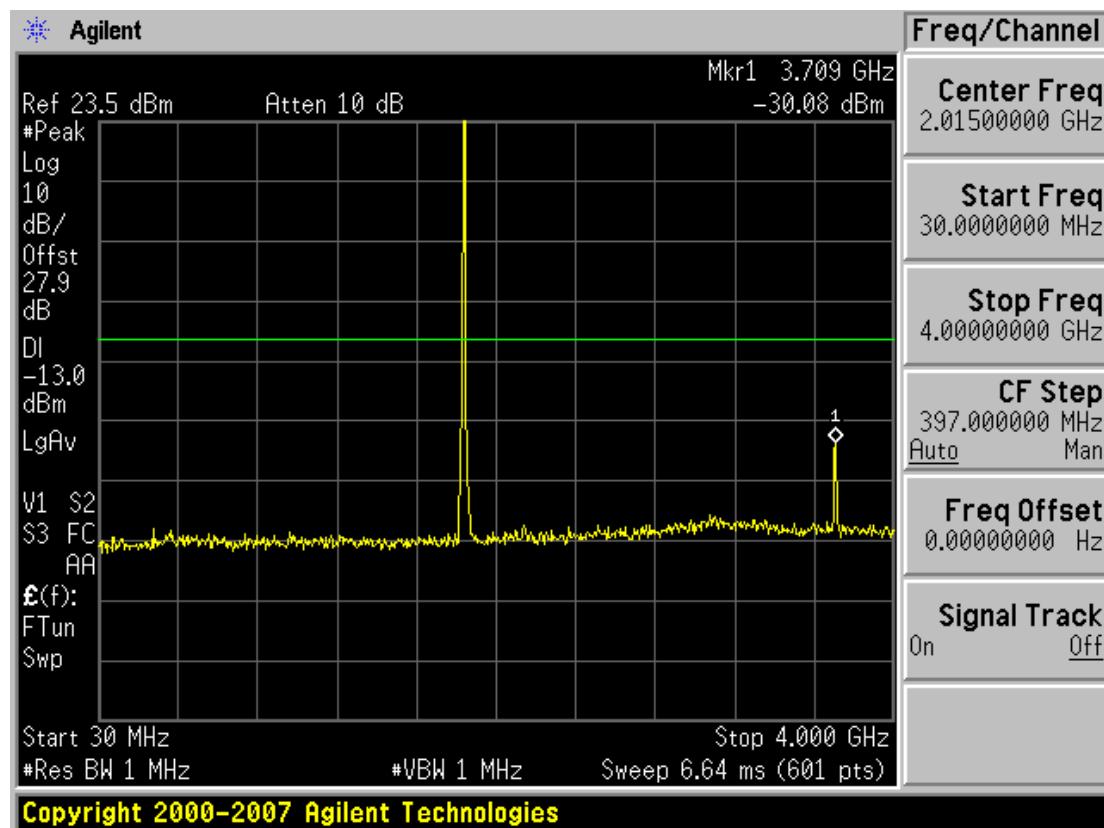


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

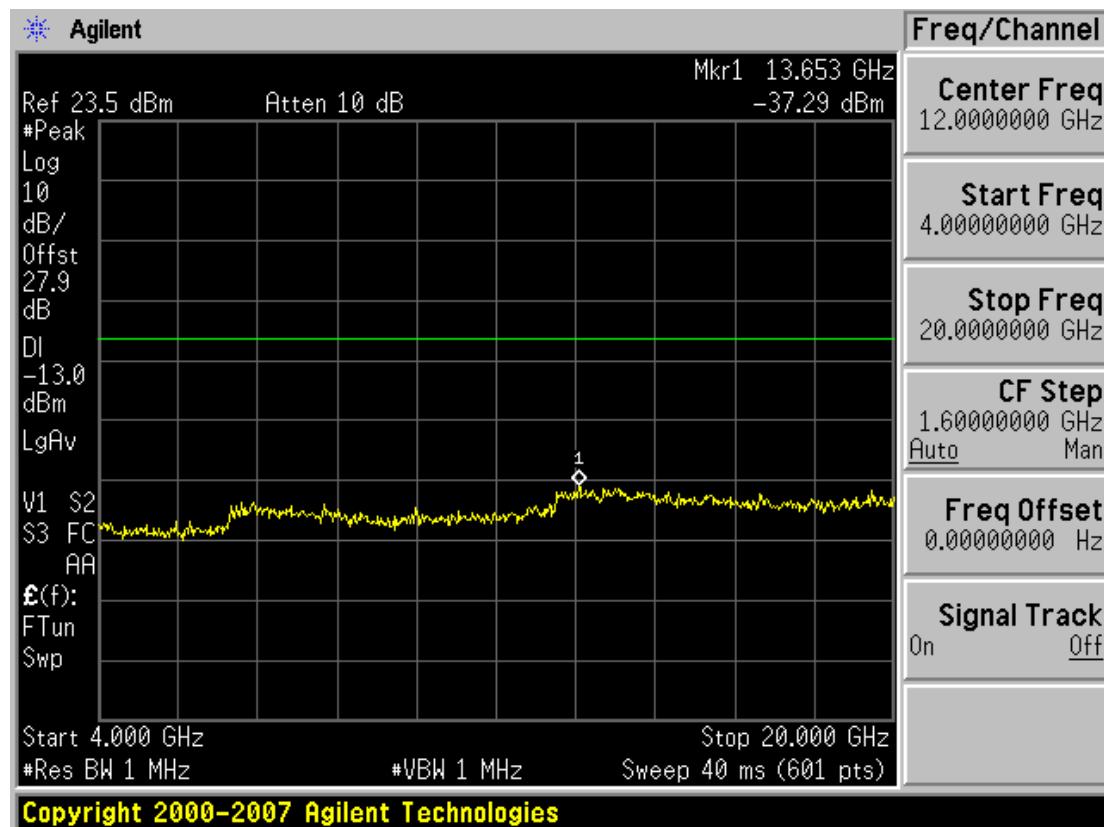


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

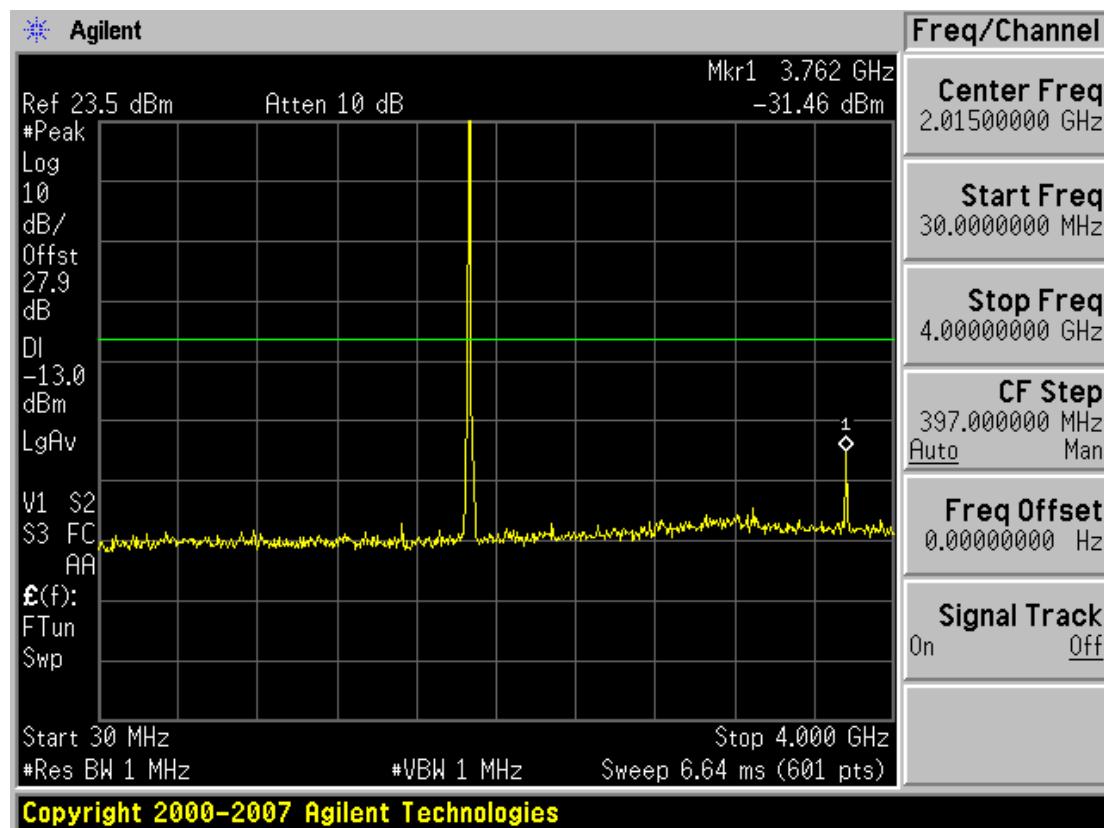


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

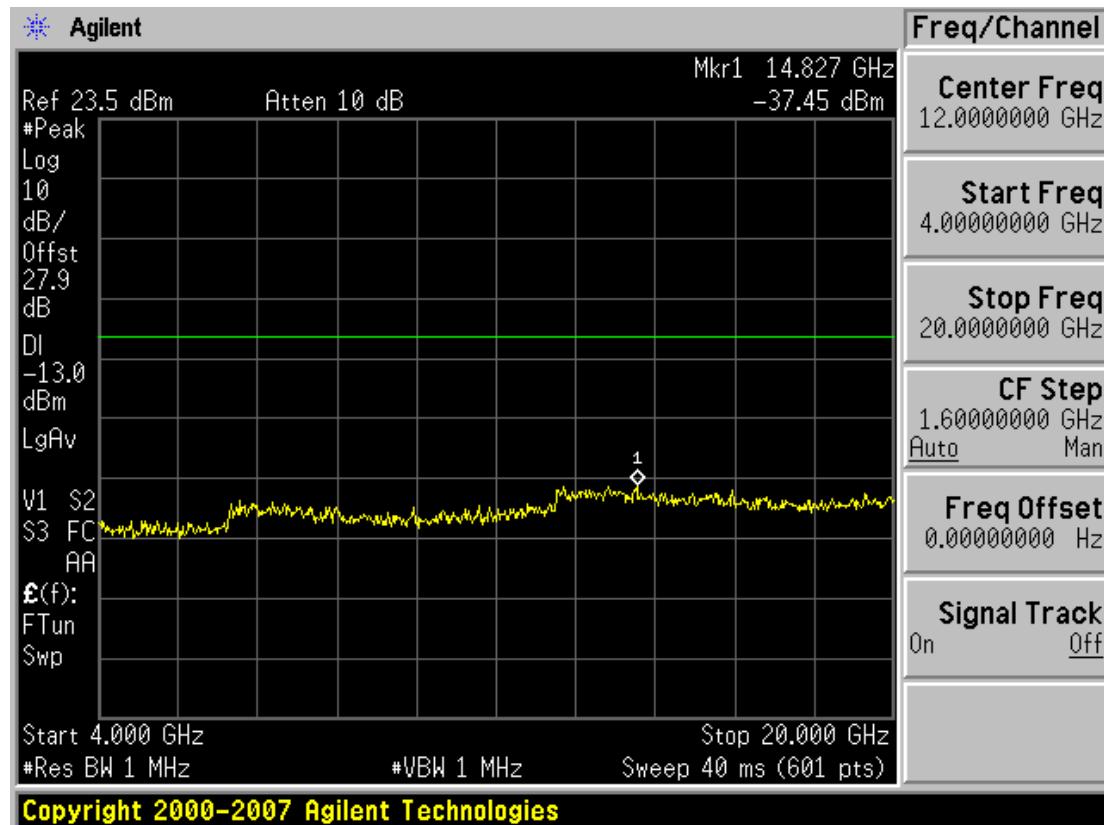

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

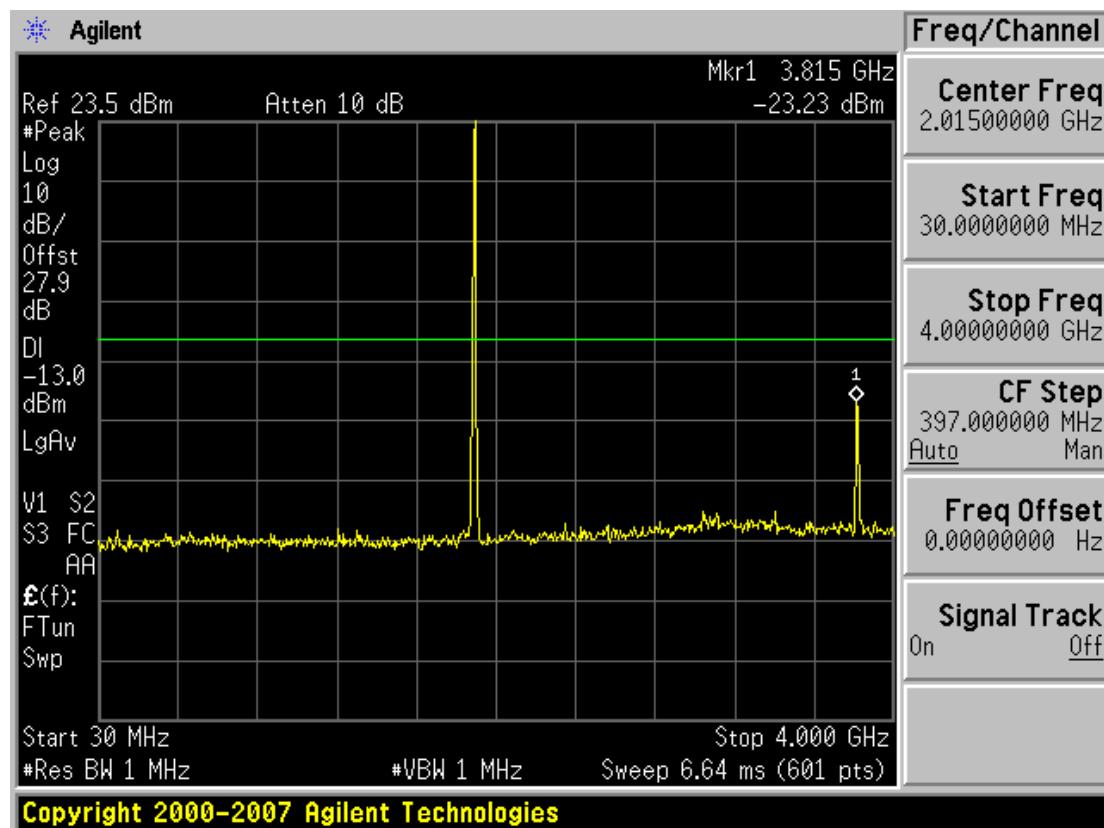


■ WCDMA1900MODE (9538 CH.) Conducted Spurious Emissions2

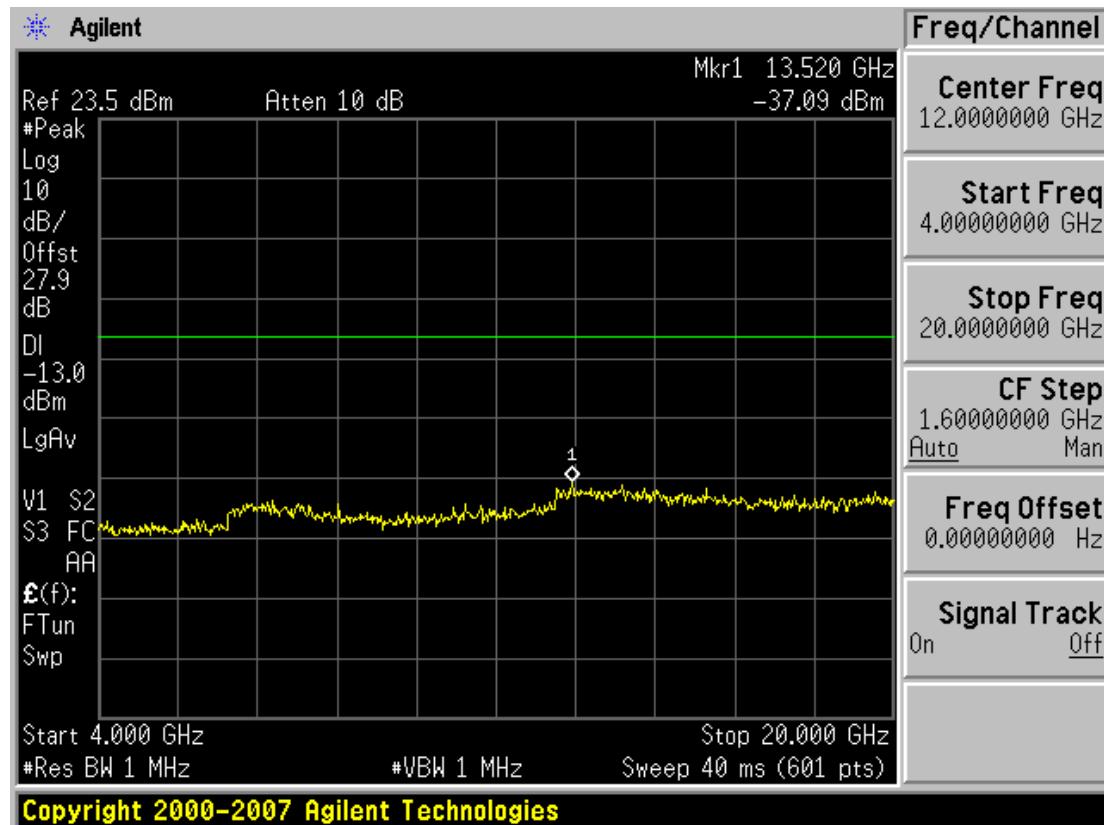


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 64 of 83

CDMA/ PCS

■ CDMA MODE (1013 CH.) Occupied Bandwidth

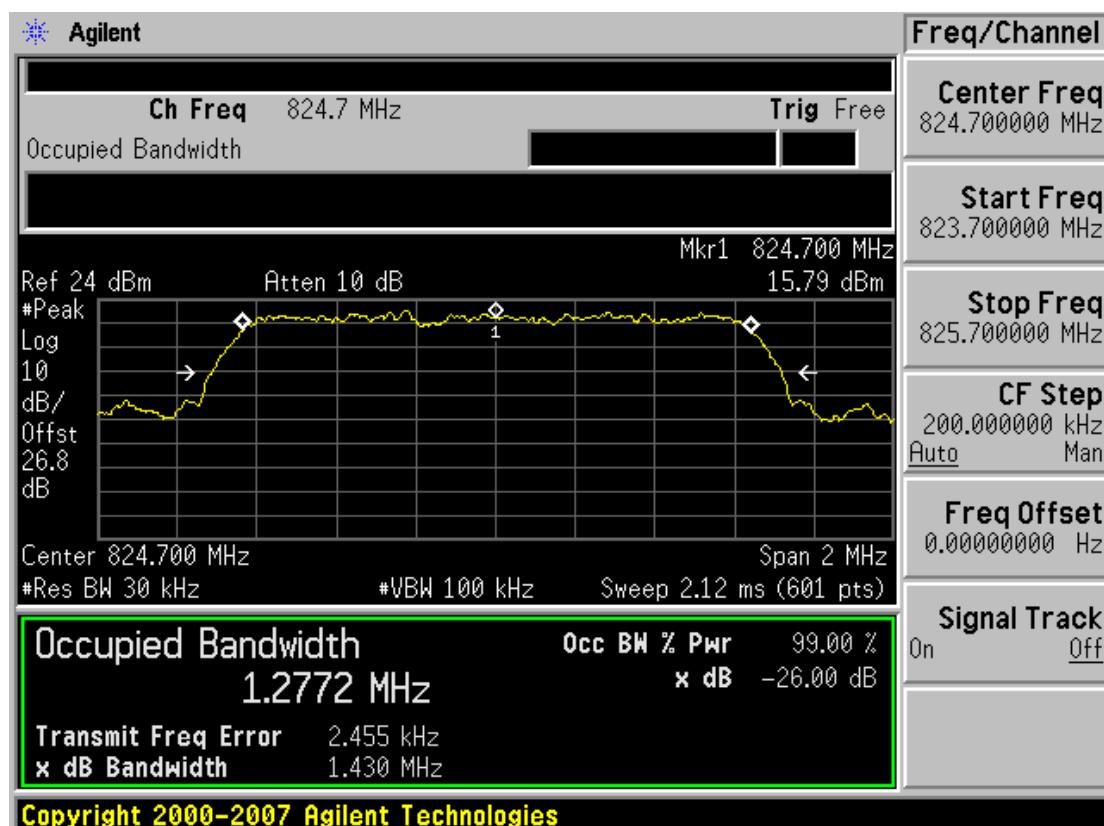


■ CDMA MODE (384 CH.) Occupied Bandwidth

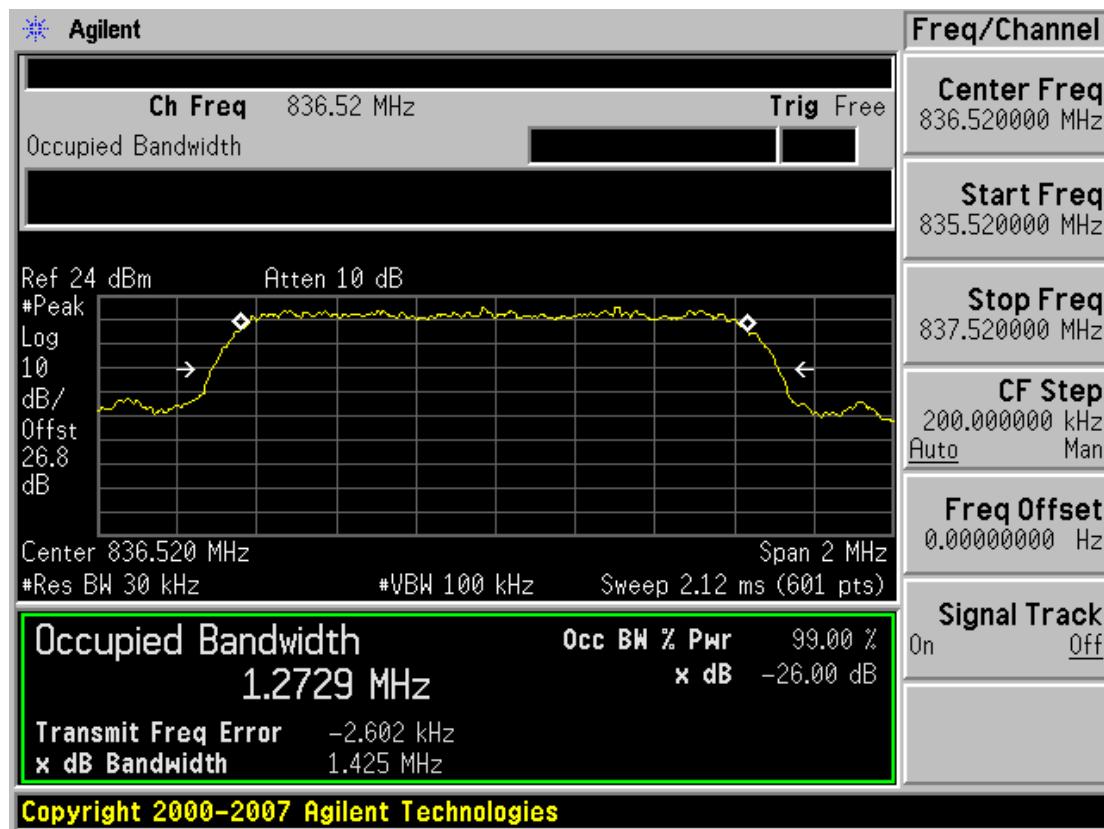


FCC CERTIFICATION REPORT

Test Report No.	Date of Issue:	EUT Type:	www.hct.co.kr
HCT-RF09-0518	May 20, 2009	USB Modem	FCC ID: PP4PX-5000 Page 65 of 83


■ CDMA MODE (777 CH.) Occupied Bandwidth

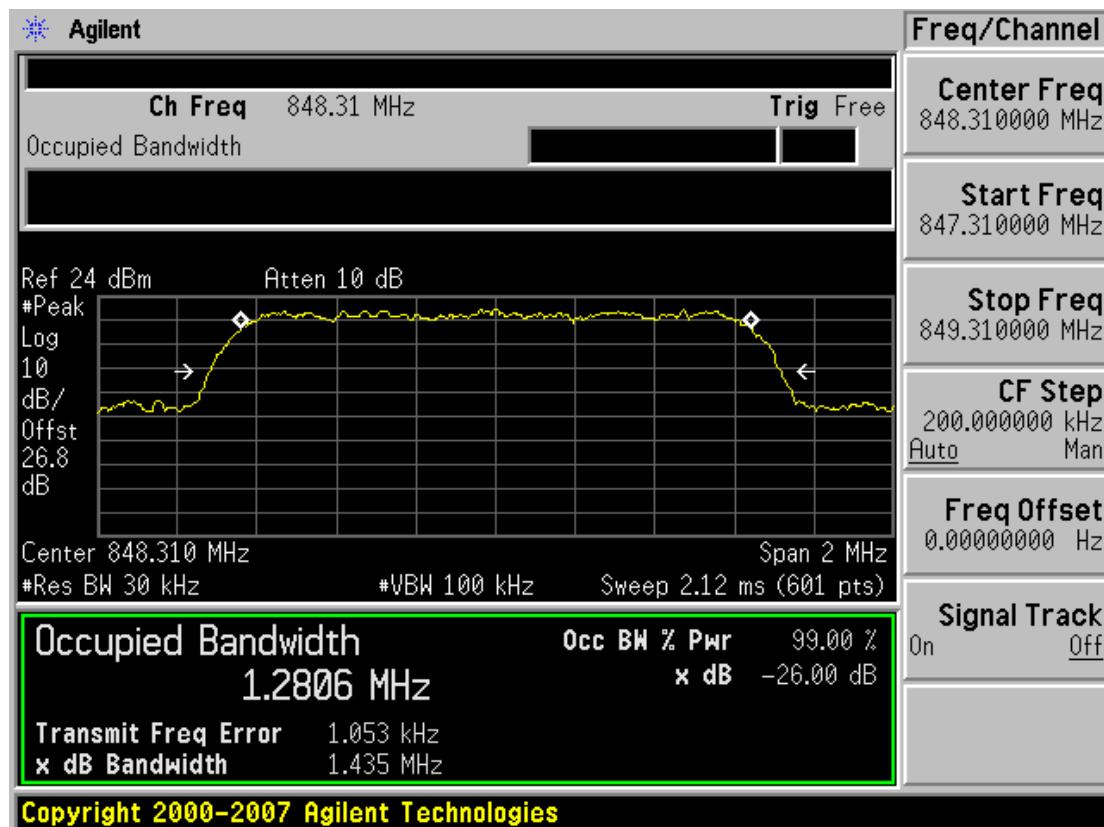


■ CDMA EVDO MODE (777 CH.) Occupied Bandwidth

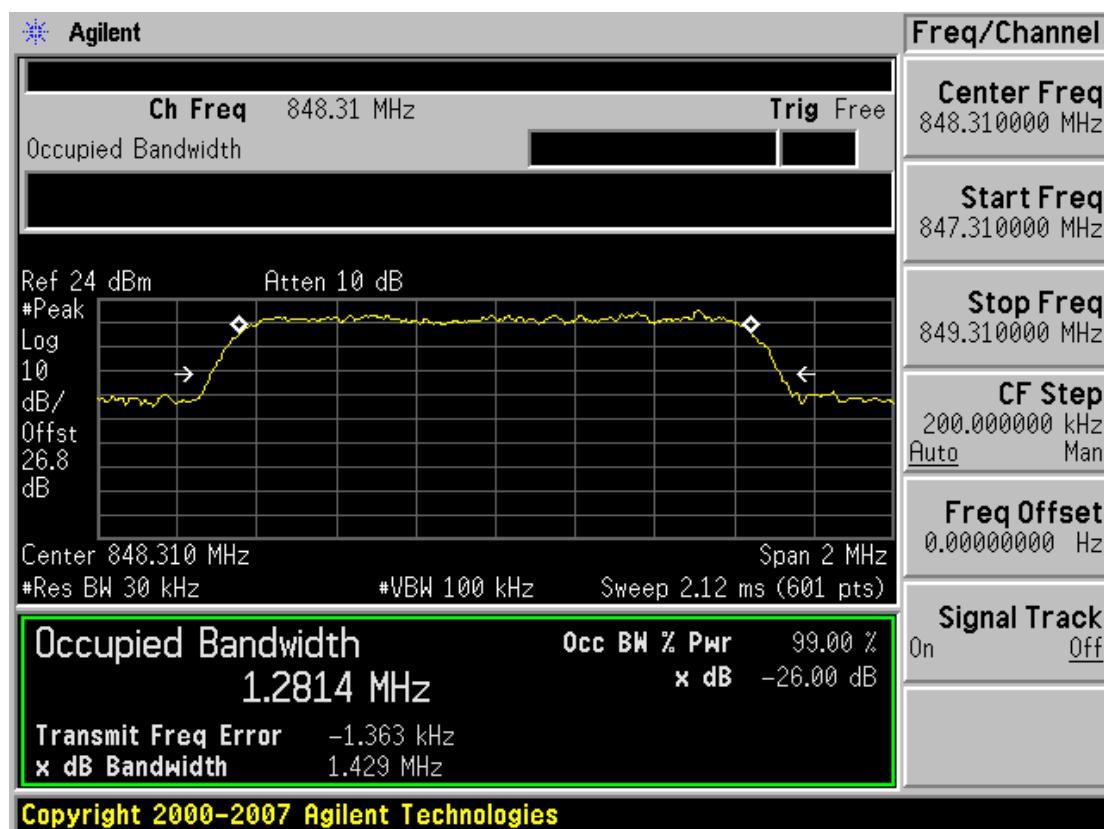


■ PCS CDMA MODE (25 CH.) Occupied Bandwidth

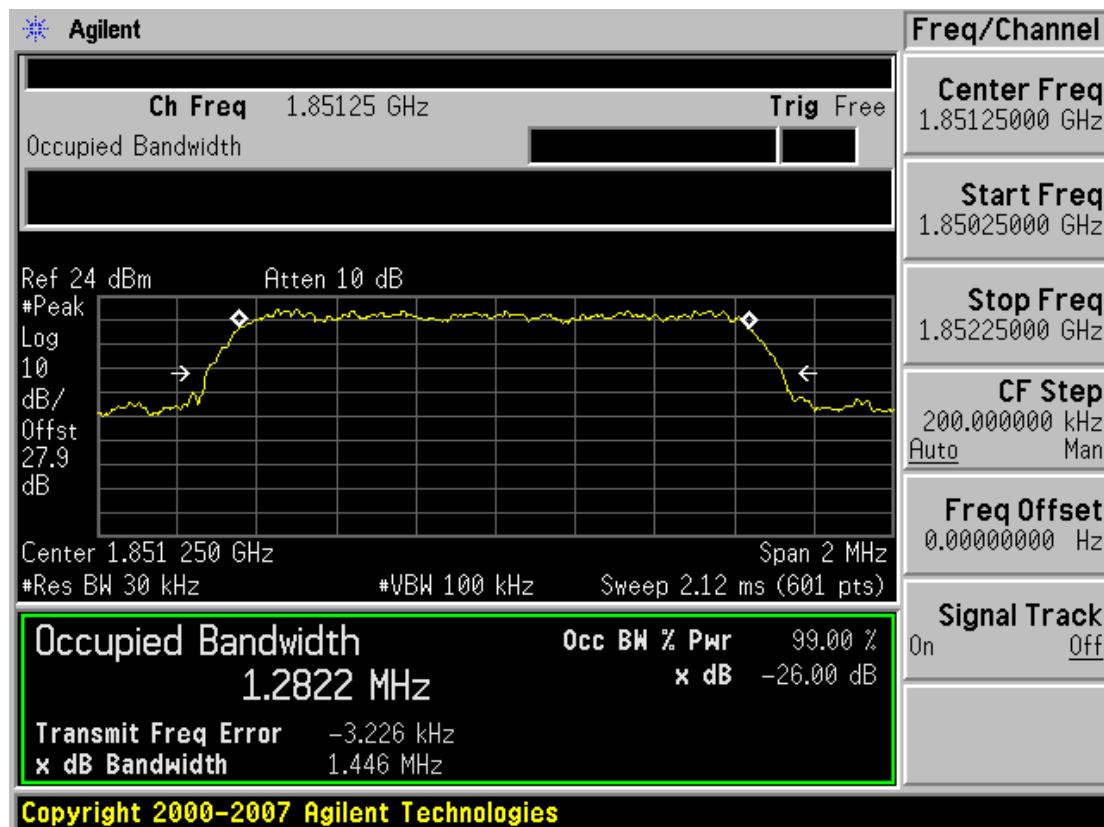


■ PCS CDMA MODE (600 CH.) Occupied Bandwidth

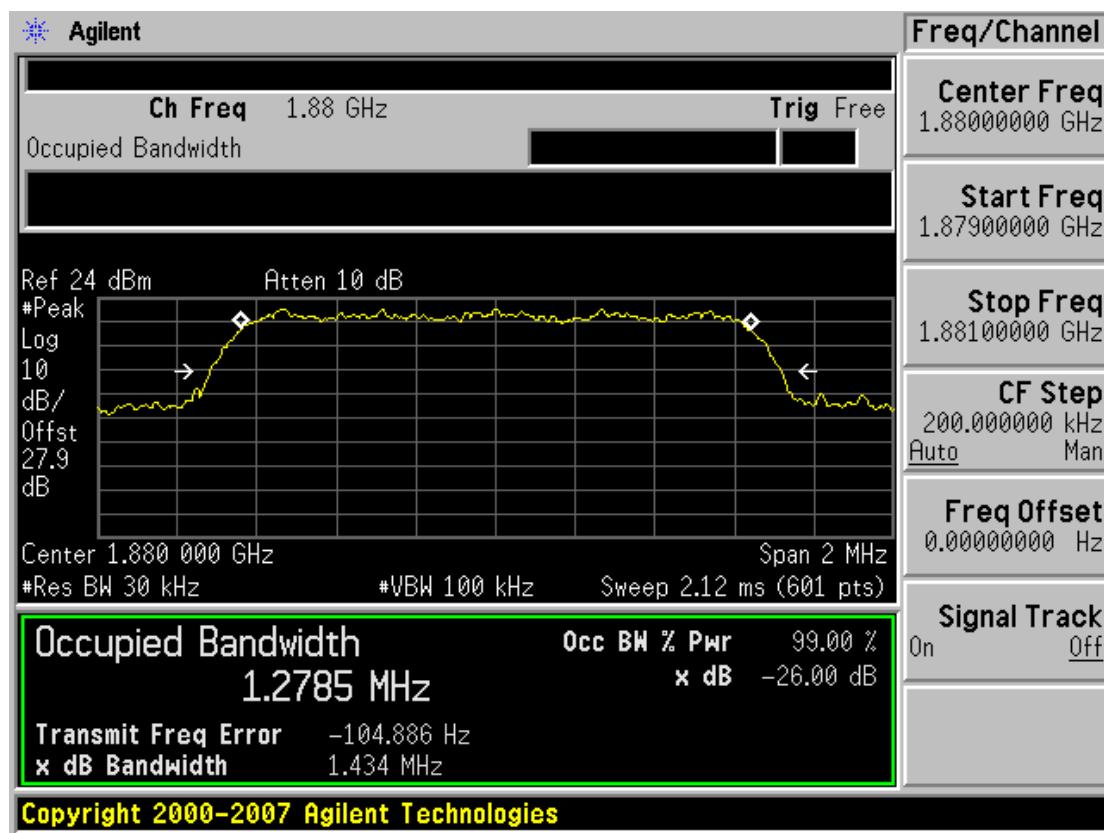

■ PCS CDMA MODE (1175 CH.) Occupied Bandwidth

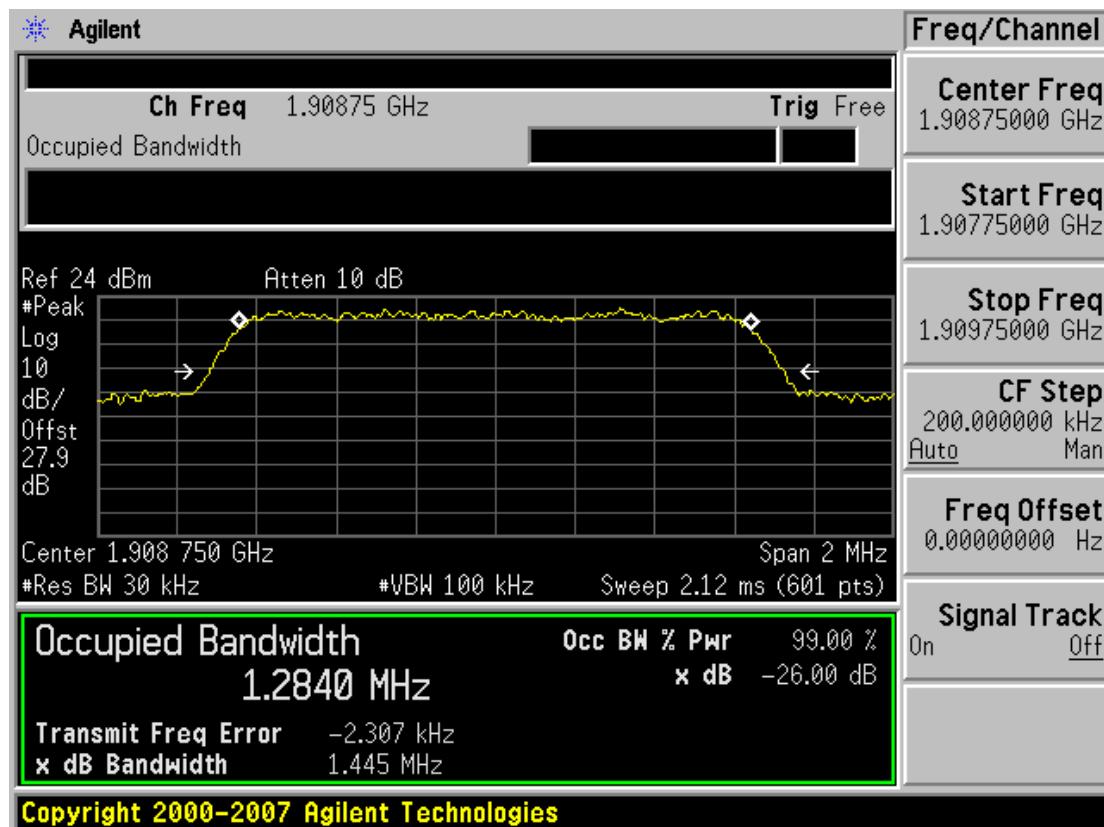


■ PCS CDMA EVDO MODE (1175 CH.) Occupied Bandwidth

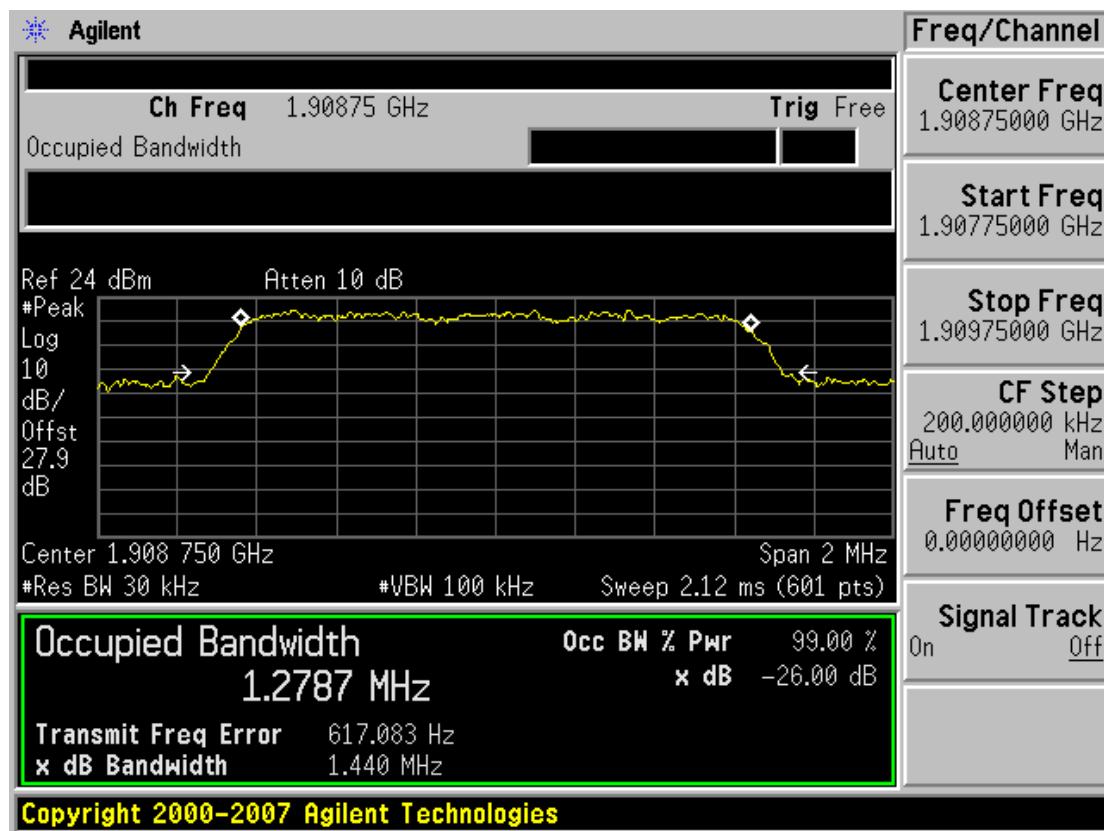


■ PCS CDMA MODE (600 CH.) Peak-to-Average Ratio




■ CDMA MODE (1013 CH.) Block Edge

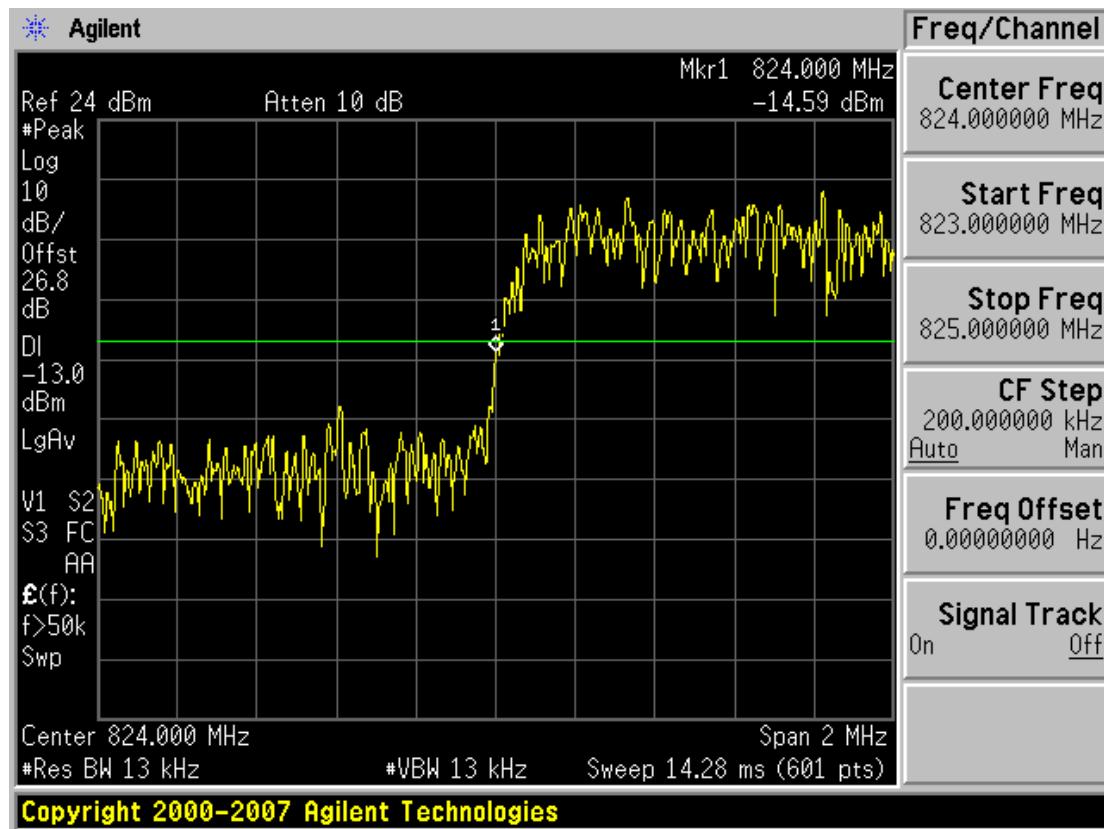

■ CDMA MODE (777 CH.) Block Edge

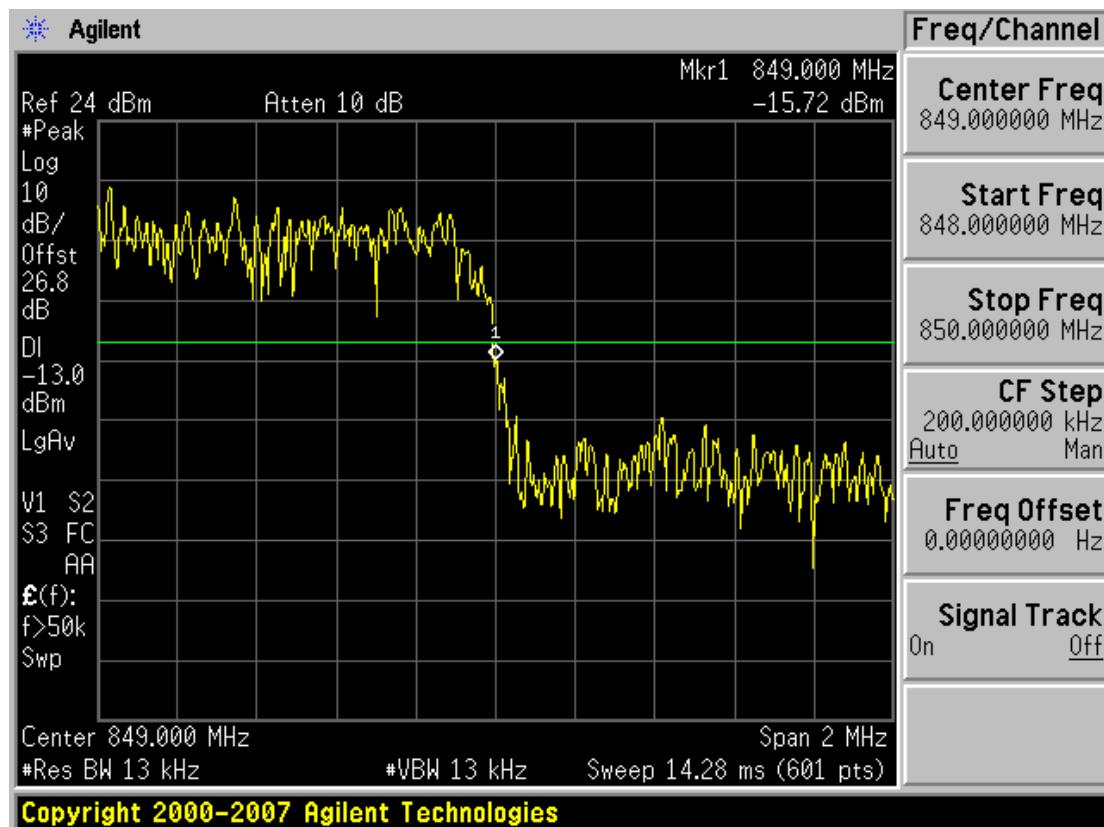


■ CDMA EVDO MODE (1013 CH.) Block Edge

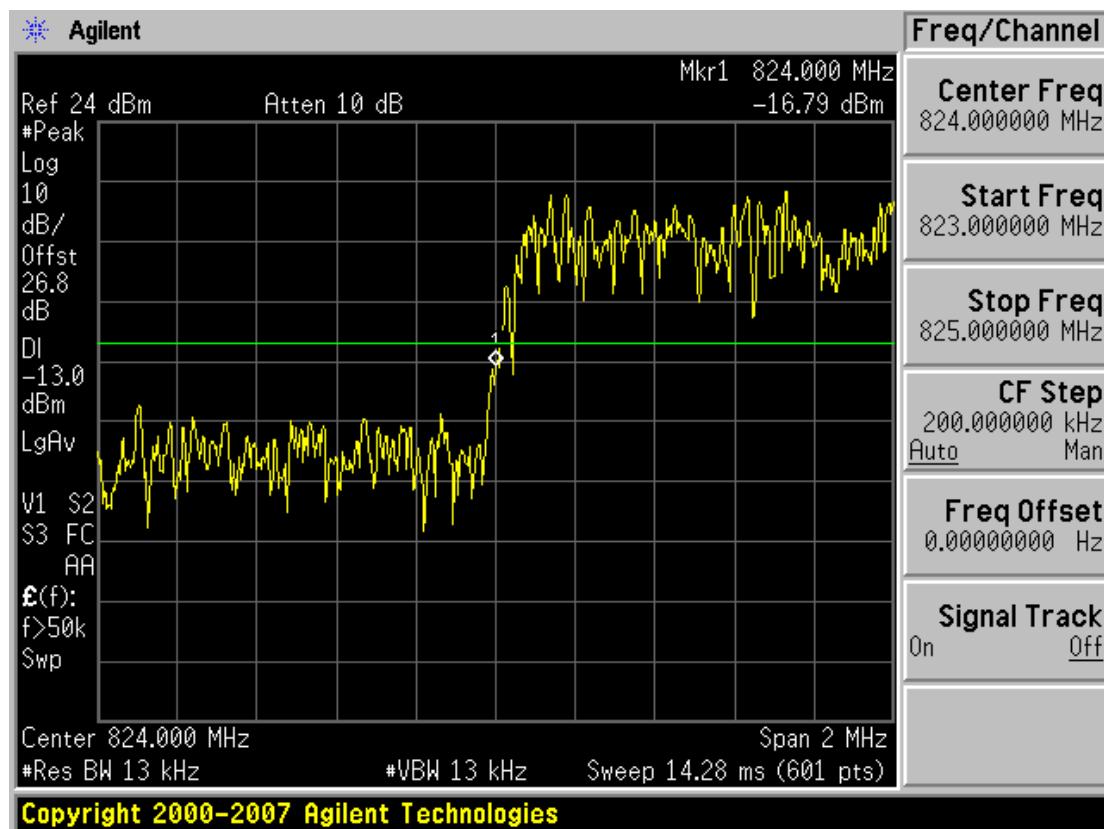


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 70 of 83

■ CDMA EVDO MODE (777 CH.) Block Edge

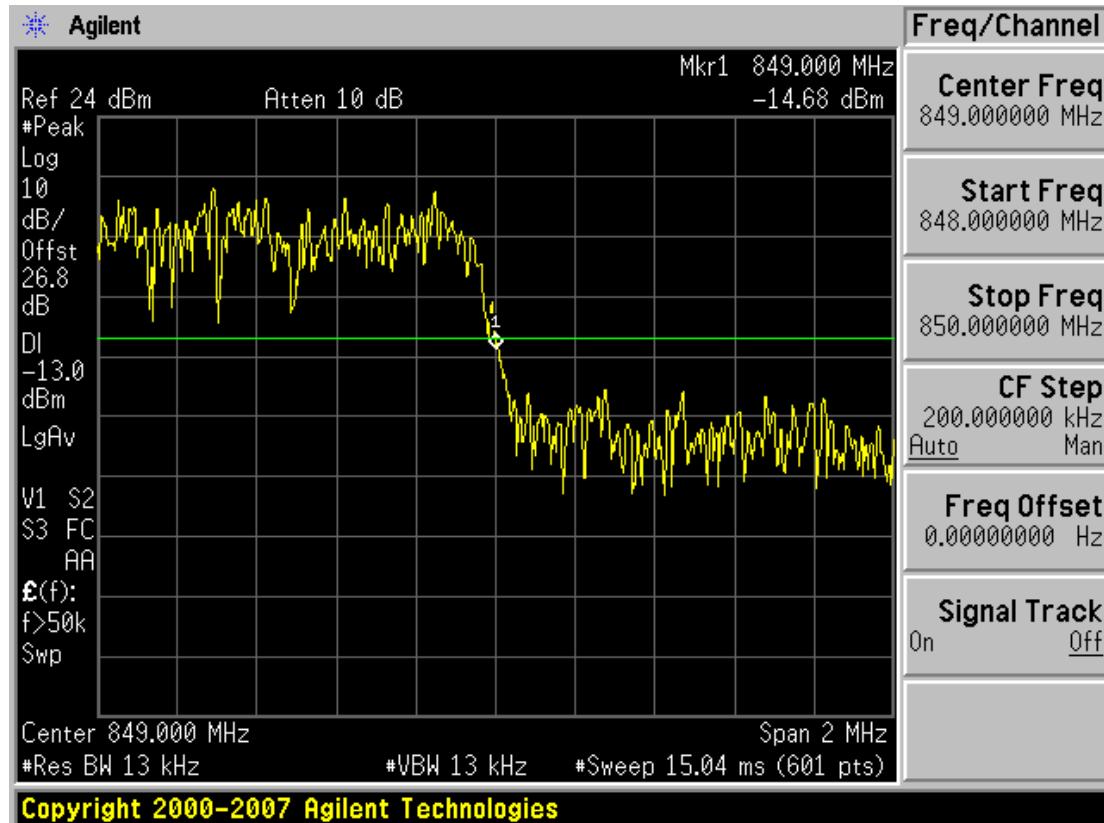


■ CDMA MODE (1013 CH.) 4 MHz Span

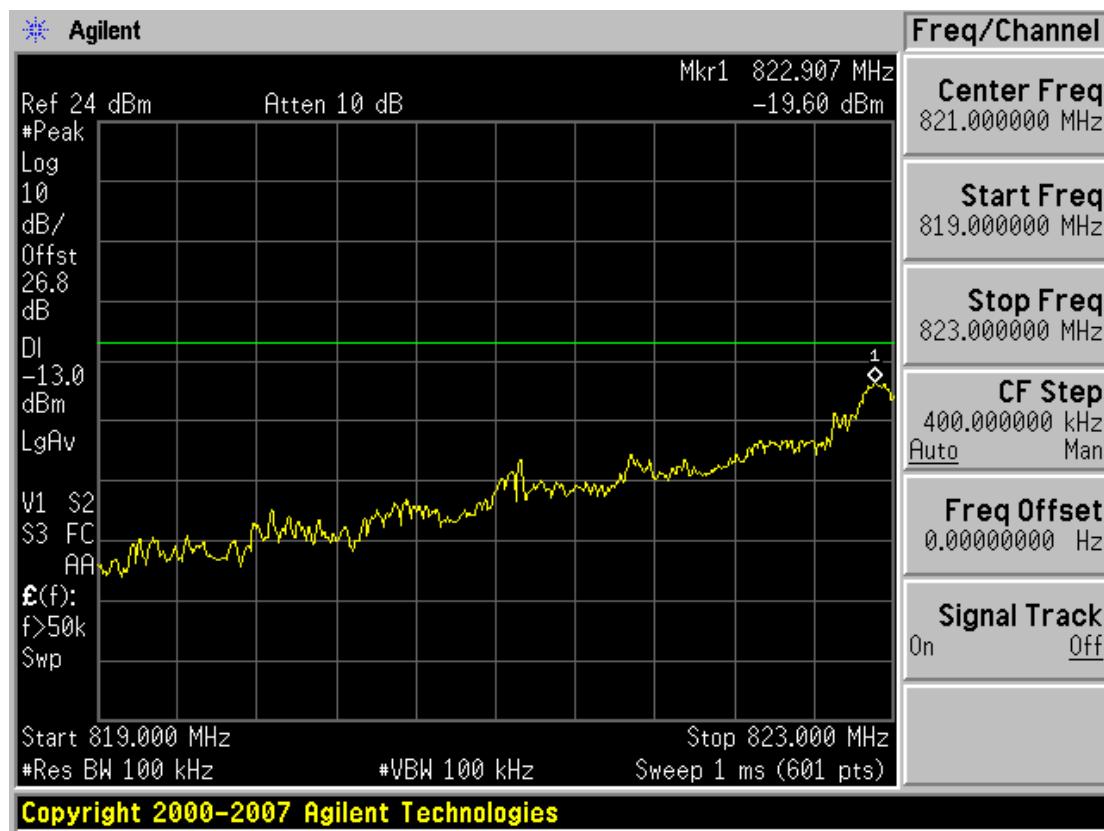


Test Report No.	Date of Issue:	EUT Type:	FCC ID:	Page 71 of 83
HCT-RF09-0518	May 20, 2009	USB Modem	PP4PX-5000	


■ CDMA MODE (777 CH.) 4 MHz Span

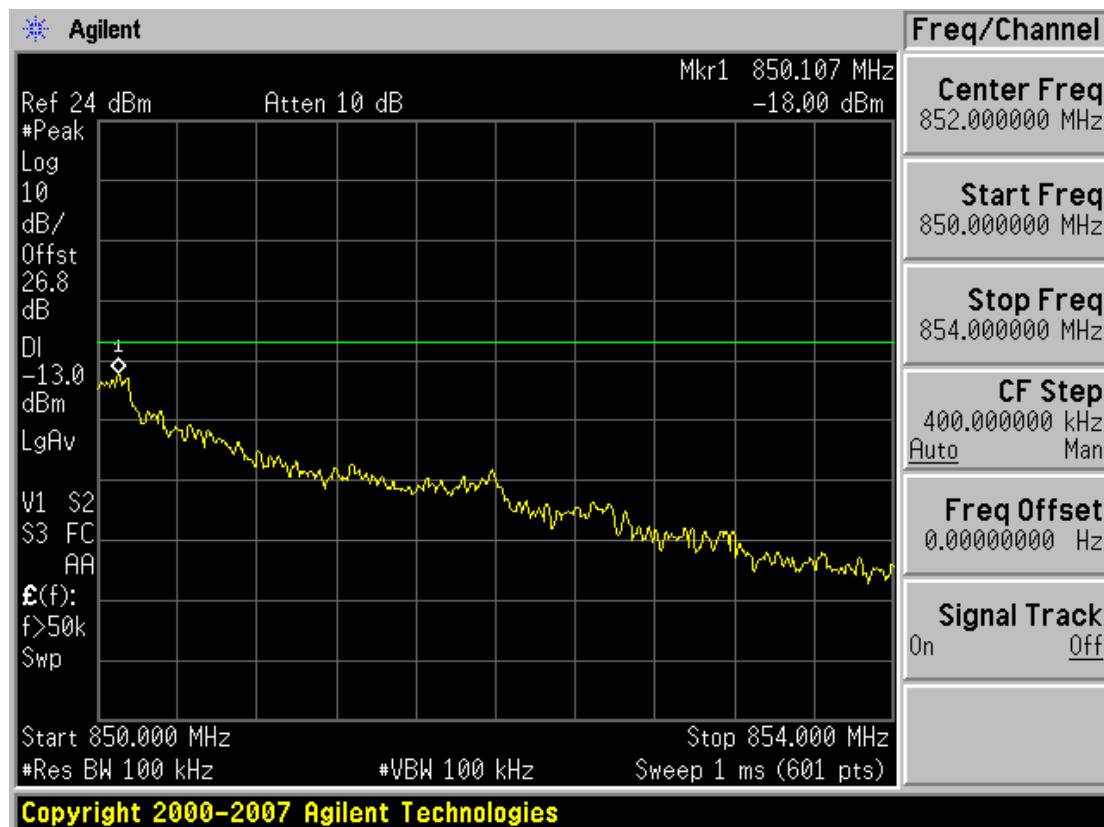


■ CDMA EVDO MODE (1013 CH.) 4 MHz Span

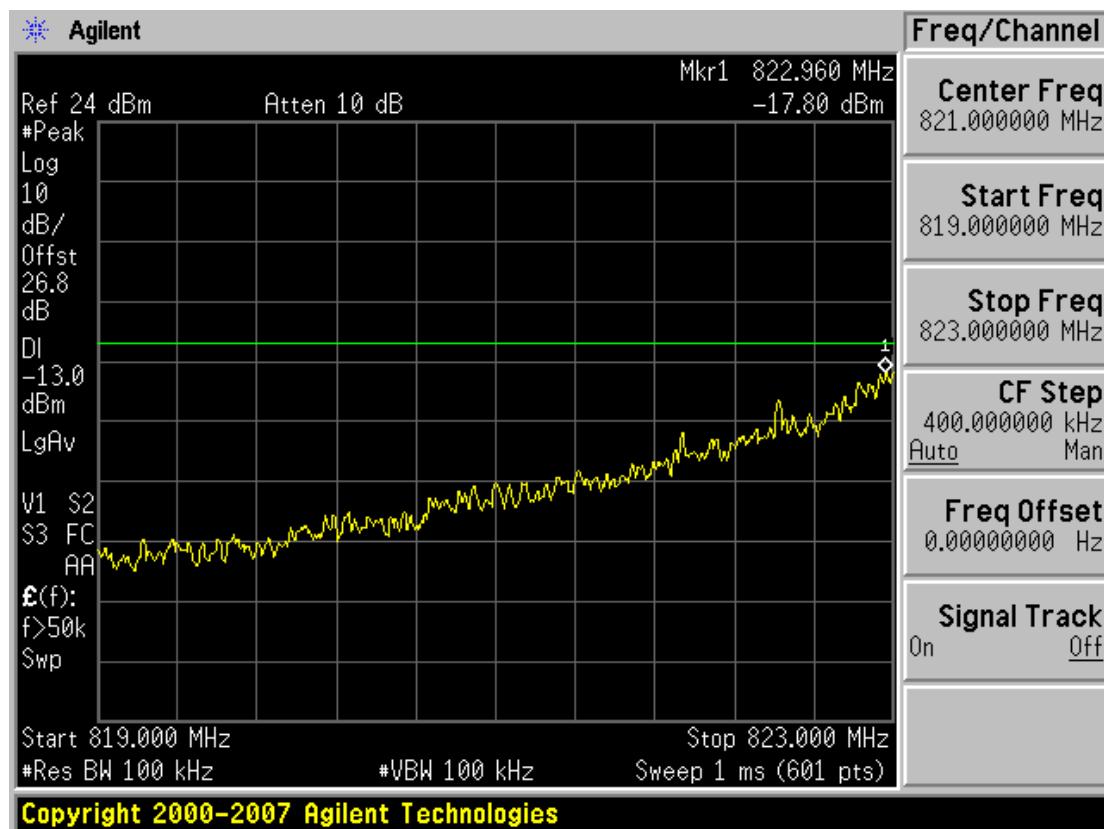


■ CDMA EVDO MODE (777 CH.) 4 MHz Span

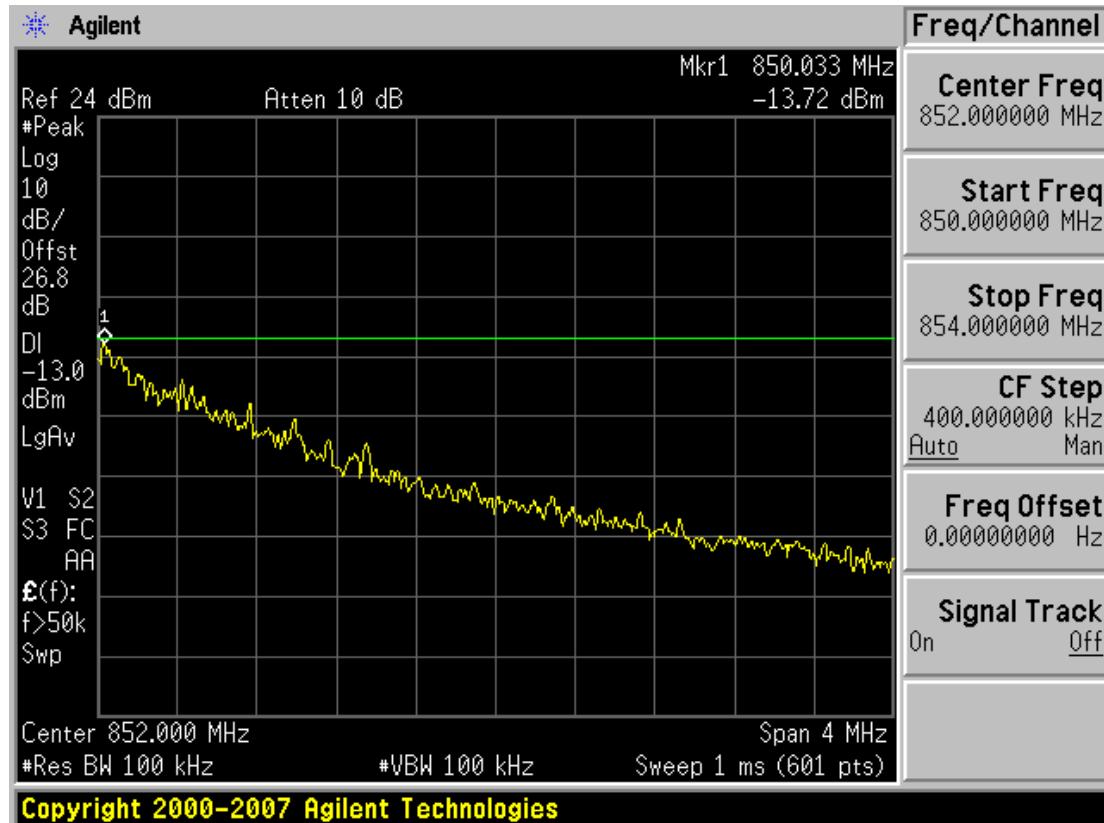


■ PCS CDMA MODE (25 CH.) Block Edge

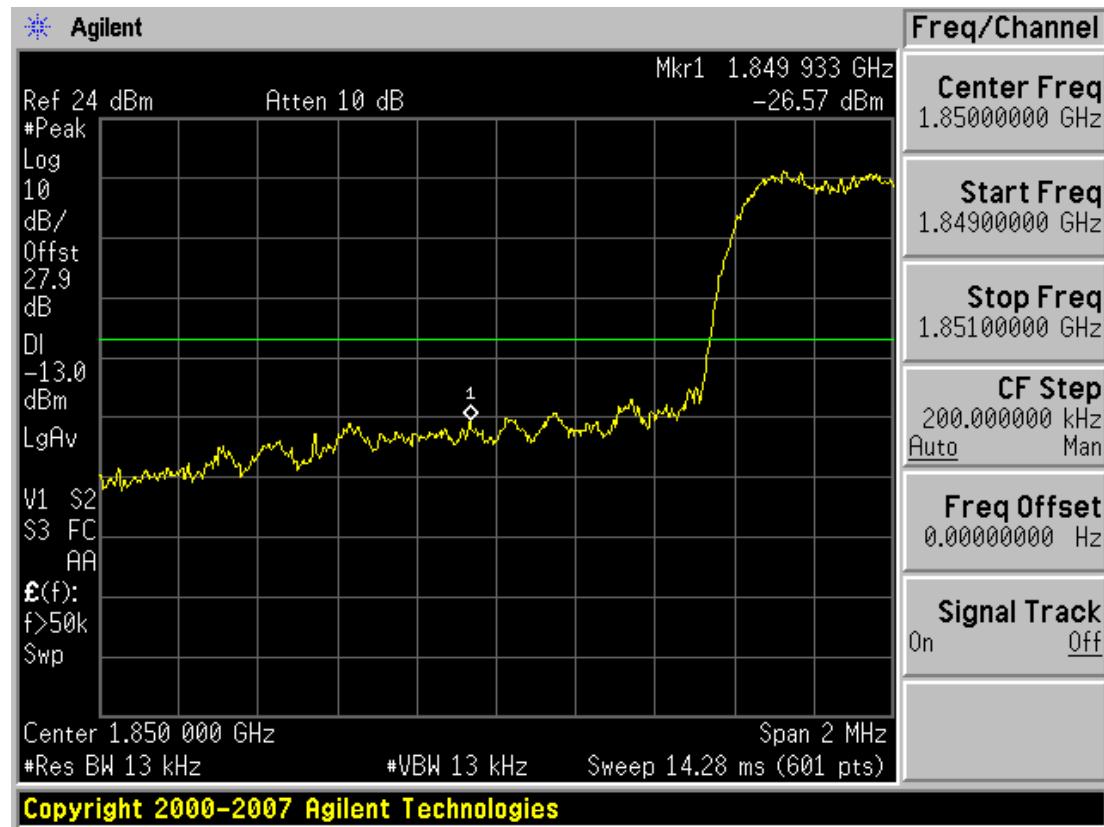


■ PCS CDMA MODE (1175 CH.) Block Edge

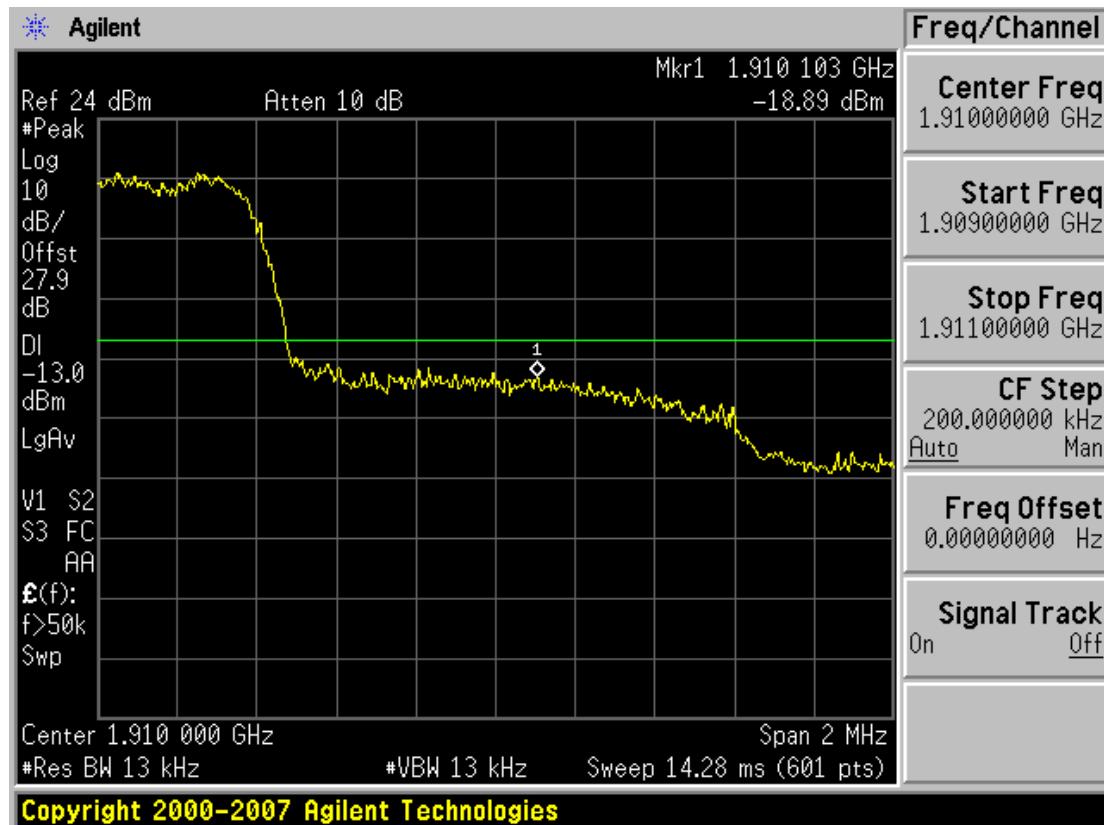

■ PCS CDMA EVDO MODE (25 CH.) Block Edge

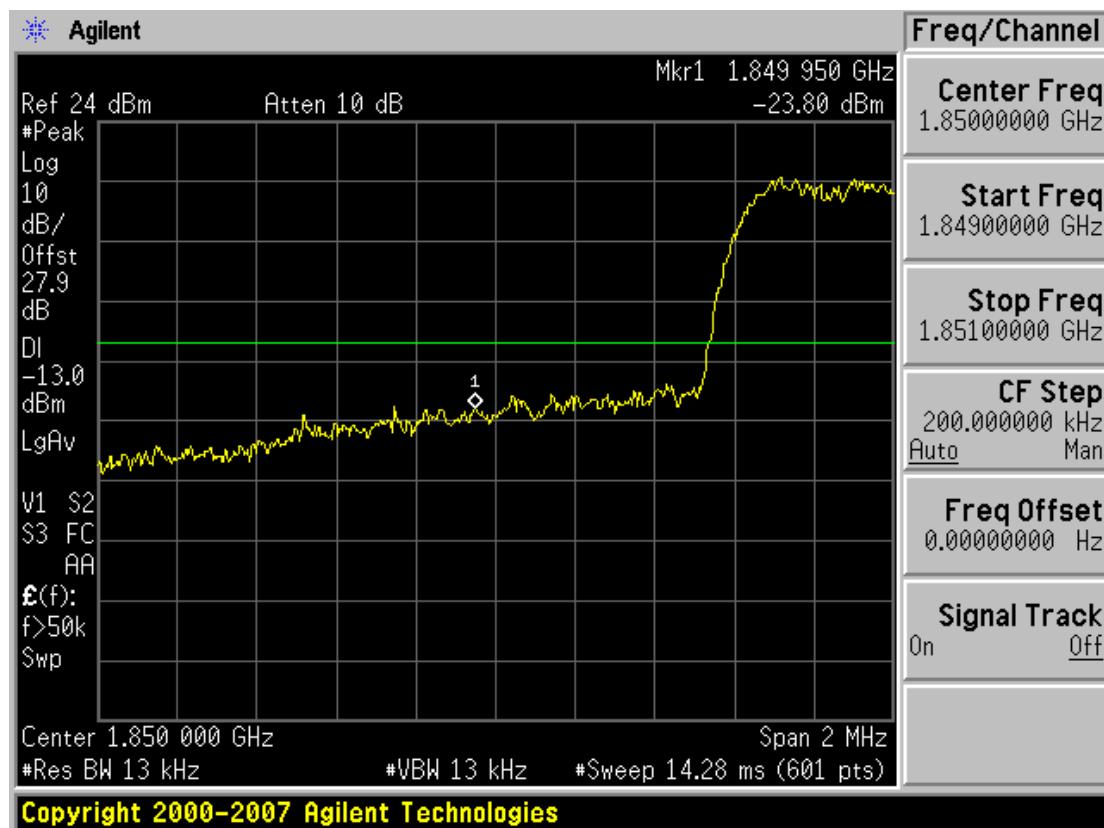

■ PCS CDMA EVDO MODE (1175 CH.) Block Edge

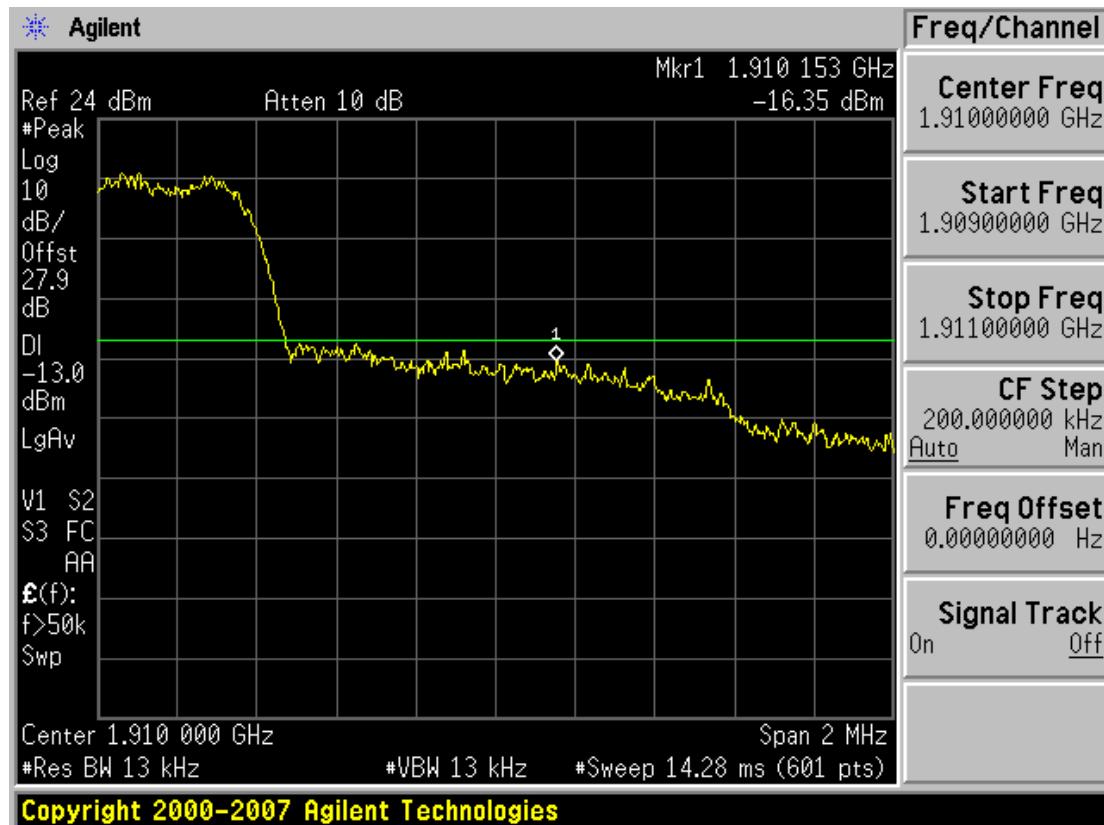


■ PCS CDMA MODE (25 CH.) 4 MHz Span




■ PCS CDMA MODE (1175 CH.) 4 MHz Span




■ PCS CDMA EVDO MODE (25 CH.) 4 MHz Span

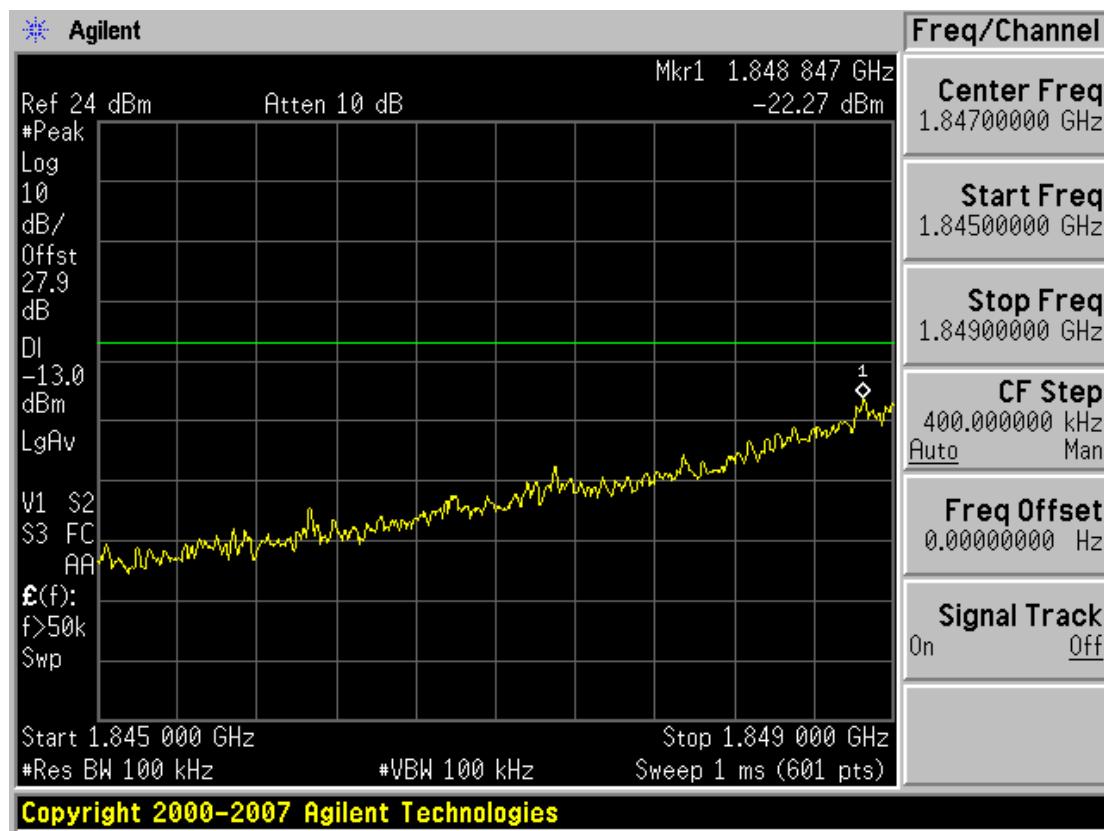


■ PCS CDMA EVDO MODE (1175 CH.) 4 MHz Span

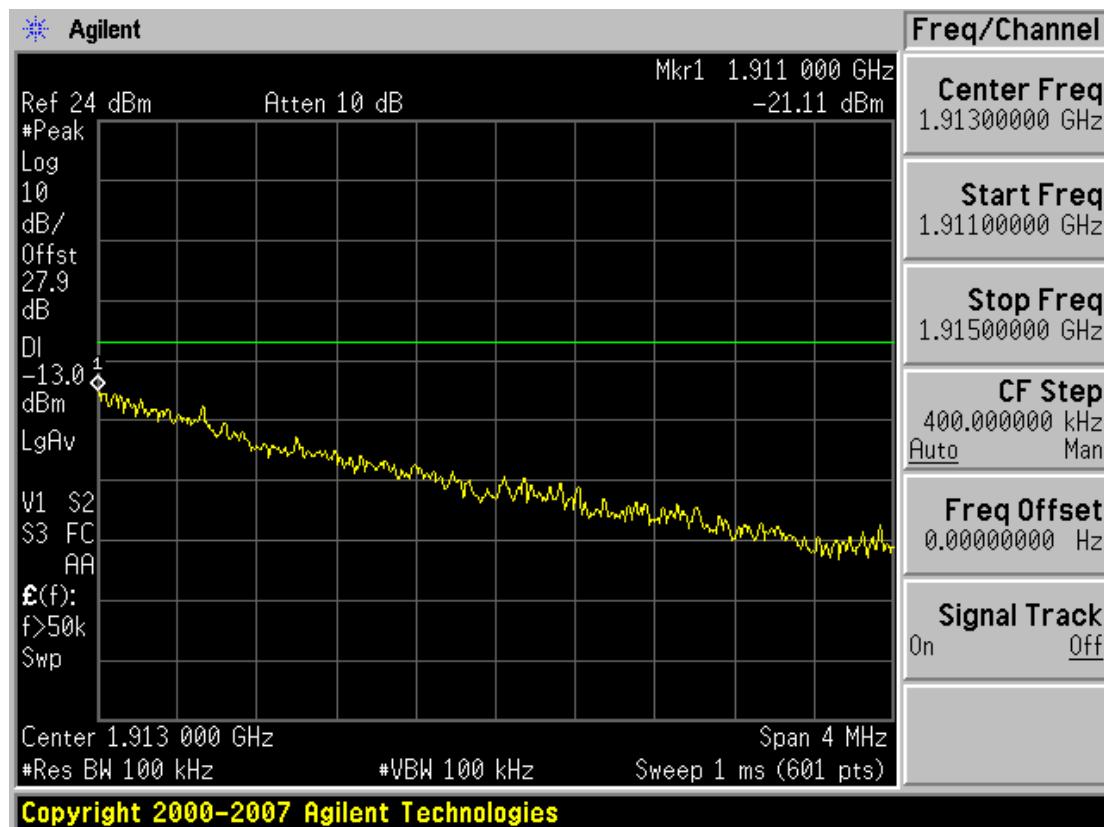


■ CDMA MODE (1013 CH.) Conducted Spurious Emissions - 1

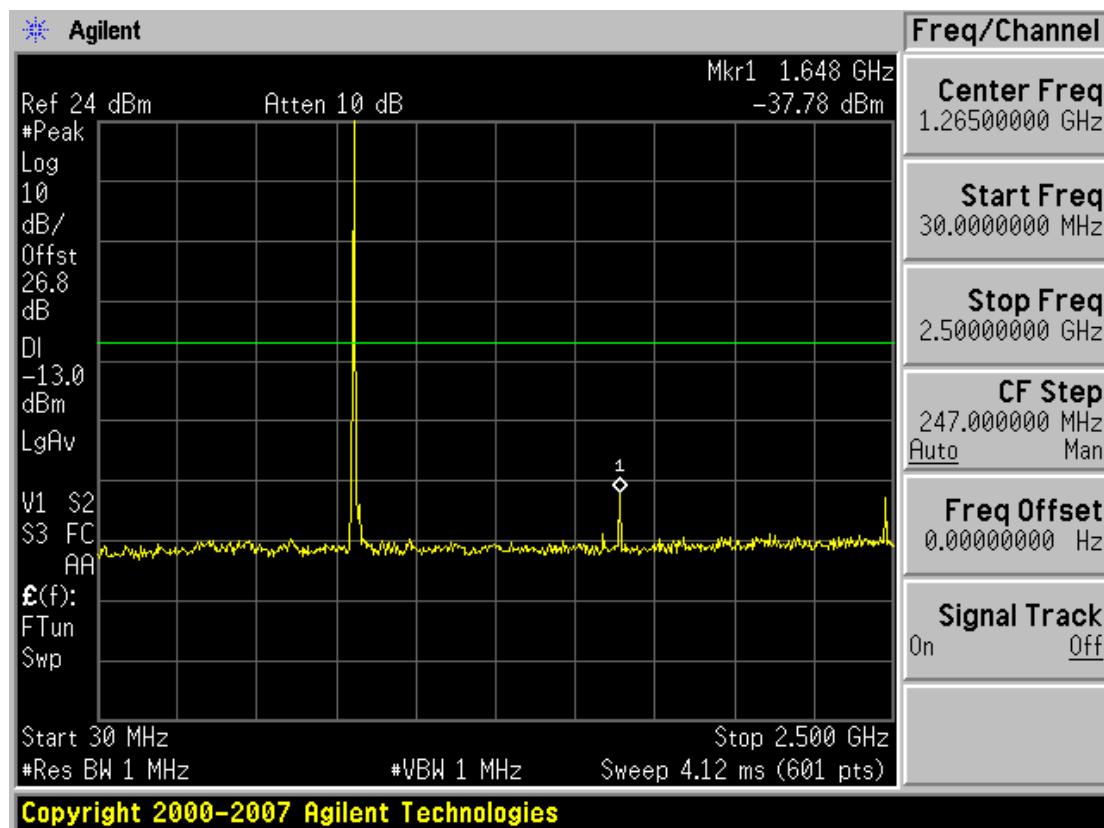


■ CDMA MODE (1013 CH.) Conducted Spurious Emissions - 2

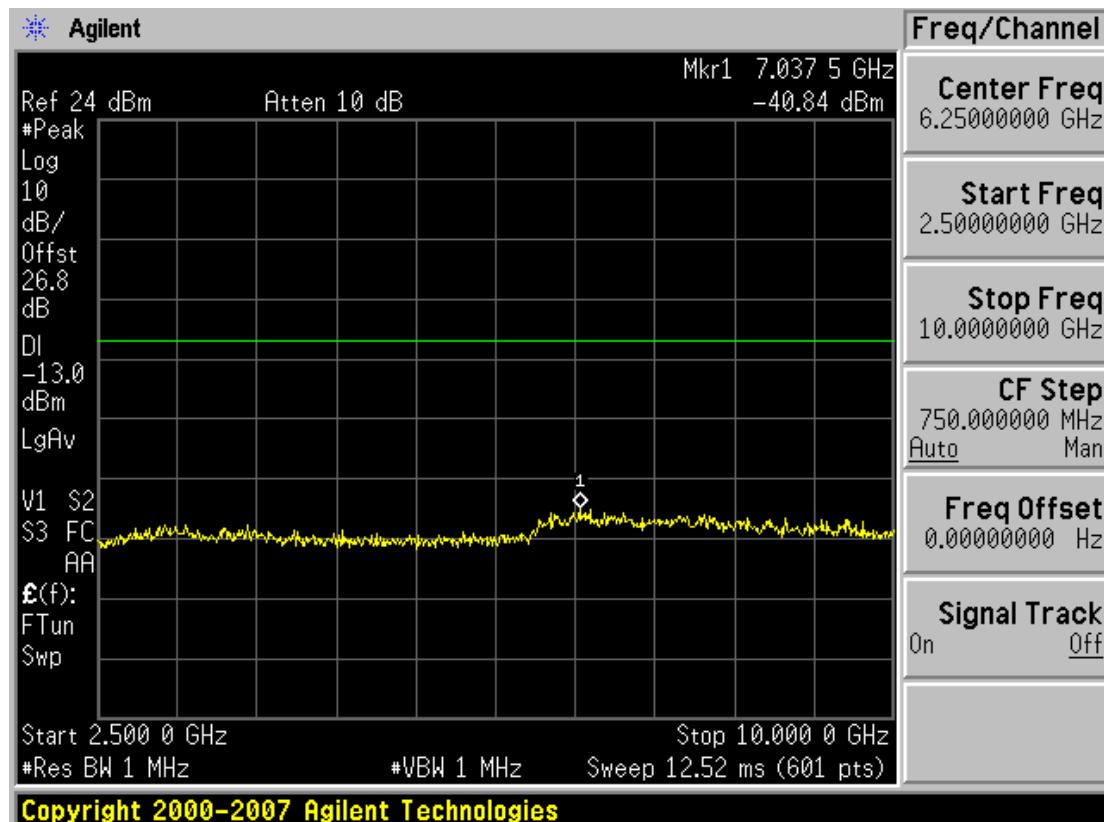


■ CDMA MODE (384 CH.) Conducted Spurious Emissions - 1

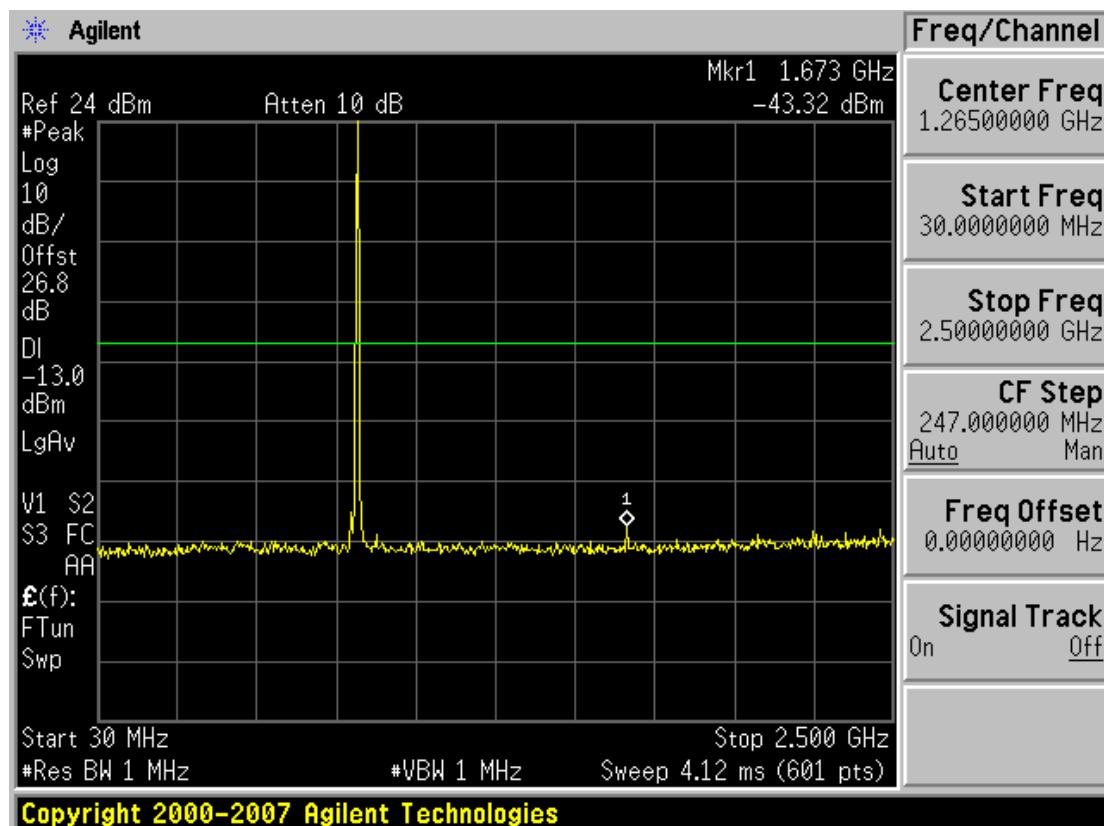

■ CDMA MODE (384 CH.) Conducted Spurious Emissions - 2

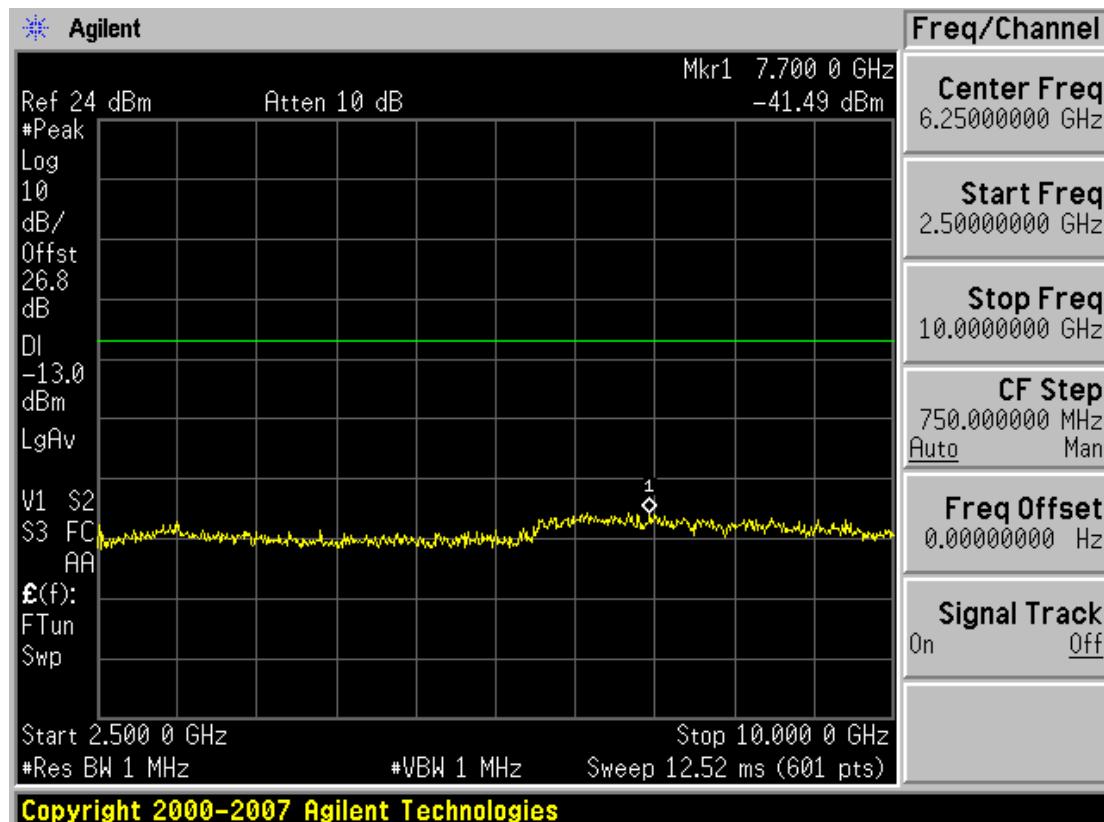


■ CDMA MODE (777 CH.) Conducted Spurious Emissions - 1

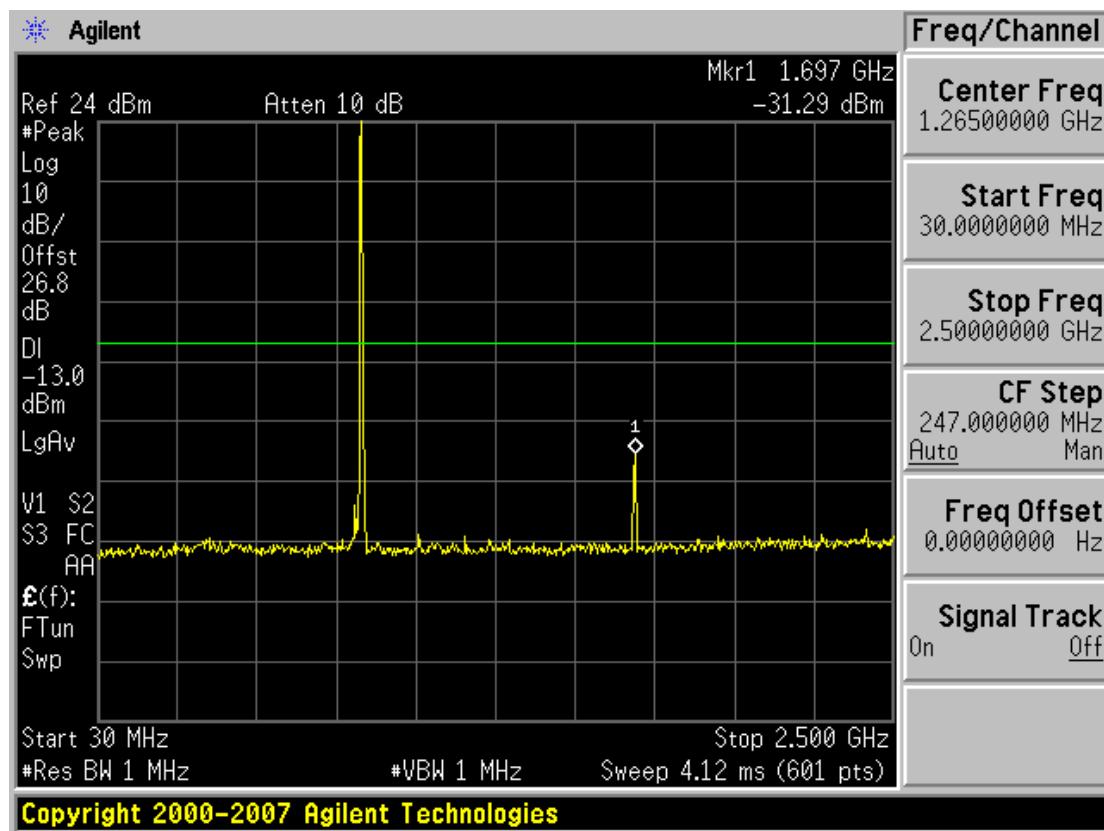


Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 79 of 83
----------------------------------	--------------------------------	------------------------	-----------------------	---------------

■ CDMA MODE (777 CH.) Conducted Spurious Emissions - 2

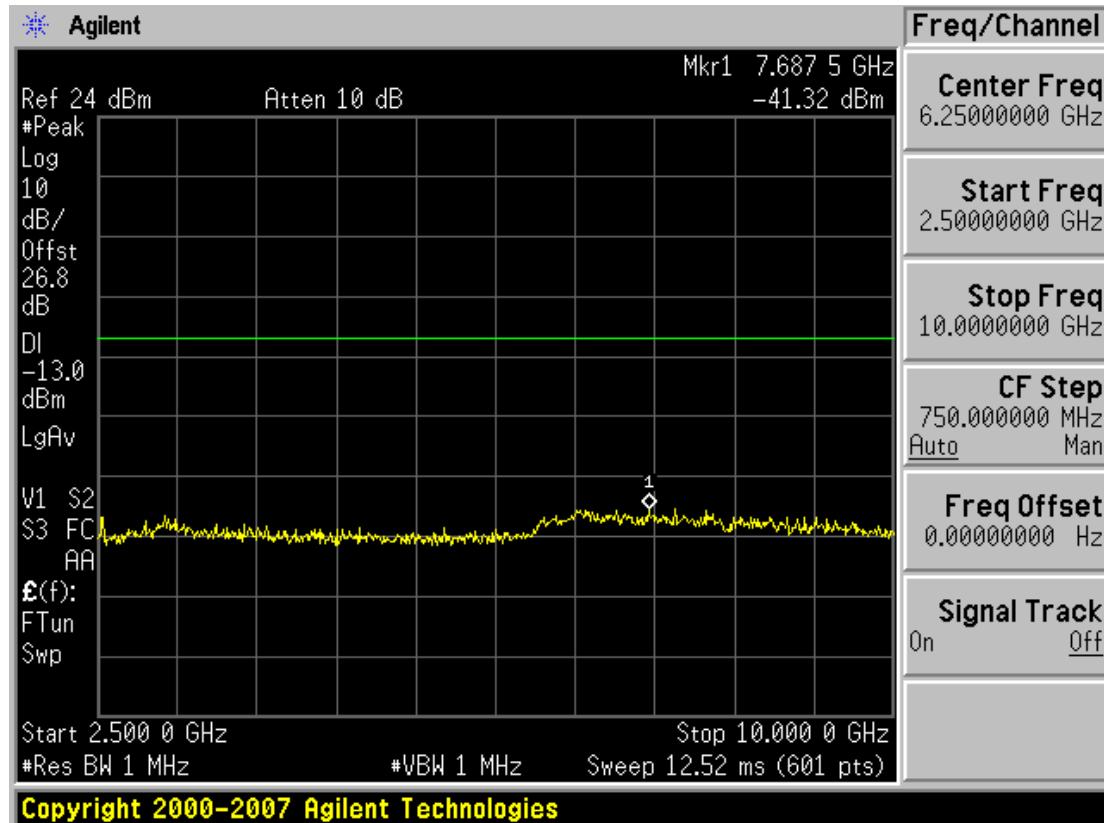


■ PCS CDMA MODE (25 CH.) Conducted Spurious Emissions - 1

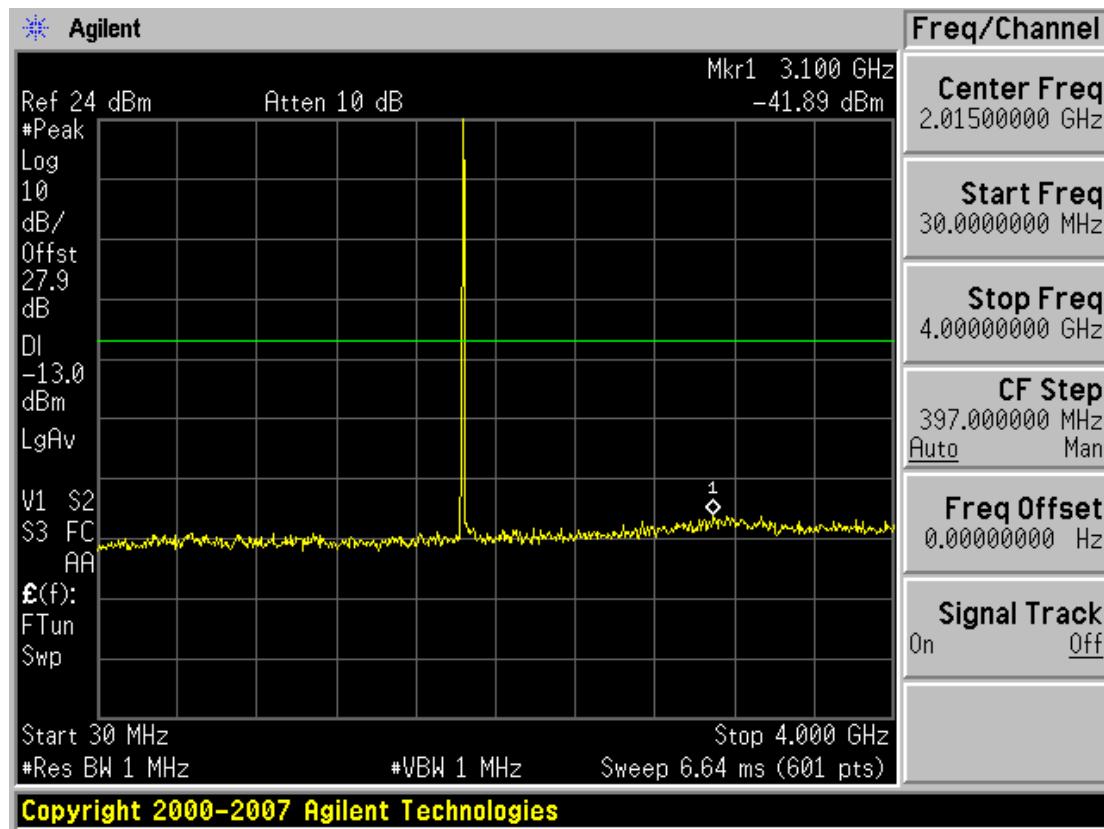


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 80 of 83

■ PCS CDMA MODE (25 CH.) Conducted Spurious Emissions - 2

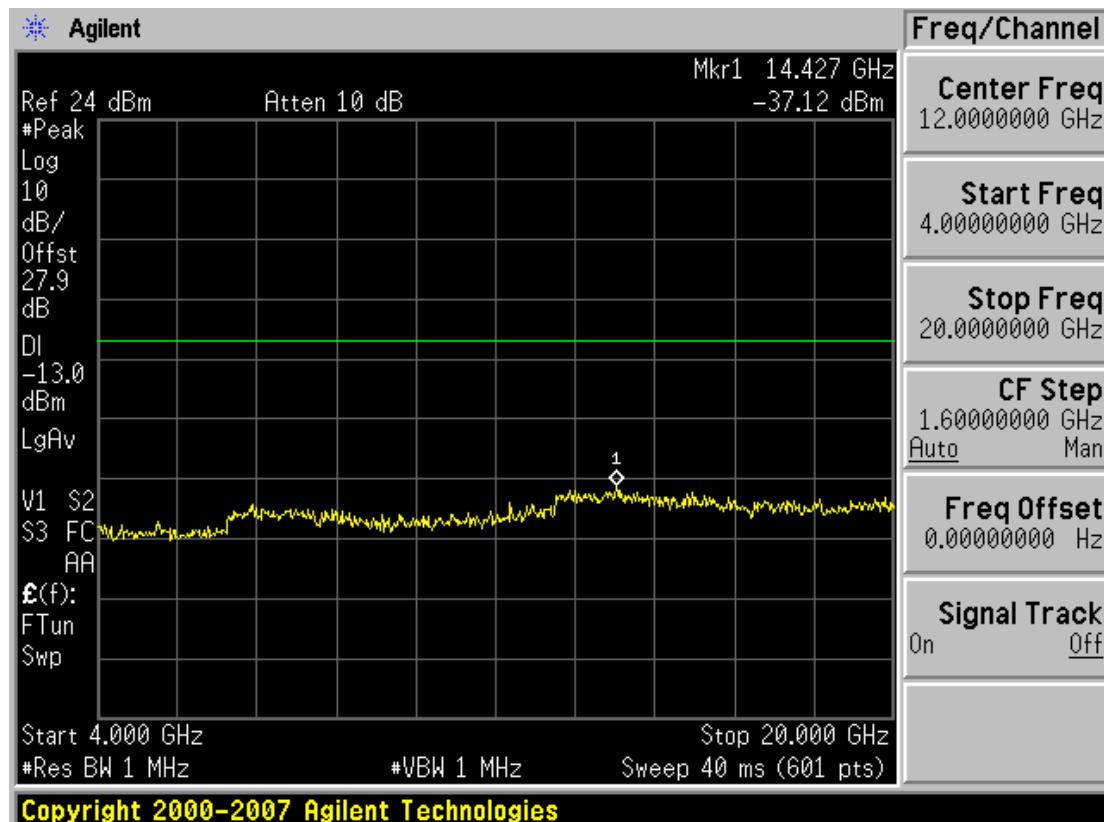


■ PCS CDMA MODE (600 CH.) Conducted Spurious Emissions - 1

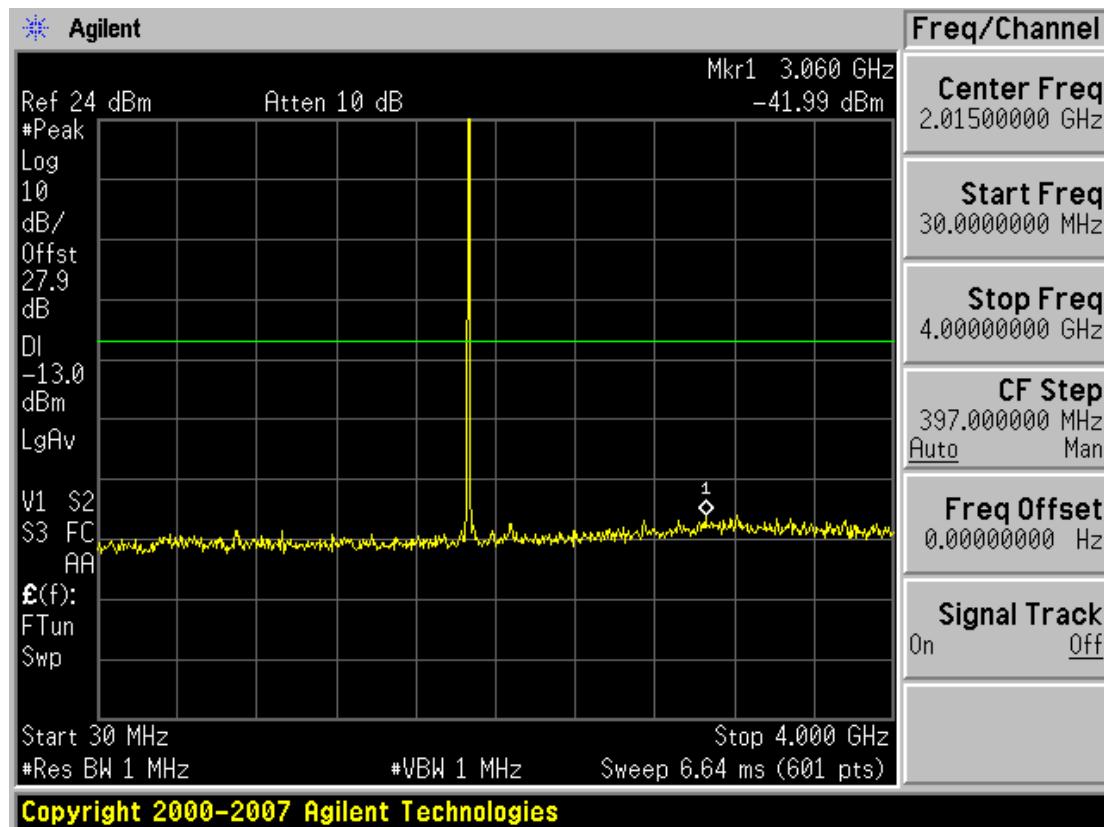


Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 81 of 83
----------------------------------	--------------------------------	------------------------	-----------------------	---------------


■ PCS CDMA MODE (600 CH.) Conducted Spurious Emissions - 2

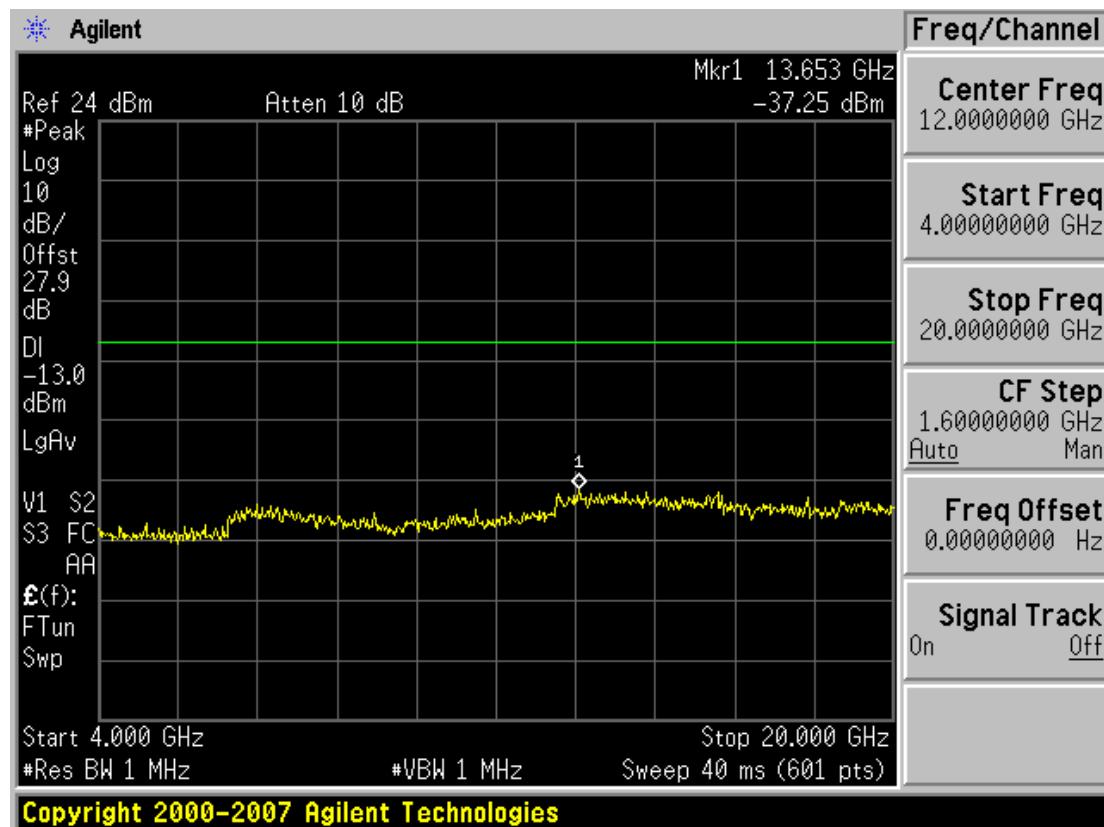

■ PCS CDMA MODE (1175 CH.) Conducted Spurious Emissions - 1

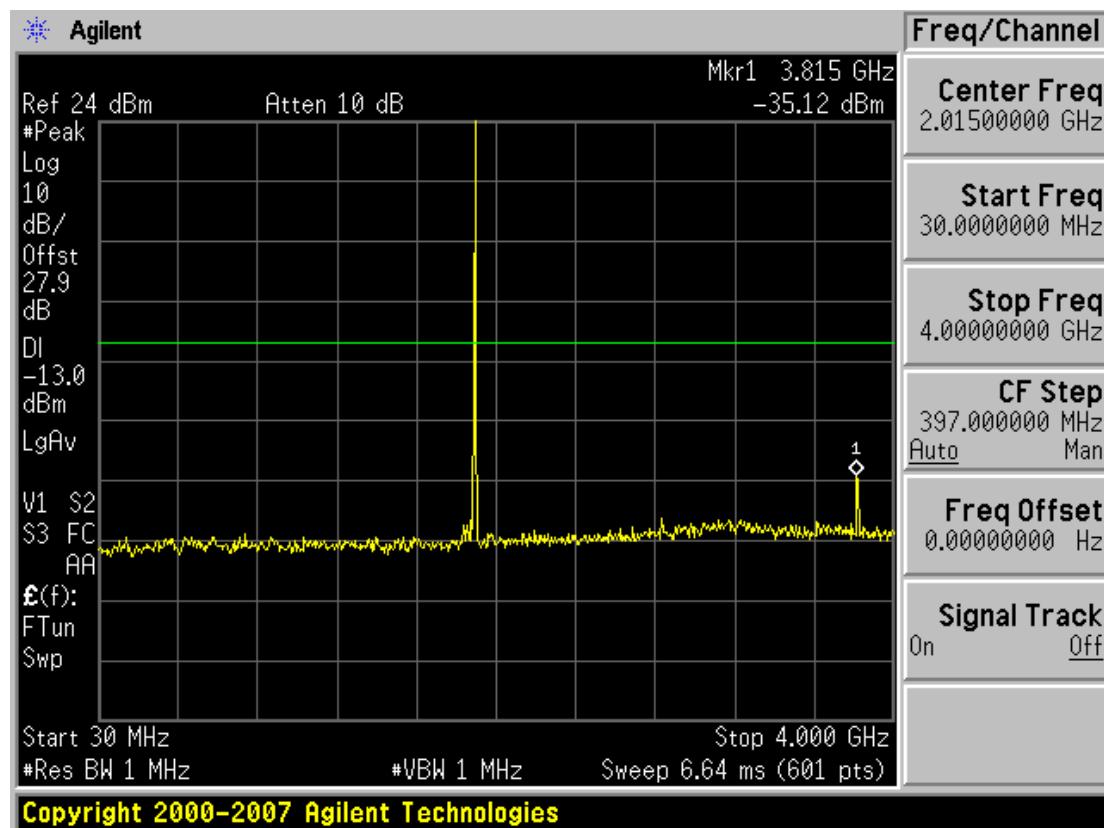

■ PCS CDMA MODE (1175 CH.) Conducted Spurious Emissions - 2

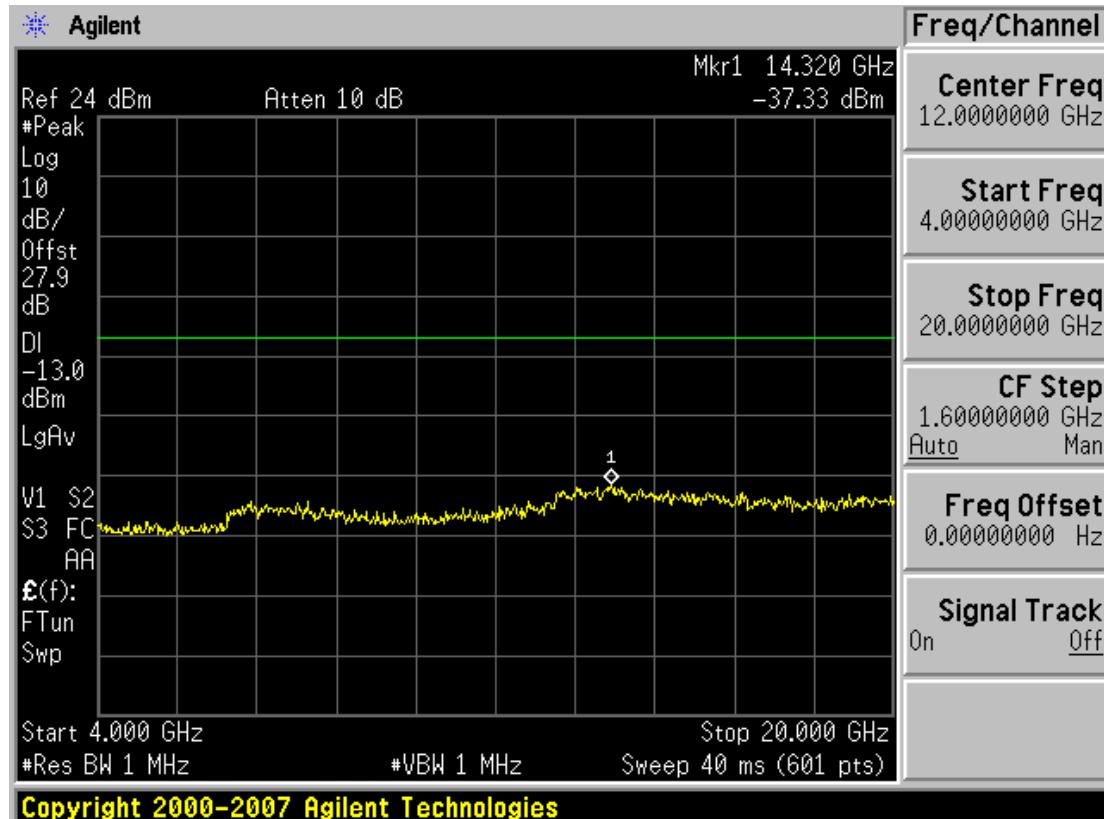

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0518	Date of Issue: May 20, 2009	EUT Type: USB Modem	FCC ID: PP4PX-5000	Page 83 of 83