

ATTACHMENT O – SAR TEST PLOTS (1 of 4)

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ p

$= 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.425 mW/g, SAR (10g): 0.290 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.01 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: AMPS / Channel: 991 (824.04MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

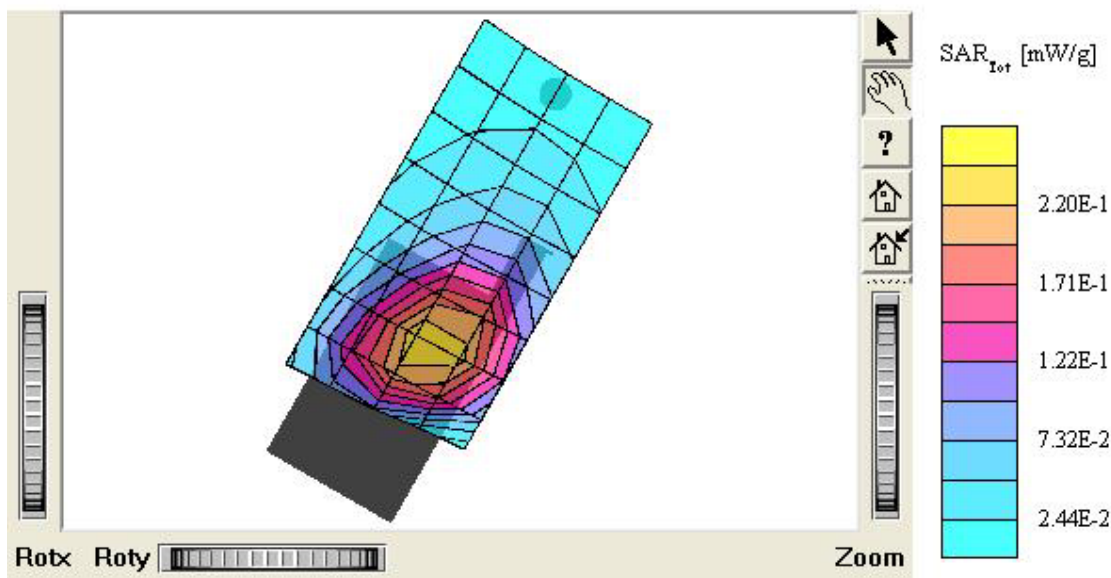

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR(1g): 0.371 mW/g, SAR(10g): 0.254 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.21 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: AMPS / Channel: 991 (824.04MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

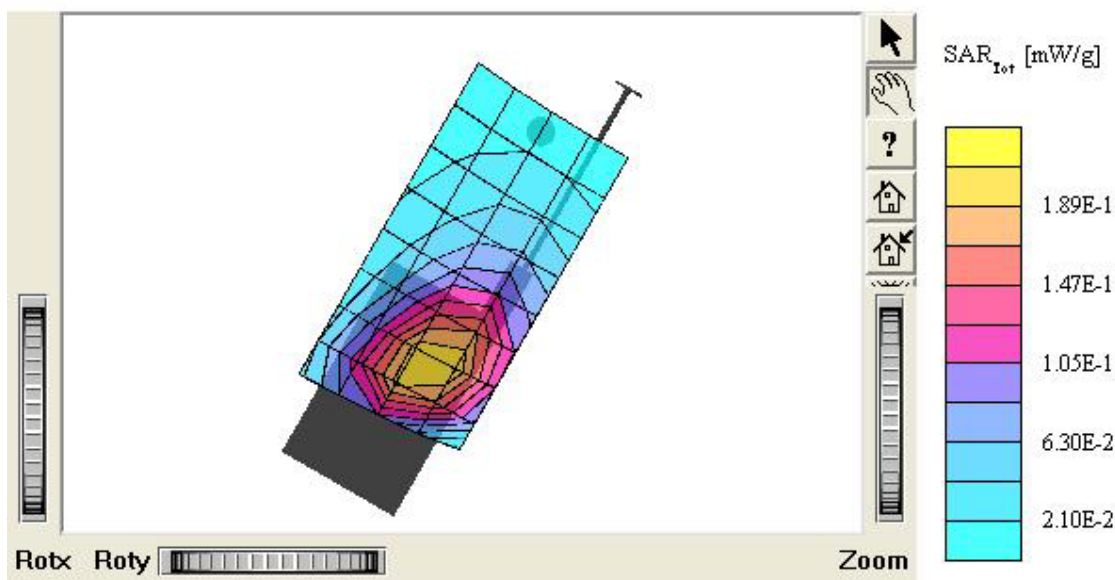

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.532 mW/g, SAR (10g): 0.362 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.14 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

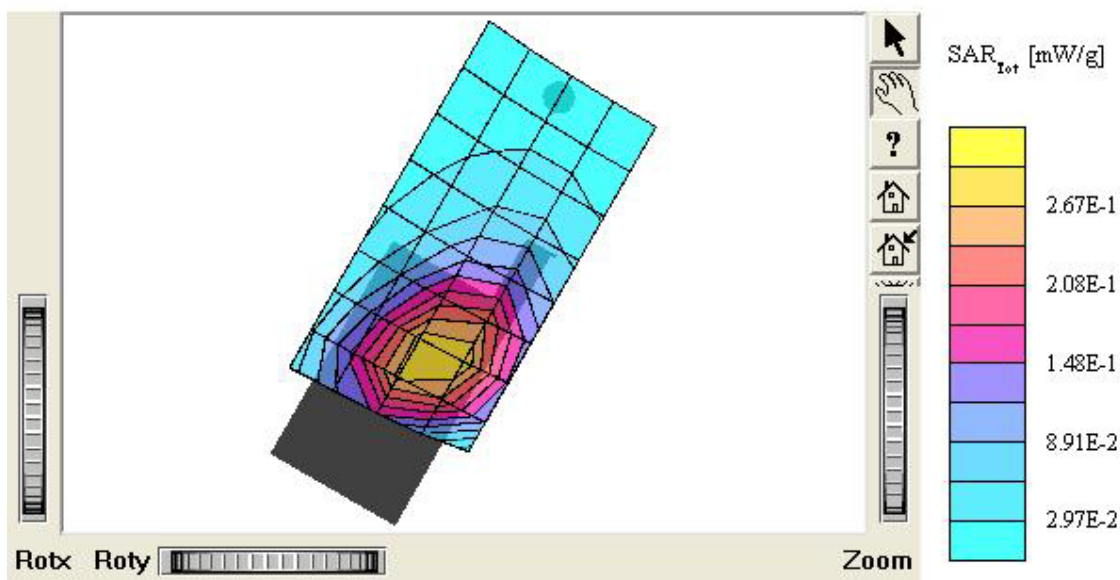

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho =$ 1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.564 mW/g, SAR (10g): 0.382 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.19 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

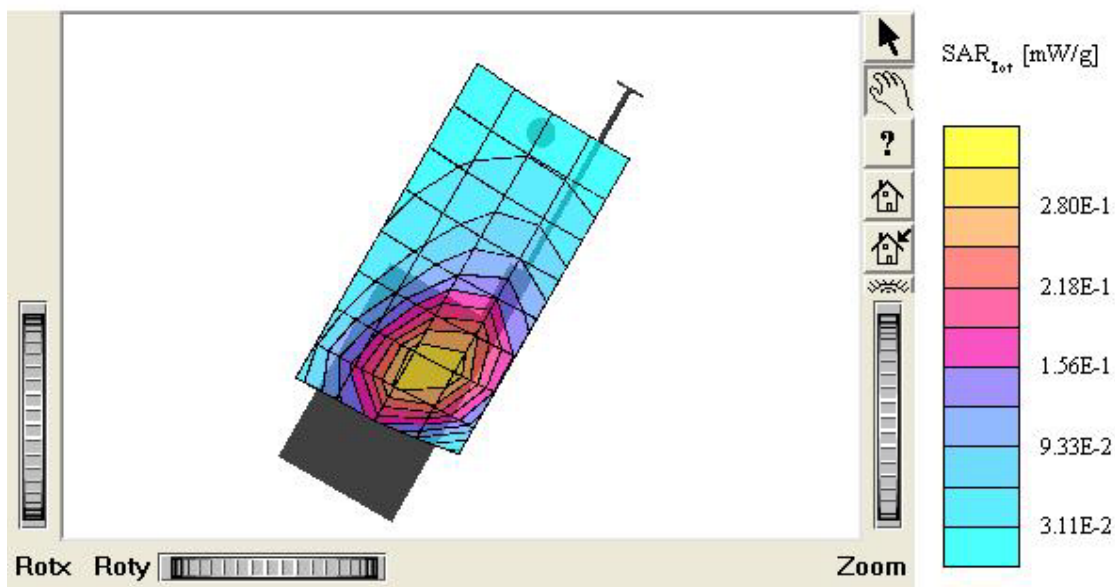

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR(1g): 0.775 mW/g, SAR(10g): 0.527 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.17 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: AMPS / Channel: 799 (848.97MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

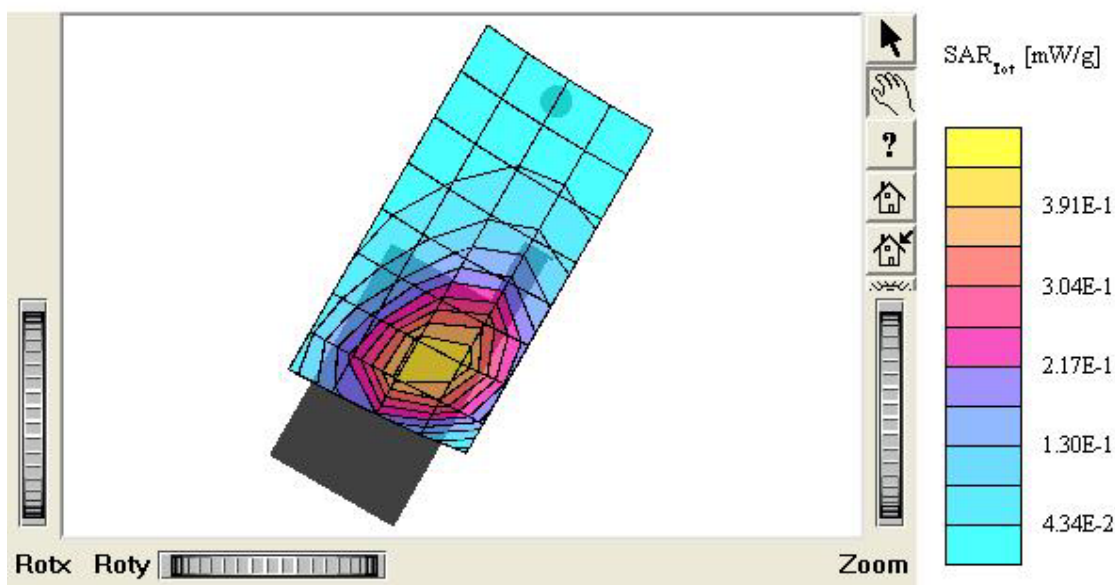

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.815 mW/g, SAR (10g): 0.552 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.17 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: AMPS / Channel: 799 (848.97MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

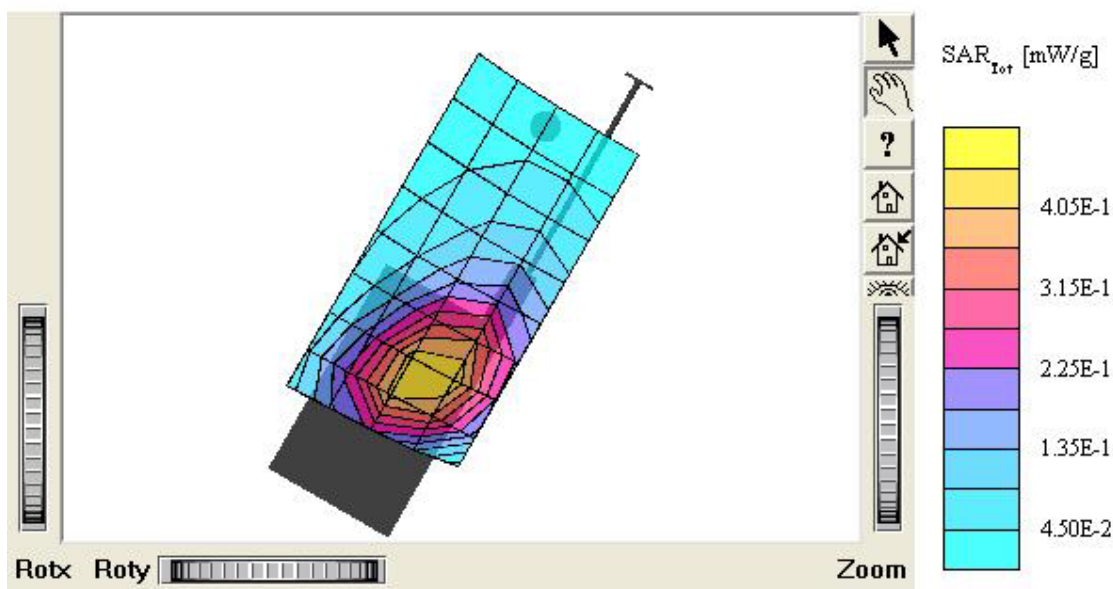

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 43.2$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR(1g): 0.811 mW/g, SAR(10g): 0.553 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.27 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C (E-battery)

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: AMPS / Channel: 799 (848.97MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

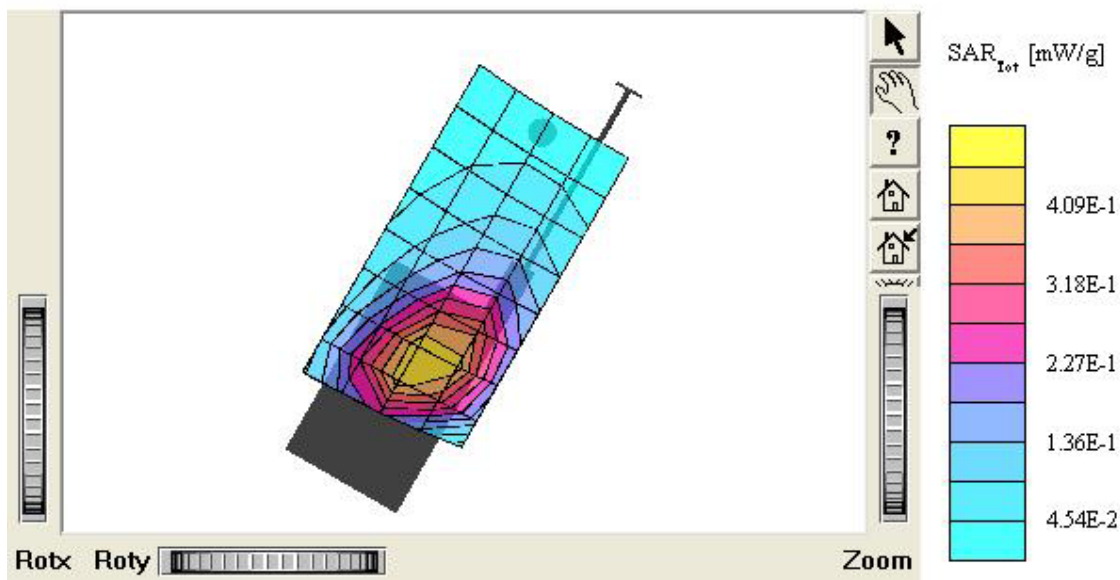

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.485 mW/g, SAR (10g): 0.323 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.02 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: AMPS / Channel: 991 (824.04MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

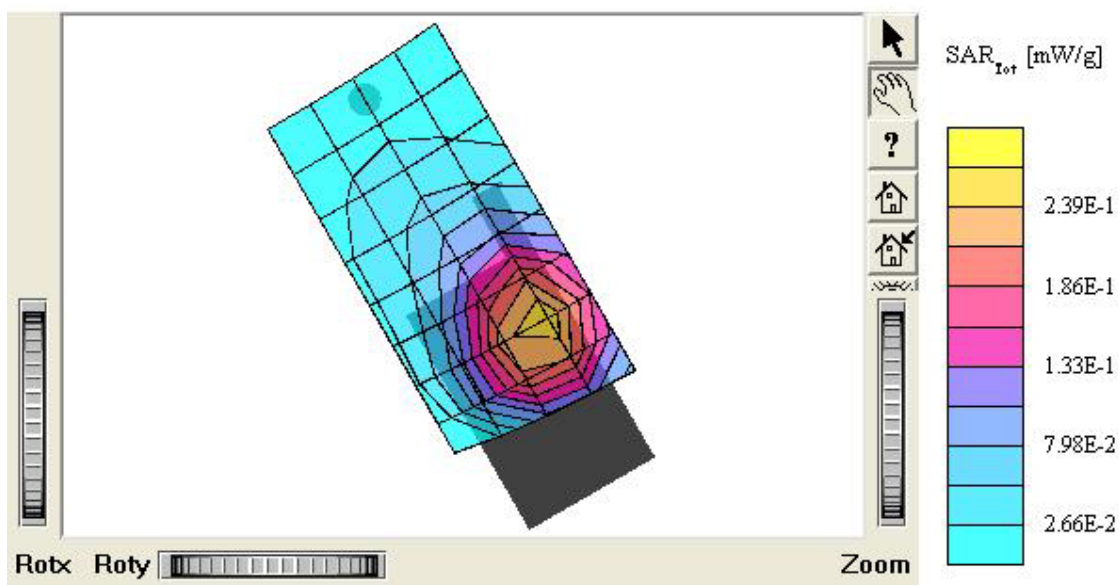

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.412 mW/g, SAR (10g): 0.275 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.09 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: AMPS / Channel: 991 (824.04MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

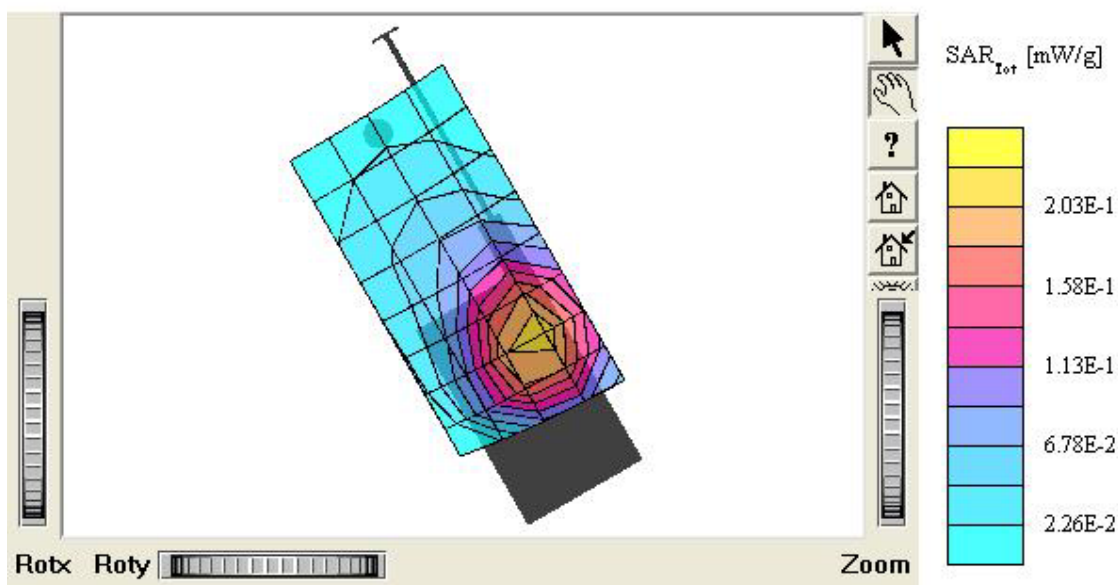

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.665 mW/g, SAR (10g): 0.440 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.12 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

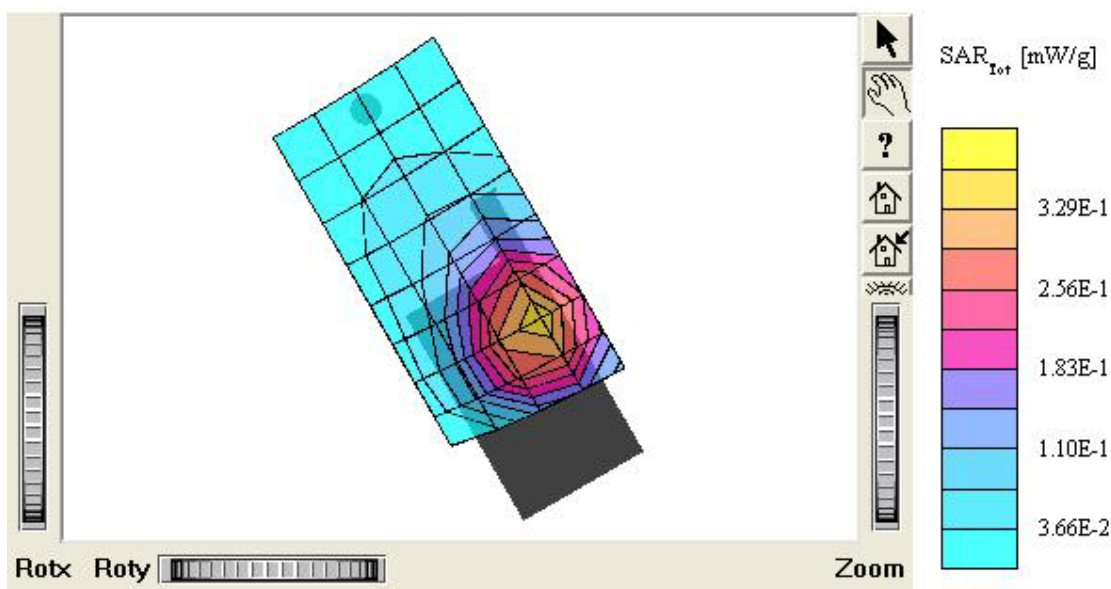

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.638 mW/g, SAR (10g): 0.423 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.10 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

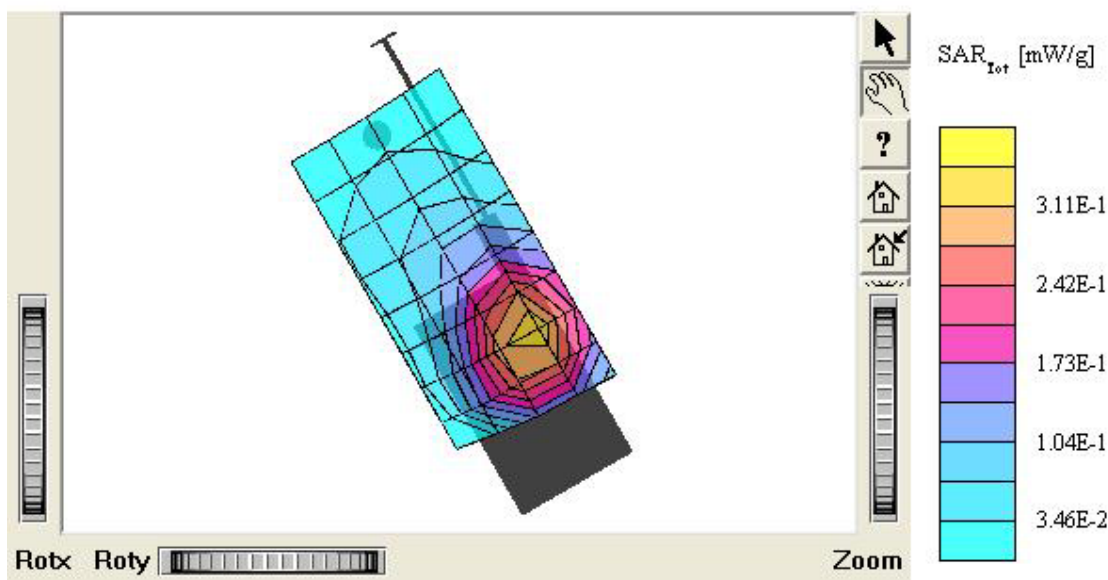

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.713 mW/g, SAR (10g): 0.474 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.02 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: AMPS / Channel: 799 (848.97MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

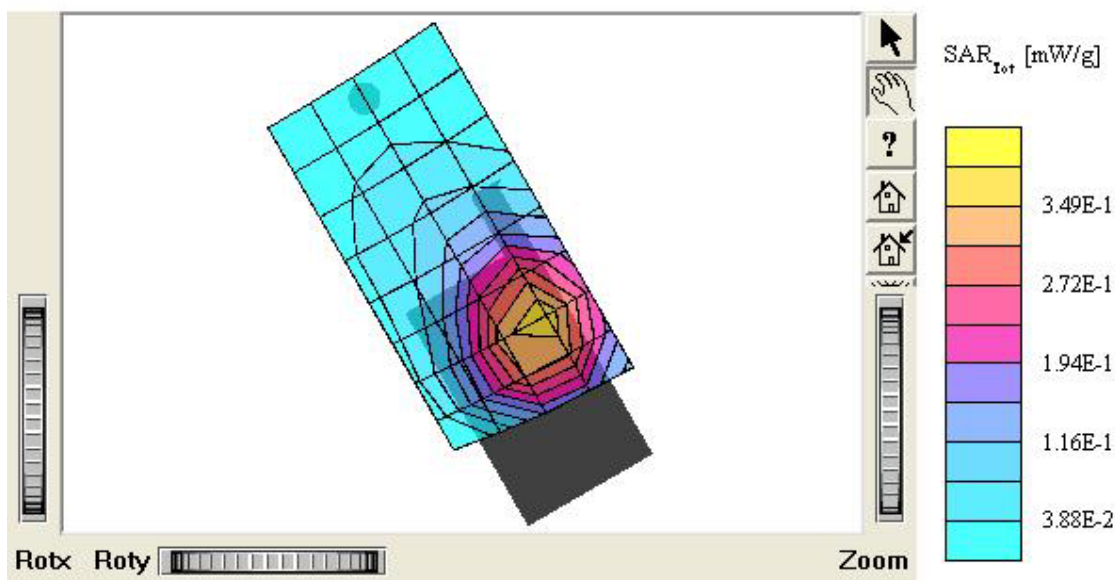

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.722 mW/g, SAR (10g): 0.484 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.14 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: AMPS / Channel: 799 (848.97MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

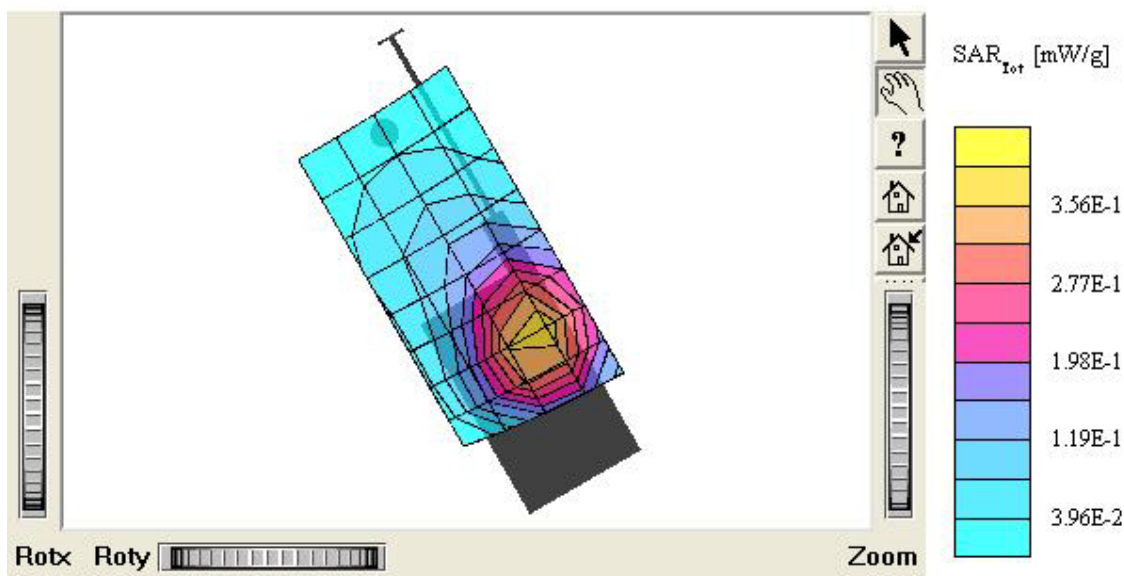

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho =$ 1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.131 mW/g, SAR (10g): 0.0947 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.37 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: in

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

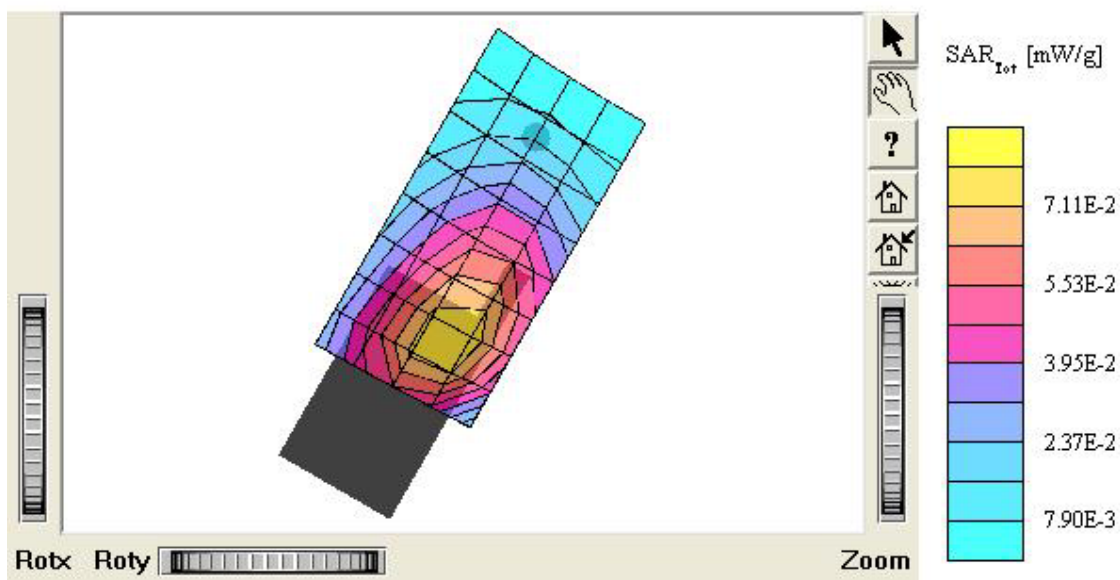

TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.138 mW/g, SAR (10g): 0.0998 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.08 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: out

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

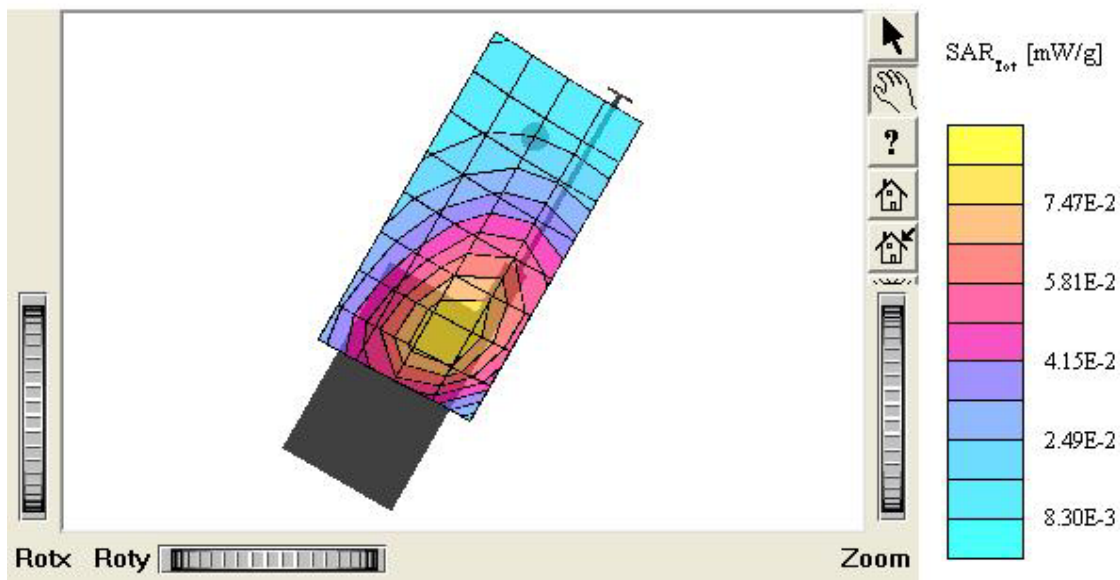

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 43.2$ ρ $= 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.143 mW/g, SAR (10g): 0.104 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.11 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.


Test Position: Right Tilt 15° / Antenna: in

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

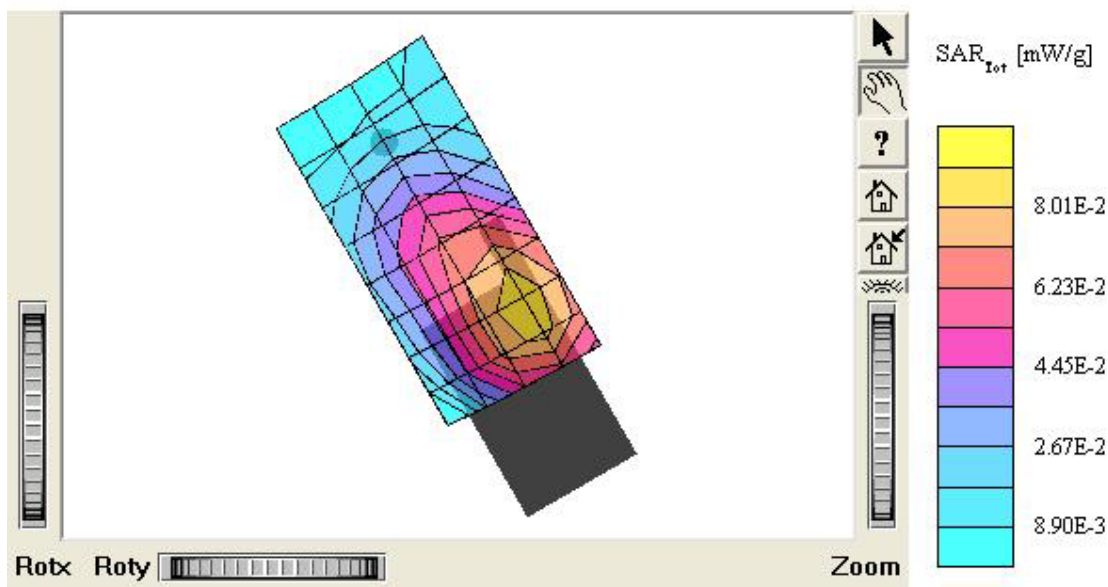

TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.90 \text{ mho/m}$ $\epsilon_r = 43.2$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.142 mW/g, SAR (10g): 0.103 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.01 dB

Comment :

FCC ID: PP4TX-110C / MODEL: TX-110C

Company: Hyundai Curitel Inc.

Test Position: Right Tilt 15° / Antenna: out

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5°C

Date Tested : September 6, 2004

