



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
Retractable Antenna	Date 2005.02.22	Page 1/37

RETRACTABLE ANTENNA SPECIFICATION

(MRT-06500)

TX-230



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 2/37

⦿ Contents ⦿

1. Specification

1.1 Electrical Specification

1.2 Mechanical Specification

1.3 Packing Specification

2. Test Equipments

3. Electrical Specification

3.1 V.S.W.R

3.2 Radiation Pattern

3.3 Gain

4. Mechanical Specification

4.1 Dimension

4.2 Bending Test

4.3 Extracting and Retraction Force

4.4 Drop Test

4.5 Pull Test

4.6 Torque Test

4.7 Cycle Test

5. Environmental Specification

5.1 Thermal Shock

5.2 Temperature Cycling

5.3 Low temp. Test

5.4 High temp. Test

5.5 Humidity

5.6 Vibration

5.7 Salt Spray Test

Appendix A. : Reference of test methods



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
Retractable Antenna	Date 2005.02.22	Page 3/37

1. Specification

1.1 Electrical Specification

Frequency Range	CELLULAR 824Mhz – 894 MHz GPS 1575 MHz US-PCS 1850MHz – 1990MHz	
V.S.W.R	CELLULAR CLOSE IN	< 3.48 : 1
	CELLULAR OPEN IN	< 4.92 : 1
	CELLULAR OPEN OUT	< 2.36 : 1
	GPS CLOSE IN	< 3.29 : 1
	GPS OPEN IN	< 3.83 : 1
	GPS OPEN OUT	< 3.57 : 1
	US-PCS CLOSE IN	< 2.97 : 1
	US-PCS OPEN IN	< 2.97 : 1
	US-PCS OPEN OUT	< 3.61 : 1
Impedance	50Ω	
Radiation Pattern	Omni-directional	
Polarization	Vertical	
Max power	2W	

CELLULAR GAIN (PEAK)	TX	824Mhz	1.01dBi	AZIMUTH	OPEN OUT
	RX	869Mhz	1.88dBi	ELEVATION-2	OPEN OUT
US - PCS GAIN (PEAK)	TX	1850Mhz	0.8dBi	AZIMUTH	OPEN OUT
	RX	1990Mhz	0.29dBi	AZIMUTH	OPEN OUT
GPS GAIN (PEAK)	1575Mhz		-0.57dBi	ELEVATION-1	OPEN OUT



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 4/37

1.2 Mechanical Specification

Length	See the drawing
Temperature	-40 °C – +70 °C
Connector type	Screw

1.3 Packing

Description	Q' ty	Material	Remark
Tray	150EA	P.P	
Air Vinyl	—	Polyester	
Inner Box	1,500EA	SW 1 (A)	17.4Kgf/50mm min.
Master Carton Box	7,500EA	DW 1 (A)	25.4Kgf/50mm min.



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 5/37

2. Test Equipment

Description	Purpose
Network Analyzer	V.S.W.R, Impedance
Standard Horn	Gain, Impedance
Digital Calipers	Dimension
Torque Driver	Torque Test
Push Pull Gauge	Force Test
Temp. Chamber	Temperature Test
Thermal Shock Chamber	Thermal Shock
Vibration Shaker	Vibration
Dummy Set	Drop Test



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 6/37
Retractable Antenna		

3. Electrical Specification

3.1 V.S.W.R

The performance of this antenna shall be in accordance with the best V.S.W.R requirements as followings over the entire band.


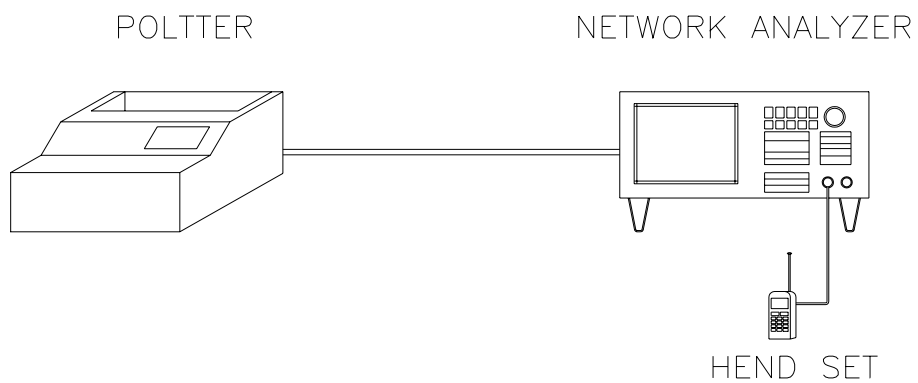


Figure 1 V.S.W.R Measurement System



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 7/37
Retractable Antenna		

CLOSE IN

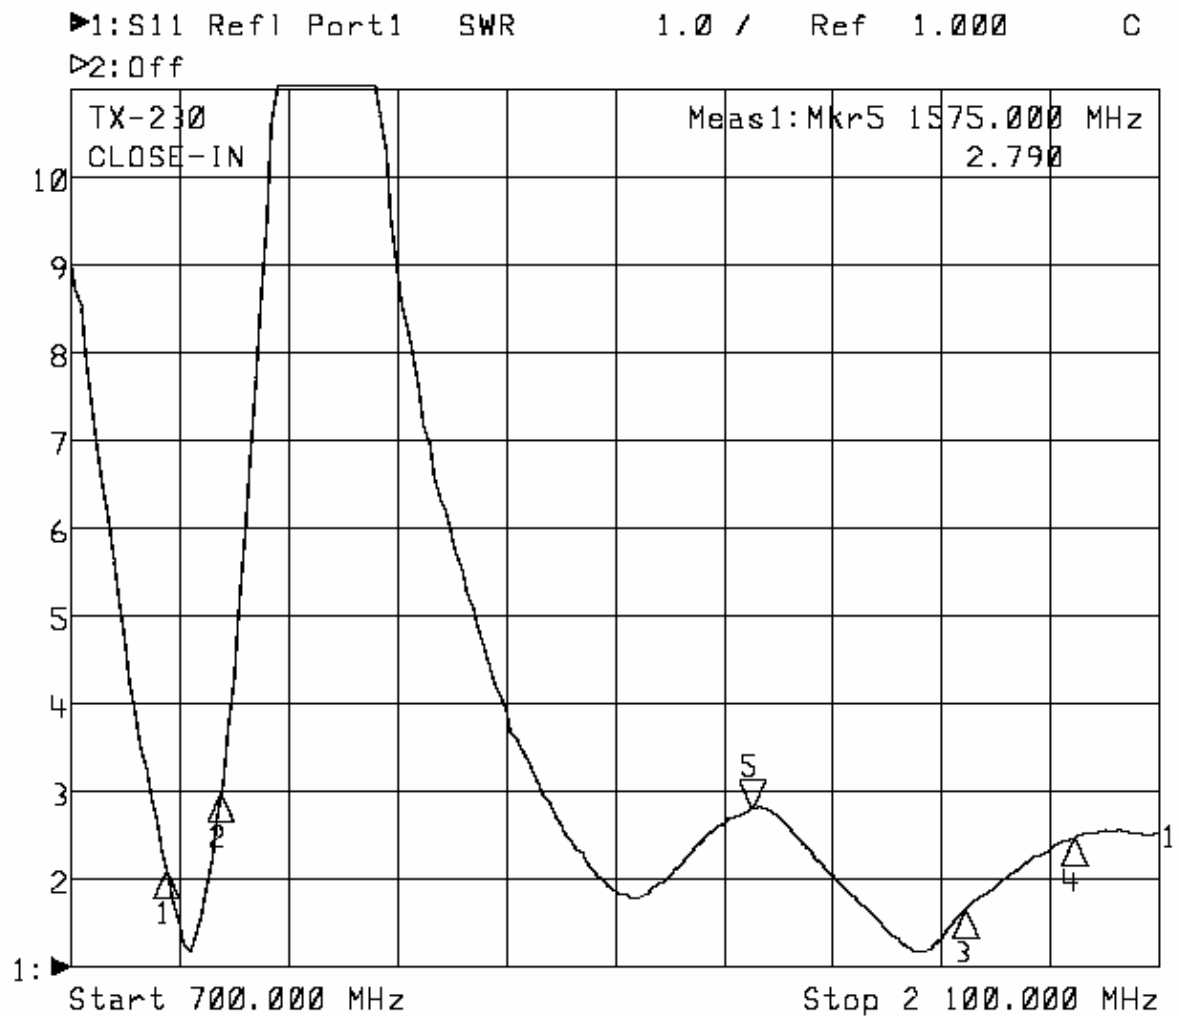


1:Mkr (MHz)	2:Mkr (MHz)	Ohm	Ohm
1: 824.0000	2.099		
2: 894.0000	2.984		
3: 1850.0000	1.650		
4: 1990.0000	2.471		
5> 1575.0000	2.790		



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 8/37
Retractable Antenna		

OPEN IN

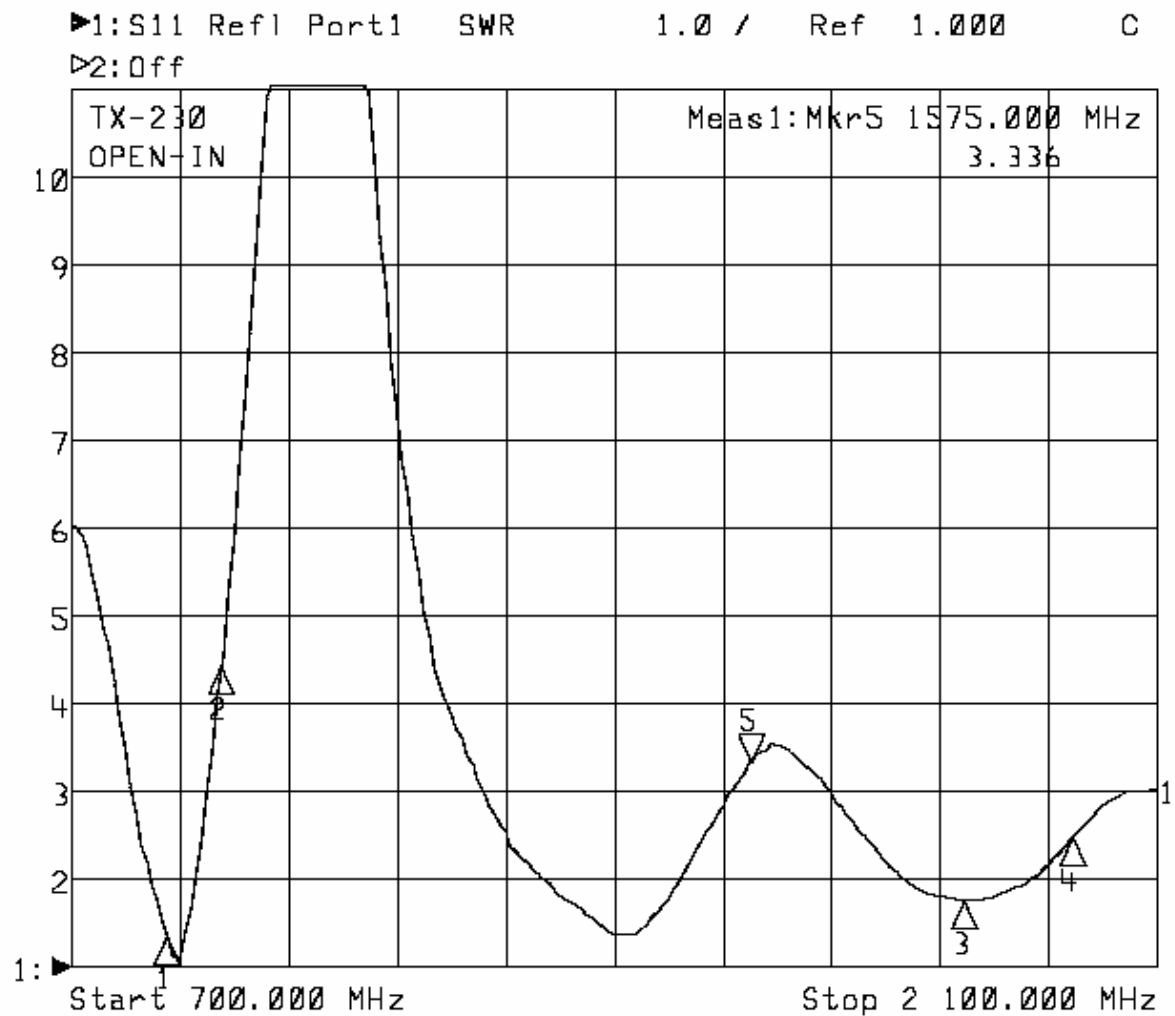

1:Mkr (MHz)		2:Mkr (MHz)	Ohm	Ohm
1: 824.0000	1.354			
2: 894.0000	4.427			
3: 1850.0000	1.759			
4: 1990.0000	2.471			
5> 1575.0000	3.336			




MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 9/37

Retractable Antenna

OPEN OUT

►1:S11 Refl Port1 SWR 1.0 / Ref 1.000 C

►2:Off

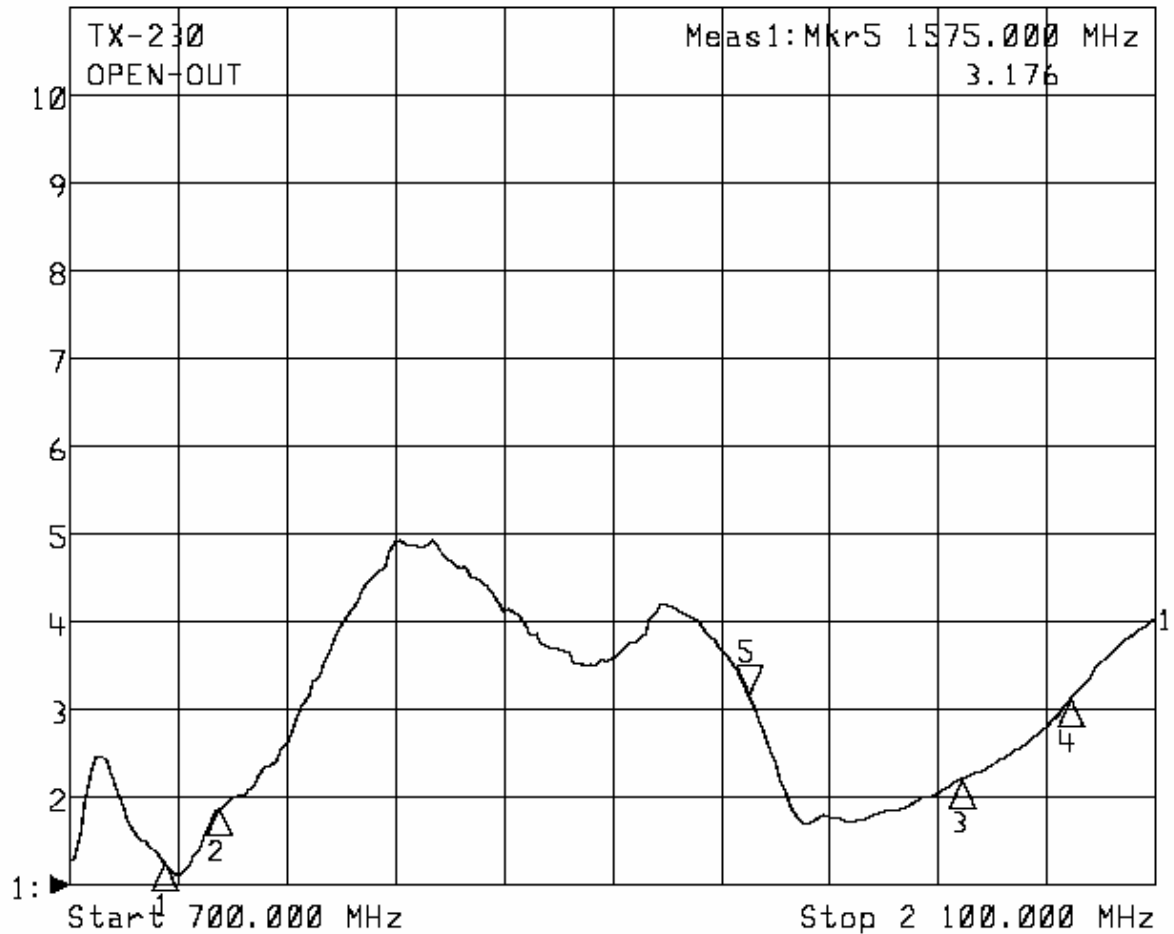

1:Mkr (MHz)		2:Mkr (MHz)	Ohm	Ohm
1: 824.0000	1.240			
2: 894.0000	1.869			
3: 1850.0000	2.209			
4: 1990.0000	3.118			
5> 1575.0000	3.176			



MRW ANTENNA SPECIFICATION	Doc.No MRWPQR-14117	Rev. No. 1
	Date 2005.02.22	Page 10/37
Retractable Antenna		

3.2 Radiation Pattern

The radiation pattern of this antenna shall be omni-directional for the horizontal plane and bi-directional for the vertical plane in both position of extended and retracted.

CELLULAR, GPS AZIMUTH CLOSE IN

