

ATTACHMENT O – SAR TEST PLOTS (1 of 3)

TX-230

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$, $\epsilon_r = 41.3$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.941 mW/g, SAR (10g): 0.626 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.14 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

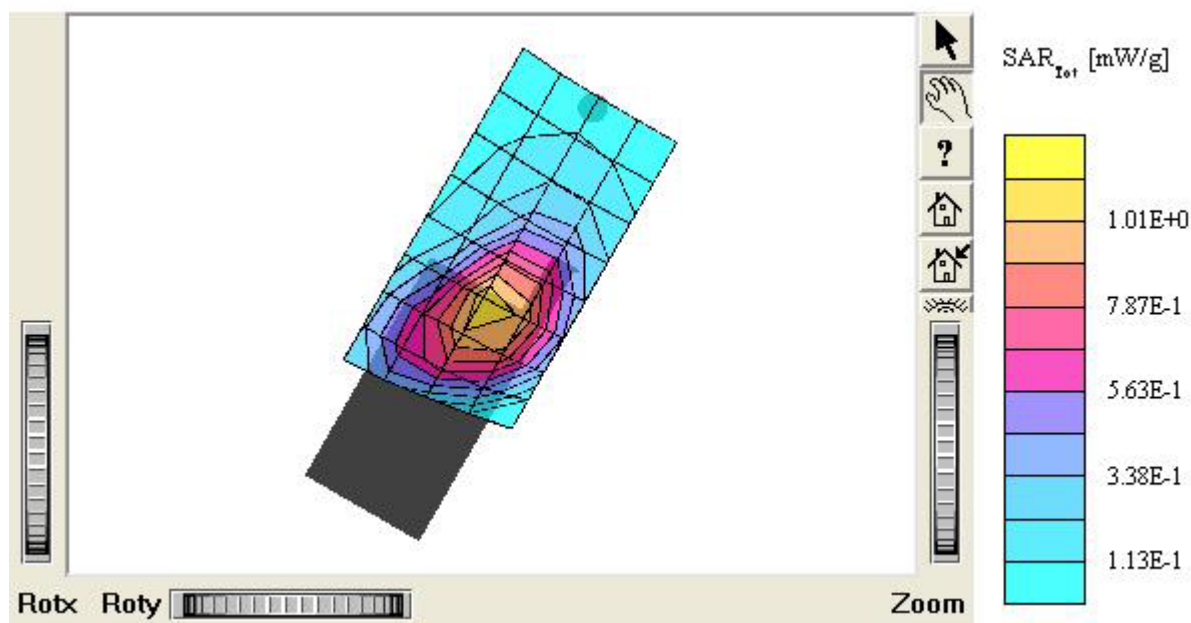

TX-230

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.28 mW/g, SAR (10g): 0.852 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.01 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

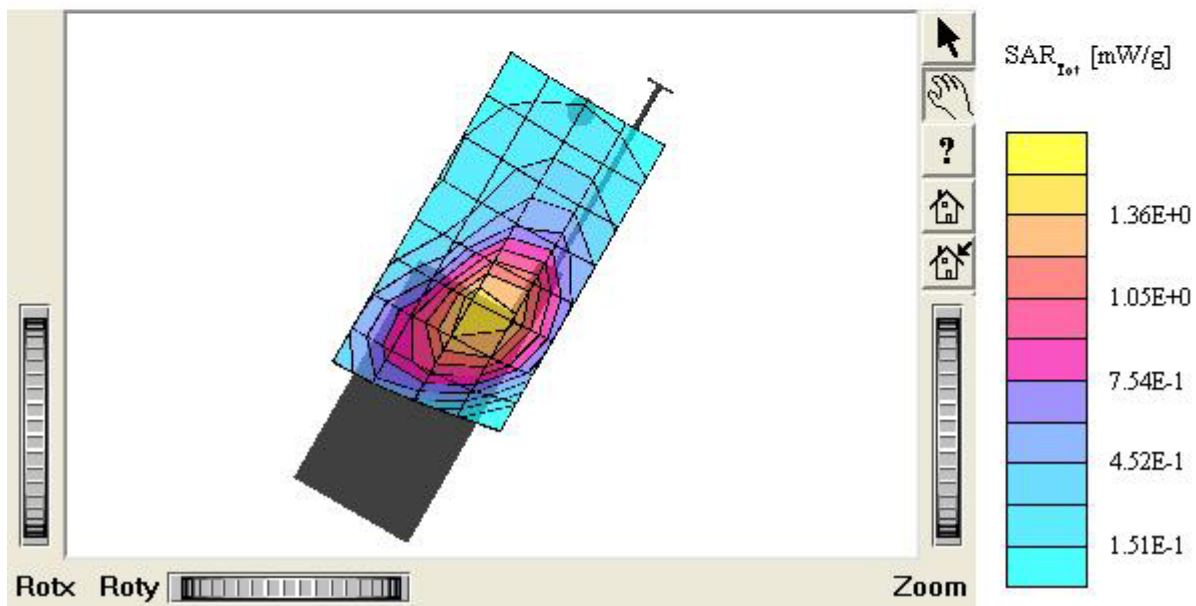

TX-230

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$, $\epsilon_r = 41.3$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.946 mW/g, SAR (10g): 0.626 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.13 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

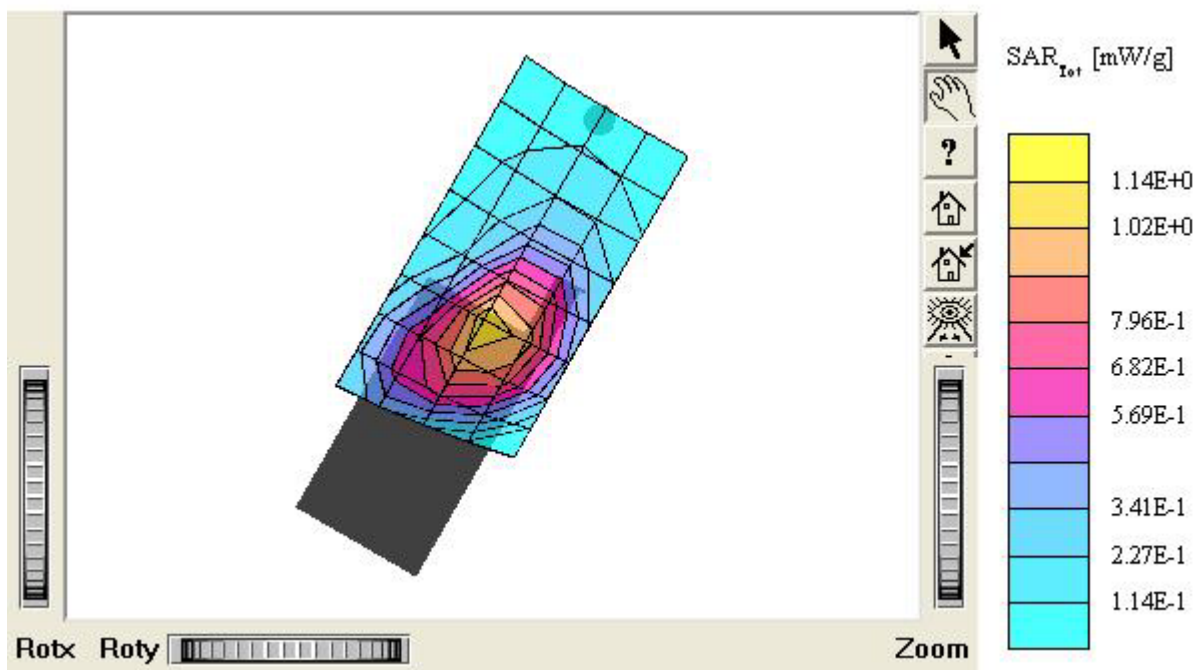

TX-230

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$, $\epsilon_r = 41.3$, $\rho =$

1.00 g/cm^3

Cube 5x5x7: SAR (1g): 1.41 mW/g, SAR (10g): 0.937 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.02 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

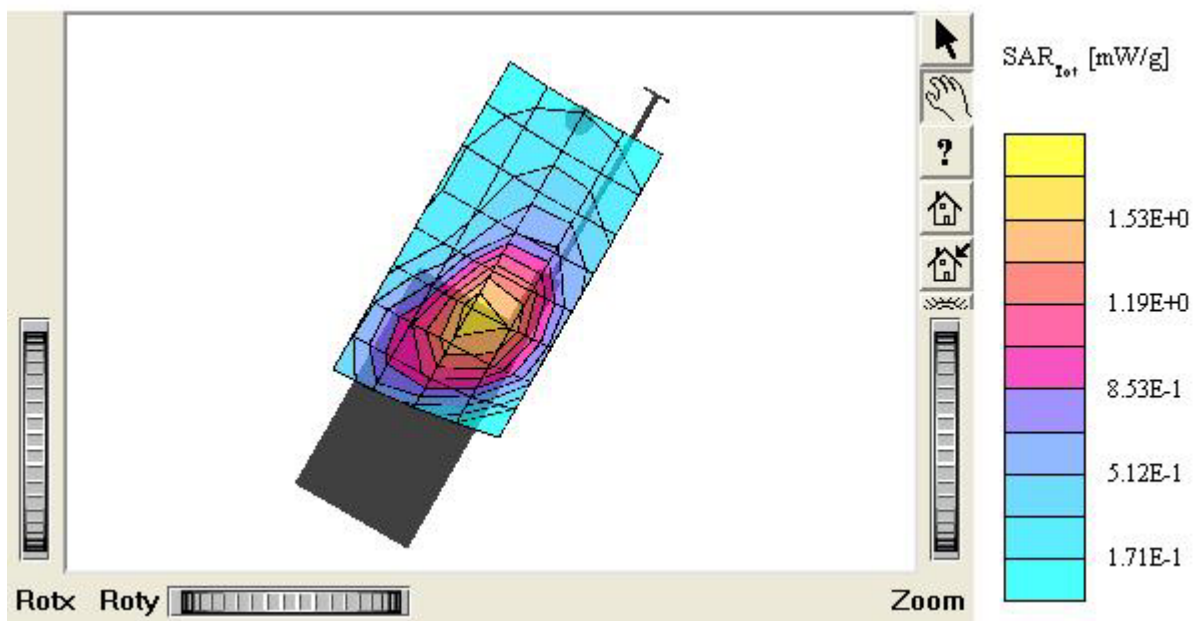

TX-230

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.07 mW/g, SAR (10g): 0.709 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.16 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

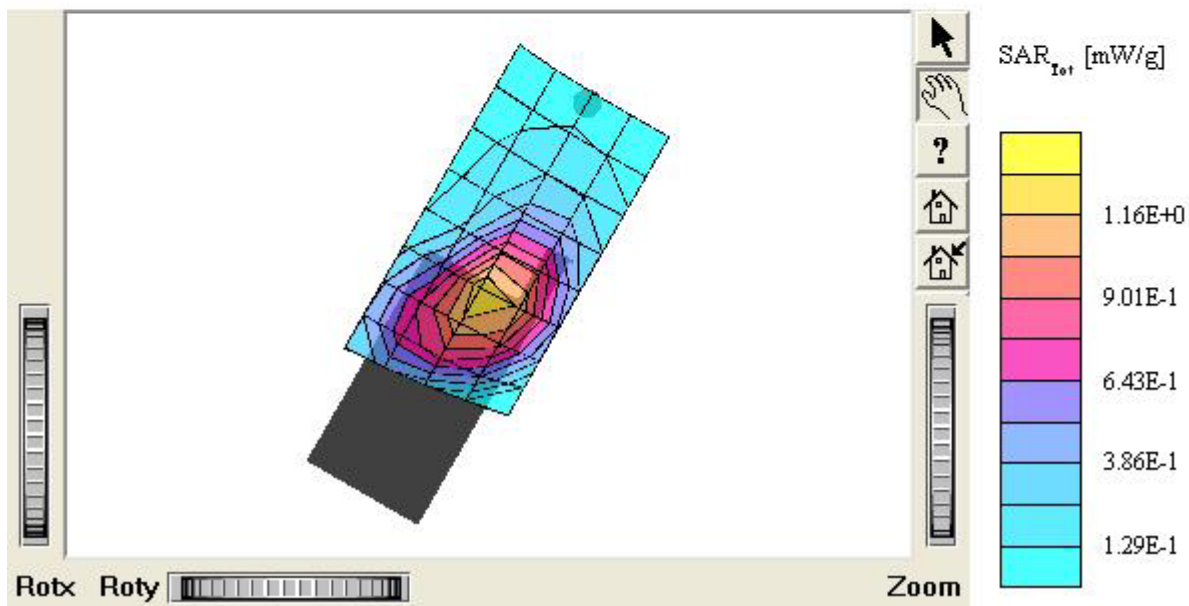

TX-230

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$ $\epsilon_r = 41.3$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 1.29 mW/g, SAR (10g): 0.856 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.18 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

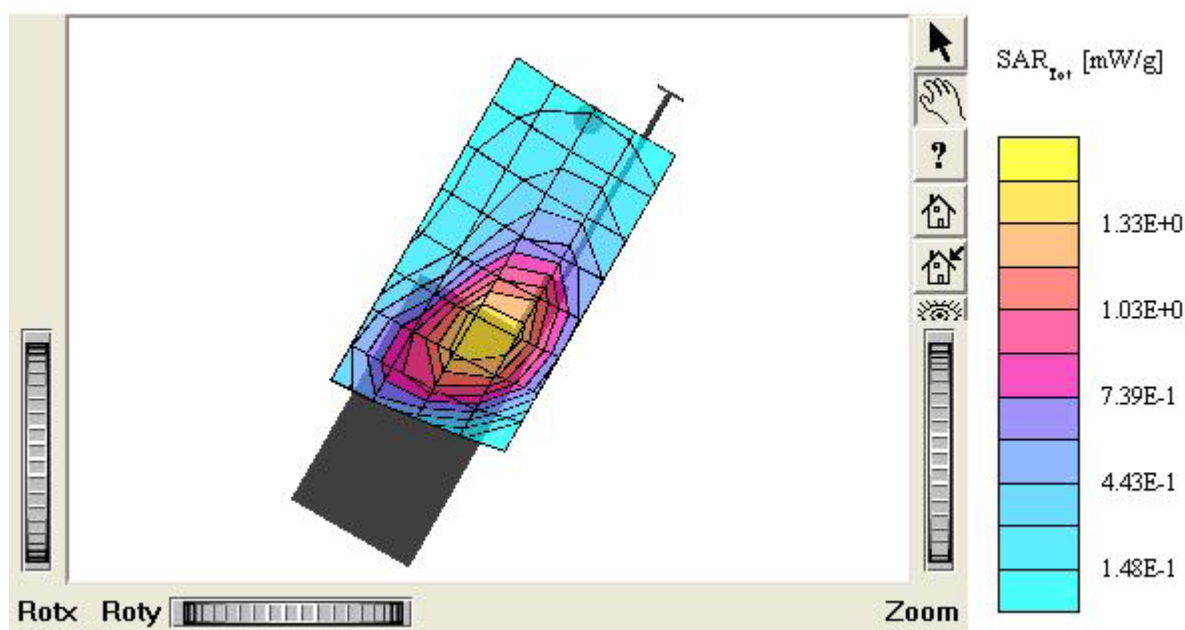

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.01 mW/g, SAR (10g): 0.667 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.08 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

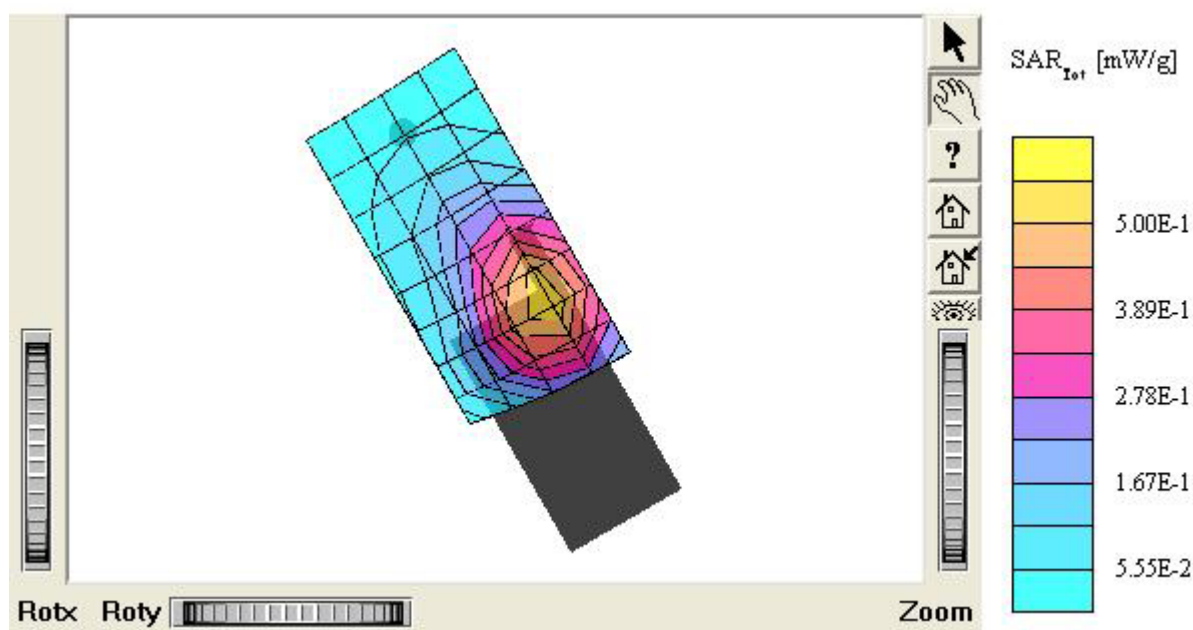

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$, $\epsilon_r = 41.3$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 1.35 mW/g, SAR (10g): 0.888 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.13 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 1013 (824.70MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

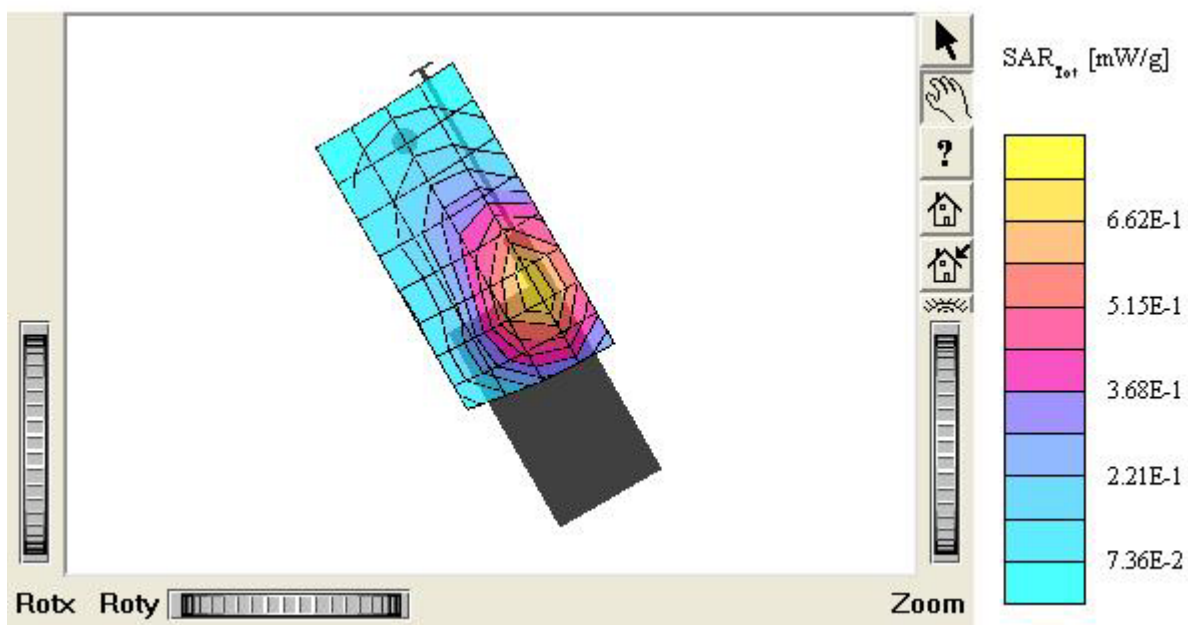

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.37 mW/g, SAR (10g): 0.900 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.01 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: CDMA / Channel: 363 (853.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

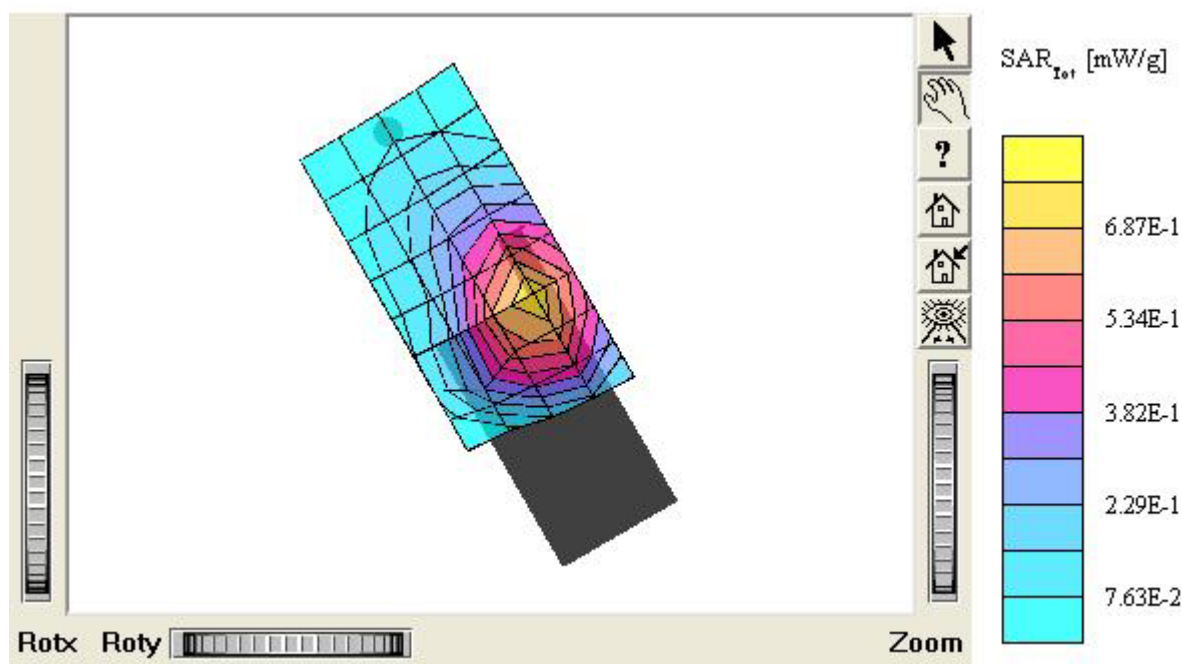

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$, $\epsilon_r = 41.3$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 1.44 mW/g, SAR (10g): 0.952 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.00 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

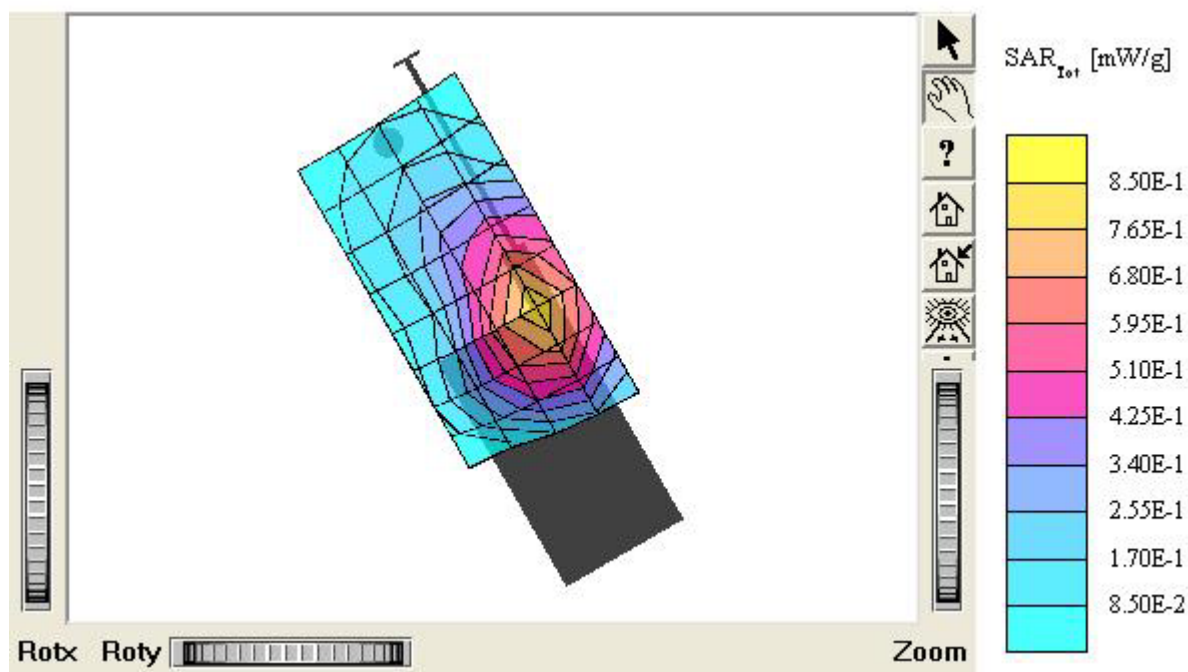

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.41 mW/g, SAR (10g): 0.913 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.19 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230(E-battery)

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

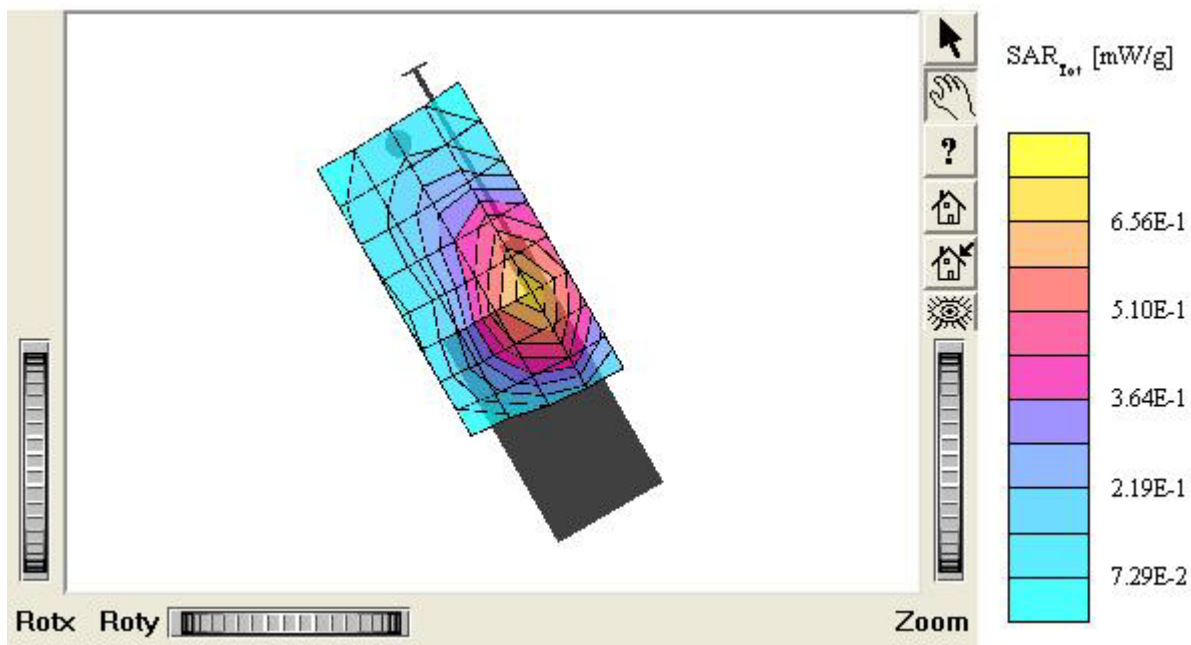

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$, $\epsilon_r = 41.3$, $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 1.20 mW/g, SAR (10g): 0.785 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.12 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

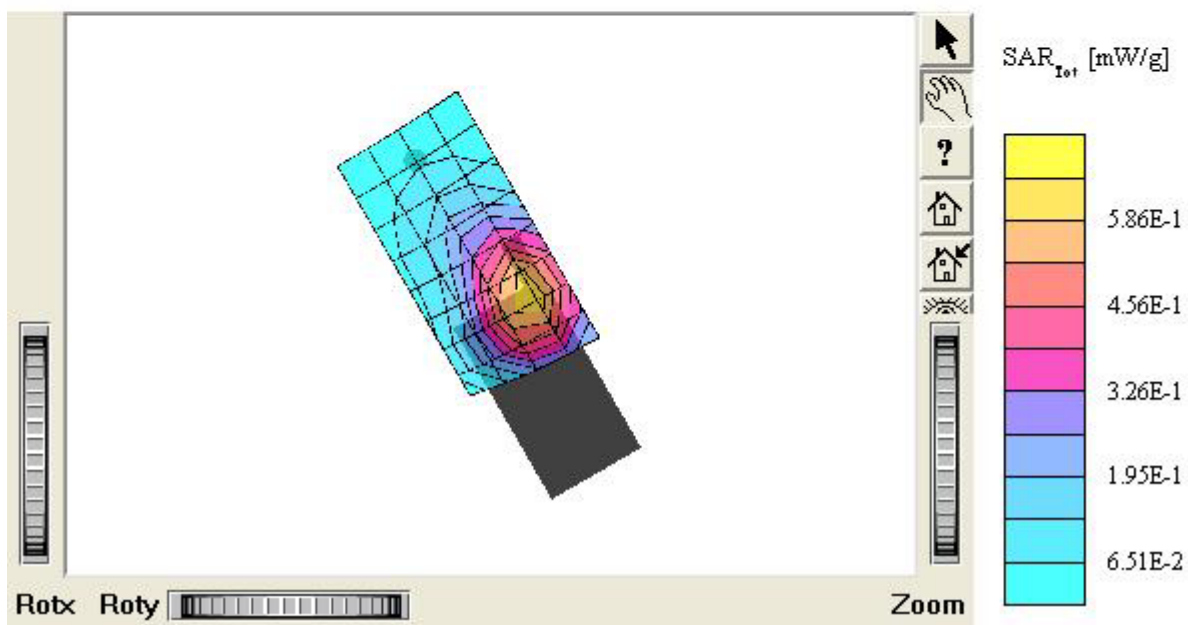

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.44 mW/g, SAR (10g): 0.948 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.14 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: CDMA / Channel: 777 (848.31MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

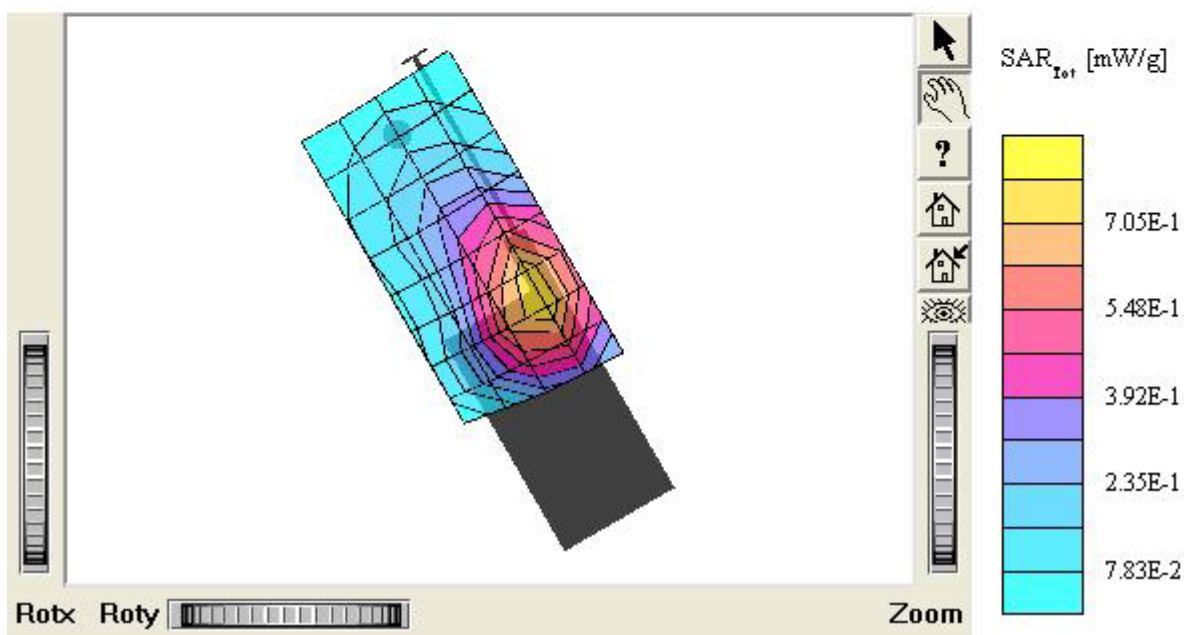

TX-230

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.373 mW/g, SAR (10g): 0.263 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.04 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: in

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

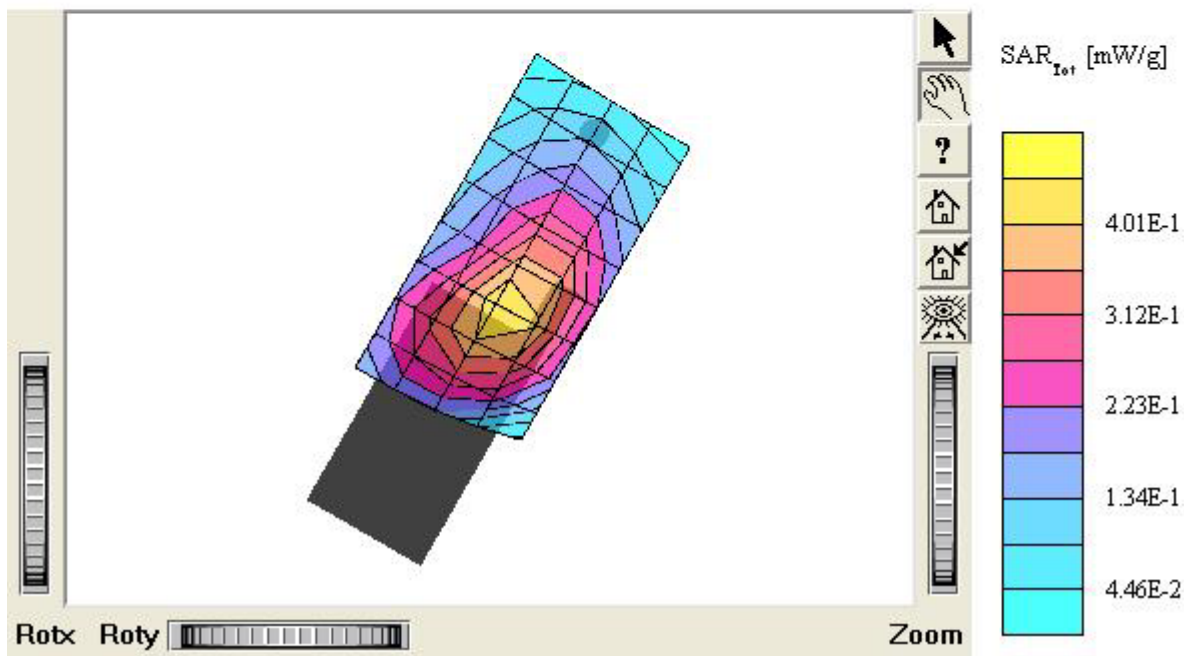

TX-230

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.374 mW/g, SAR (10g): 0.264 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.00 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

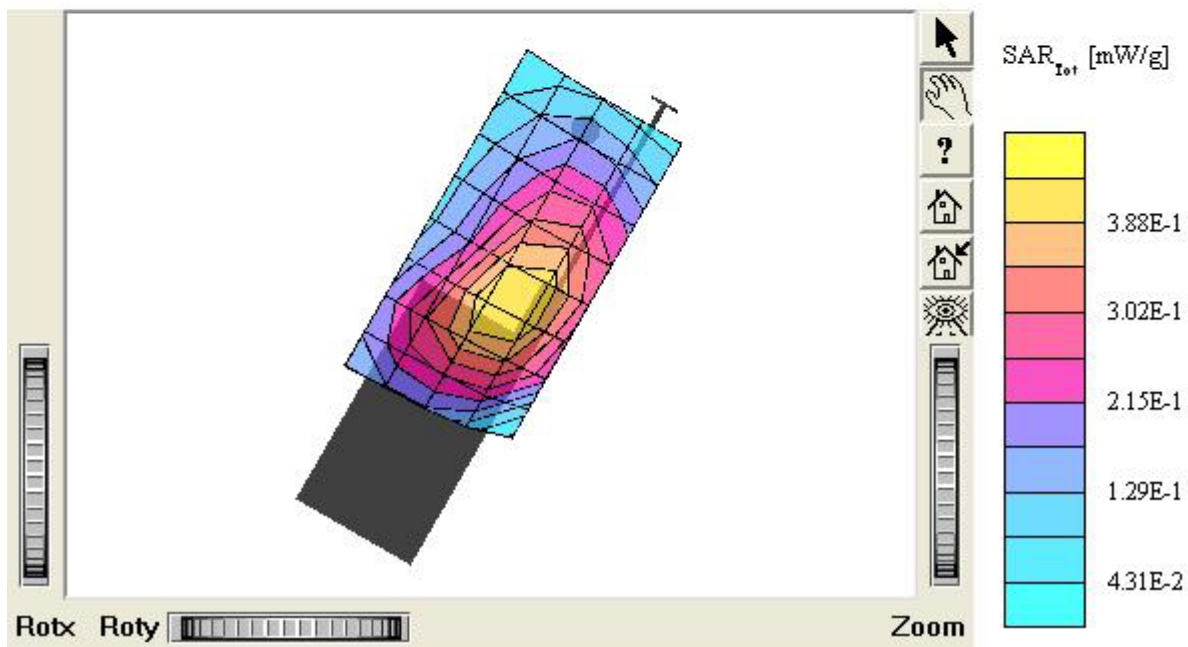

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87 \text{ mho/m}$ $\epsilon_r = 41.3$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.371 mW/g, SAR (10g): 0.267 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.11 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.


Test Position: Right Tilt 15° / Antenna: out

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

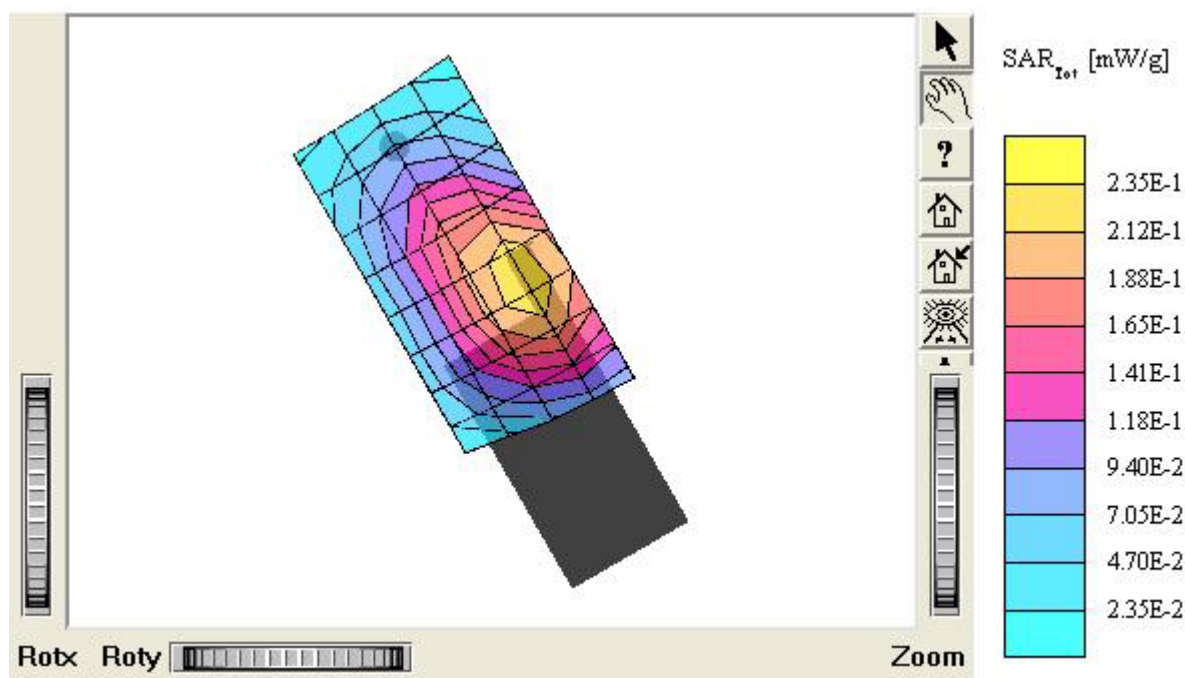

TX-230

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.91,6.91,6.91); Crest factor: 1.0; Head 835 MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.342 mW/g, SAR (10g): 0.249 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.00 dB

Comment :

FCC ID: PP4TX-230 / MODEL: TX-230

Company: Hyundai Curitel Inc.

Test Position: Right Tilt 15° / Antenna: in

Mode: CDMA / Channel: 363 (833.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.5°C

Date Tested : October 05, 2005

