



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7**

CERTIFICATION TEST REPORT

FOR

802.11n-BT COMBO CARD

MODEL NUMBER: AR5B195

**FCC ID: PPD-AR5B195
IC: 4104A-AR5B195**

REPORT NUMBER: 09U12738-2, Revision B

ISSUE DATE: OCTOBER 06, 2009

Prepared for
ATHEROS COMMUNICATIONS, INC.
5480 GREAT AMERICA PARKWAY
SANTA CLARA, CA 95054, U.S.A.

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	09/23/09	Initial Issue	T. Chan
A	10/01/09	Corrected IC #	T. Chan
B	10/06/09	Addressed TCB Questions On Section 9.4 & 9.5	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
4.2. <i>SAMPLE CALCULATION.....</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT.....</i>	7
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	7
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	7
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	8
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. DUAL ANTENNA CONFIGURATION TEST RESULTS.....	12
7.1. <i>BASIC DATA RATE GFSK MODULATION.....</i>	12
7.1.1. 20 dB AND 99% BANDWIDTH.....	12
7.1.2. HOPPING FREQUENCY SEPARATION	17
7.1.3. NUMBER OF HOPPING CHANNELS.....	19
7.1.4. AVERAGE TIME OF OCCUPANCY.....	22
7.1.5. OUTPUT POWER	26
7.1.6. AVERAGE POWER	29
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	30
7.2. <i>ENHANCED DATA RATE 8PSK MODULATION.....</i>	35
7.2.1. 20 dB AND 99% BANDWIDTH.....	35
7.2.2. HOPPING FREQUENCY SEPARATION	40
7.2.3. NUMBER OF HOPPING CHANNELS.....	42
7.2.4. AVERAGE TIME OF OCCUPANCY.....	45
7.2.5. OUTPUT POWER	49
7.2.6. AVERAGE POWER	52
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	53
8. SINGLE ANTENNA CONFIGURATION TEST RESULTS.....	58
8.1. <i>ENHANCED DATA RATE 8PSK MODULATION (WORST CASE)</i>	58
8.1.1. 20 dB AND 99% BANDWIDTH.....	58
8.1.2. HOPPING FREQUENCY SEPARATION	62
8.1.3. NUMBER OF HOPPING CHANNELS.....	64
8.1.4. AVERAGE TIME OF OCCUPANCY.....	69

8.1.5. OUTPUT POWER	73
8.1.6. AVERAGE POWER	77
8.1.7. CONDUCTED SPURIOUS EMISSIONS.....	78
9. RADIATED TEST RESULTS	83
9.1. <i>LIMITS AND PROCEDURE</i>	83
9.2. <i>DUAL ANTENNA TRANSMITTER ABOVE 1 GHz</i>	84
9.2.1. BASIC DATA RATE GFSK MODULATION.....	84
9.2.2. ENHANCED DATA RATE 8PSK MODULATION.....	89
9.3. <i>SINGLE ANTENNA TRANSMITTER ABOVE 1 GHz</i>	94
9.3.1. ENHANCED DATA RATE 8PSK MODULATION (WORST CASE)	94
9.4. <i>RECEIVER ABOVE 1 GHz (DUAL ANTENNA CONFIGURATION)</i>	99
9.5. <i>WORST-CASE BELOW 1 GHz (DUAL ANTENNA CONFIGURATION)</i>	100
10. AC POWER LINE CONDUCTED EMISSIONS	101
11. MAXIMUM PERMISSIBLE EXPOSURE	105
12. SETUP PHOTOS	109

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ATHEROS COMMUNICATION, INC
5480 GREAT AMERICA PARKWAY
SANTA CLARA, CA 95054 USA

EUT DESCRIPTION: 802.11n-BT COMBO CARD

MODEL: AR5B195

SERIAL NUMBER: WB-195DA-040-D1090 (Dual Antenna configuration);
WB-195SA-140-D1163 (Single Antenna configuration)

DATE TESTED: AUGUST 27-SEPTEMBER 01, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



THU CHAN
EMC MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11n-BT Combo Card with dual and single antenna configuration.

The radio module is manufactured by Atheros Communications, Inc.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Dual Antenna Port			
Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	2.48	1.77
2402 - 2480	Enhanced 8PSK	4.21	2.64
Single Antenna Port (Test Worst Case Modulation)			
Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	Same Power as Dual Antenna Configuration	
2402 - 2480	Enhanced 8PSK	4.61	2.89

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna with 800mm cable length and maximum peak gain of 3.62 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was AR5B195BT

The test utility software used during testing was BtUSB_V1_0_B7.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

The worst-case data rate for each mode is determined to be as follows, based on input from the manufacturer of the radio:

All final tests in the GFSK mode were made at 1 Mb/s.
All final tests in the 8PSK mode were made at 3 Mb/s.

For radiated emissions below 1 GHz, the channel with highest power was used; this was determined to be high Channel for EDR mode, at a data rate of 3 Mbps.

There are two types of radio module under test, Dual antenna configuration and Single antenna configuration

From the results of dual antenna configuration, 8PSK has the highest power; therefore, single antenna card is tested at the worst case.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	769	L3-BA653	Doc
AC Adapter	Lenovo	42T5008	11S92P1156Z1ZDXN7CR2AD	Doc


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	No
2	DC	1	DC	Un-shielded	2m	No

TEST SETUP

The EUT is installed in a host laptop computer via an extended card during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

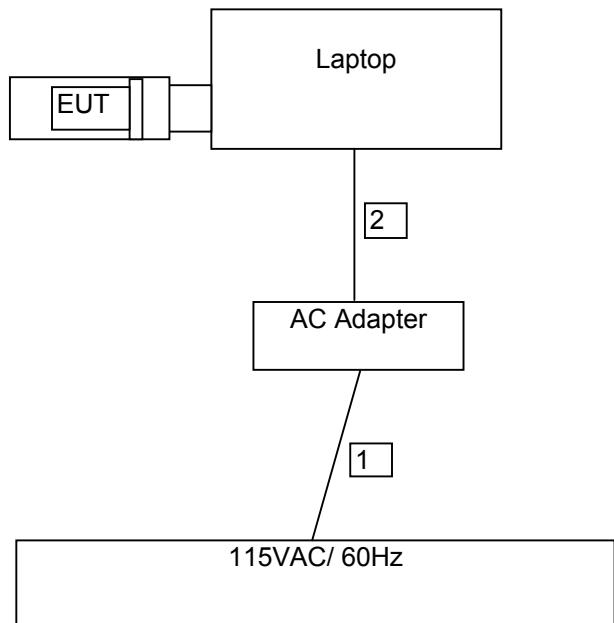

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	06/01/10
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	01/14/10
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	02/04/10
Antenna, Horn, 18 GHz	EMCO	3115	C00783	01/29/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00778	12/16/09
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/07/09
Peak Power Meter	Agilent / HP	E4416A	C00963	12/04/09
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR

7. DUAL ANTENNA CONFIGURATION TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	872.959	855.9096
Middle	2441	877.939	842.9088
High	2480	871.094	858.0003


99% BANDWIDTH

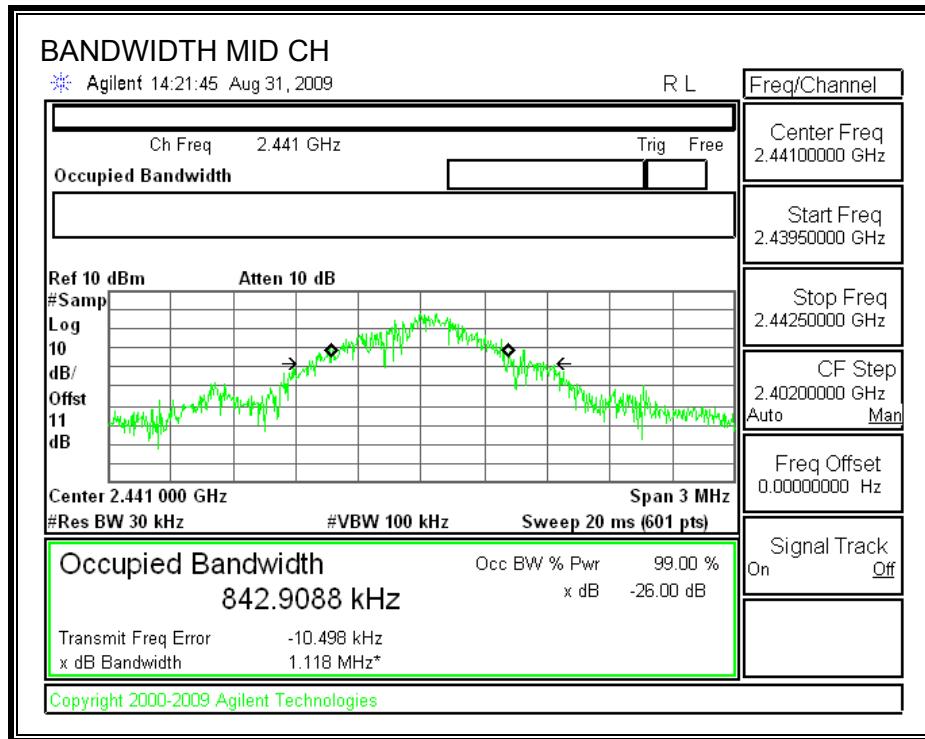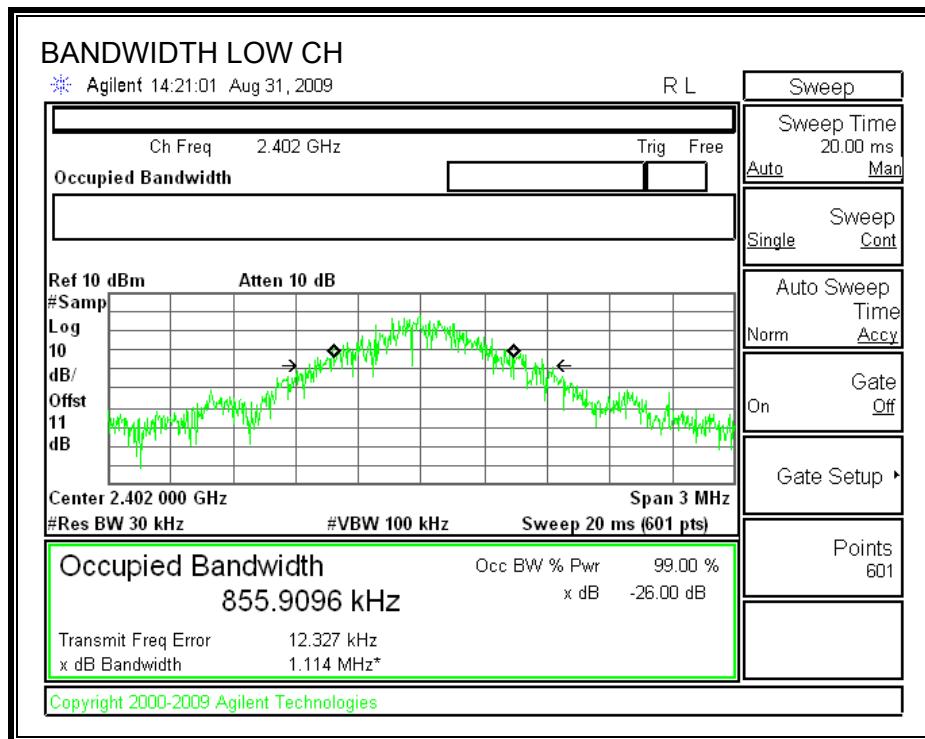

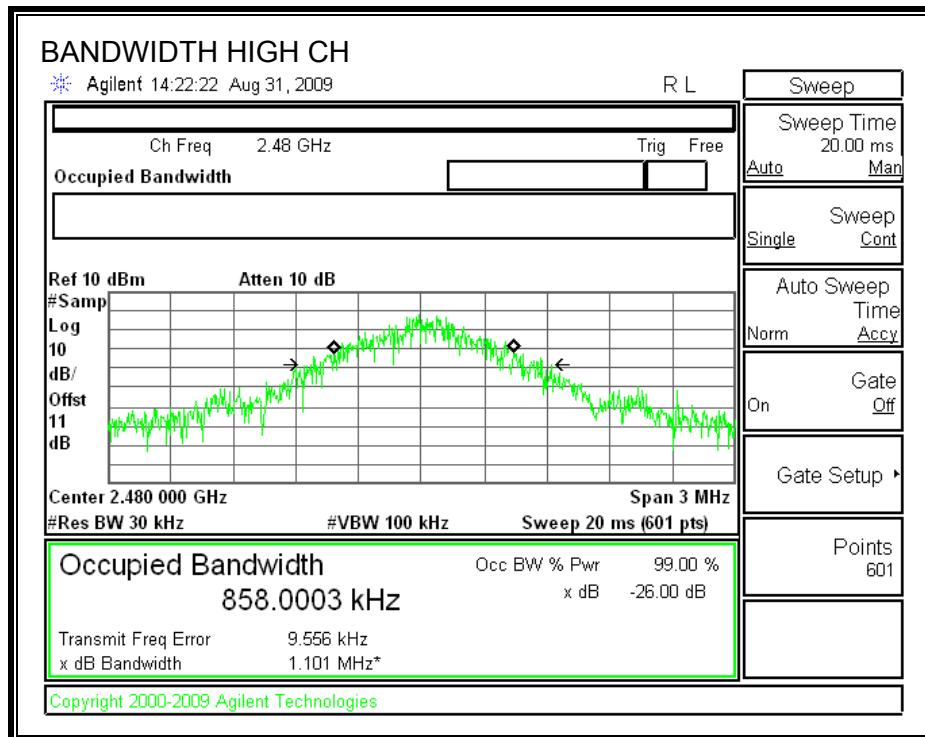

20dB BANDWIDTH

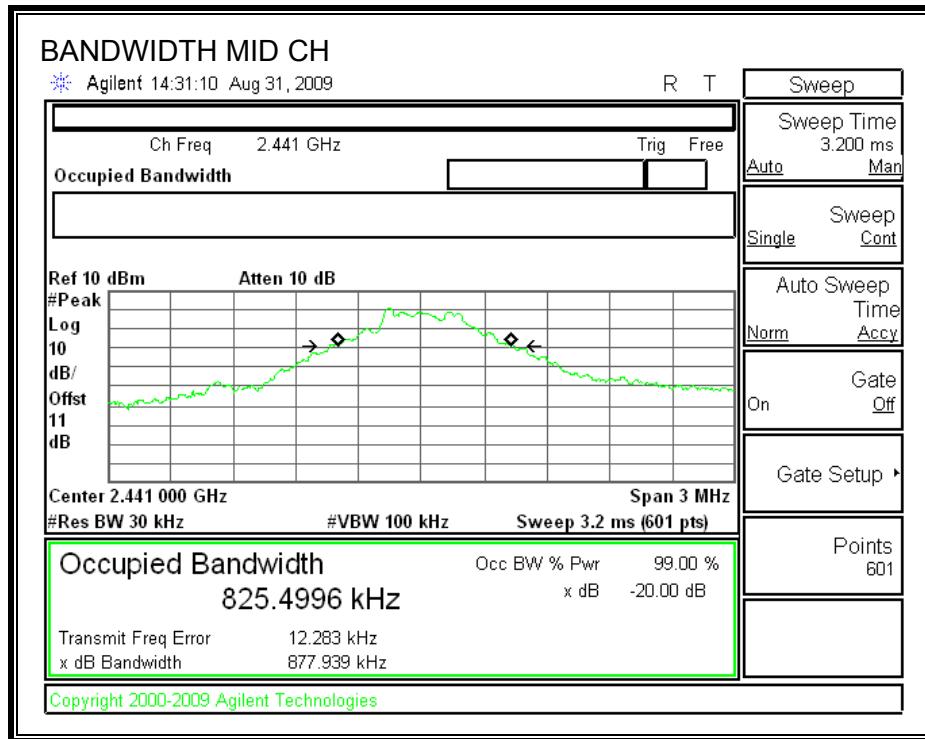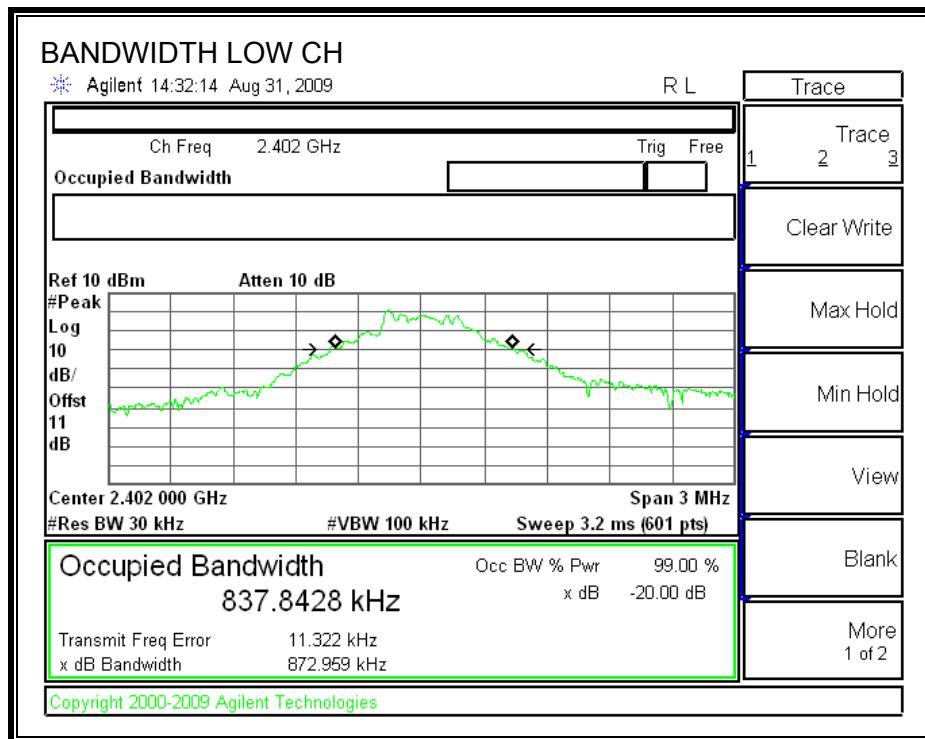

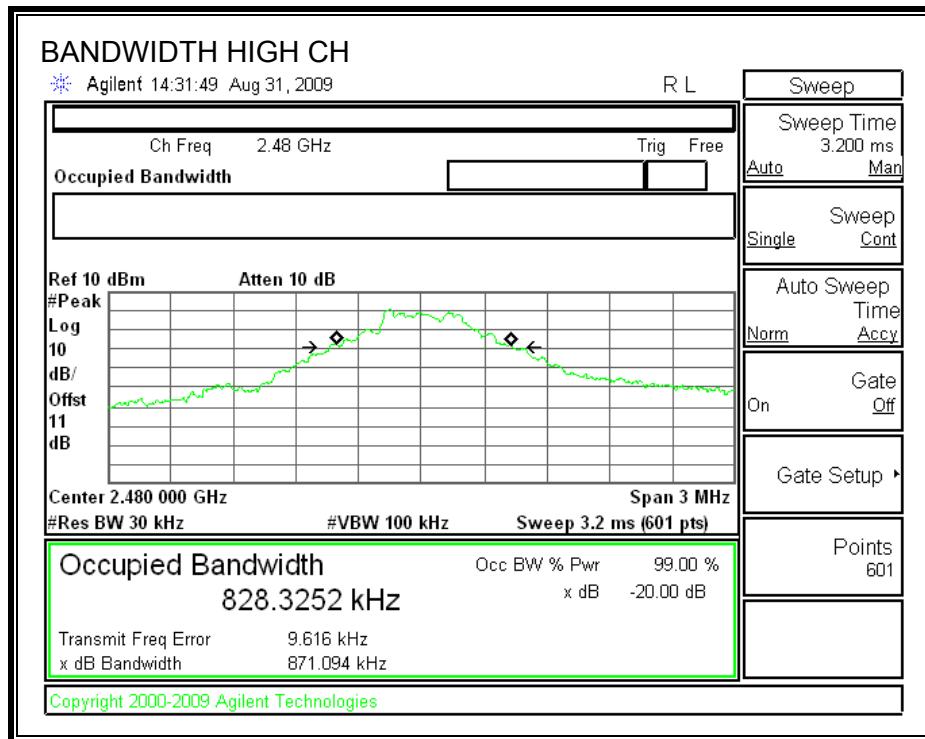

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

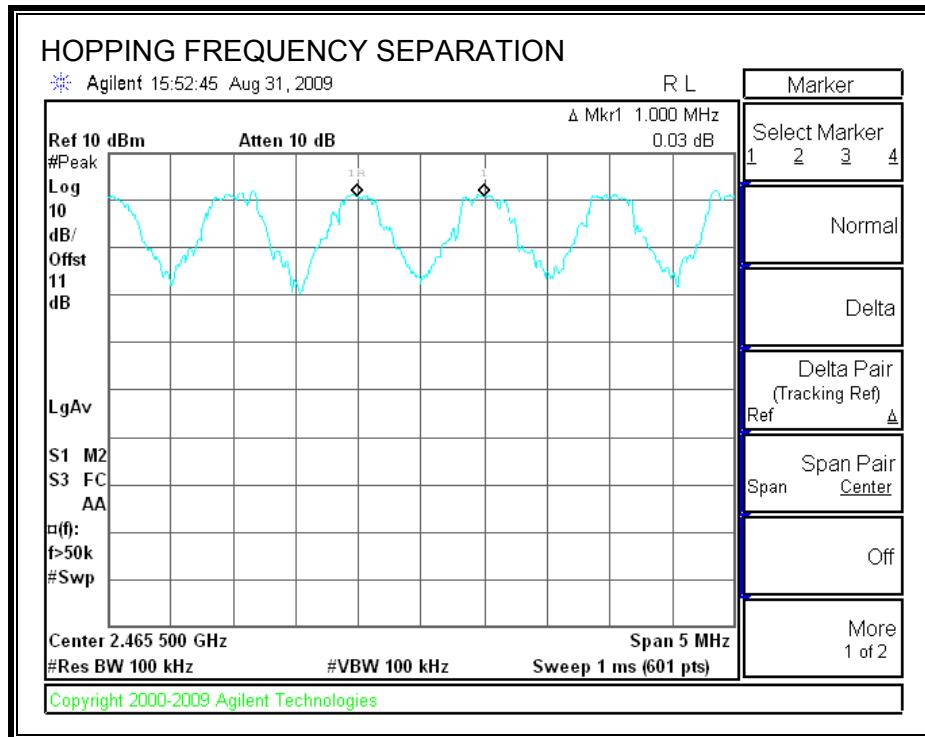

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

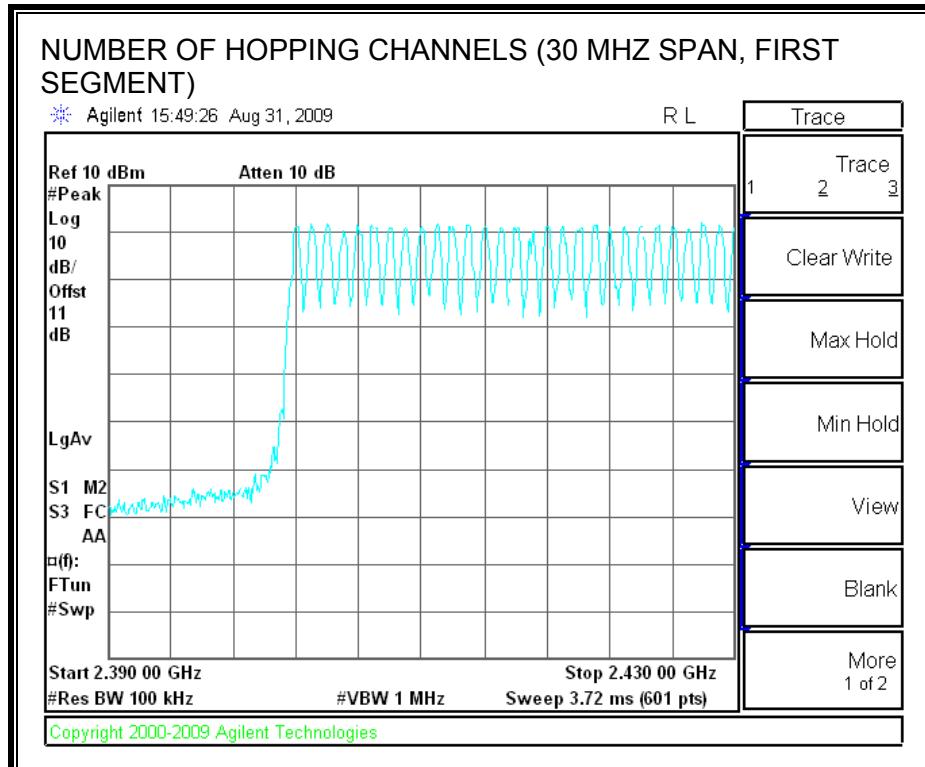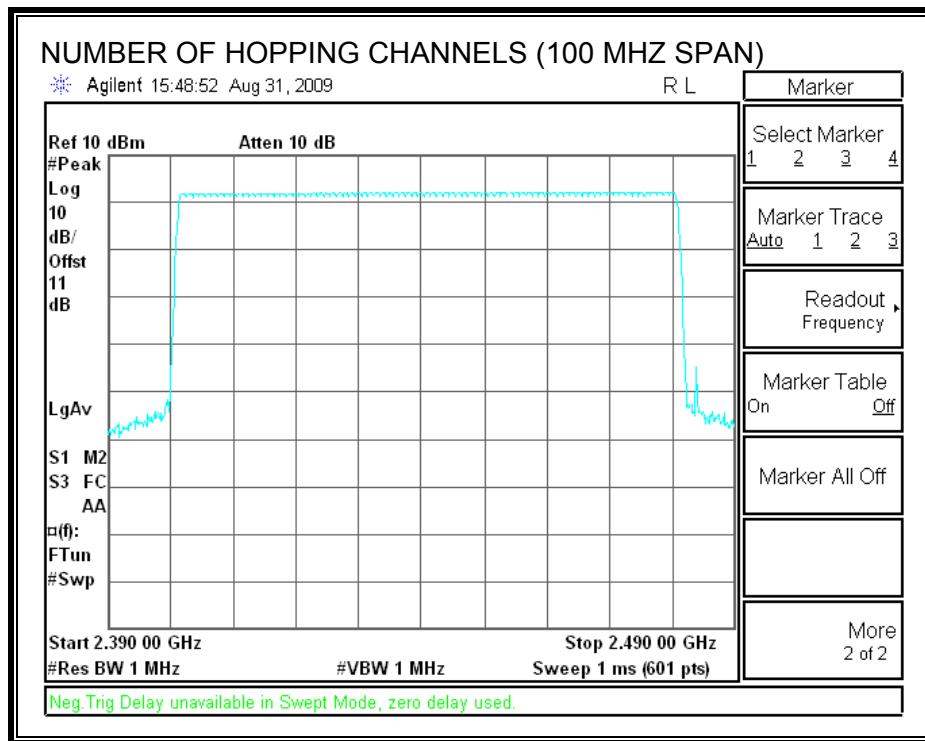

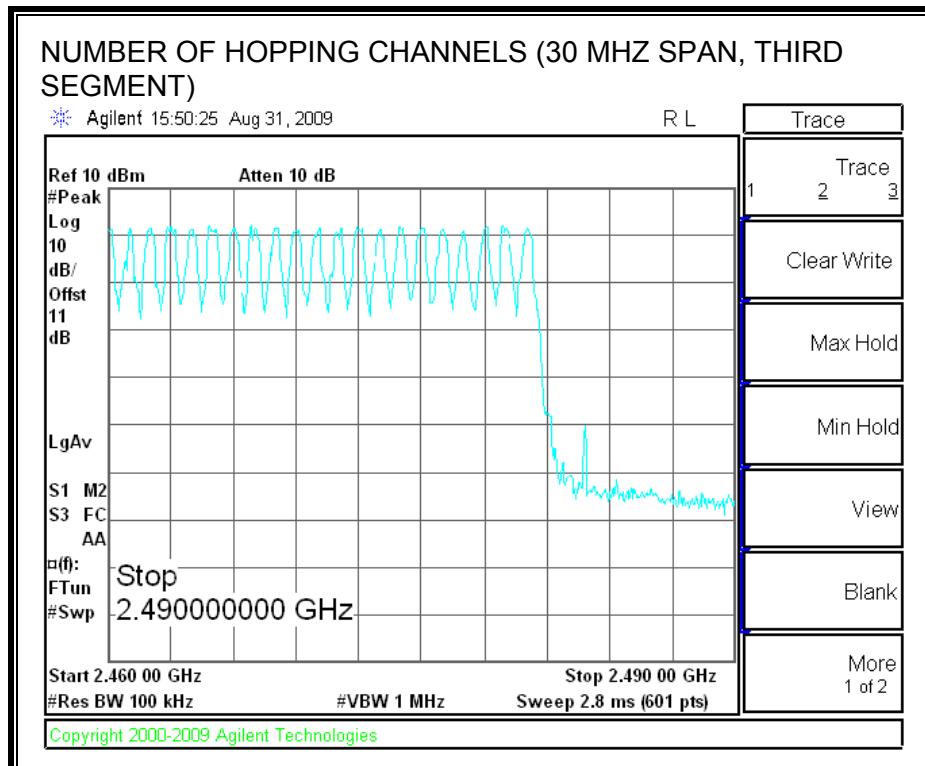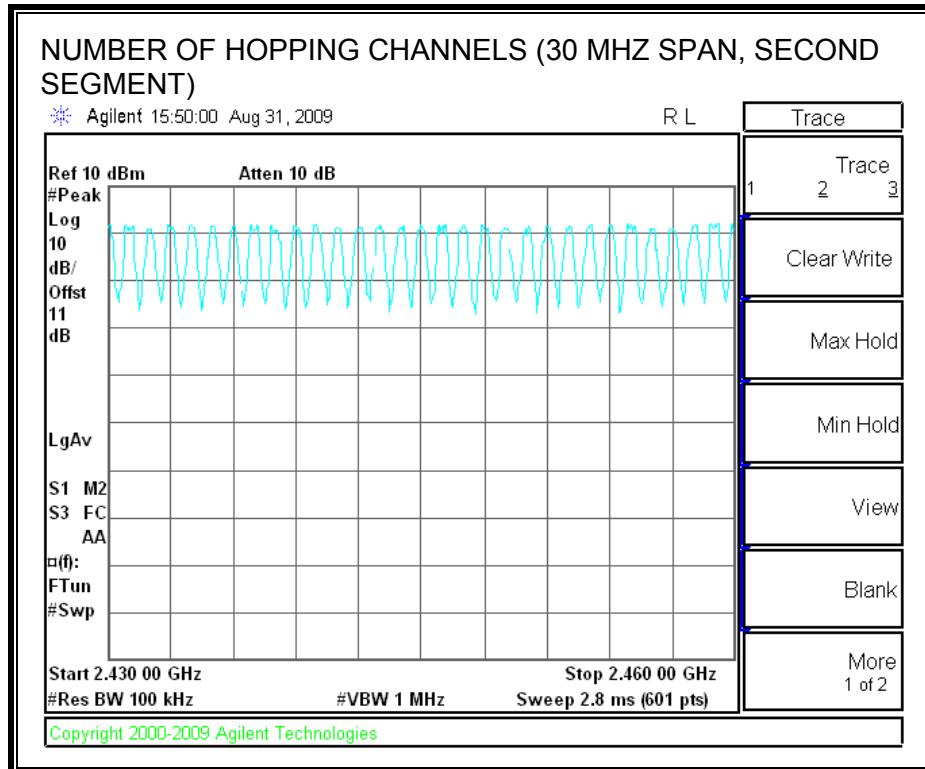

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.3917	35	0.137	0.4	0.263
DH3	1.667	18	0.300	0.4	0.100
DH5	2.918	12	0.350	0.4	0.050

DH1

PULSE WIDTH

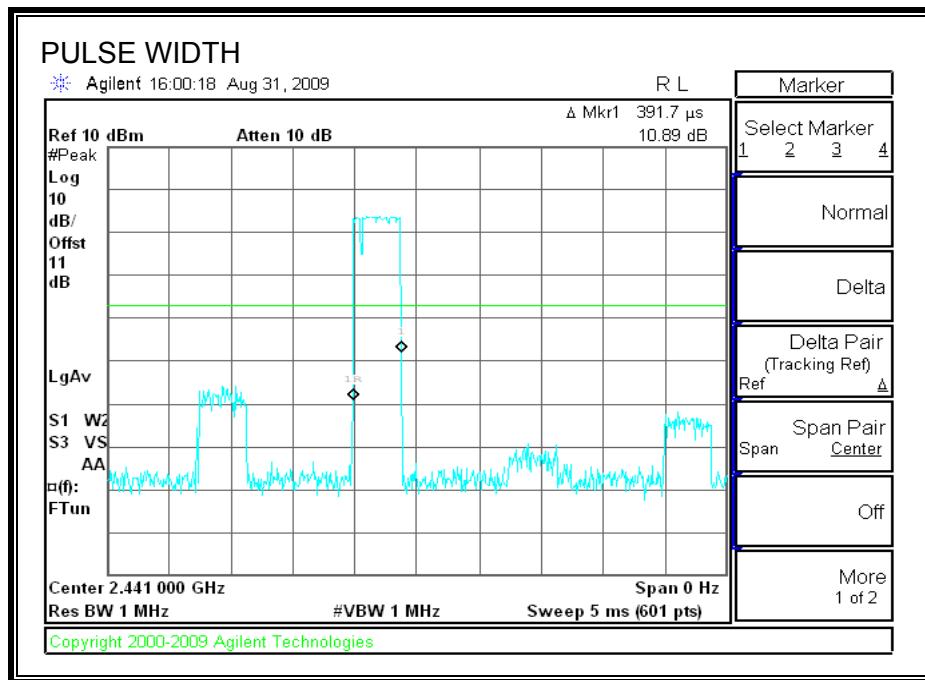


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

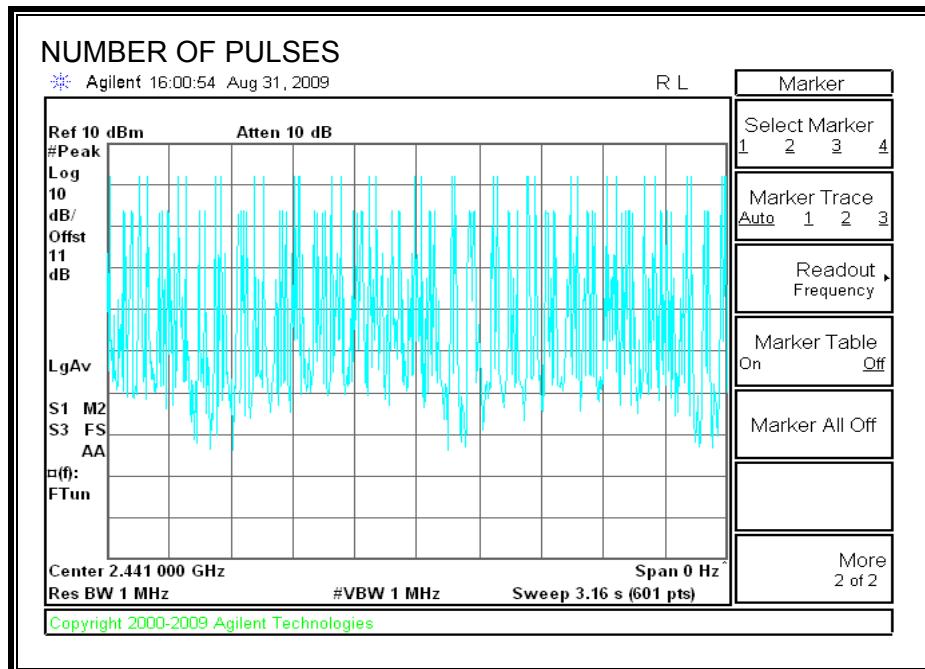


DH3

PULSE WIDTH

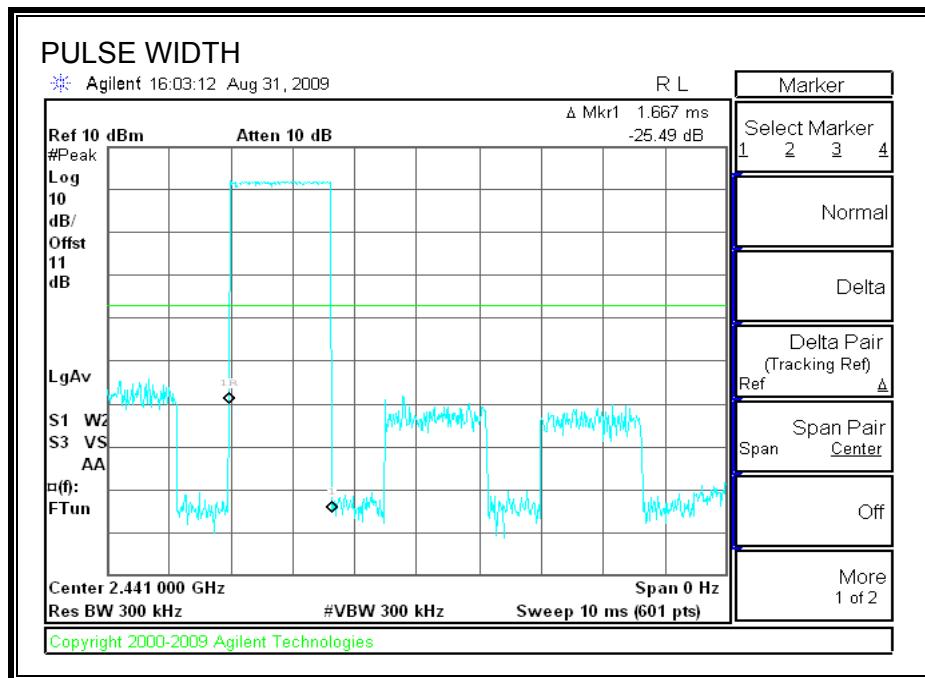


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

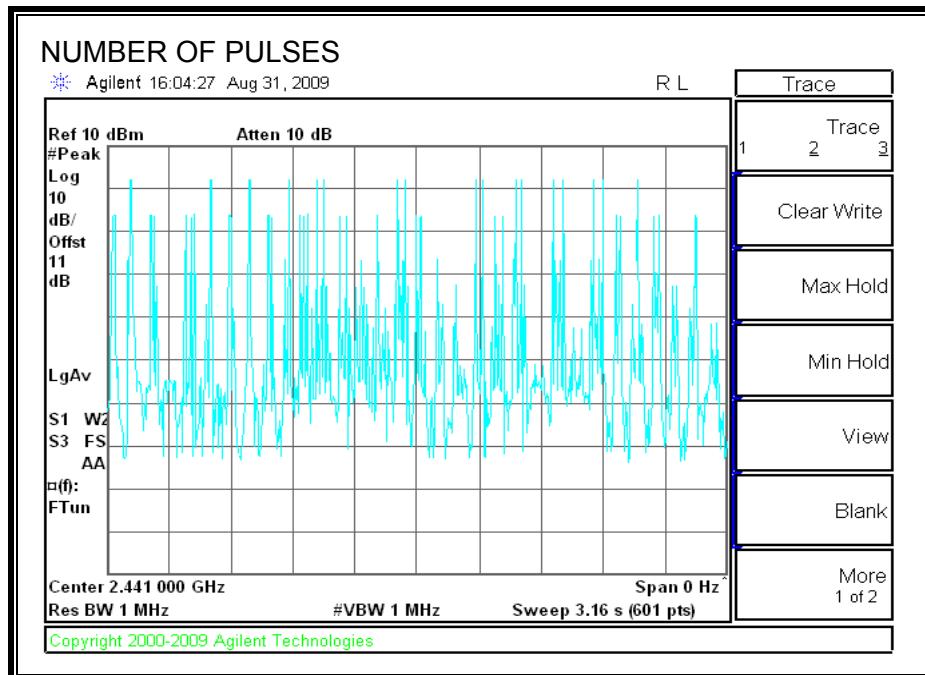


DH5

PULSE WIDTH

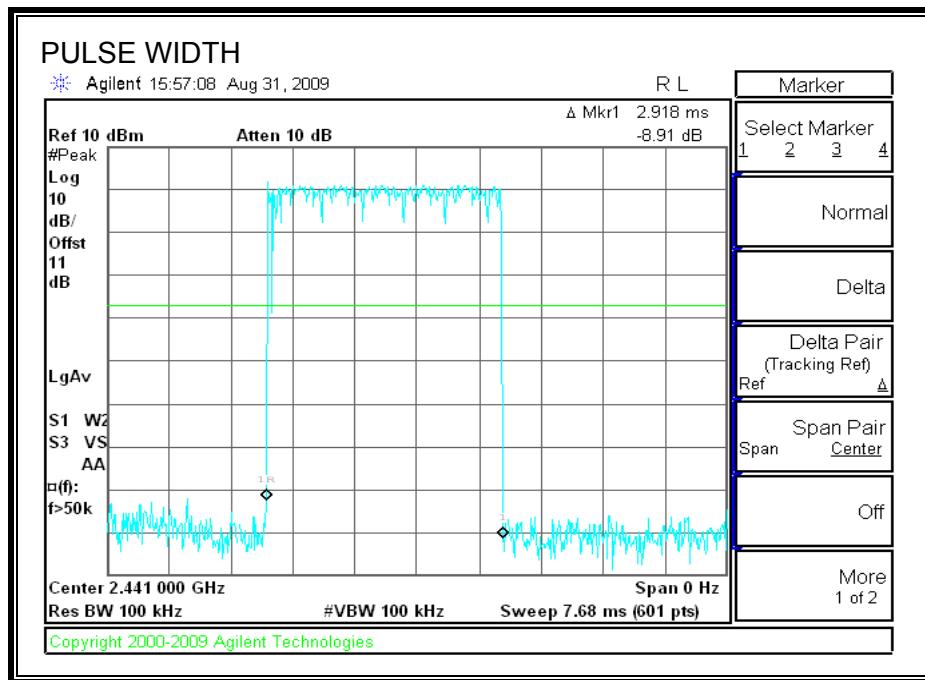

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

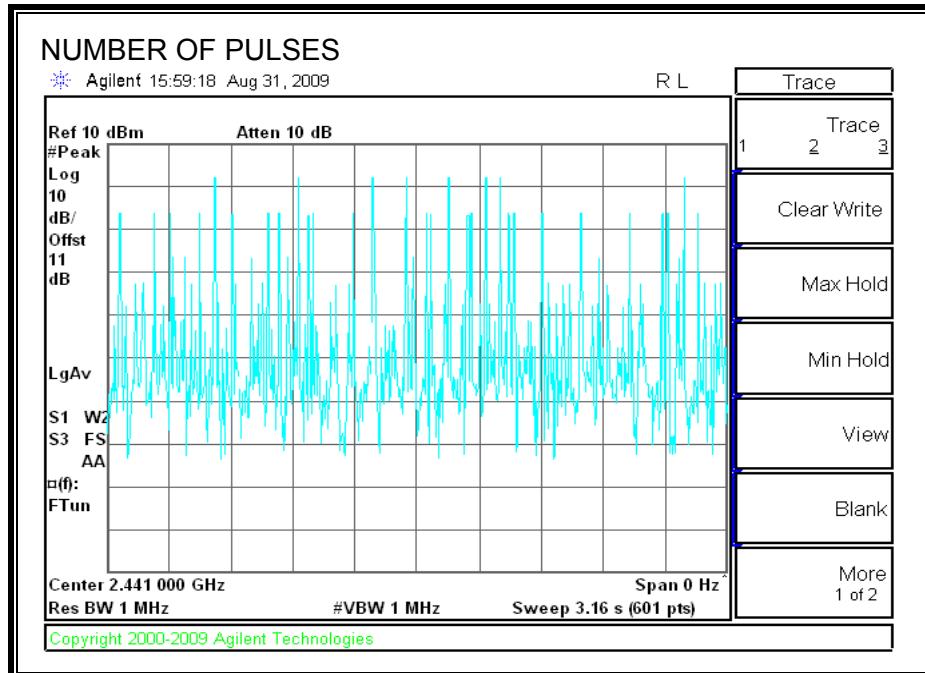

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.09	30	-27.91
Middle	2441	2.39	30	-27.61
High	2480	2.48	30	-27.52

OUTPUT POWER

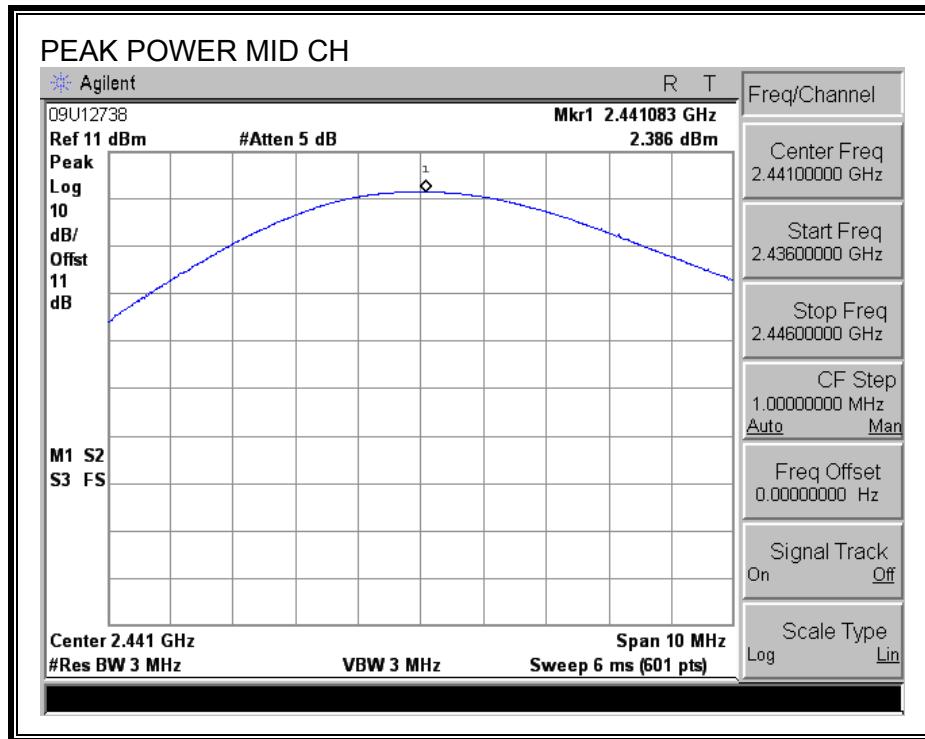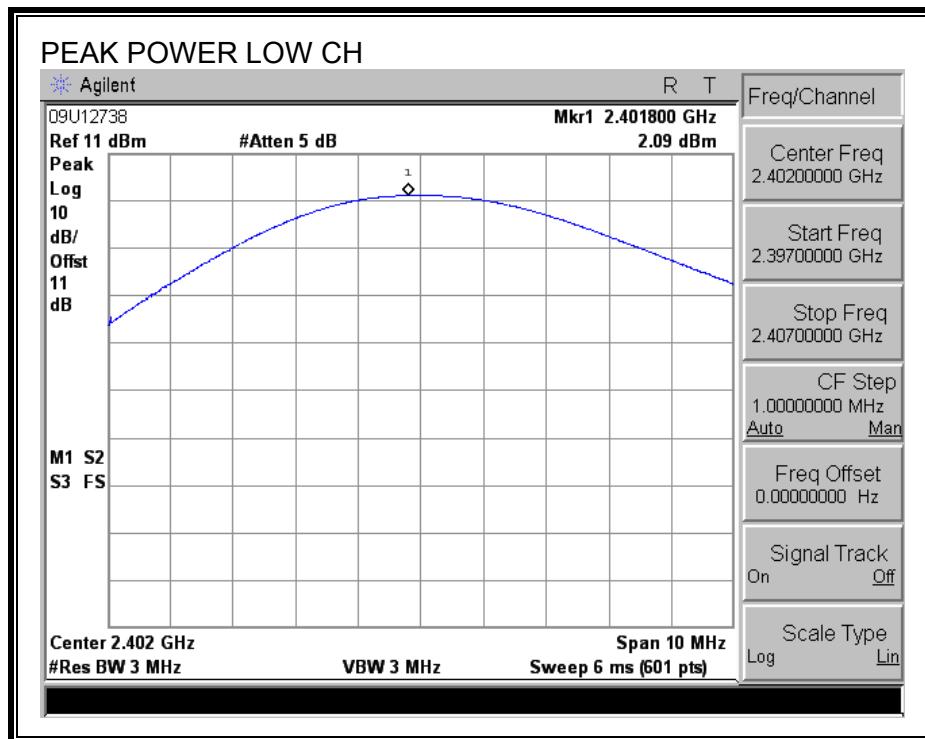

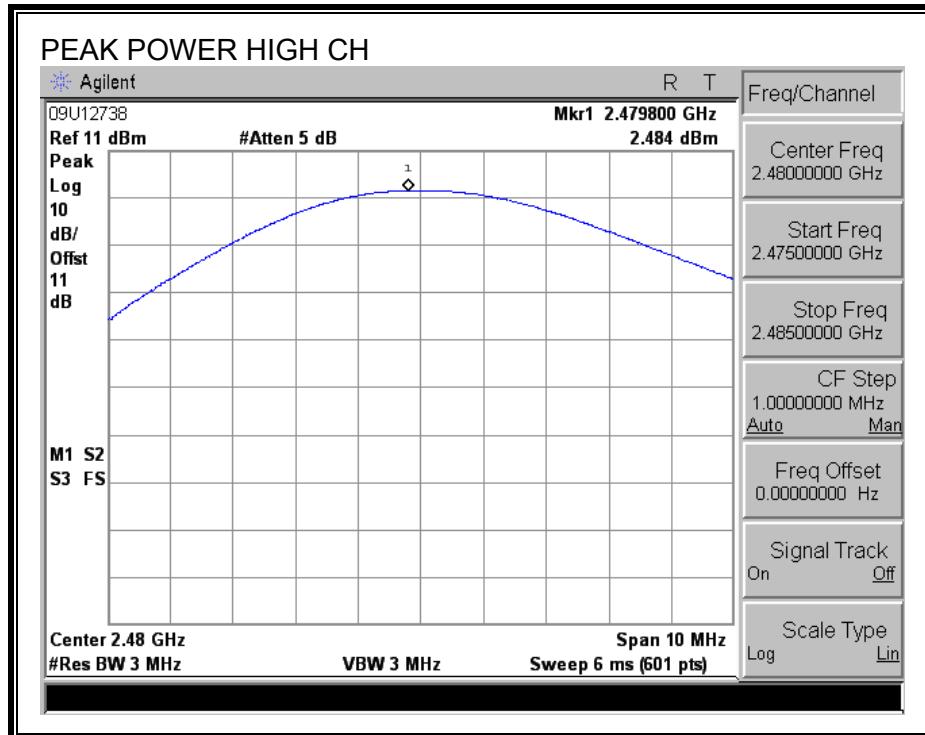

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	1.76
Middle	2441	2.05
High	2480	2.17

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

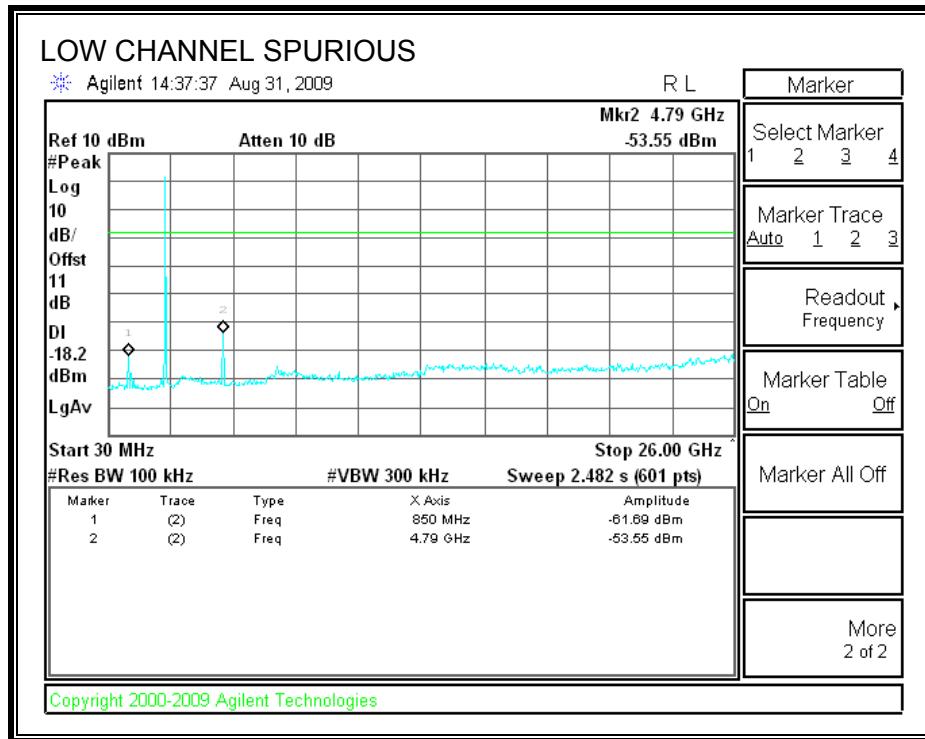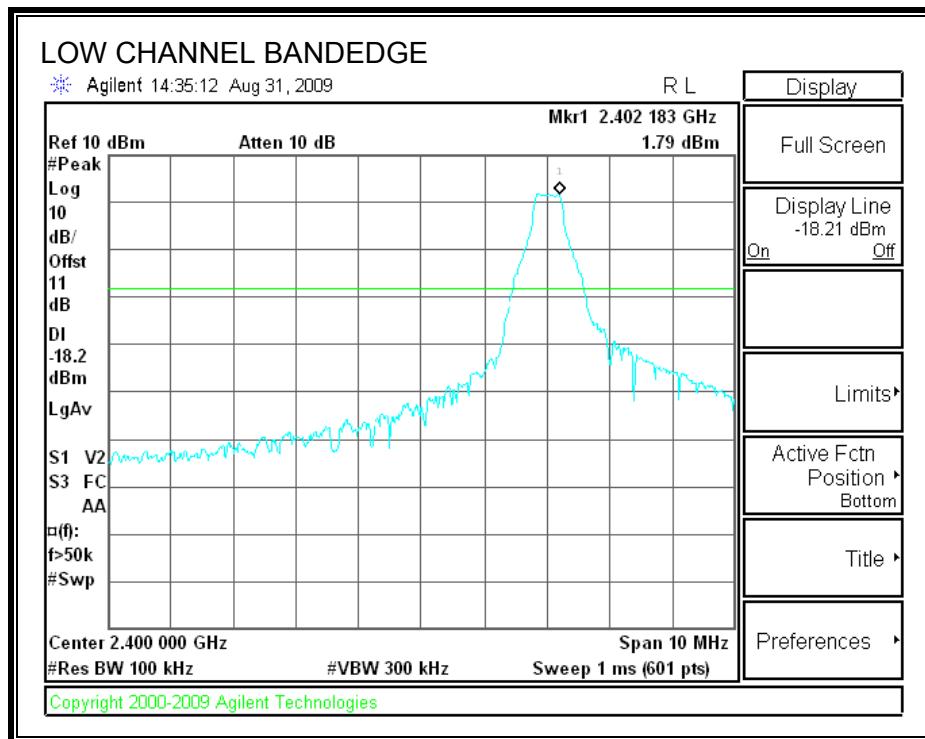



SPURIOUS EMISSIONS, MID CHANNEL

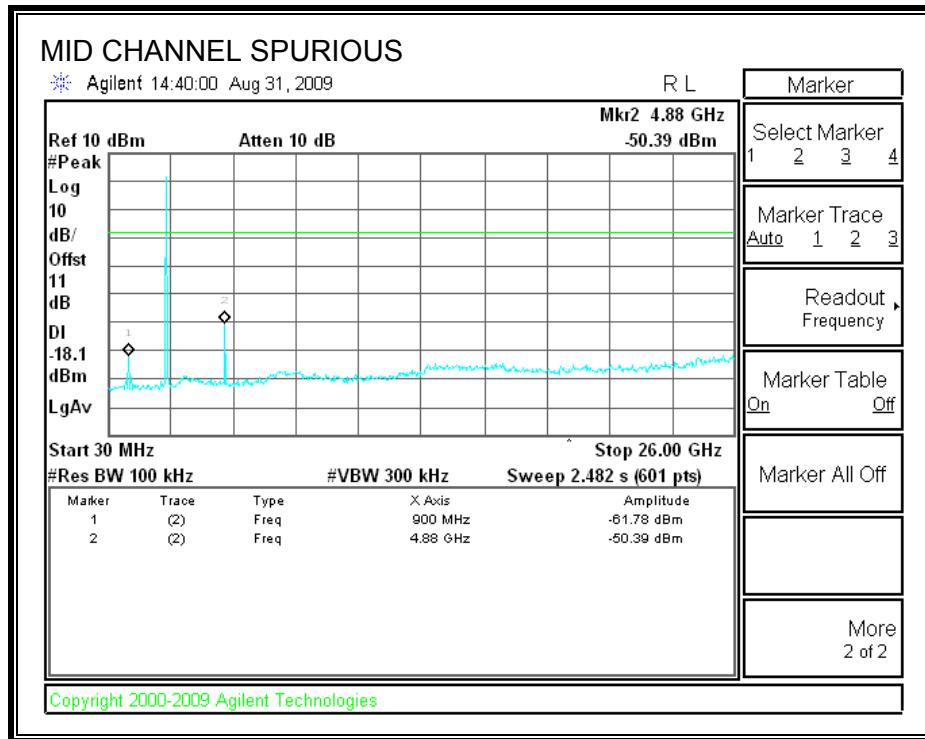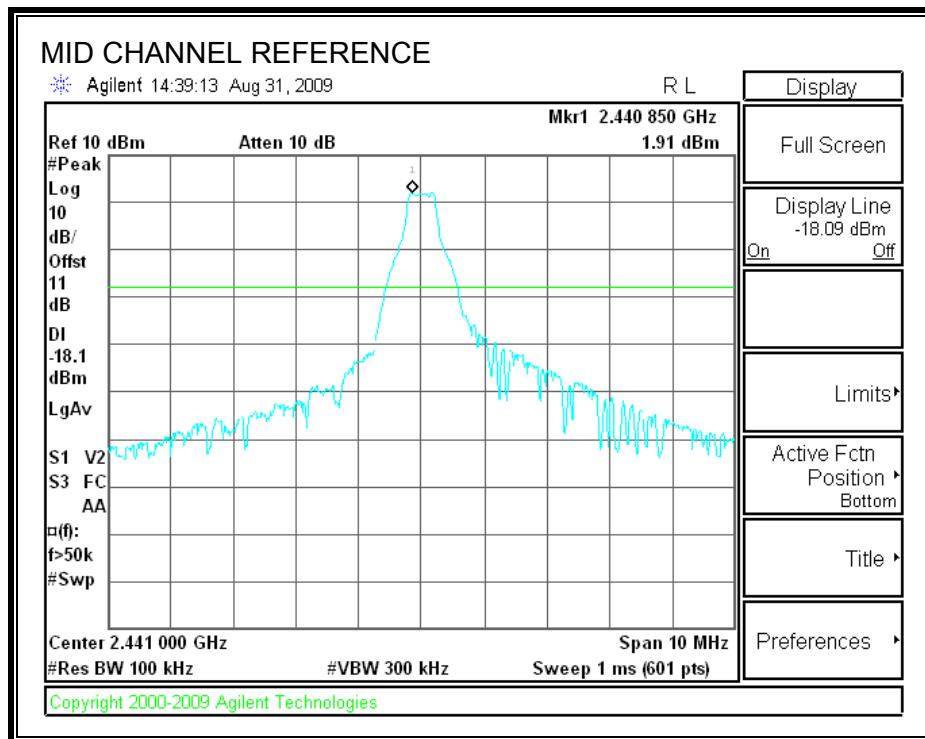

SPURIOUS EMISSIONS, HIGH CHANNEL

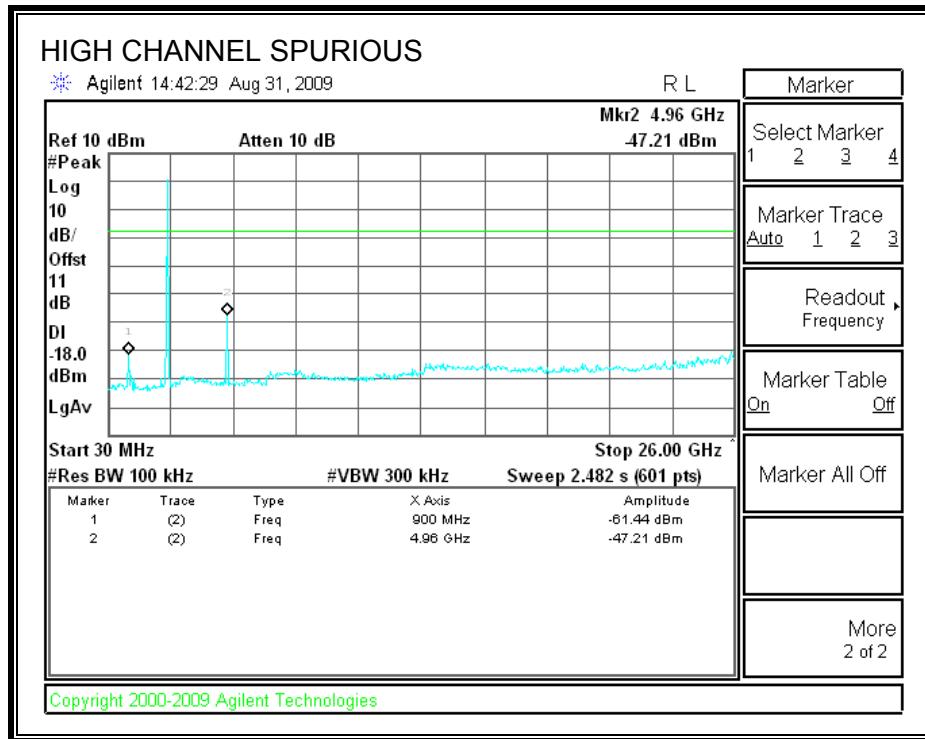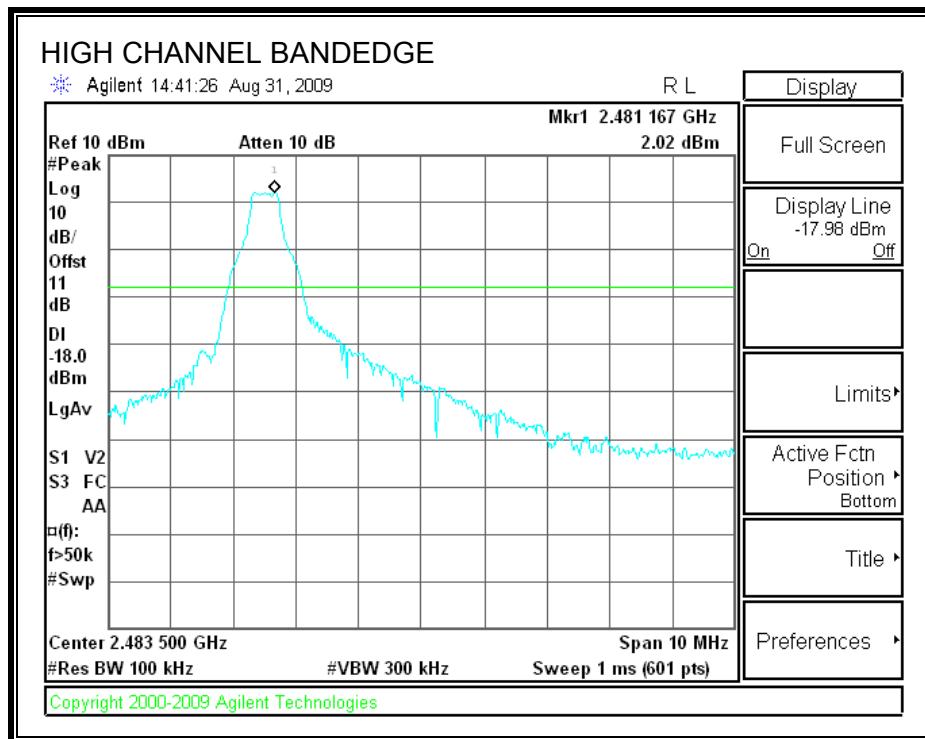

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

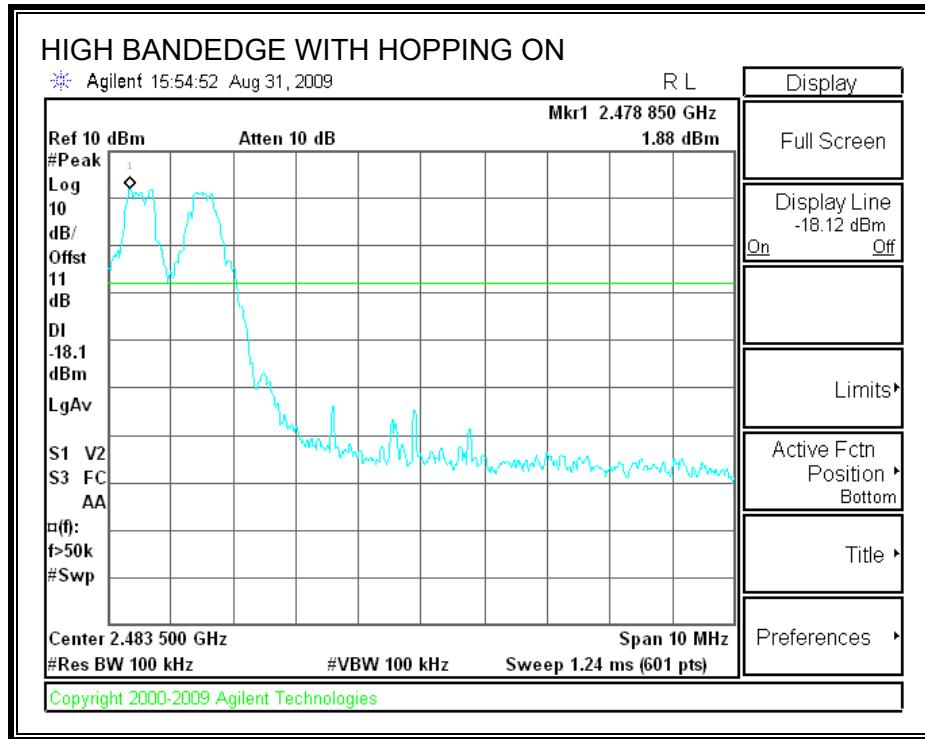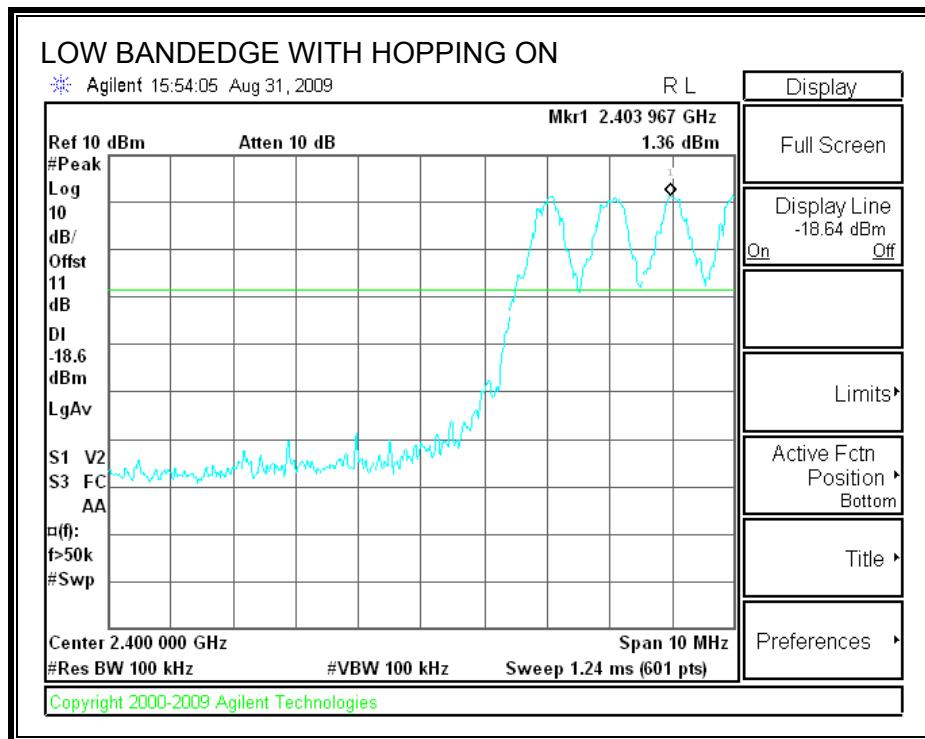

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.300	1.1933
Middle	2441	1.271	1.2151
High	2480	1.282	1.2100


99% BANDWIDTH

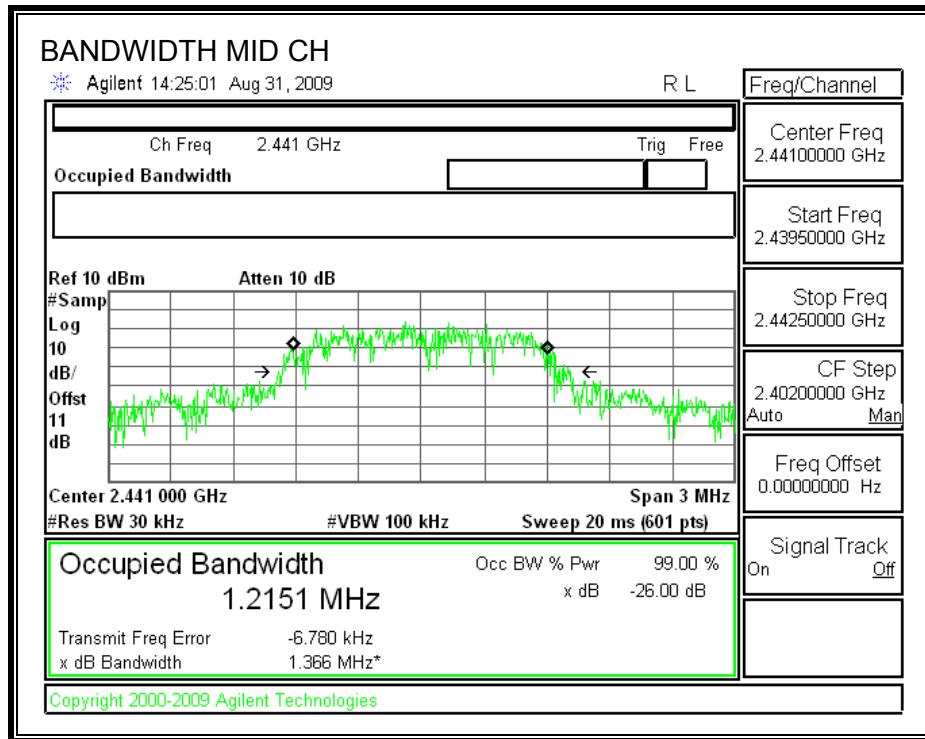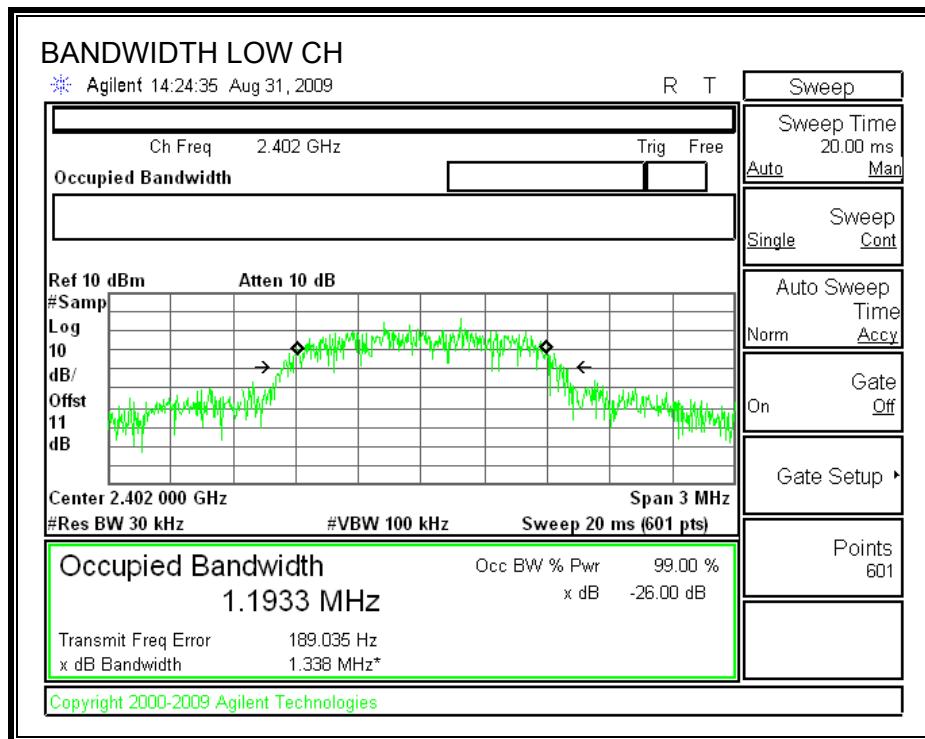

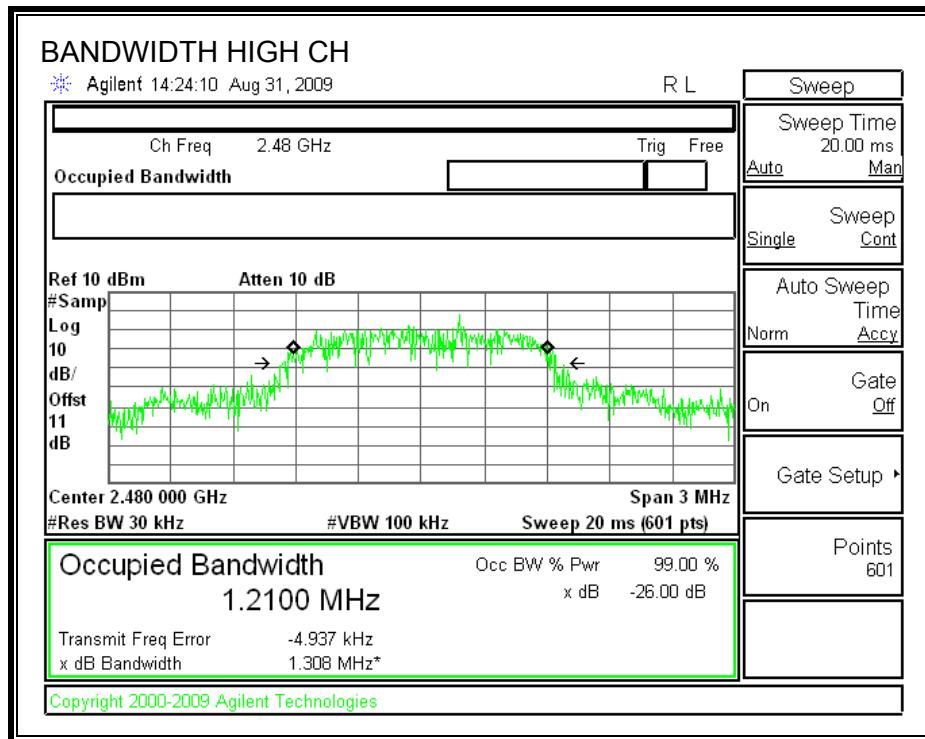

20dB BANDWIDTH

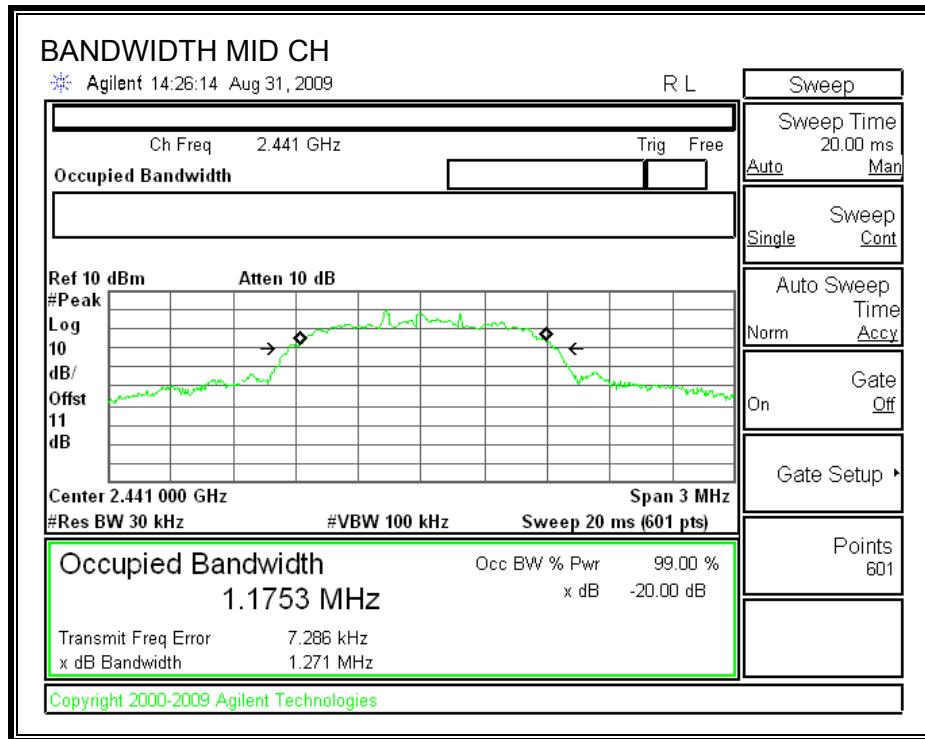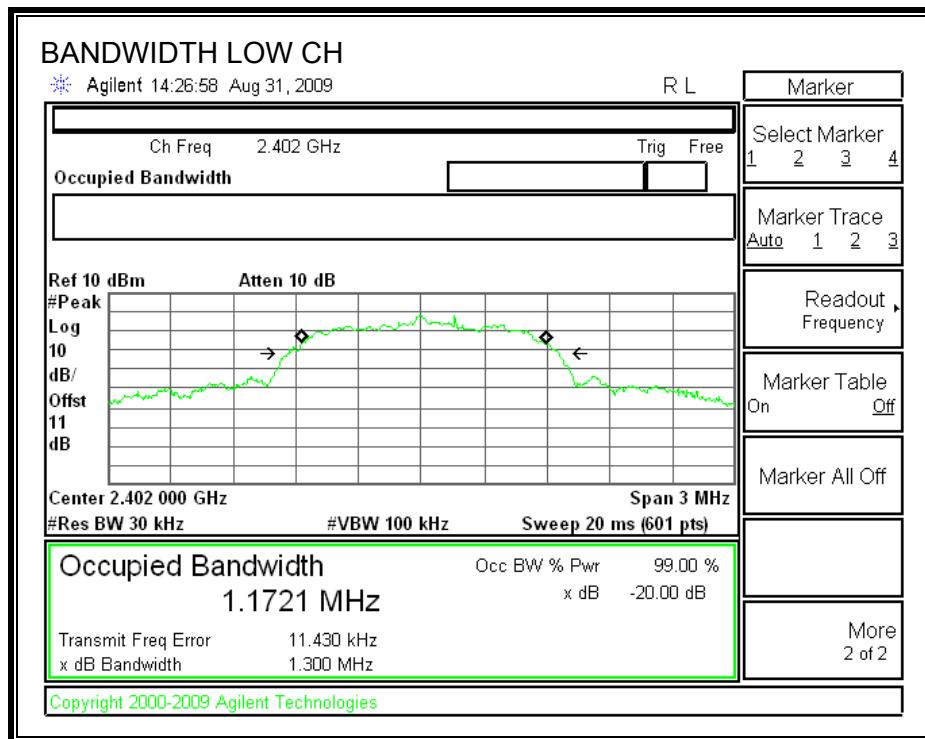

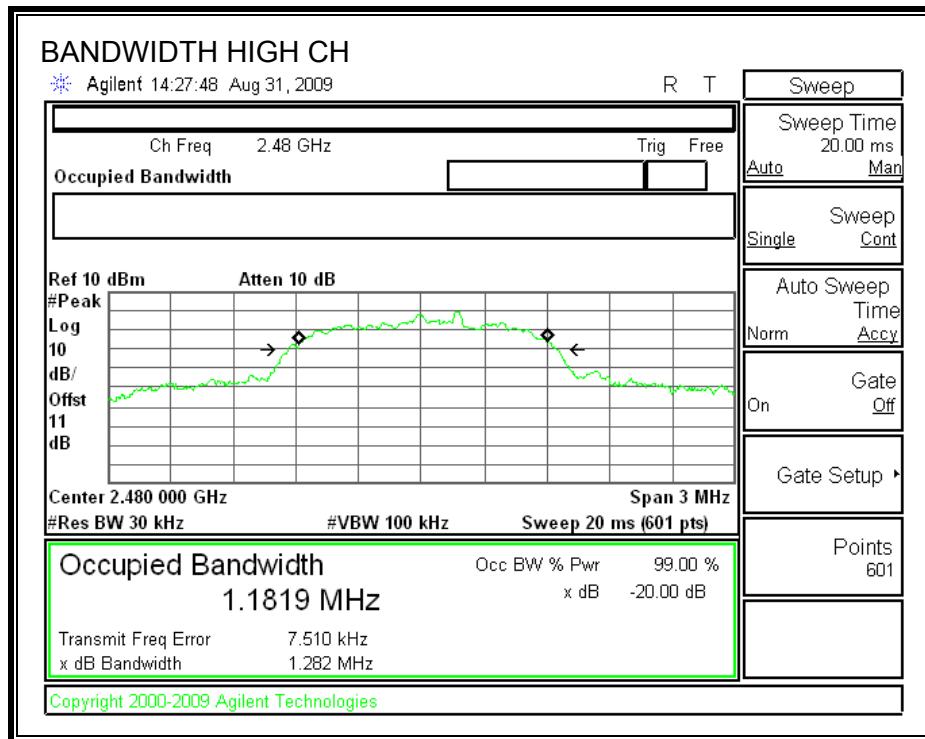

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

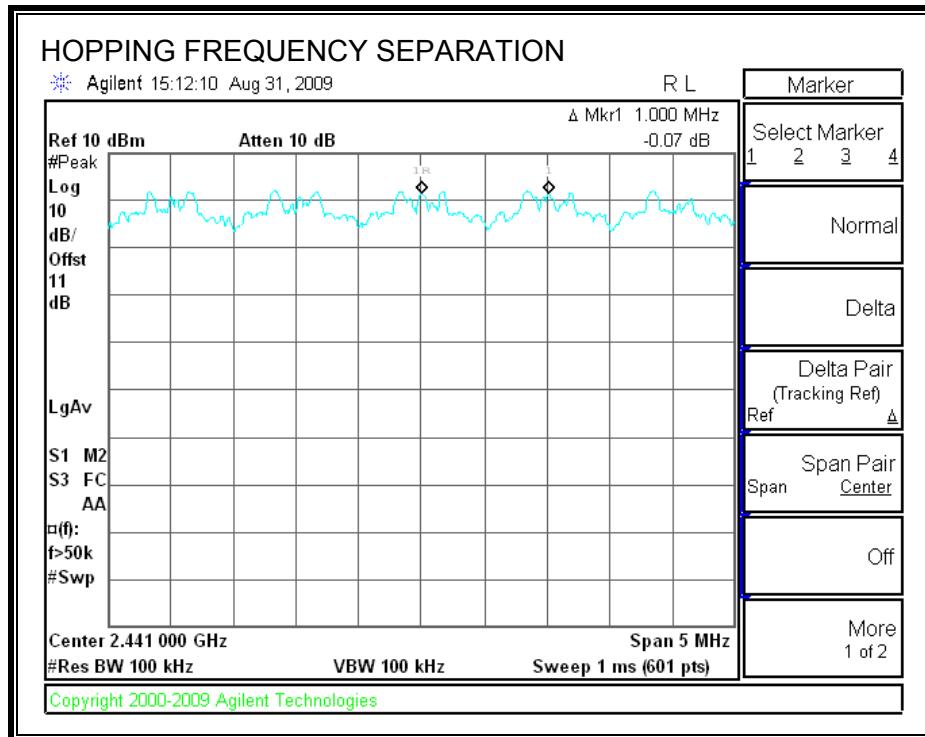

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

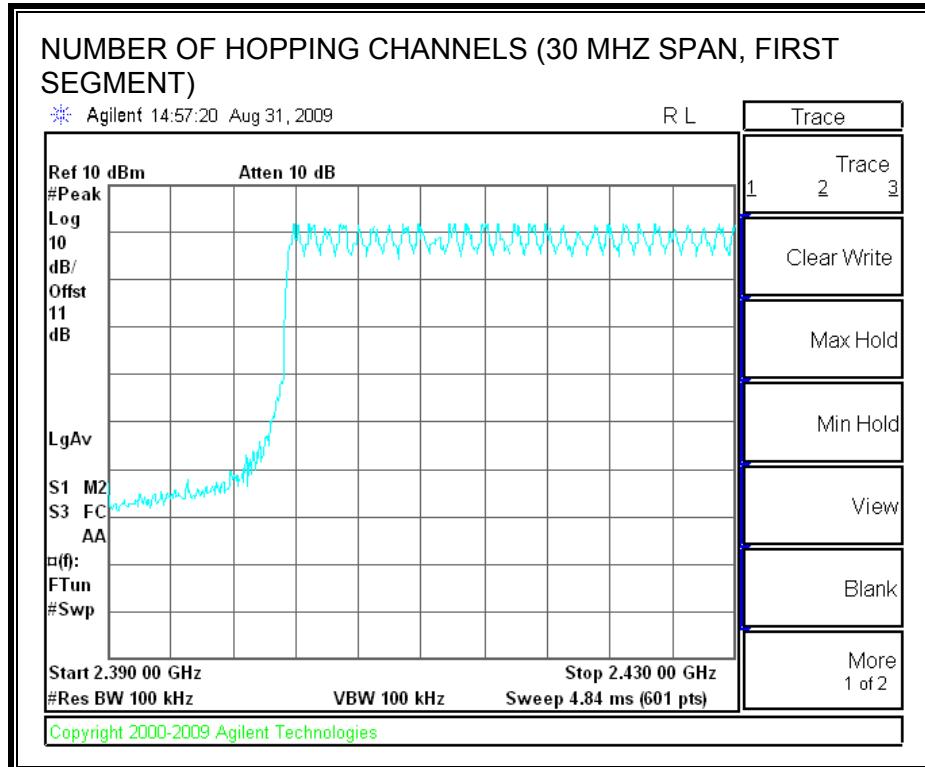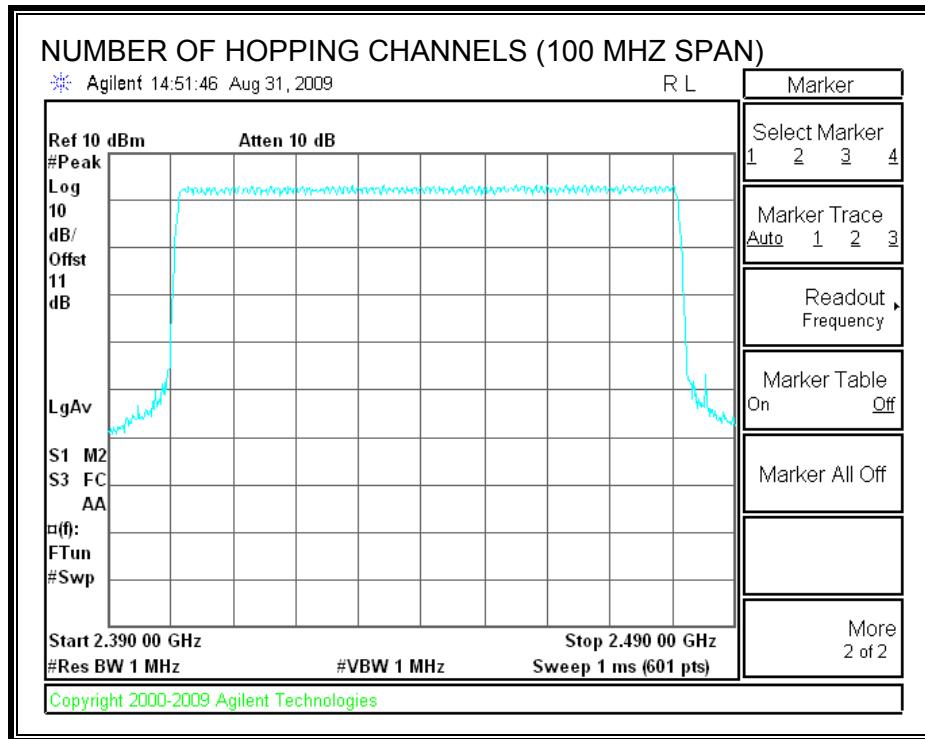

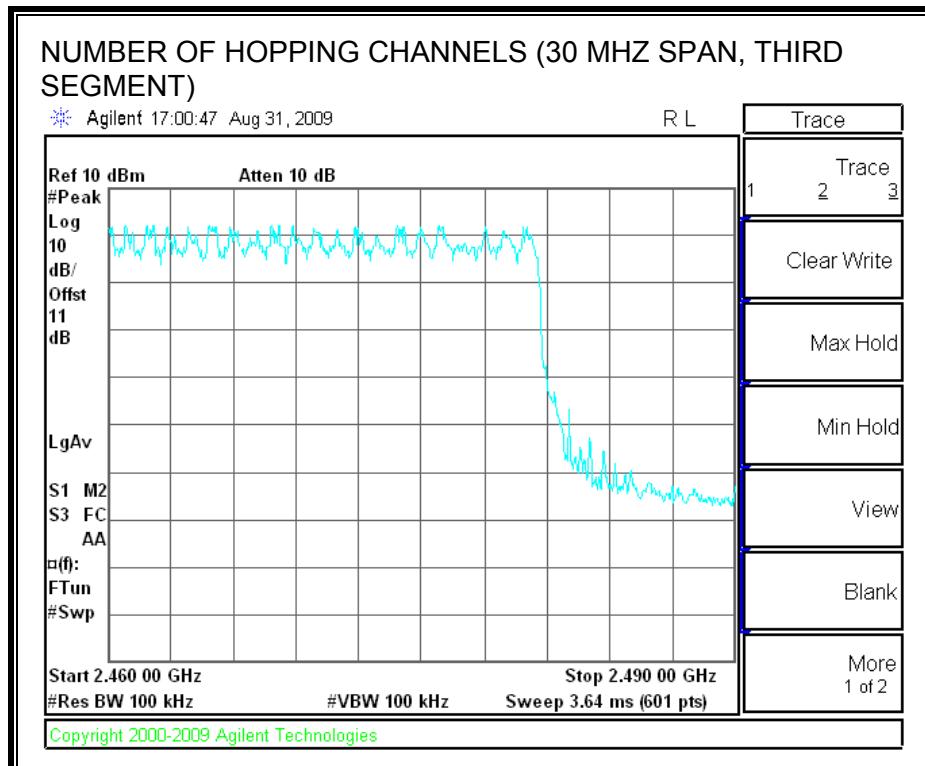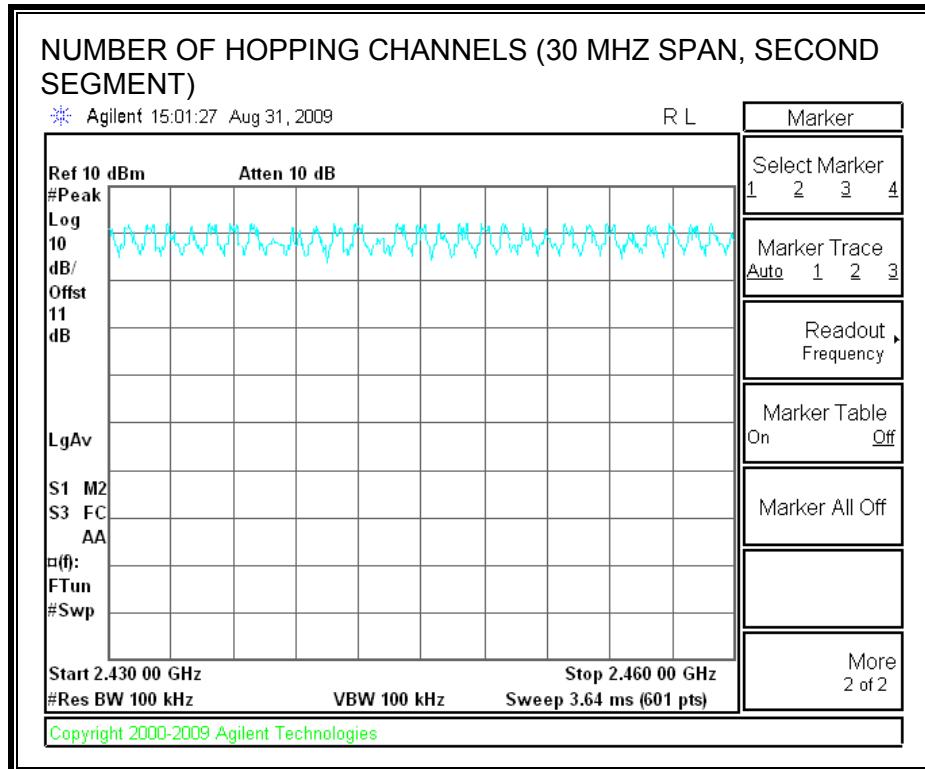

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.4083	35	0.143	0.4	0.257
DH3	1.7	17	0.289	0.4	0.111
DH5	2.92	12	0.350	0.4	0.050

3DH1

PULSE WIDTH

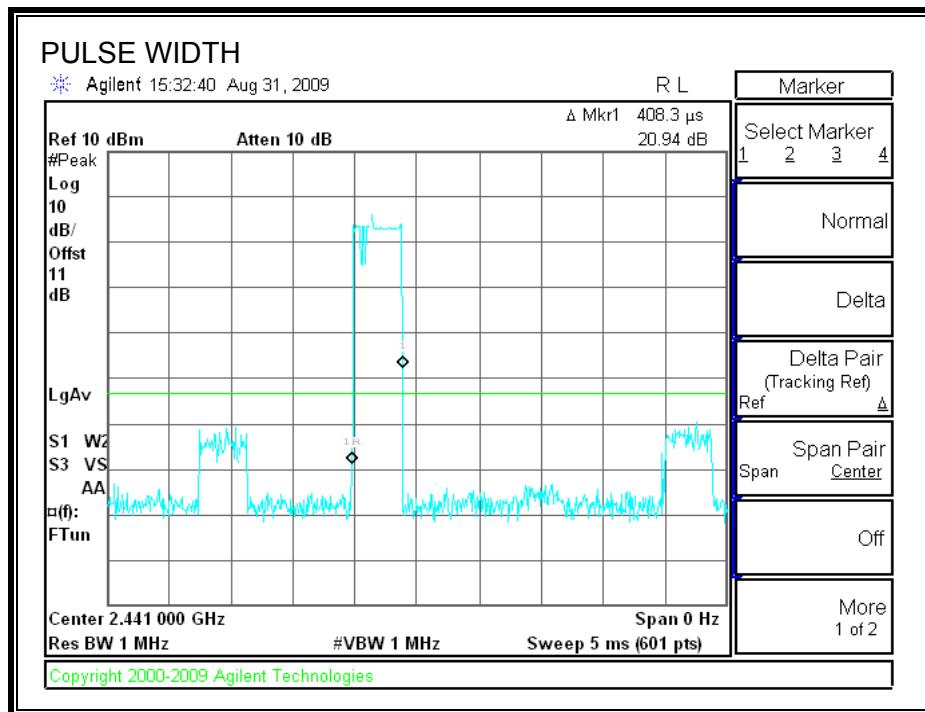


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

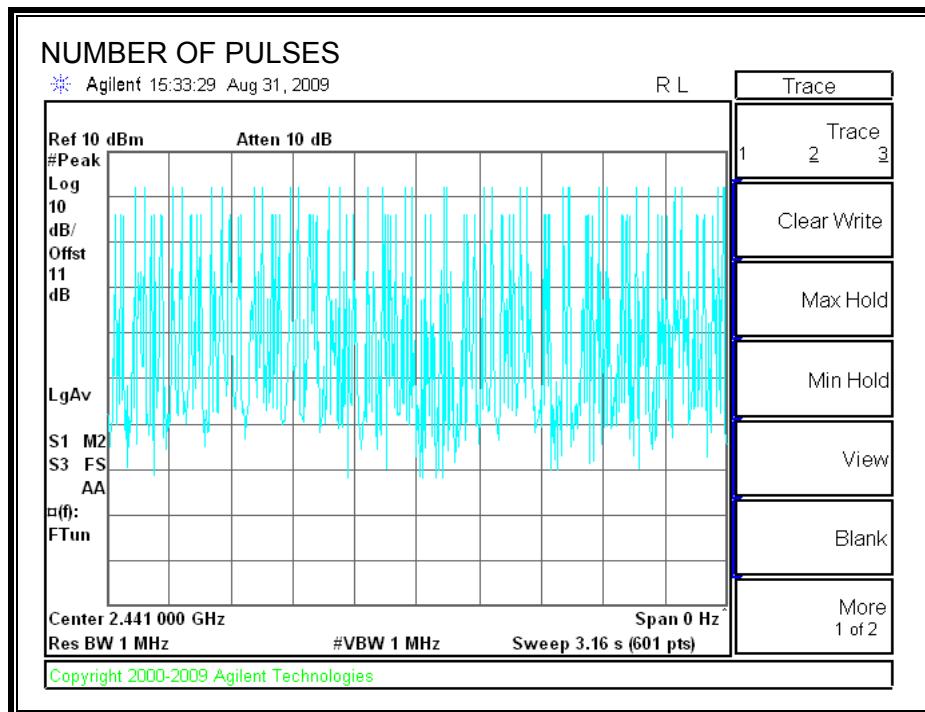


3DH3

PULSE WIDTH

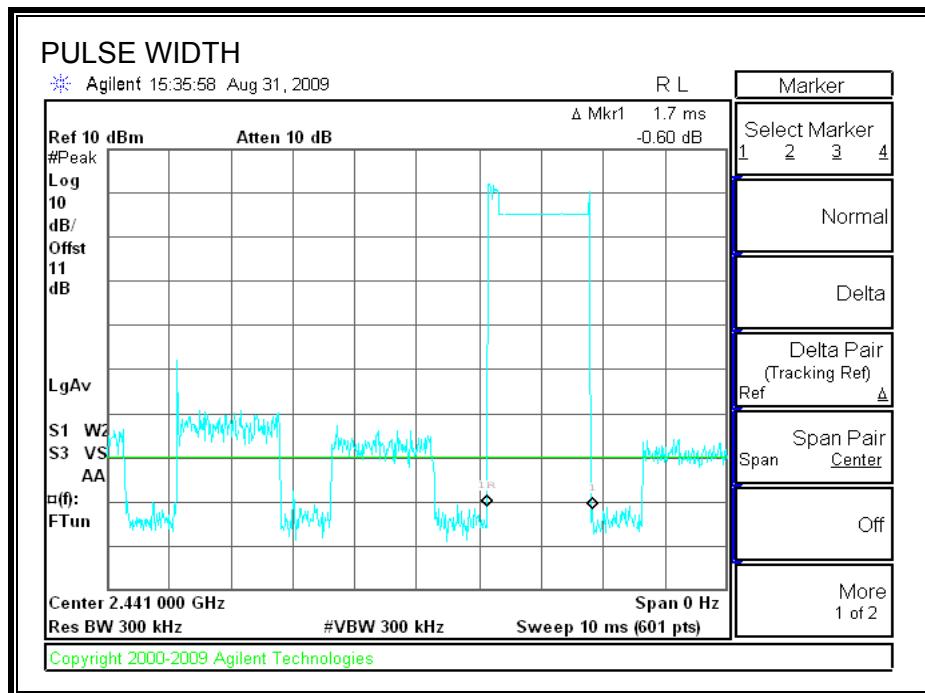


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

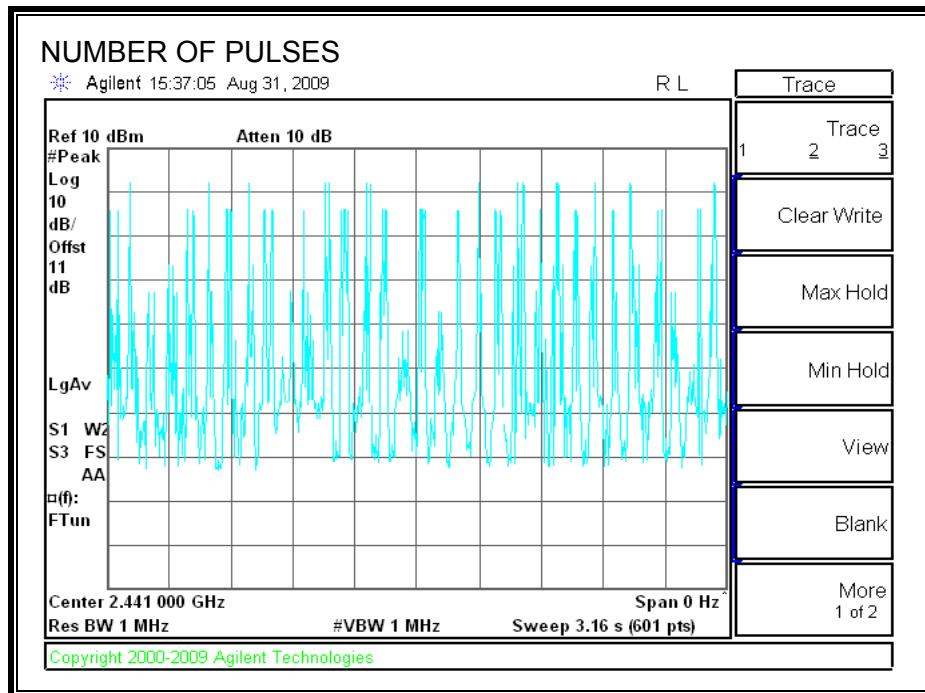


3DH5

PULSE WIDTH

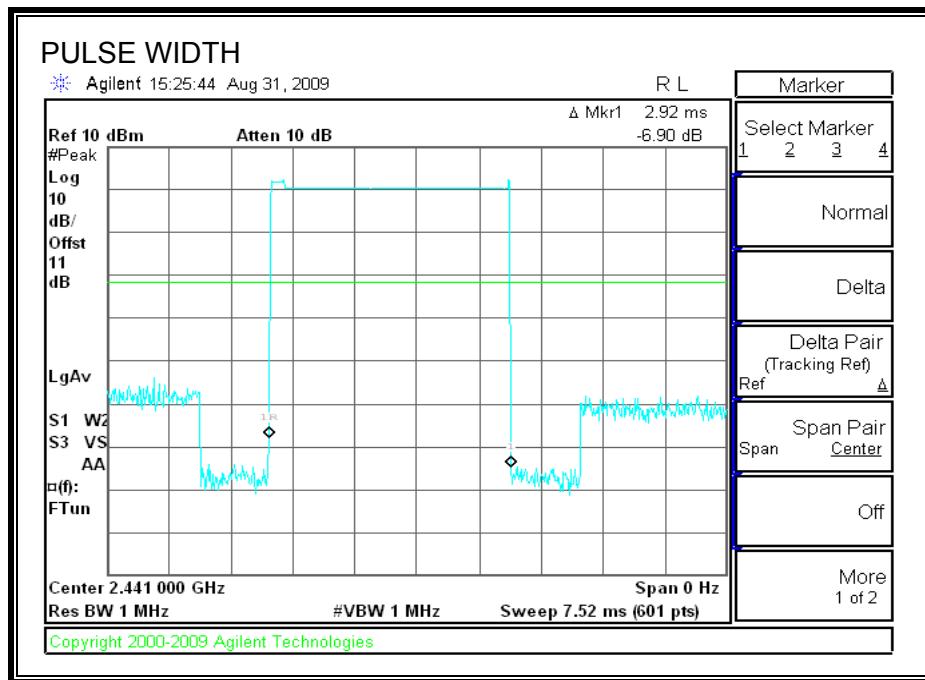

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

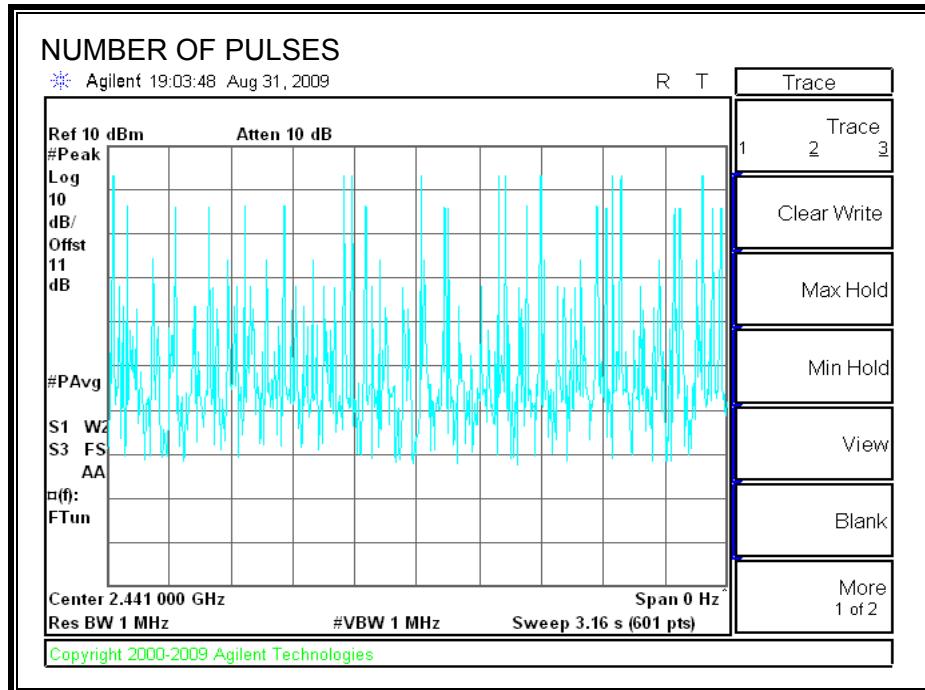

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.93	21	-17.04
Middle	2441	4.08	21	-16.89
High	2480	4.21	21	-16.76

OUTPUT POWER

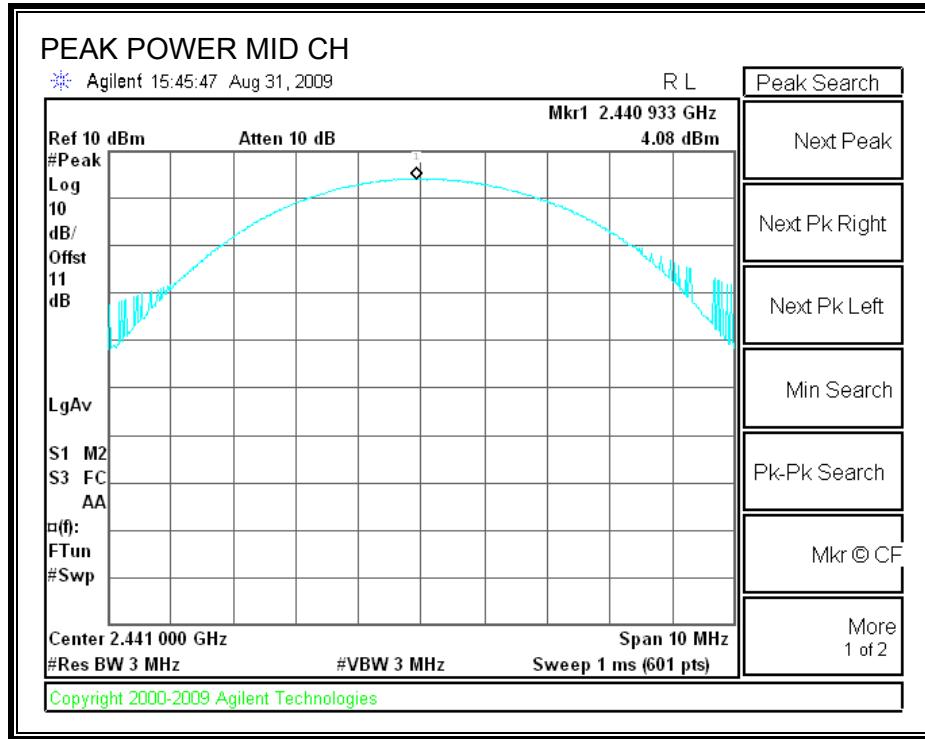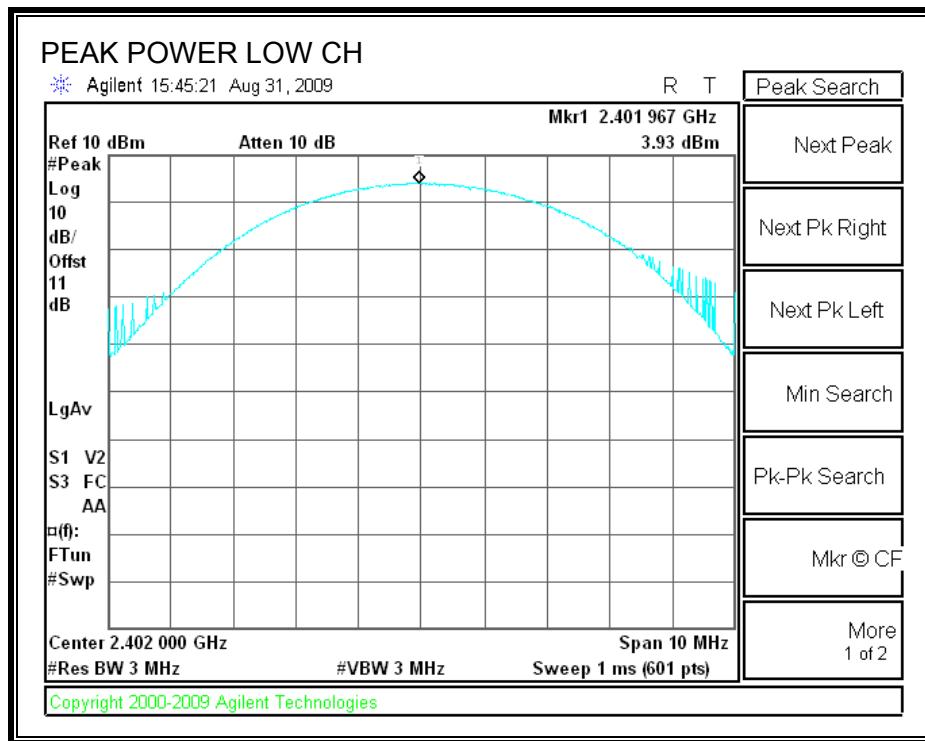

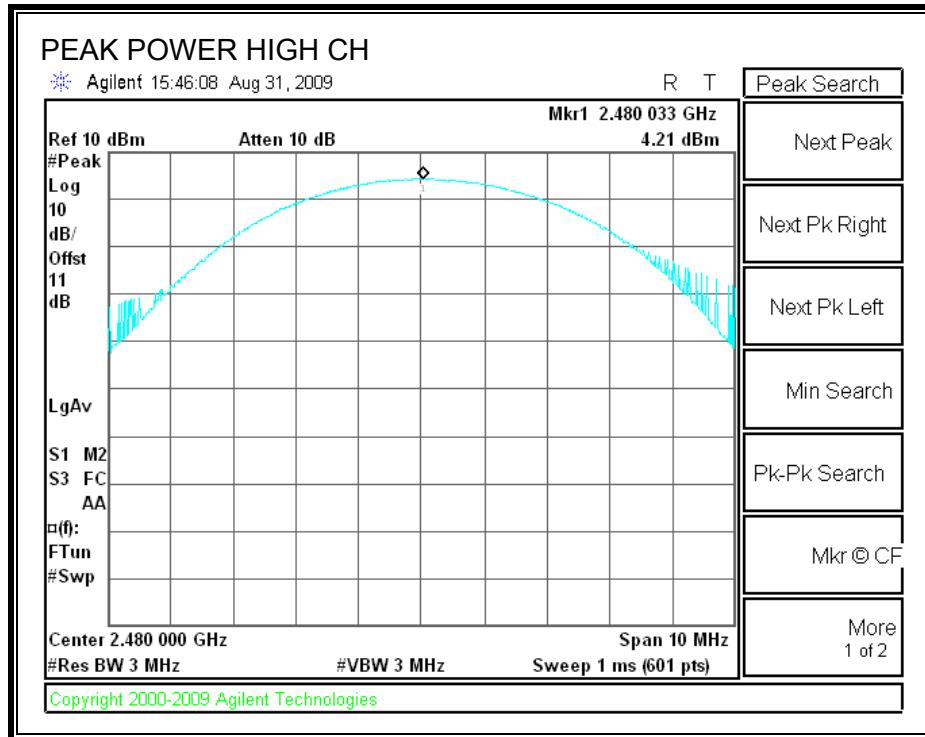

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and xx dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	0.96
Middle	2441	1.32
High	2480	1.64

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

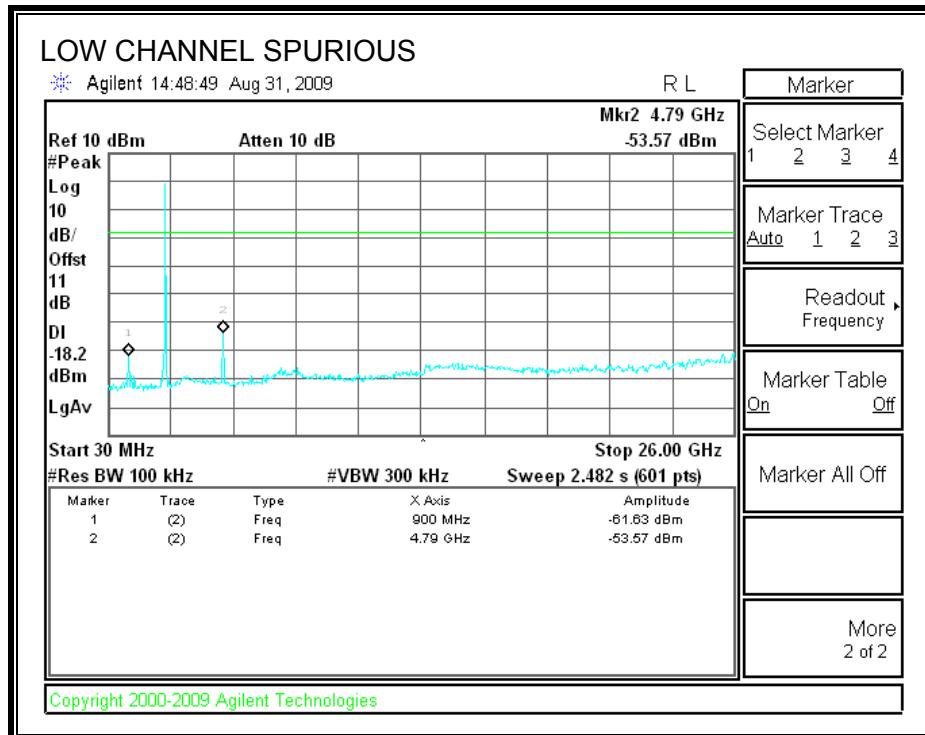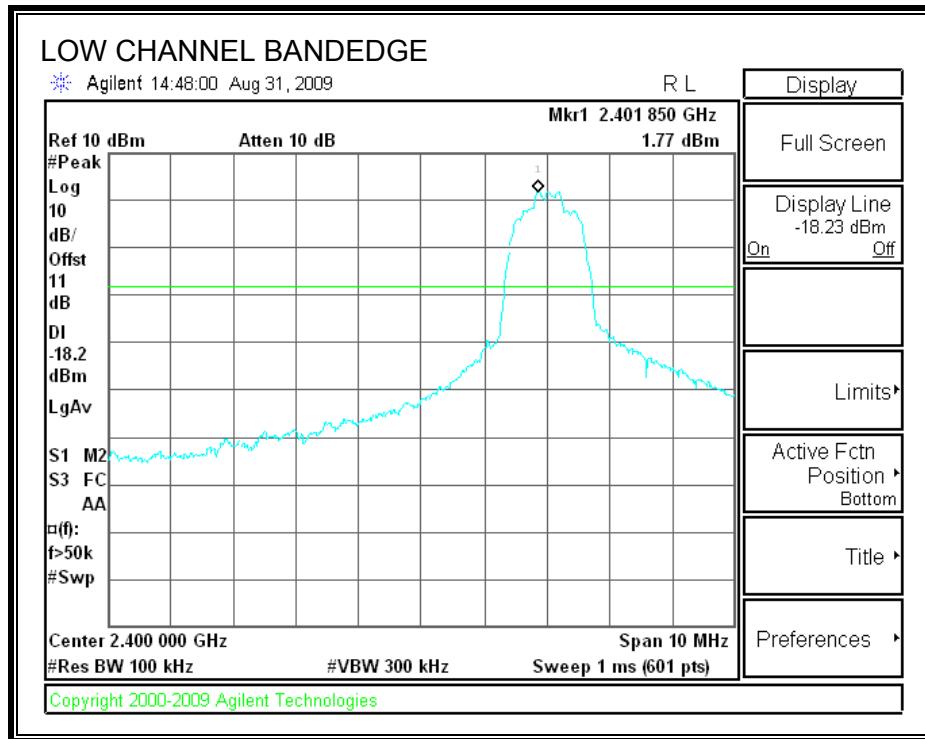



SPURIOUS EMISSIONS, MID CHANNEL

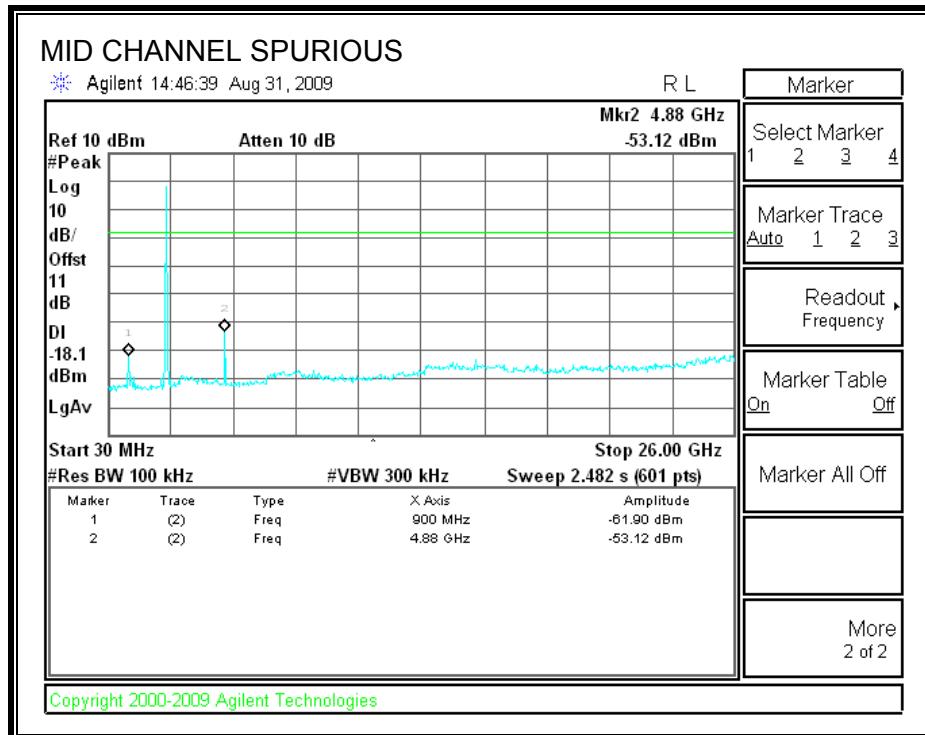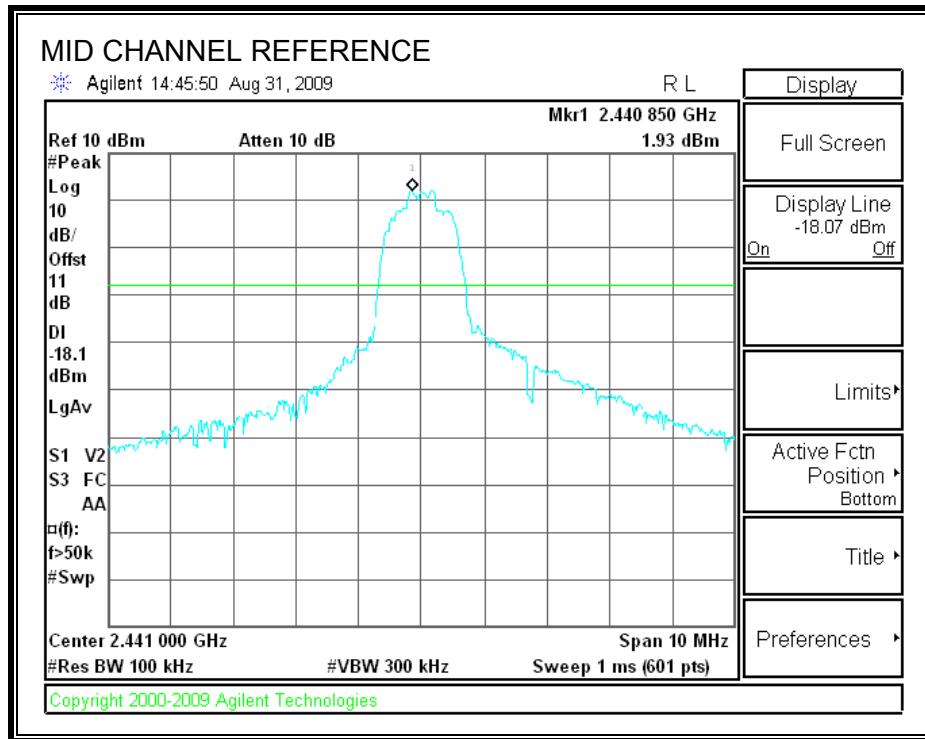

SPURIOUS EMISSIONS, HIGH CHANNEL

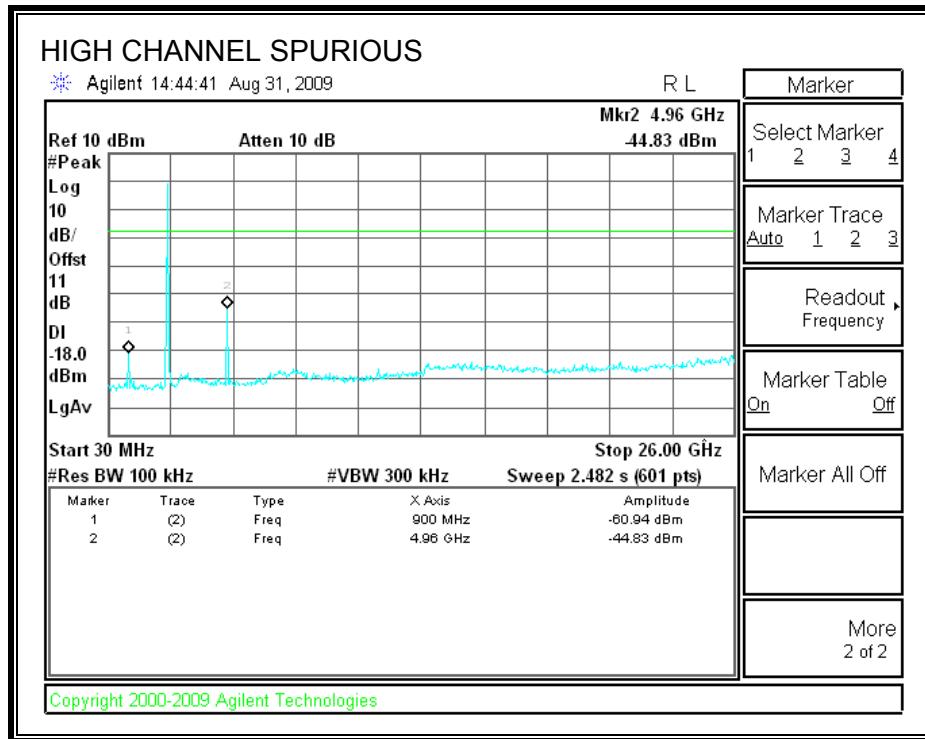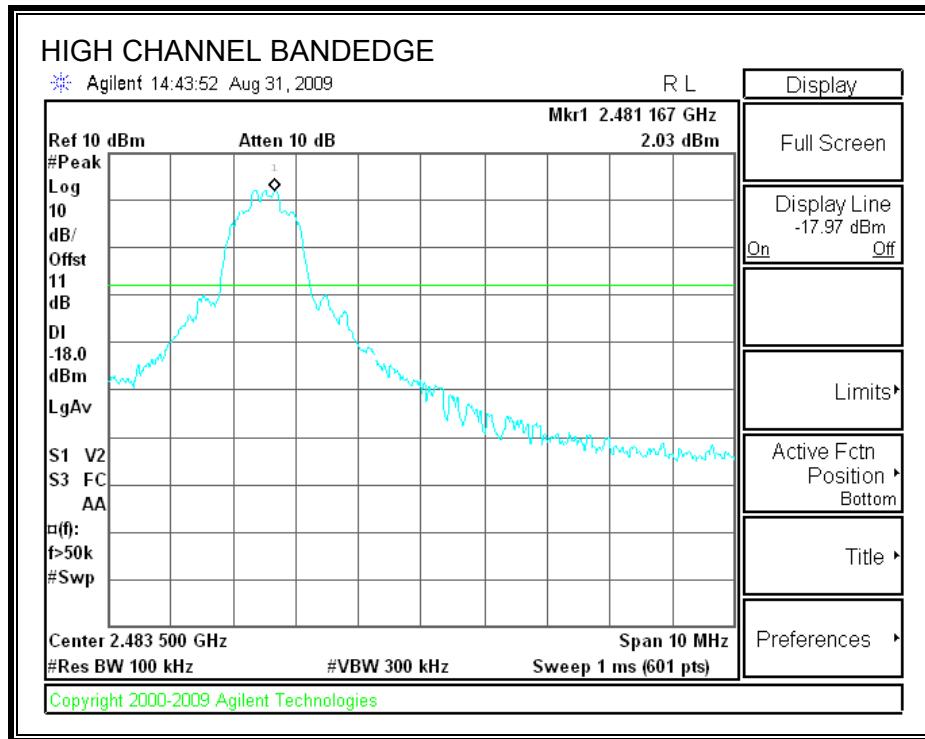

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

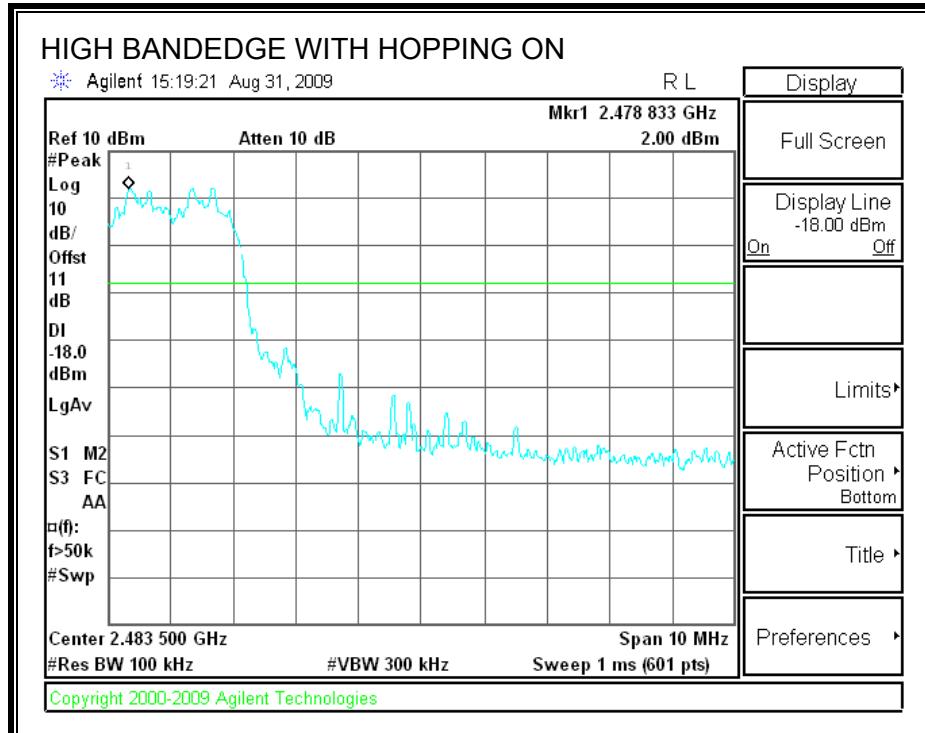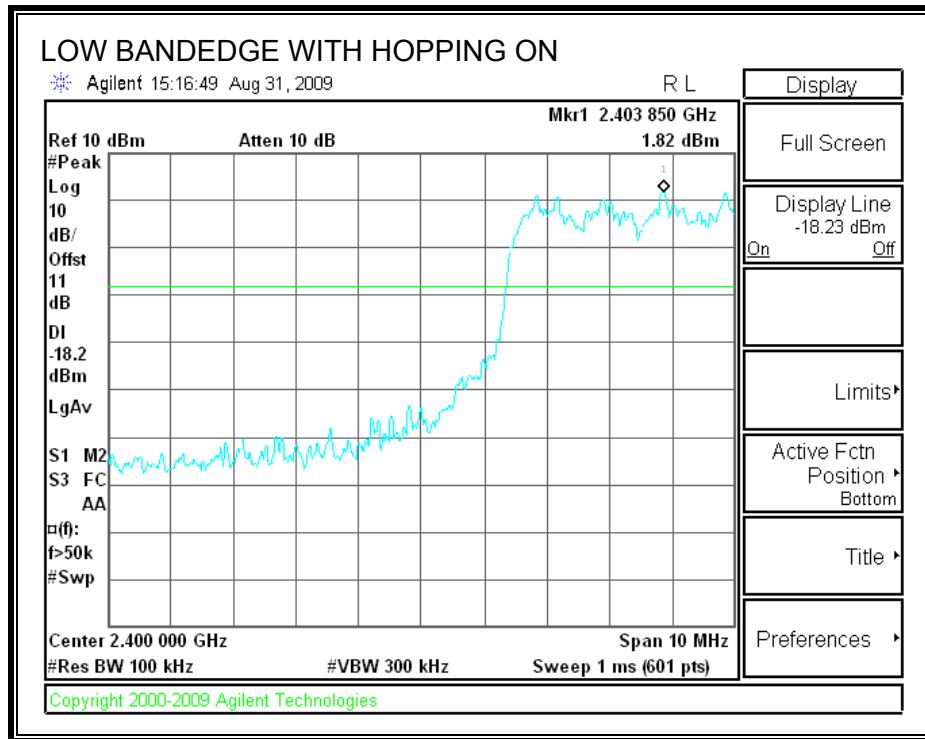

8. SINGLE ANTENNA CONFIGURATION TEST RESULTS

8.1. ENHANCED DATA RATE 8PSK MODULATION (WORST CASE)

8.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.275	1.187
Middle	2441	1.288	1.226
High	2480	1.271	1.189



99% BANDWIDTH

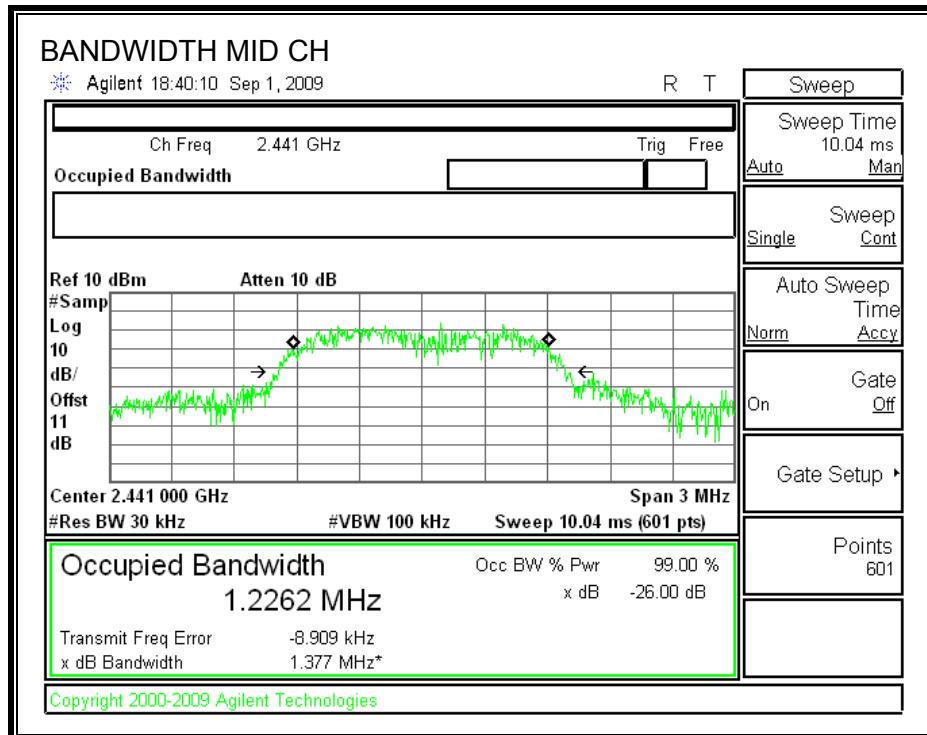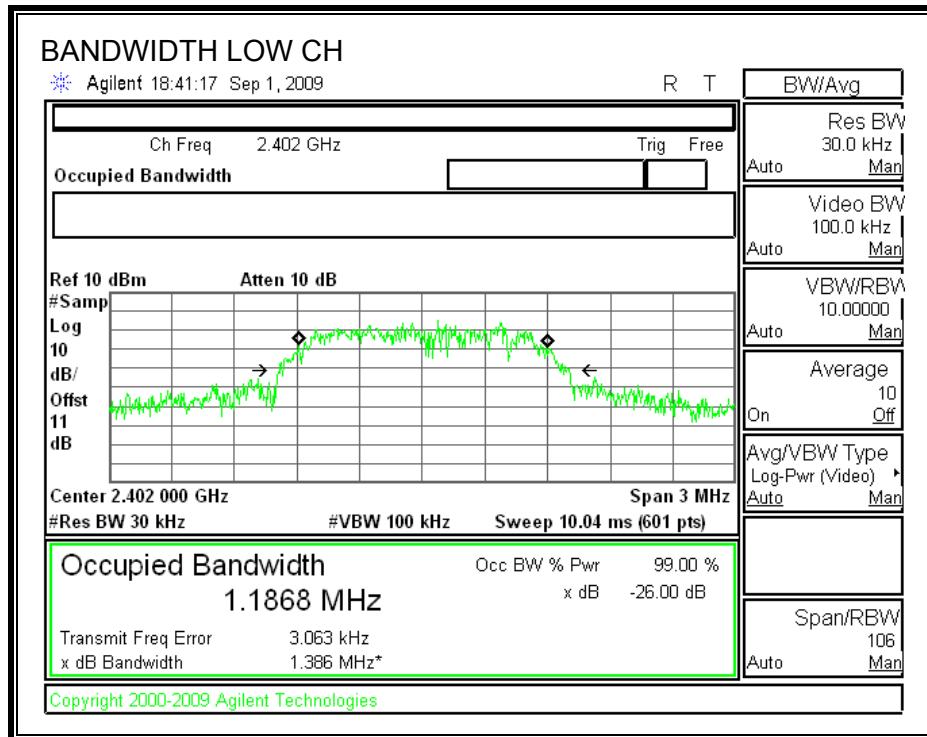

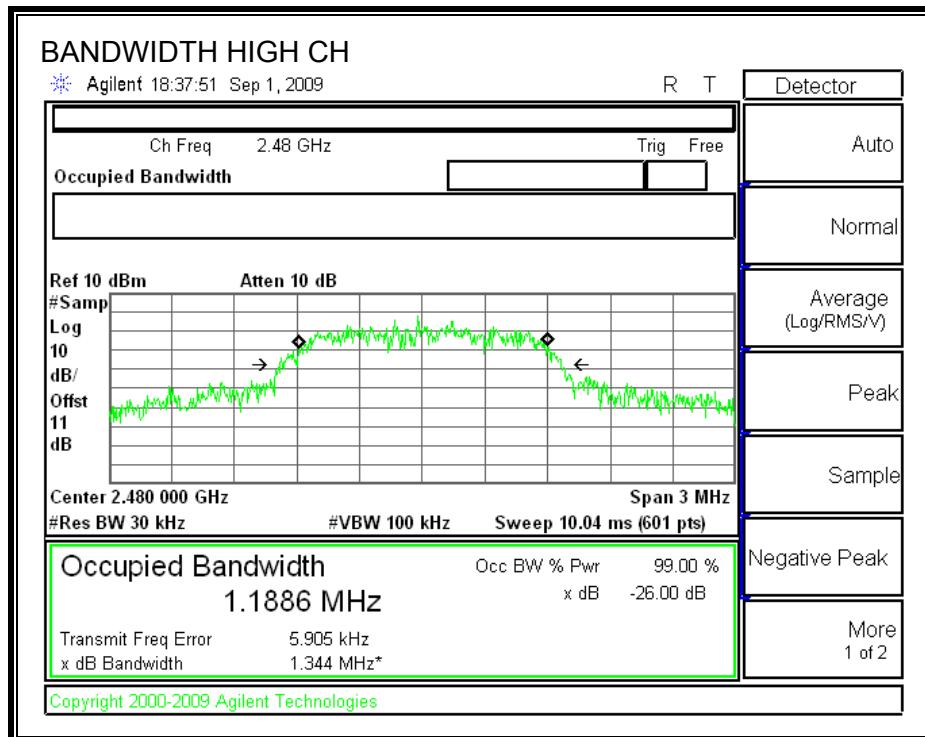

20dB BANDWIDTH

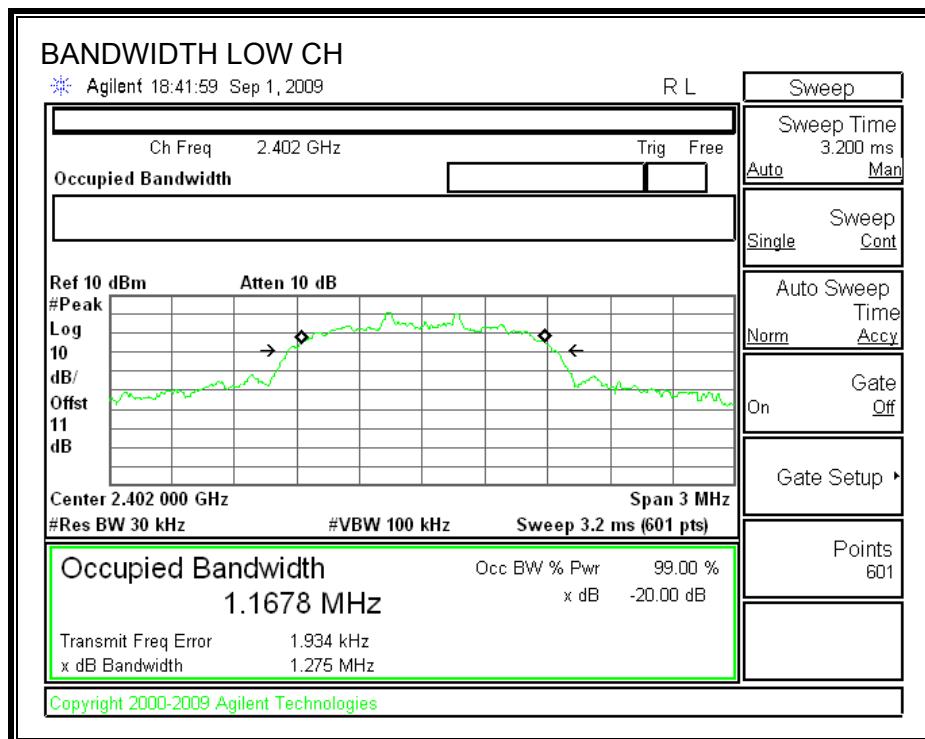

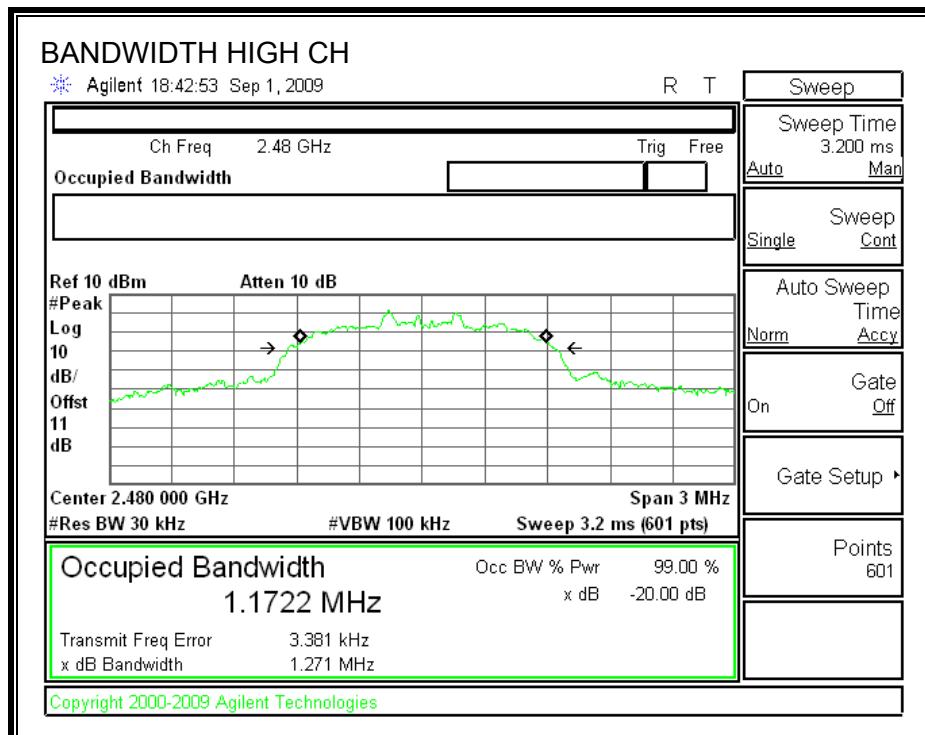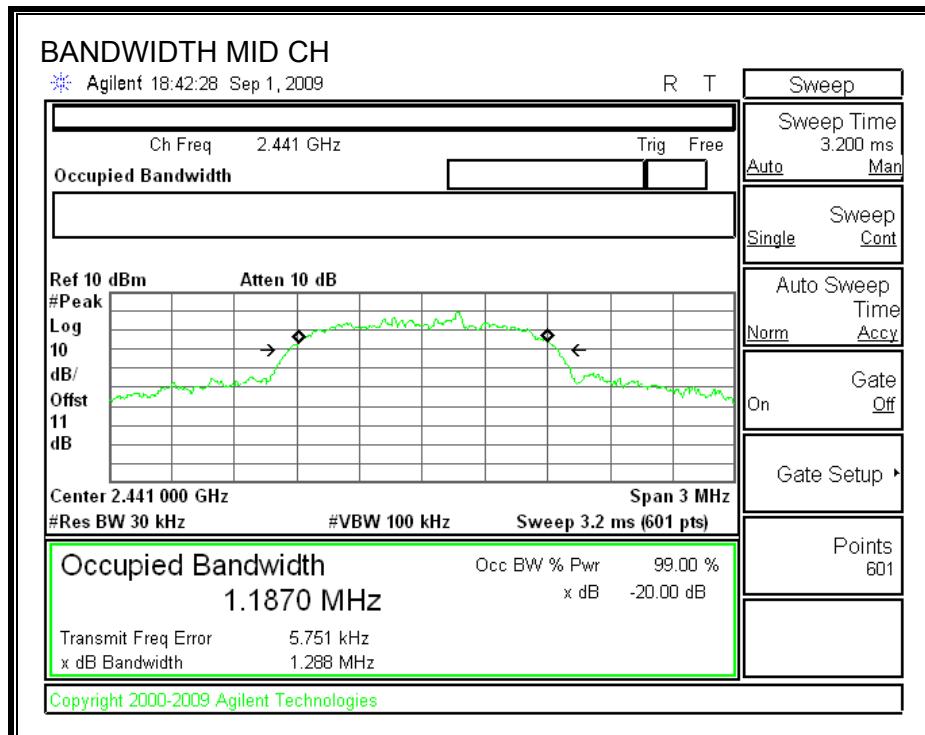

8.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

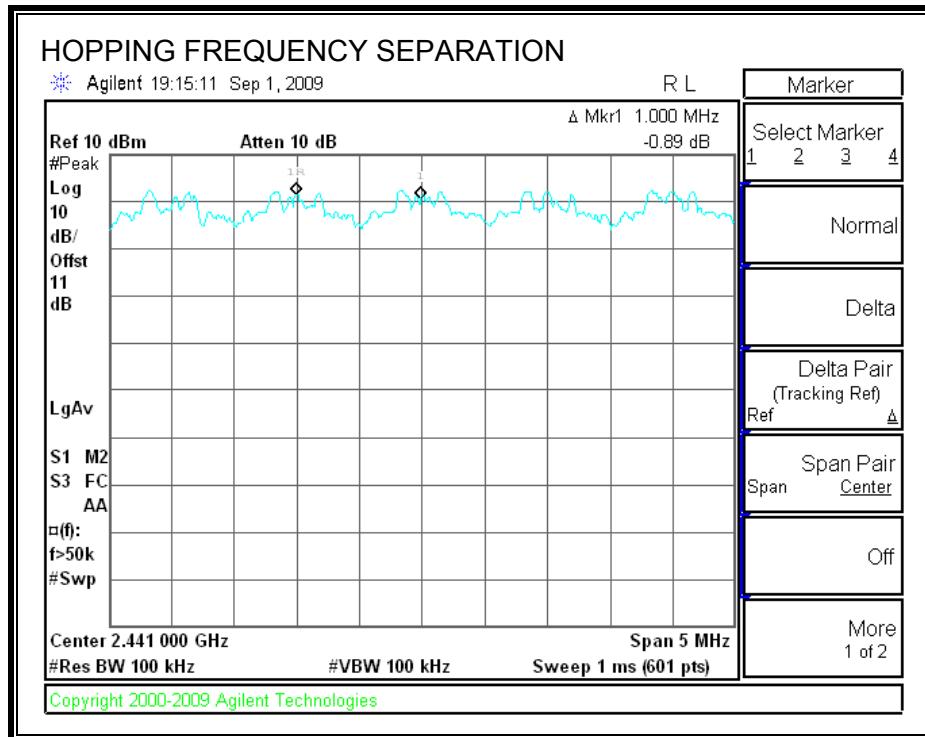

8.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

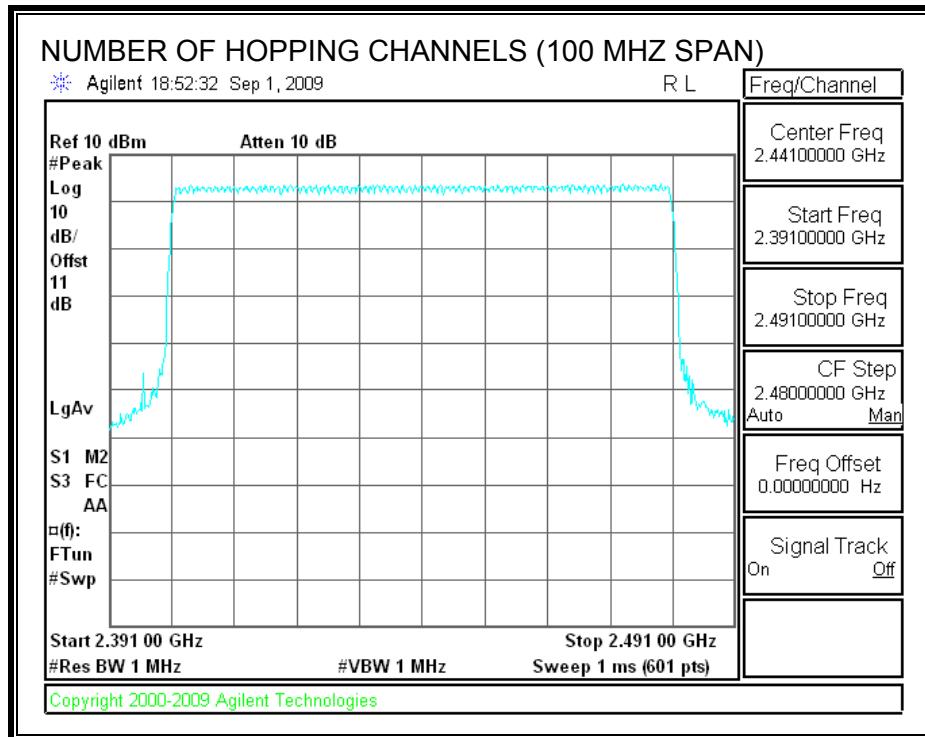

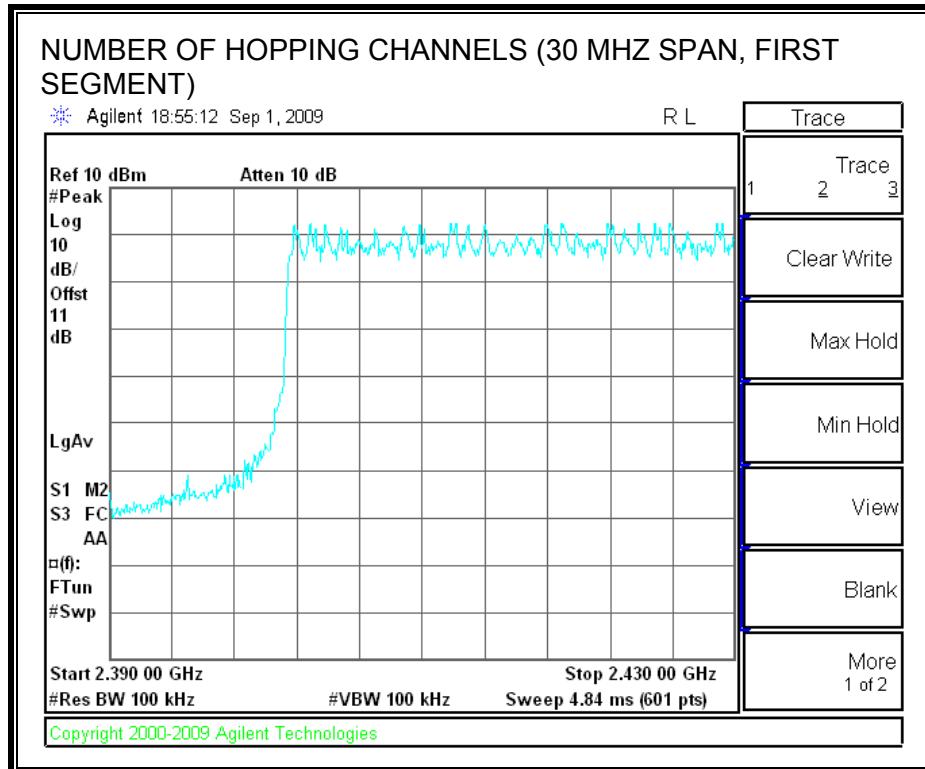

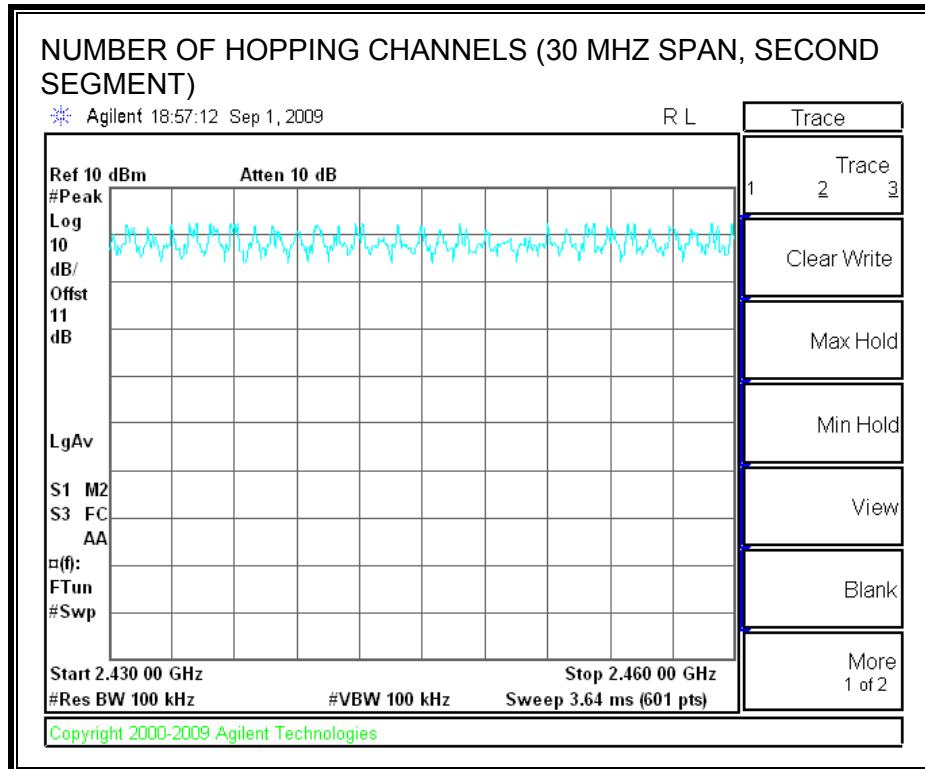

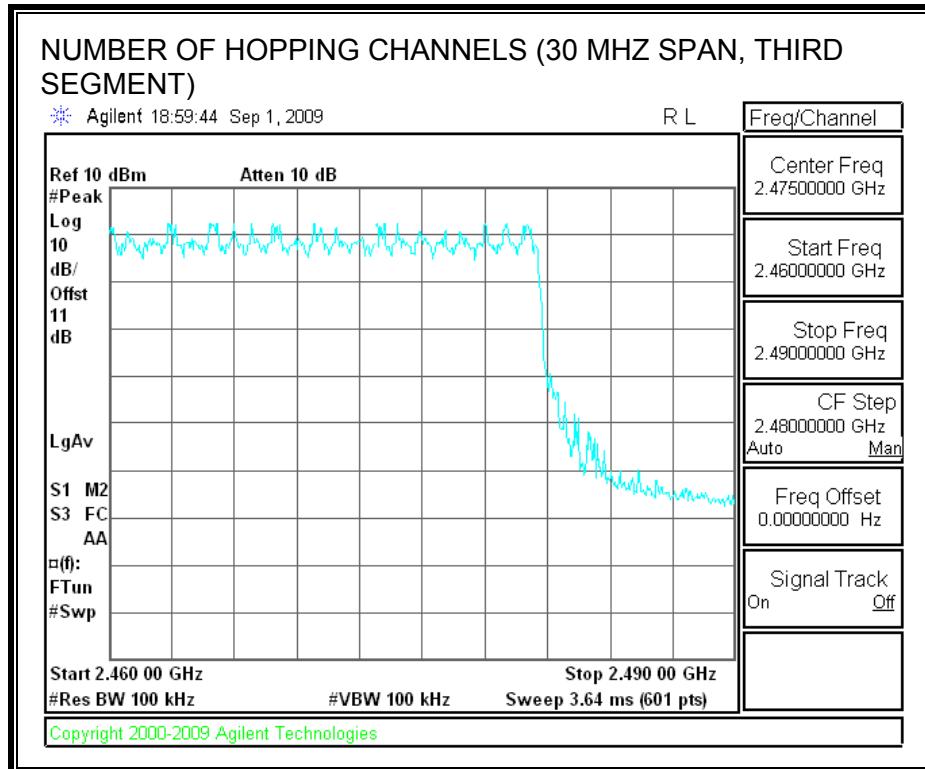

8.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.4128	34	0.140	0.4	0.260
DH3	1.661	20	0.332	0.4	0.068
DH5	2.917	13	0.379	0.4	0.021

DH1

PULSE WIDTH

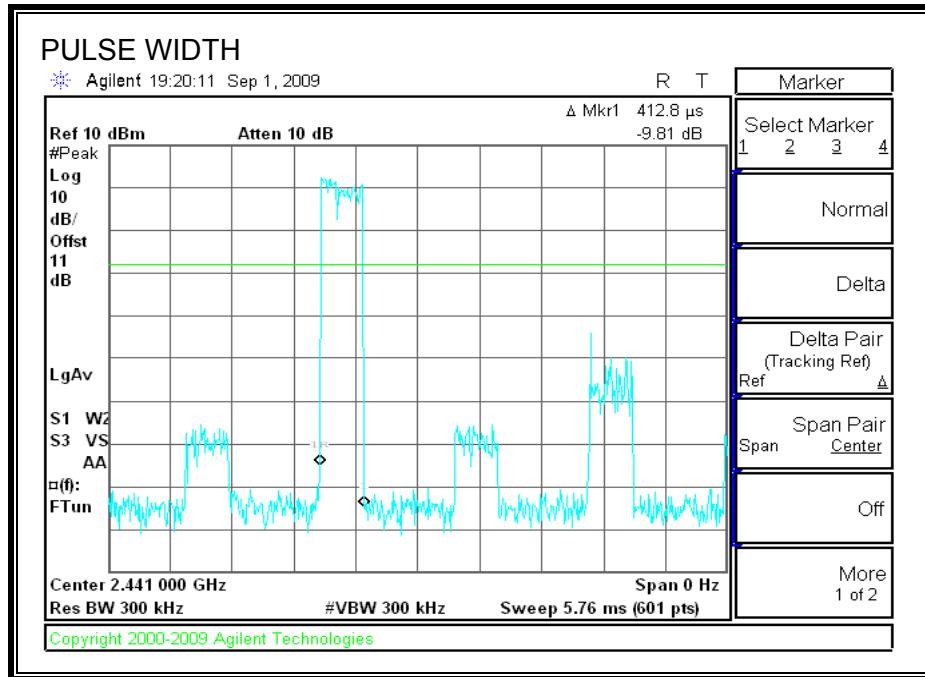


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

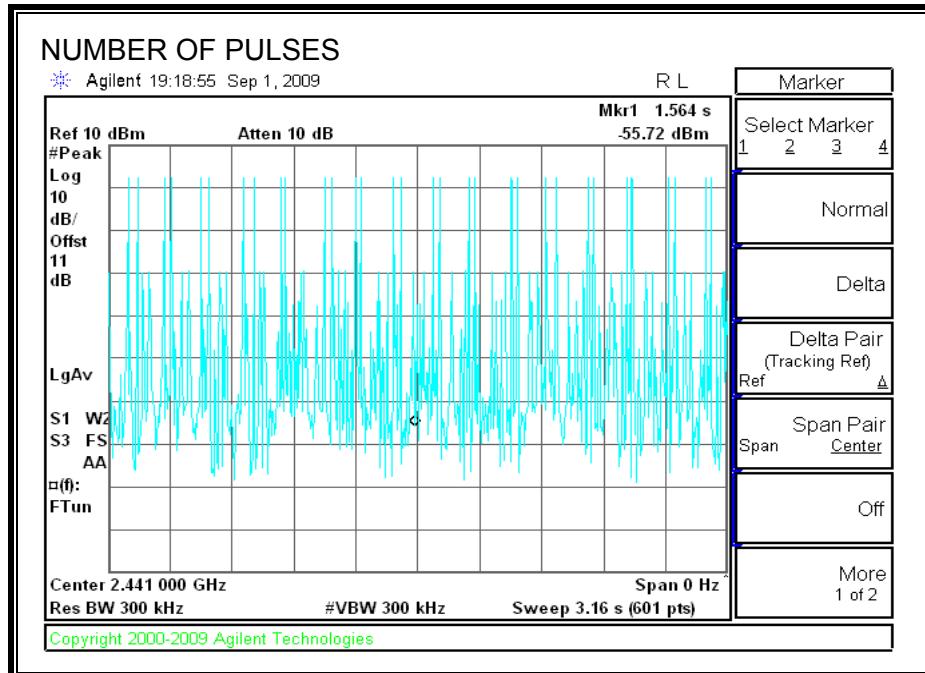


DH3

PULSE WIDTH

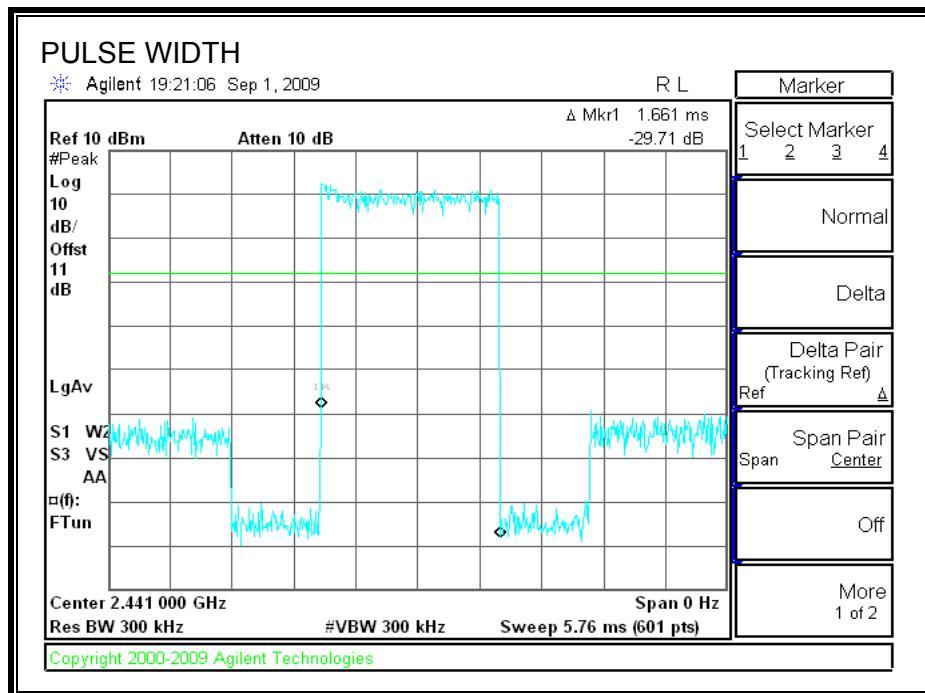


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

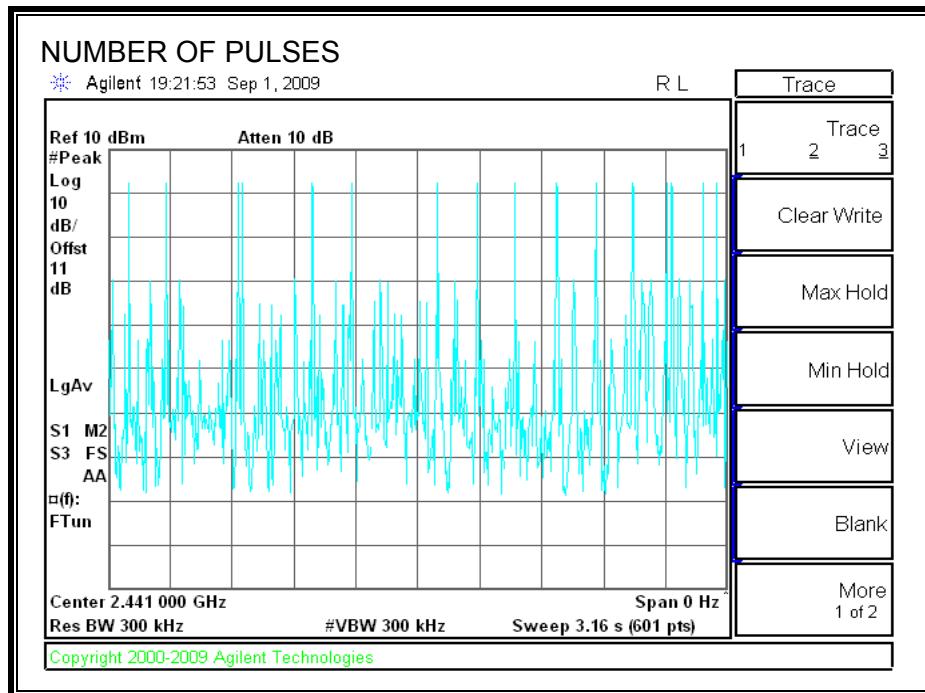


DH5

PULSE WIDTH

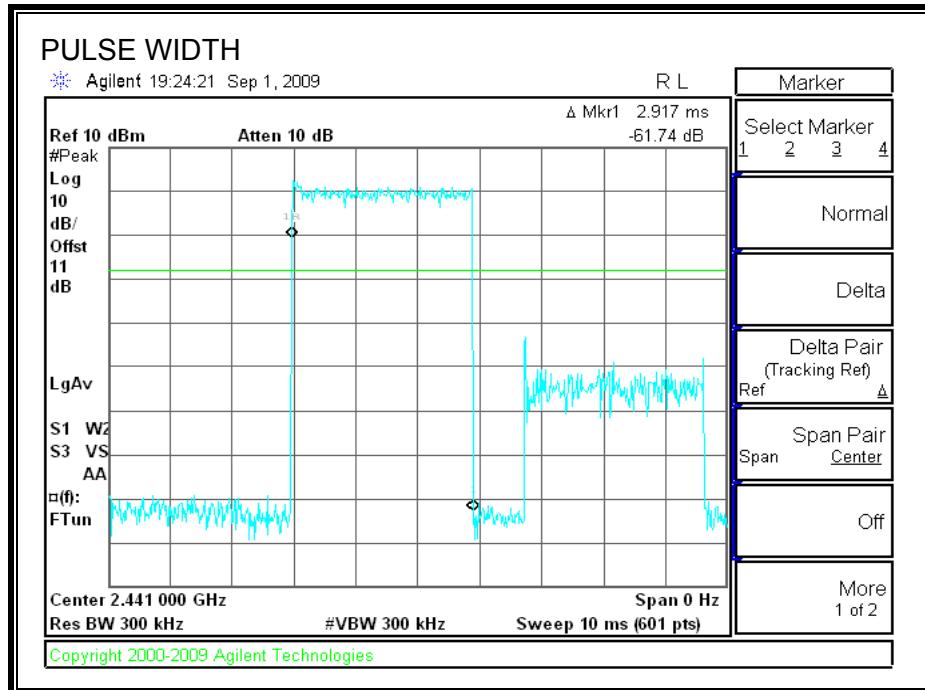

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

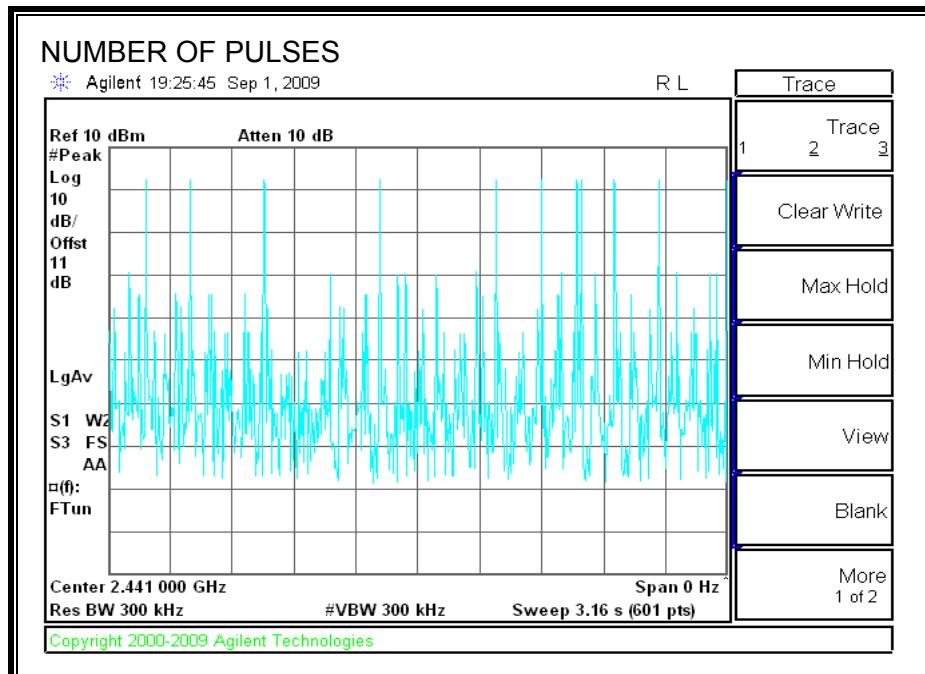

8.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	4.32	21	-16.65
Middle	2441	4.49	21	-16.48
High	2480	4.61	21	-16.36

OUTPUT POWER

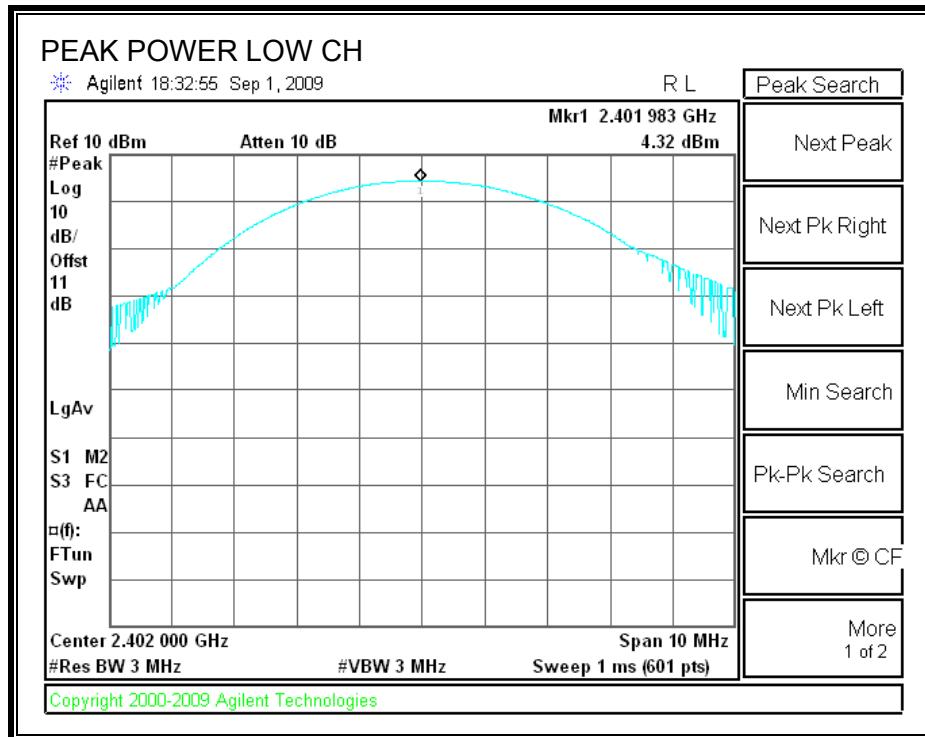

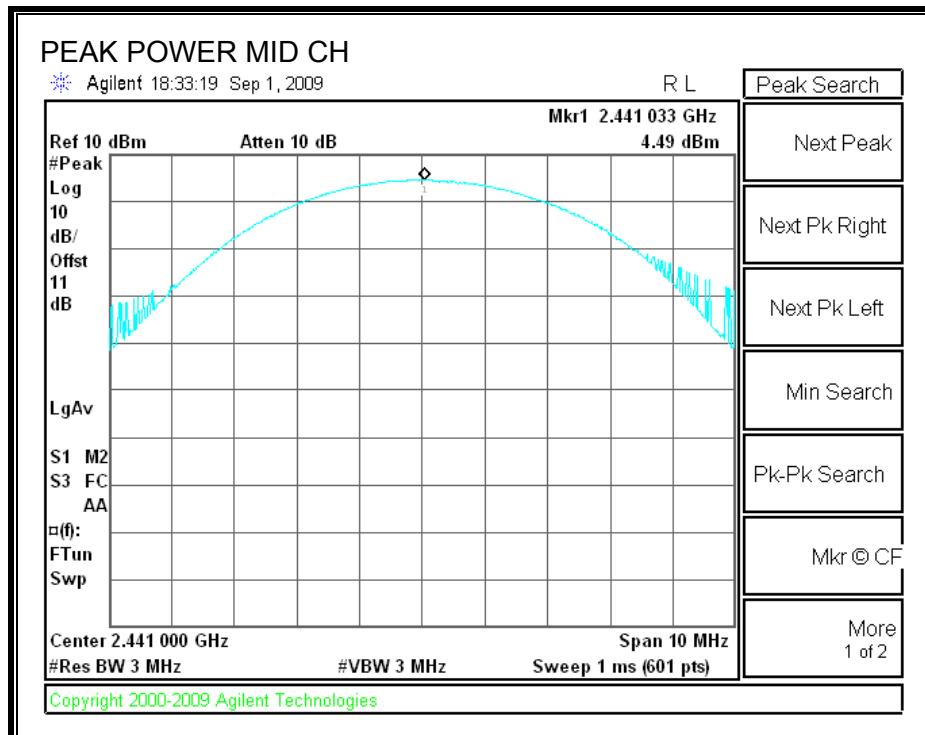

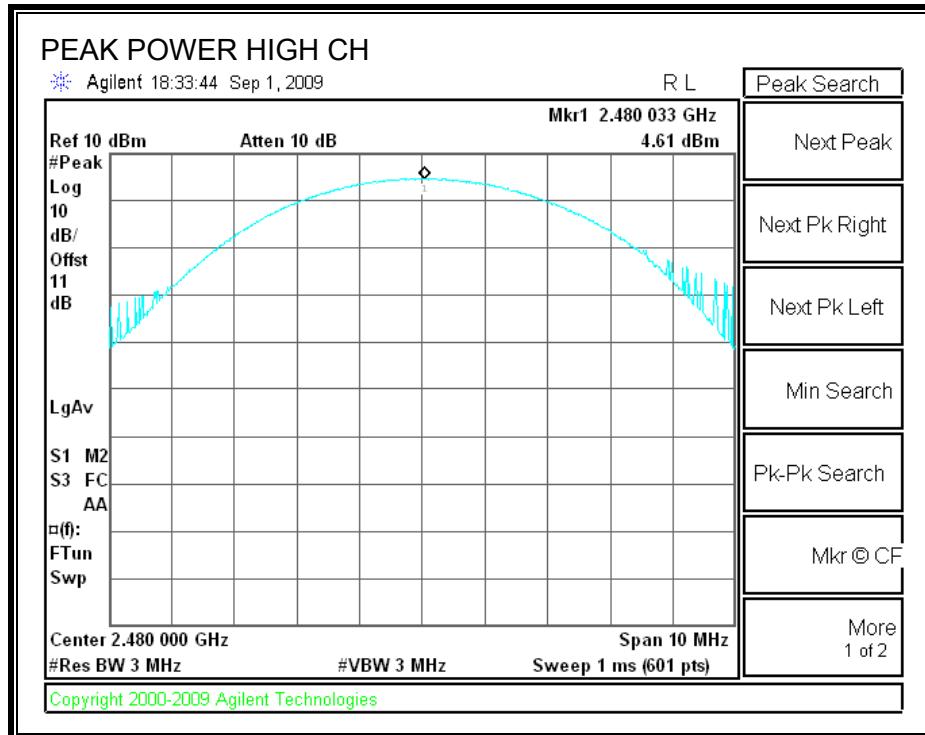

8.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	0.71
Middle	2441	1.02
High	2480	1.33

8.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

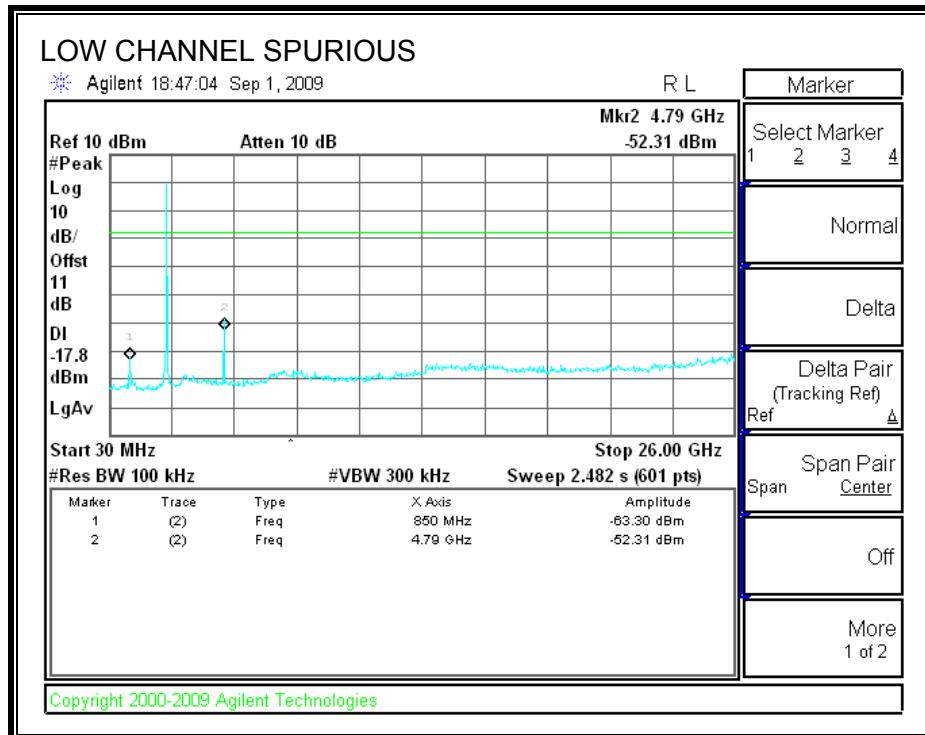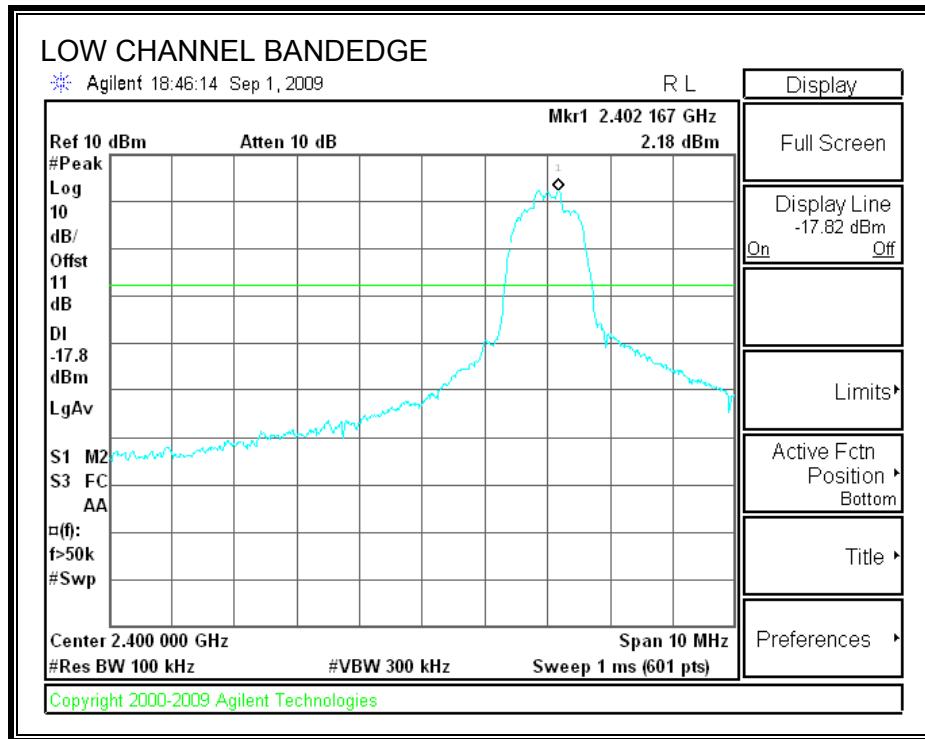



SPURIOUS EMISSIONS, MID CHANNEL

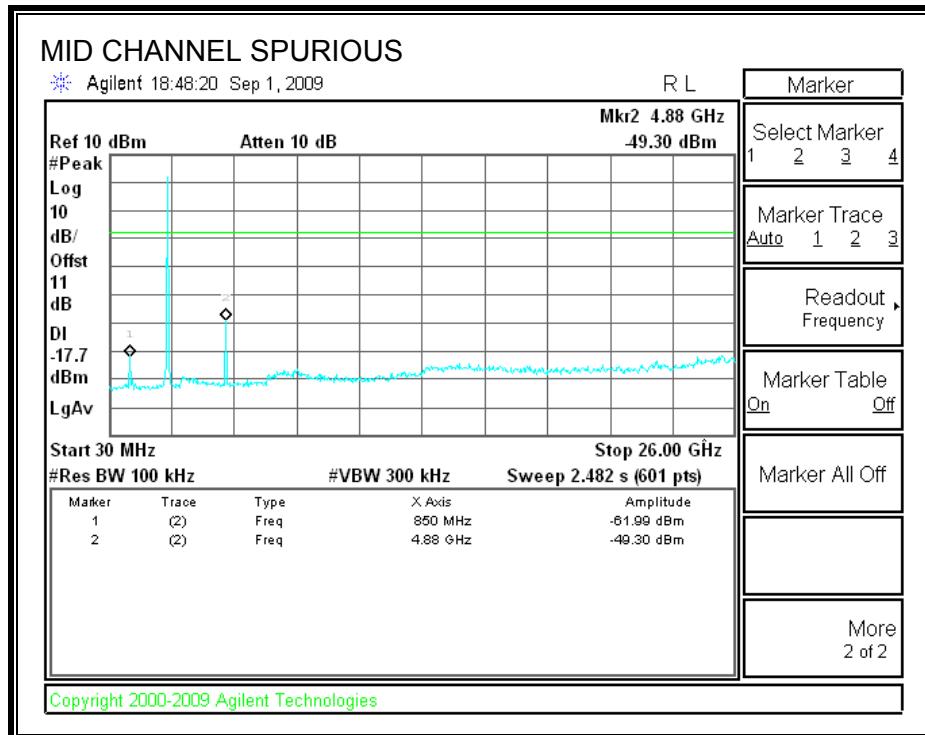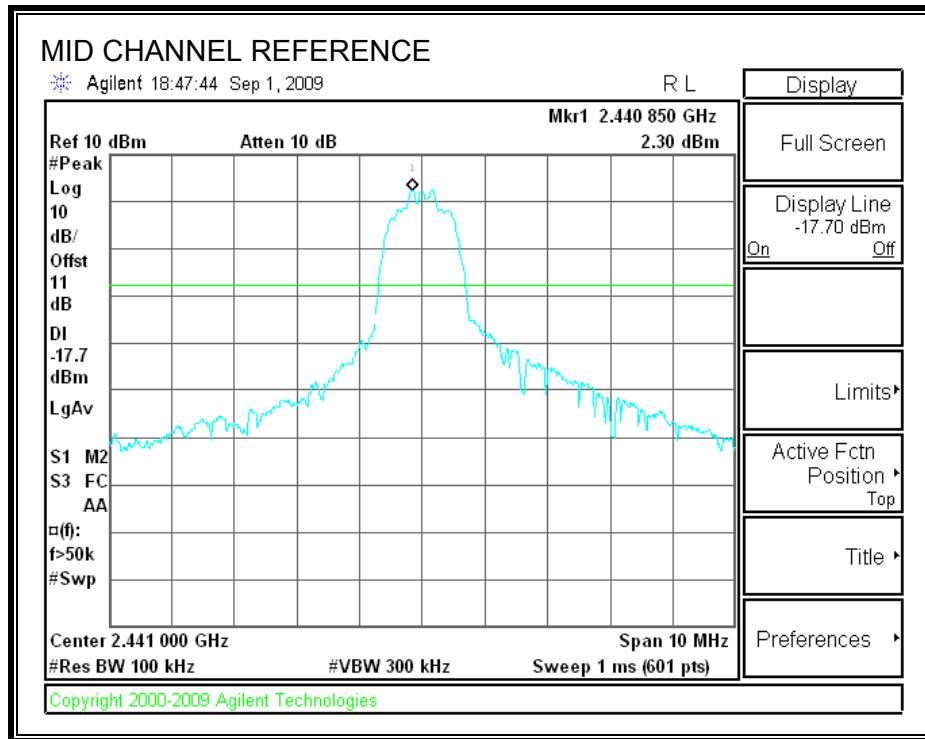

SPURIOUS EMISSIONS, HIGH CHANNEL

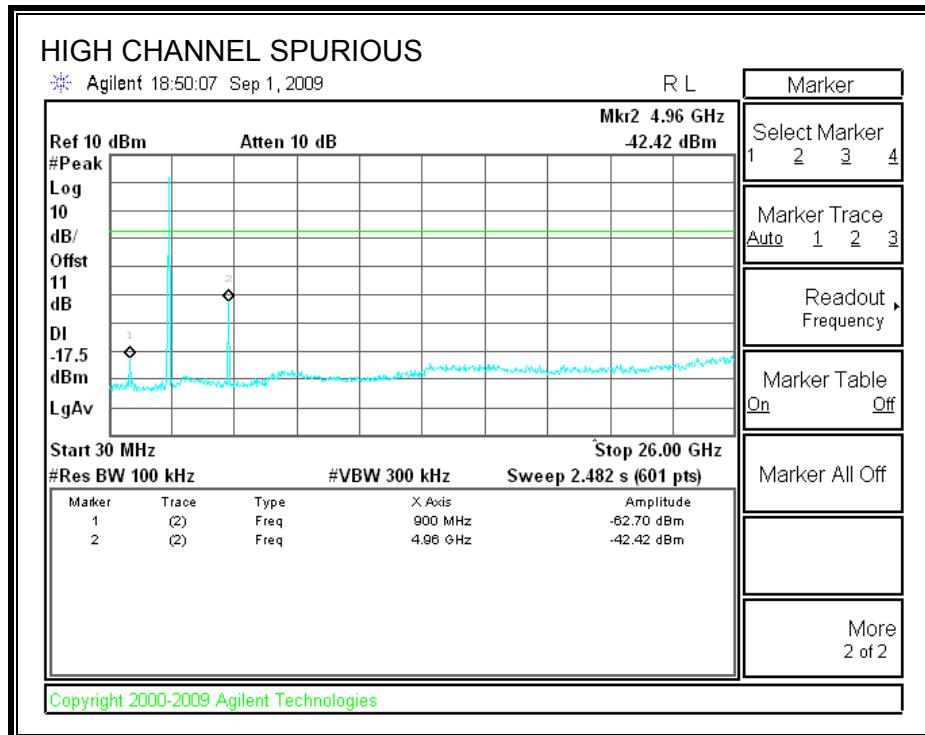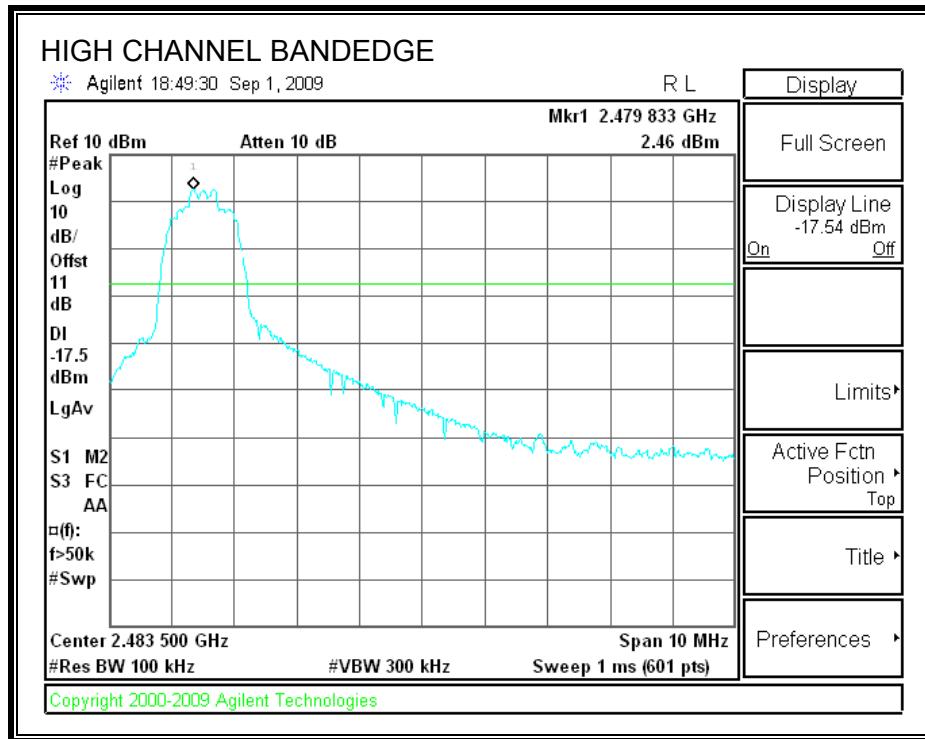

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

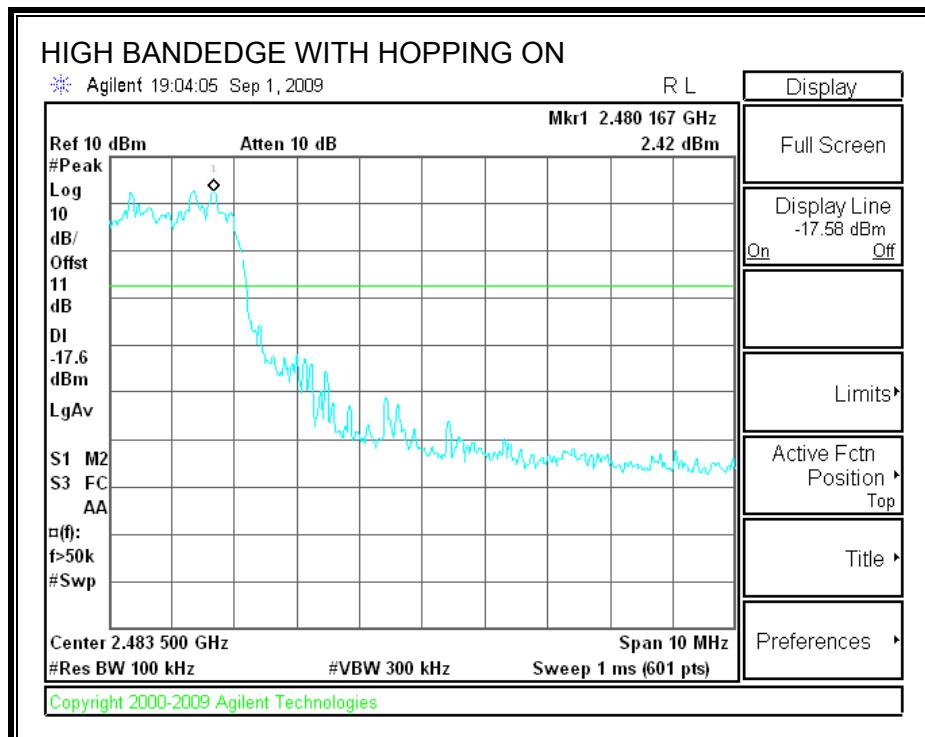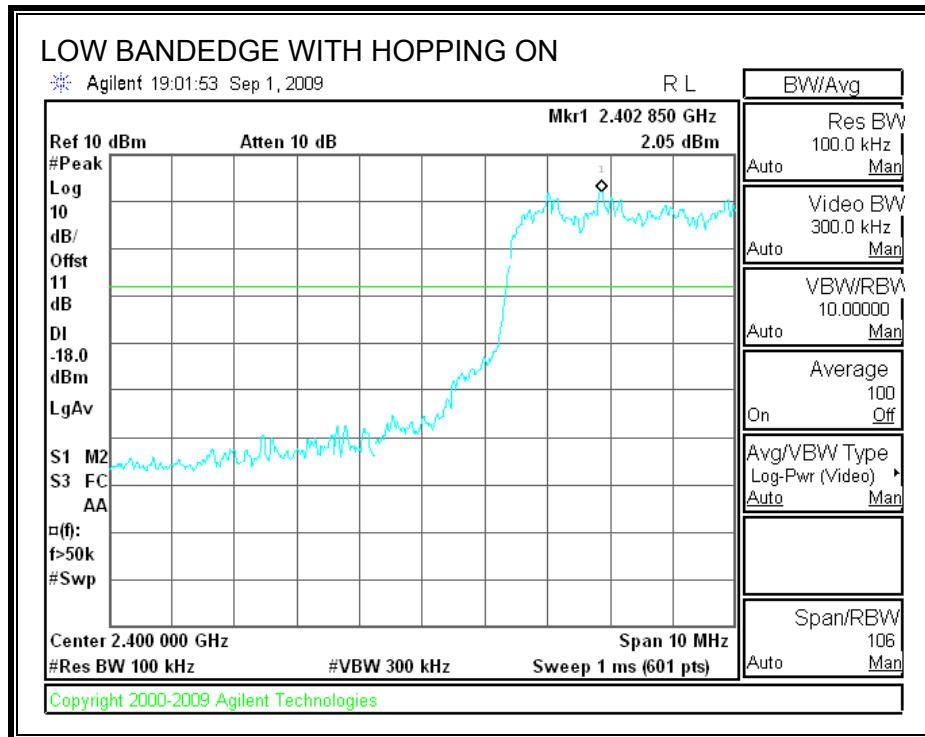

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



9.2. DUAL ANTENNA TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

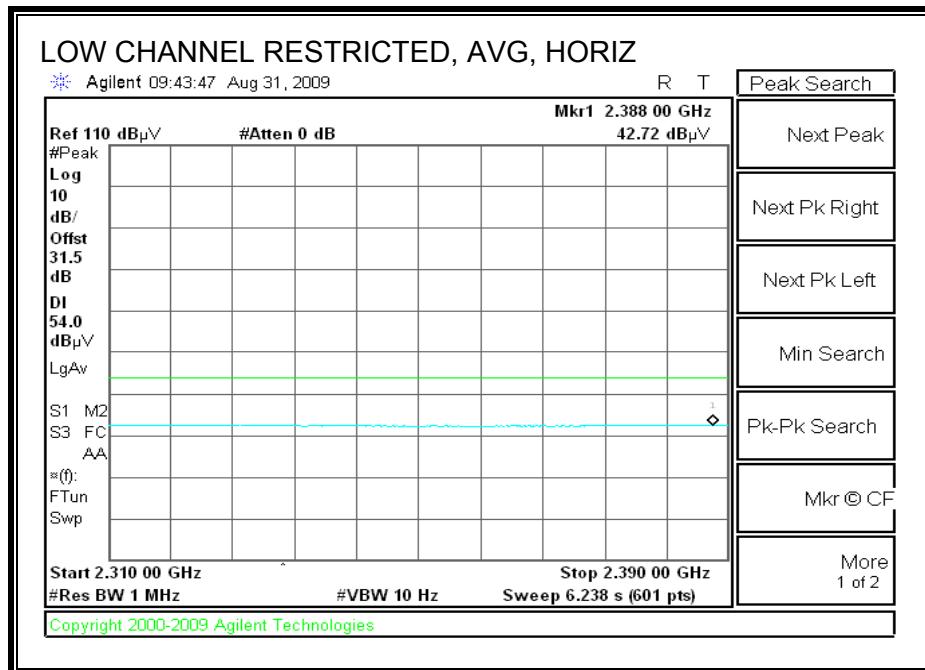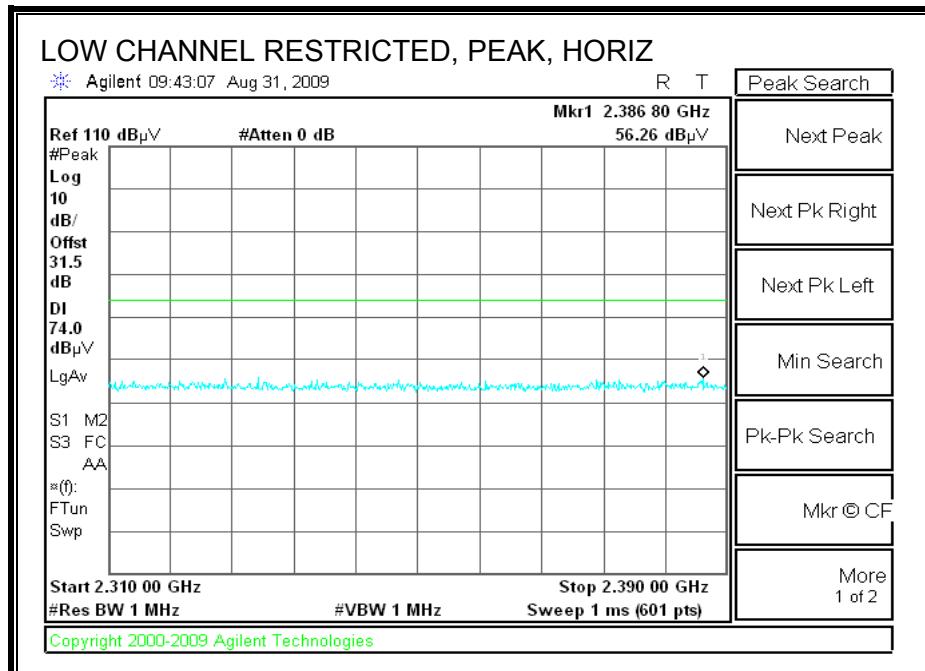



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

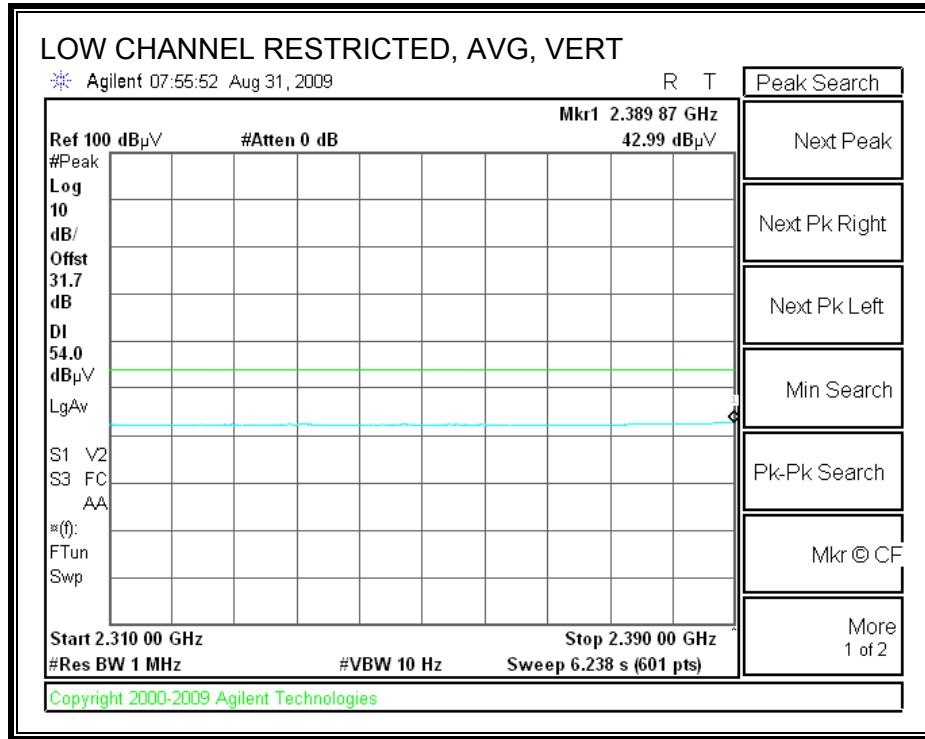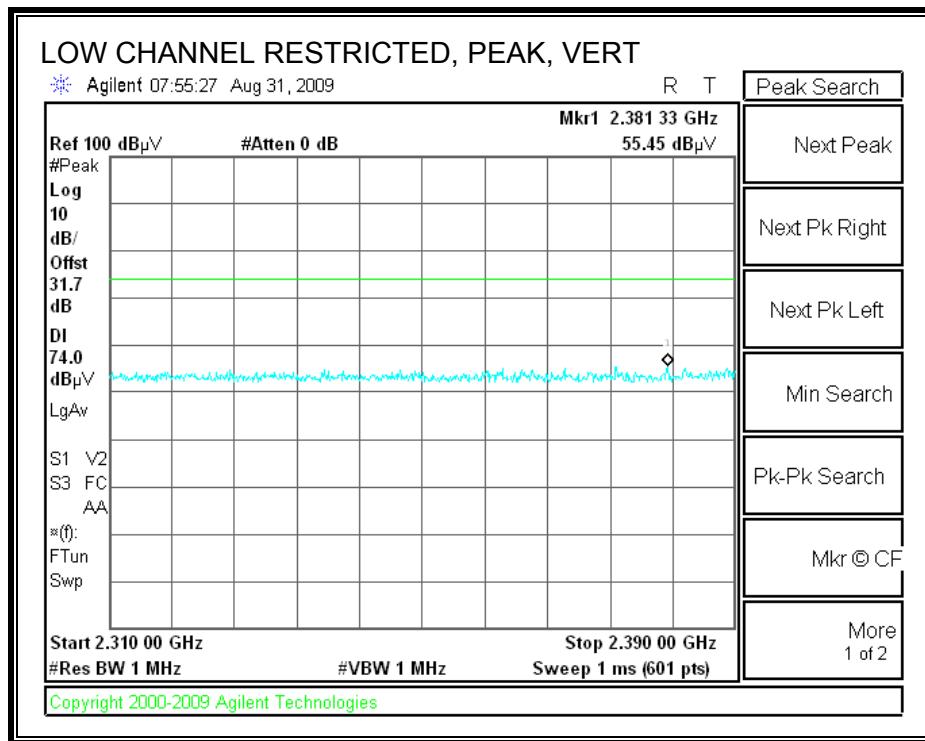

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

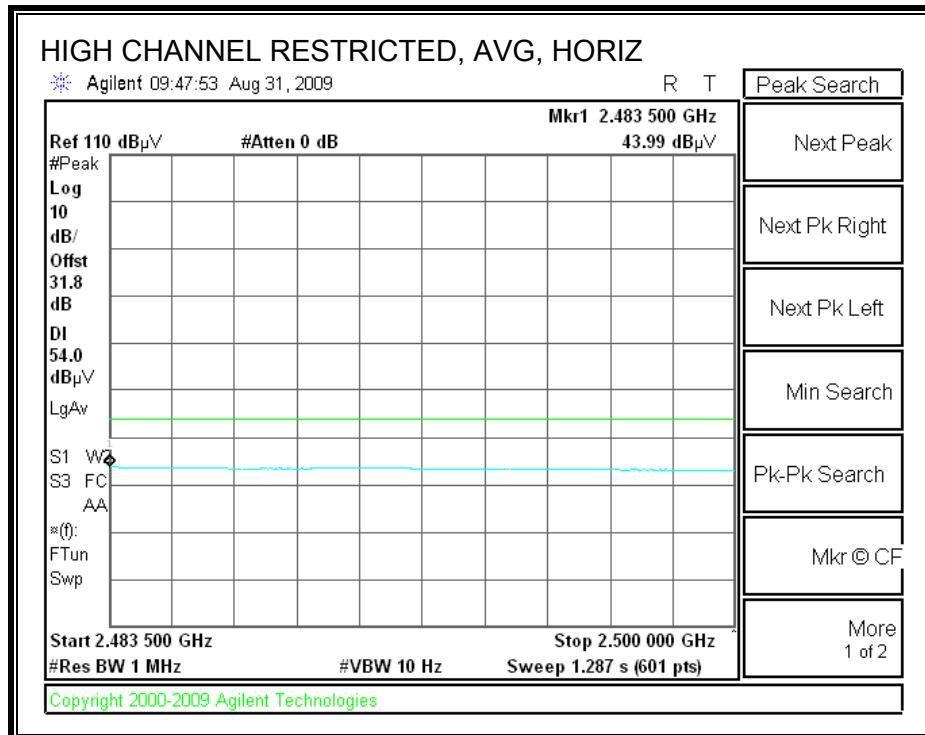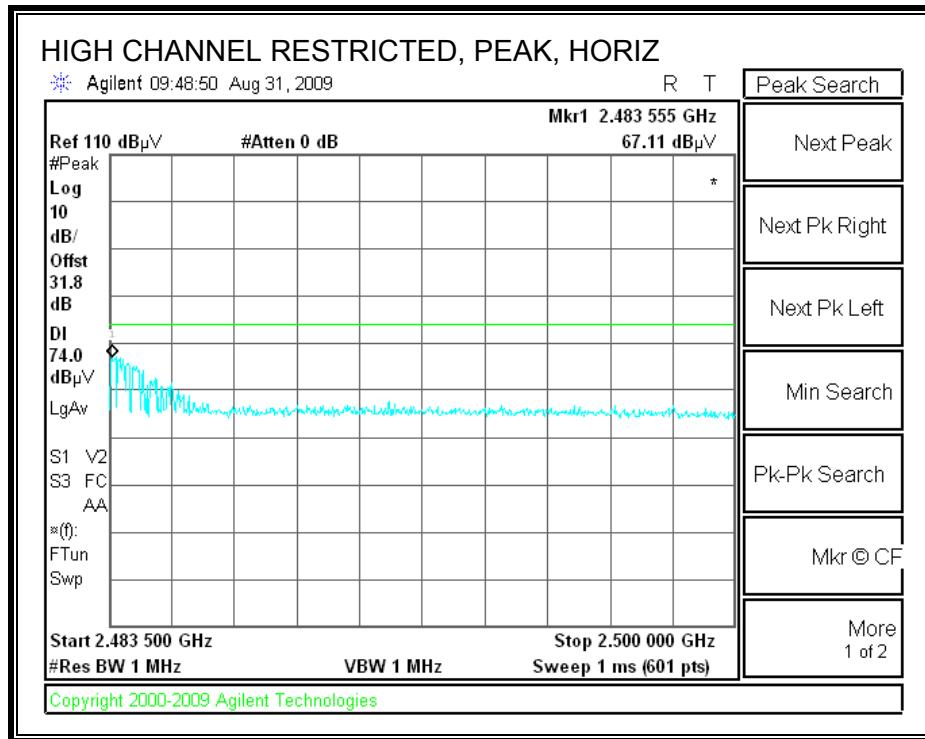

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

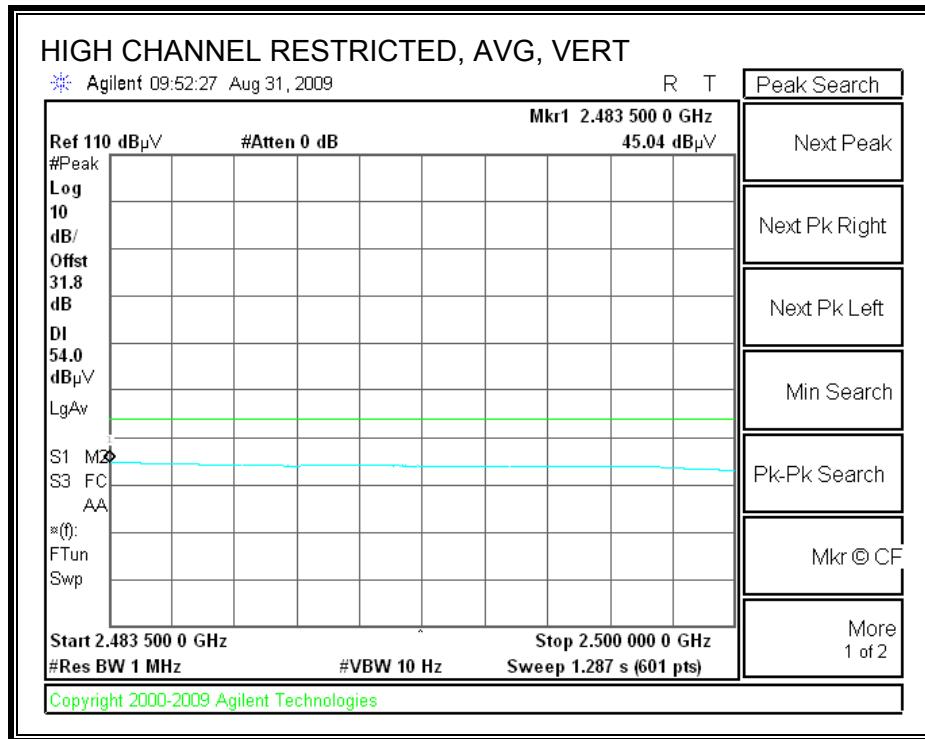
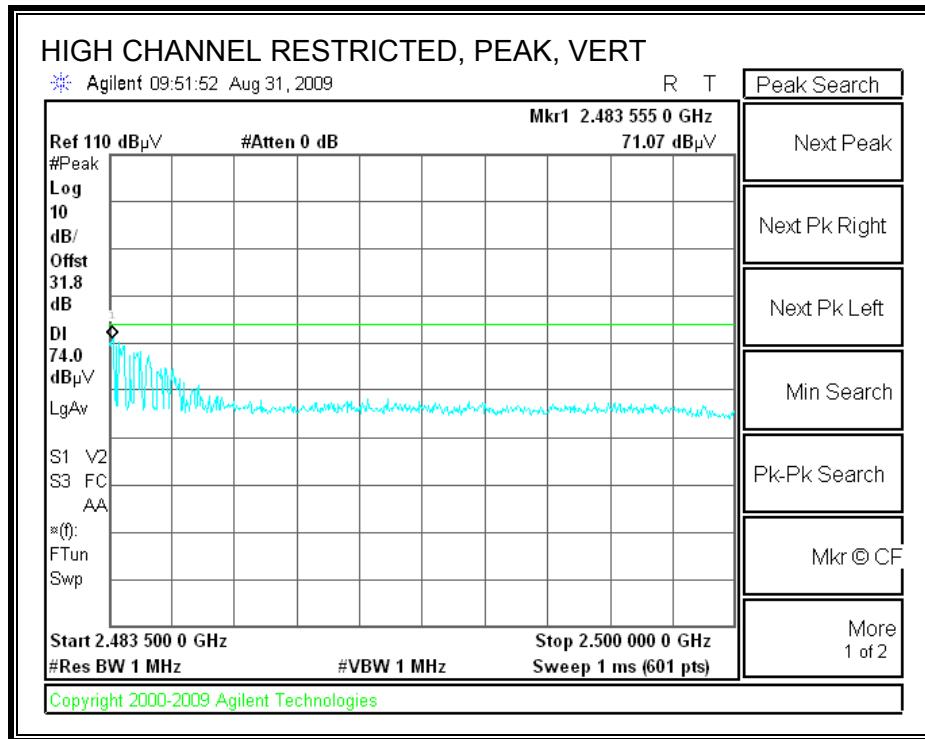


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																																																																																																																																																																	
<p>Company: Atheros Project #: 09U12738 Date: 8/31/09 Test Engineer: Chin Pang Configuration: EUT and Antenna Mode: GFSK, TX</p> <p><u>Test Equipment:</u></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.205</td> </tr> <tr> <td colspan="14">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="5">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td>R_001</td> <td colspan="5">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> <tr> <td colspan="14">Low Ch, 2402MHz</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>47.0</td> <td>39.6</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>50.6</td> <td>43.2</td> <td>74</td> <td>54</td> <td>-23.4</td> <td>-10.8</td> <td>V</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>42.0</td> <td>34.0</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>45.6</td> <td>37.6</td> <td>74</td> <td>54</td> <td>-28.4</td> <td>-16.4</td> <td>H</td> </tr> <tr> <td colspan="14">Mid Ch, 2441MHz</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>48.6</td> <td>40.2</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>52.3</td> <td>43.9</td> <td>74</td> <td>54</td> <td>-21.7</td> <td>-10.1</td> <td>V</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>40.0</td> <td>28.0</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.7</td> <td>36.7</td> <td>74</td> <td>54</td> <td>-25.3</td> <td>-17.3</td> <td>V</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>41.5</td> <td>34.1</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>45.2</td> <td>37.8</td> <td>74</td> <td>54</td> <td>-28.8</td> <td>-16.2</td> <td>H</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>39.5</td> <td>27.2</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.2</td> <td>35.9</td> <td>74</td> <td>54</td> <td>-25.8</td> <td>-18.1</td> <td>H</td> </tr> <tr> <td colspan="14">High Ch, 2480MHz</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>48.9</td> <td>41.1</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>52.8</td> <td>45.0</td> <td>74</td> <td>54</td> <td>-21.2</td> <td>-9.0</td> <td>V</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>40.0</td> <td>27.0</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.9</td> <td>35.9</td> <td>74</td> <td>54</td> <td>-25.1</td> <td>-18.1</td> <td>V</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>44.5</td> <td>36.5</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>48.4</td> <td>40.4</td> <td>74</td> <td>54</td> <td>-25.6</td> <td>-13.6</td> <td>H</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>39.4</td> <td>26.8</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.3</td> <td>35.7</td> <td>74</td> <td>54</td> <td>-25.7</td> <td>-18.3</td> <td>H</td> </tr> <tr> <td colspan="14">Rev. 11.10.08</td> </tr> <tr> <td colspan="14">Note: No other emissions were detected above the system noise floor.</td> </tr> <tr> <td>f</td> <td colspan="3">Measurement Frequency</td> <td>Amp</td> <td colspan="3">Preamp Gain</td> <td colspan="3">Avg Lim</td> <td colspan="3">Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td colspan="3">Distance to Antenna</td> <td>D Corr</td> <td colspan="3">Distance Correct to 3 meters</td> <td colspan="3">Pk Lim</td> <td colspan="3">Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td colspan="3">Analyzer Reading</td> <td>Avg</td> <td colspan="3">Average Field Strength @ 3 m</td> <td colspan="3">Avg Mar</td> <td colspan="3">Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td colspan="3">Antenna Factor</td> <td>Peak</td> <td colspan="3">Calculated Peak Field Strength</td> <td colspan="3">Pk Mar</td> <td colspan="3">Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td colspan="3">Cable Loss</td> <td>HPF</td> <td colspan="3">High Pass Filter</td> <td colspan="3"></td> <td colspan="3"></td> </tr> </table>														Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205	Hi Frequency Cables														3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz					3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001	Average Measurements RBW=1MHz ; VBW=10Hz					f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low Ch, 2402MHz														4.804	3.0	47.0	39.6	32.7	5.8	-34.8	0.0	0.0	50.6	43.2	74	54	-23.4	-10.8	V	4.804	3.0	42.0	34.0	32.7	5.8	-34.8	0.0	0.0	45.6	37.6	74	54	-28.4	-16.4	H	Mid Ch, 2441MHz														4.882	3.0	48.6	40.2	32.7	5.8	-34.8	0.0	0.0	52.3	43.9	74	54	-21.7	-10.1	V	7.323	3.0	40.0	28.0	35.5	7.3	-34.1	0.0	0.0	48.7	36.7	74	54	-25.3	-17.3	V	4.882	3.0	41.5	34.1	32.7	5.8	-34.8	0.0	0.0	45.2	37.8	74	54	-28.8	-16.2	H	7.323	3.0	39.5	27.2	35.5	7.3	-34.1	0.0	0.0	48.2	35.9	74	54	-25.8	-18.1	H	High Ch, 2480MHz														4.960	3.0	48.9	41.1	32.8	5.9	-34.8	0.0	0.0	52.8	45.0	74	54	-21.2	-9.0	V	7.440	3.0	40.0	27.0	35.6	7.3	-34.1	0.0	0.0	48.9	35.9	74	54	-25.1	-18.1	V	4.960	3.0	44.5	36.5	32.8	5.9	-34.8	0.0	0.0	48.4	40.4	74	54	-25.6	-13.6	H	7.440	3.0	39.4	26.8	35.6	7.3	-34.1	0.0	0.0	48.3	35.7	74	54	-25.7	-18.3	H	Rev. 11.10.08														Note: No other emissions were detected above the system noise floor.														f	Measurement Frequency			Amp	Preamp Gain			Avg Lim			Average Field Strength Limit			Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim			Peak Field Strength Limit			Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar			Margin vs. Average Limit			AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar			Margin vs. Peak Limit			CL	Cable Loss			HPF	High Pass Filter								
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																																																																																										
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205																																																																																																																																																																																																																																																																																																																																																																																										
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																																																																																																	
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																																																																																									
3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001	Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																																																																																																																									
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																																																																																		
Low Ch, 2402MHz																																																																																																																																																																																																																																																																																																																																																																																																	
4.804	3.0	47.0	39.6	32.7	5.8	-34.8	0.0	0.0	50.6	43.2	74	54	-23.4	-10.8	V																																																																																																																																																																																																																																																																																																																																																																																		
4.804	3.0	42.0	34.0	32.7	5.8	-34.8	0.0	0.0	45.6	37.6	74	54	-28.4	-16.4	H																																																																																																																																																																																																																																																																																																																																																																																		
Mid Ch, 2441MHz																																																																																																																																																																																																																																																																																																																																																																																																	
4.882	3.0	48.6	40.2	32.7	5.8	-34.8	0.0	0.0	52.3	43.9	74	54	-21.7	-10.1	V																																																																																																																																																																																																																																																																																																																																																																																		
7.323	3.0	40.0	28.0	35.5	7.3	-34.1	0.0	0.0	48.7	36.7	74	54	-25.3	-17.3	V																																																																																																																																																																																																																																																																																																																																																																																		
4.882	3.0	41.5	34.1	32.7	5.8	-34.8	0.0	0.0	45.2	37.8	74	54	-28.8	-16.2	H																																																																																																																																																																																																																																																																																																																																																																																		
7.323	3.0	39.5	27.2	35.5	7.3	-34.1	0.0	0.0	48.2	35.9	74	54	-25.8	-18.1	H																																																																																																																																																																																																																																																																																																																																																																																		
High Ch, 2480MHz																																																																																																																																																																																																																																																																																																																																																																																																	
4.960	3.0	48.9	41.1	32.8	5.9	-34.8	0.0	0.0	52.8	45.0	74	54	-21.2	-9.0	V																																																																																																																																																																																																																																																																																																																																																																																		
7.440	3.0	40.0	27.0	35.6	7.3	-34.1	0.0	0.0	48.9	35.9	74	54	-25.1	-18.1	V																																																																																																																																																																																																																																																																																																																																																																																		
4.960	3.0	44.5	36.5	32.8	5.9	-34.8	0.0	0.0	48.4	40.4	74	54	-25.6	-13.6	H																																																																																																																																																																																																																																																																																																																																																																																		
7.440	3.0	39.4	26.8	35.6	7.3	-34.1	0.0	0.0	48.3	35.7	74	54	-25.7	-18.3	H																																																																																																																																																																																																																																																																																																																																																																																		
Rev. 11.10.08																																																																																																																																																																																																																																																																																																																																																																																																	
Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																																																																																																																																																																																	
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim			Average Field Strength Limit																																																																																																																																																																																																																																																																																																																																																																																						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim			Peak Field Strength Limit																																																																																																																																																																																																																																																																																																																																																																																						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar			Margin vs. Average Limit																																																																																																																																																																																																																																																																																																																																																																																						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar			Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																																																																																						
CL	Cable Loss			HPF	High Pass Filter																																																																																																																																																																																																																																																																																																																																																																																												

9.2.2. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

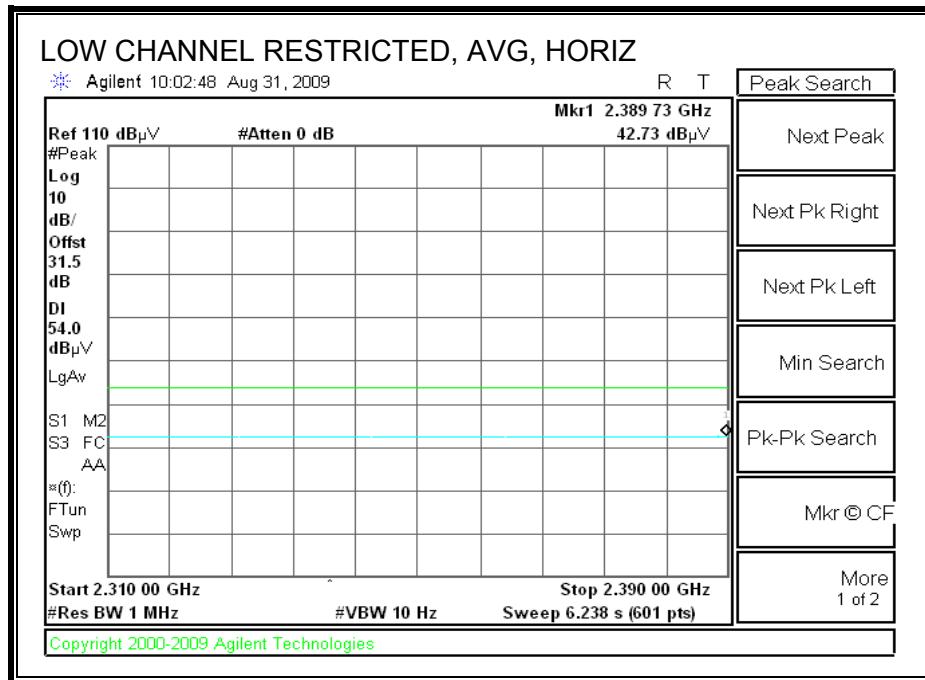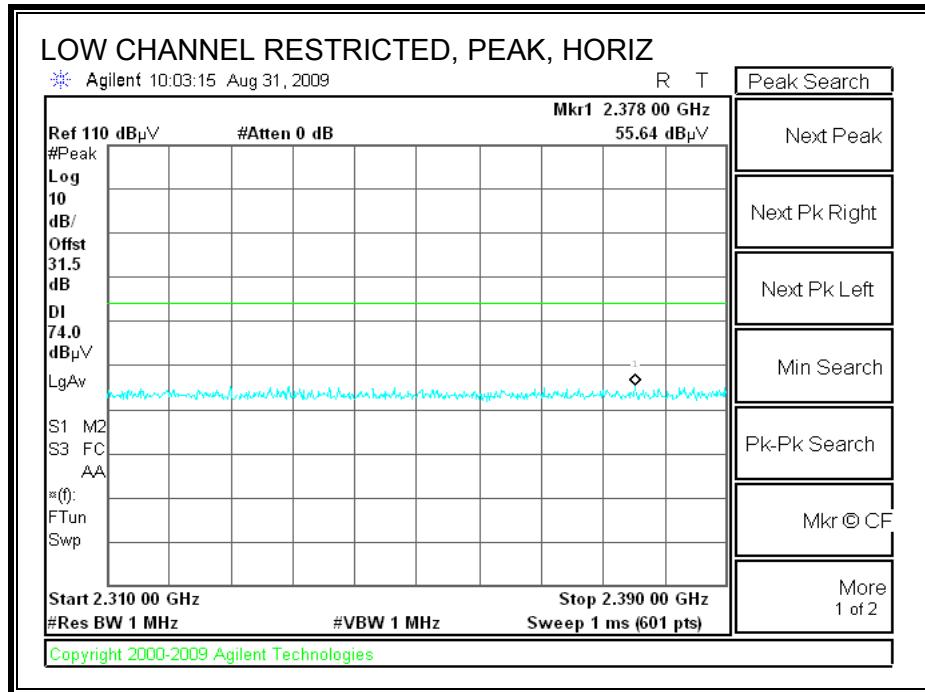



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

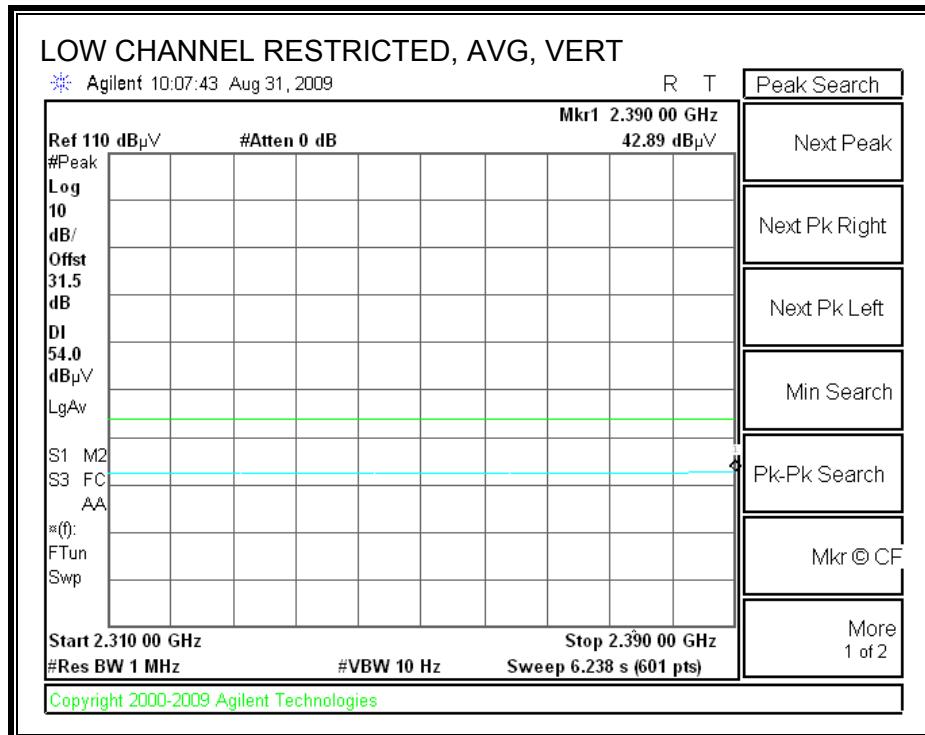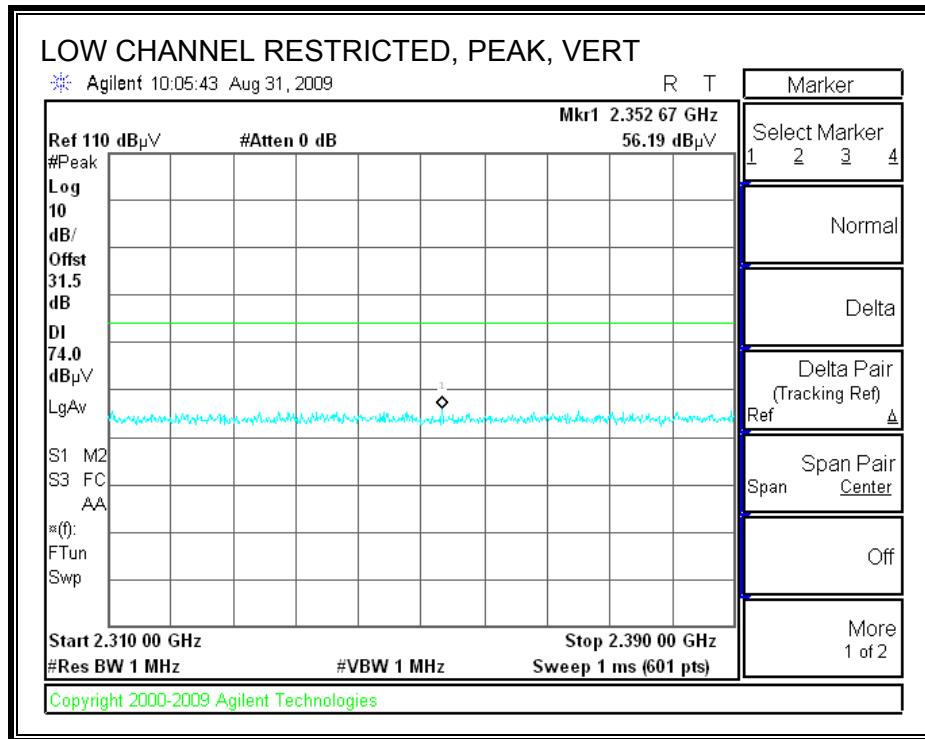

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

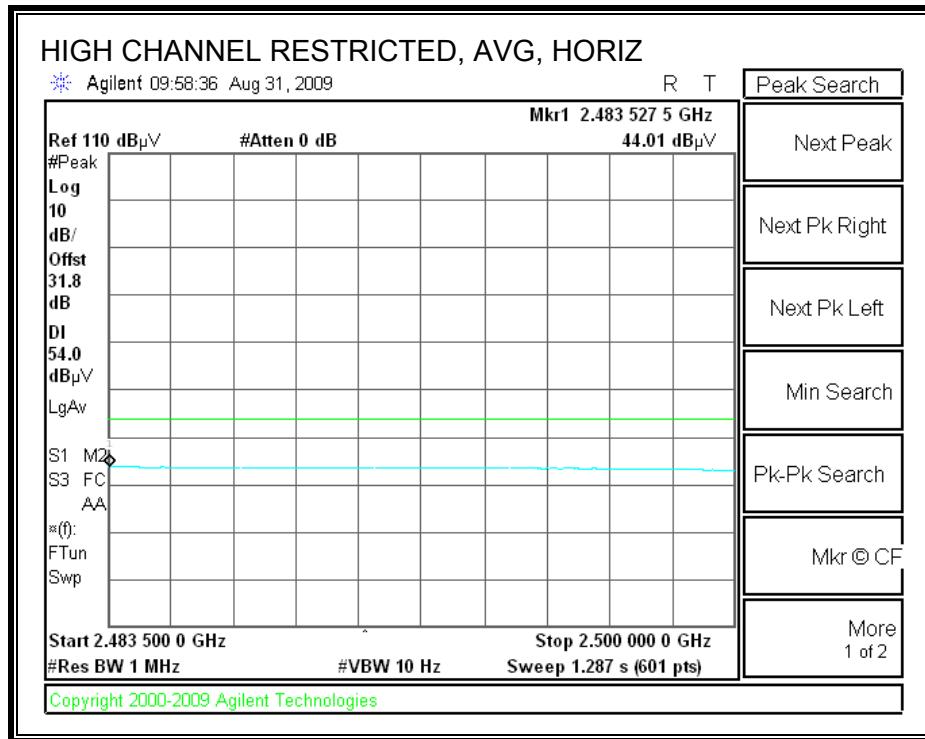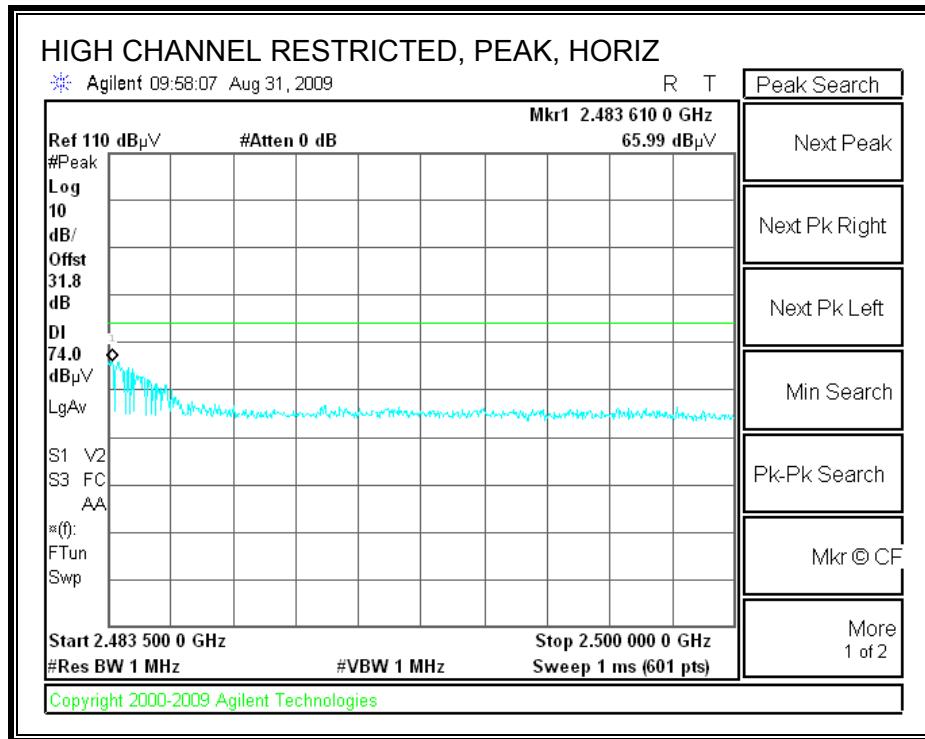

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

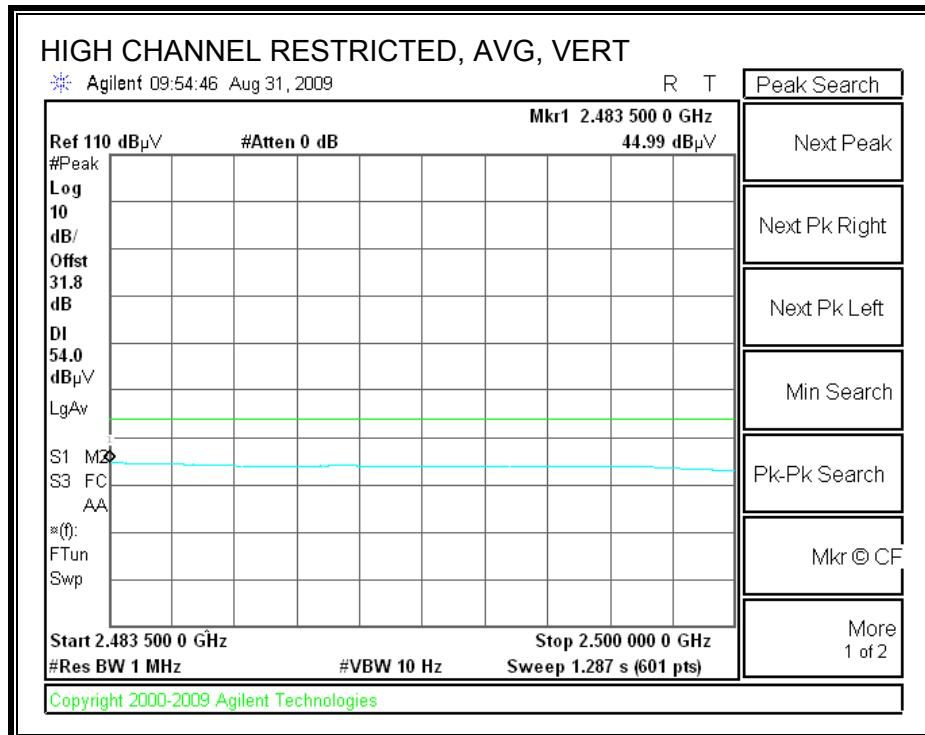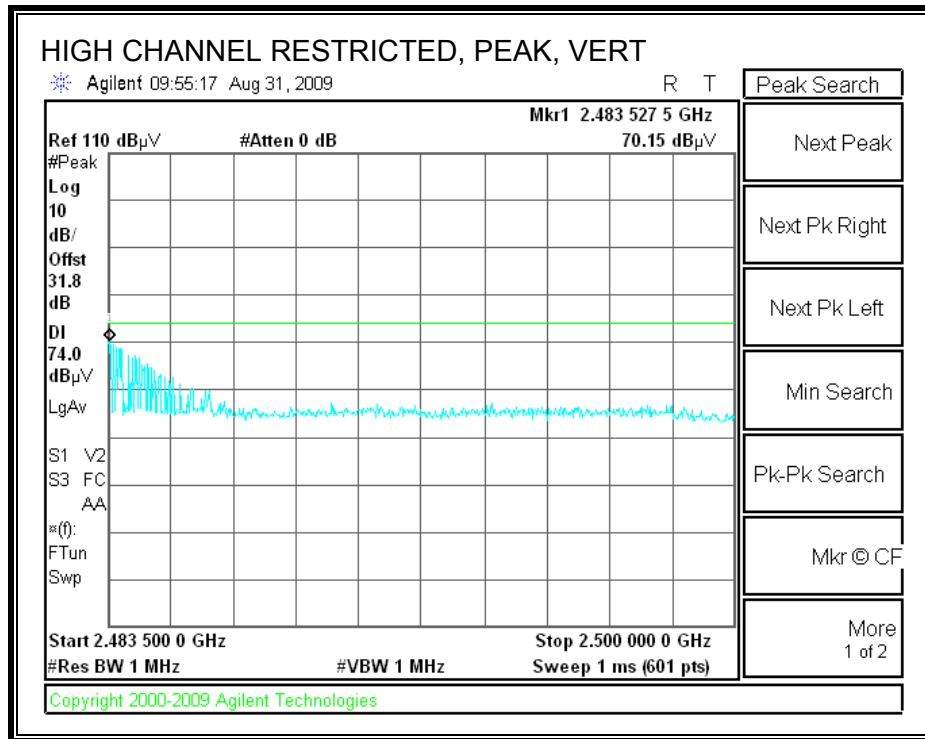



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																																																																																																							
<p>Company: Atheros Project #: 09U12738 Date: 8/31/09 Test Engineer: Chin Pang Configuration: EUT and Antenna Mode: 8PSK, TX</p> <p><u>Test Equipment:</u></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.205</td> </tr> <tr> <td colspan="14">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="5">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td>R_001</td> <td colspan="5">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> <tr> <td colspan="14">Low Ch, 2402MHz</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>46.5</td> <td>39.3</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>50.1</td> <td>42.9</td> <td>74</td> <td>54</td> <td>-23.9</td> <td>-11.1</td> <td>V</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>44.6</td> <td>37.5</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>48.2</td> <td>41.1</td> <td>74</td> <td>54</td> <td>-25.8</td> <td>-12.9</td> <td>H</td> </tr> <tr> <td colspan="14">Mid Ch, 2441MHz</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>45.2</td> <td>38.1</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>48.9</td> <td>41.8</td> <td>74</td> <td>54</td> <td>-25.1</td> <td>-12.2</td> <td>V</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>40.0</td> <td>27.6</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.7</td> <td>36.3</td> <td>74</td> <td>54</td> <td>-25.3</td> <td>-17.7</td> <td>V</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>42.0</td> <td>34.0</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>45.7</td> <td>37.7</td> <td>74</td> <td>54</td> <td>-28.3</td> <td>-16.3</td> <td>H</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>39.7</td> <td>27.6</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.4</td> <td>36.3</td> <td>74</td> <td>54</td> <td>-25.6</td> <td>-17.7</td> <td>H</td> </tr> <tr> <td colspan="14">High Ch, 2480MHz</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>47.4</td> <td>39.7</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>51.3</td> <td>43.6</td> <td>74</td> <td>54</td> <td>-22.7</td> <td>-10.4</td> <td>V</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>39.6</td> <td>26.7</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.5</td> <td>35.6</td> <td>74</td> <td>54</td> <td>-25.5</td> <td>-18.4</td> <td>V</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>43.7</td> <td>34.2</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>47.6</td> <td>38.1</td> <td>74</td> <td>54</td> <td>-26.4</td> <td>-15.9</td> <td>H</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>39.5</td> <td>26.6</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.4</td> <td>35.5</td> <td>74</td> <td>54</td> <td>-25.6</td> <td>-18.5</td> <td>H</td> </tr> <tr> <td colspan="14">Rev. 11.10.08</td> </tr> <tr> <td colspan="14">Note: No other emissions were detected above the system noise floor.</td> </tr> <tr> <td colspan="4"> f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss </td> <td colspan="4"> Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter </td> <td colspan="4"> Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit </td> </tr> </table>														Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205	Hi Frequency Cables														3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz					3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001	Average Measurements RBW=1MHz ; VBW=10Hz					f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low Ch, 2402MHz														4.804	3.0	46.5	39.3	32.7	5.8	-34.8	0.0	0.0	50.1	42.9	74	54	-23.9	-11.1	V	4.804	3.0	44.6	37.5	32.7	5.8	-34.8	0.0	0.0	48.2	41.1	74	54	-25.8	-12.9	H	Mid Ch, 2441MHz														4.882	3.0	45.2	38.1	32.7	5.8	-34.8	0.0	0.0	48.9	41.8	74	54	-25.1	-12.2	V	7.323	3.0	40.0	27.6	35.5	7.3	-34.1	0.0	0.0	48.7	36.3	74	54	-25.3	-17.7	V	4.882	3.0	42.0	34.0	32.7	5.8	-34.8	0.0	0.0	45.7	37.7	74	54	-28.3	-16.3	H	7.323	3.0	39.7	27.6	35.5	7.3	-34.1	0.0	0.0	48.4	36.3	74	54	-25.6	-17.7	H	High Ch, 2480MHz														4.960	3.0	47.4	39.7	32.8	5.9	-34.8	0.0	0.0	51.3	43.6	74	54	-22.7	-10.4	V	7.440	3.0	39.6	26.7	35.6	7.3	-34.1	0.0	0.0	48.5	35.6	74	54	-25.5	-18.4	V	4.960	3.0	43.7	34.2	32.8	5.9	-34.8	0.0	0.0	47.6	38.1	74	54	-26.4	-15.9	H	7.440	3.0	39.5	26.6	35.6	7.3	-34.1	0.0	0.0	48.4	35.5	74	54	-25.6	-18.5	H	Rev. 11.10.08														Note: No other emissions were detected above the system noise floor.														f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit			
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																																
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205																																																																																																																																																																																																																																																																																																																																
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																																							
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																															
3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001	Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																																																															
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																								
Low Ch, 2402MHz																																																																																																																																																																																																																																																																																																																																							
4.804	3.0	46.5	39.3	32.7	5.8	-34.8	0.0	0.0	50.1	42.9	74	54	-23.9	-11.1	V																																																																																																																																																																																																																																																																																																																								
4.804	3.0	44.6	37.5	32.7	5.8	-34.8	0.0	0.0	48.2	41.1	74	54	-25.8	-12.9	H																																																																																																																																																																																																																																																																																																																								
Mid Ch, 2441MHz																																																																																																																																																																																																																																																																																																																																							
4.882	3.0	45.2	38.1	32.7	5.8	-34.8	0.0	0.0	48.9	41.8	74	54	-25.1	-12.2	V																																																																																																																																																																																																																																																																																																																								
7.323	3.0	40.0	27.6	35.5	7.3	-34.1	0.0	0.0	48.7	36.3	74	54	-25.3	-17.7	V																																																																																																																																																																																																																																																																																																																								
4.882	3.0	42.0	34.0	32.7	5.8	-34.8	0.0	0.0	45.7	37.7	74	54	-28.3	-16.3	H																																																																																																																																																																																																																																																																																																																								
7.323	3.0	39.7	27.6	35.5	7.3	-34.1	0.0	0.0	48.4	36.3	74	54	-25.6	-17.7	H																																																																																																																																																																																																																																																																																																																								
High Ch, 2480MHz																																																																																																																																																																																																																																																																																																																																							
4.960	3.0	47.4	39.7	32.8	5.9	-34.8	0.0	0.0	51.3	43.6	74	54	-22.7	-10.4	V																																																																																																																																																																																																																																																																																																																								
7.440	3.0	39.6	26.7	35.6	7.3	-34.1	0.0	0.0	48.5	35.6	74	54	-25.5	-18.4	V																																																																																																																																																																																																																																																																																																																								
4.960	3.0	43.7	34.2	32.8	5.9	-34.8	0.0	0.0	47.6	38.1	74	54	-26.4	-15.9	H																																																																																																																																																																																																																																																																																																																								
7.440	3.0	39.5	26.6	35.6	7.3	-34.1	0.0	0.0	48.4	35.5	74	54	-25.6	-18.5	H																																																																																																																																																																																																																																																																																																																								
Rev. 11.10.08																																																																																																																																																																																																																																																																																																																																							
Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																																																																																																																							
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																															



9.3. SINGLE ANTENNA TRANSMITTER ABOVE 1 GHz

9.3.1. ENHANCED DATA RATE 8PSK MODULATION (WORST CASE)



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

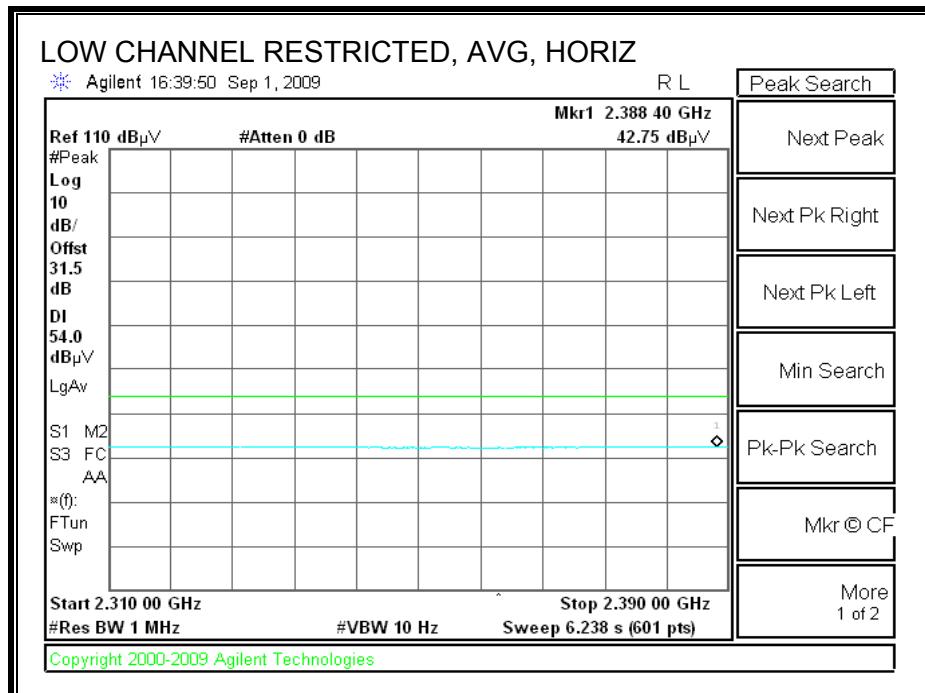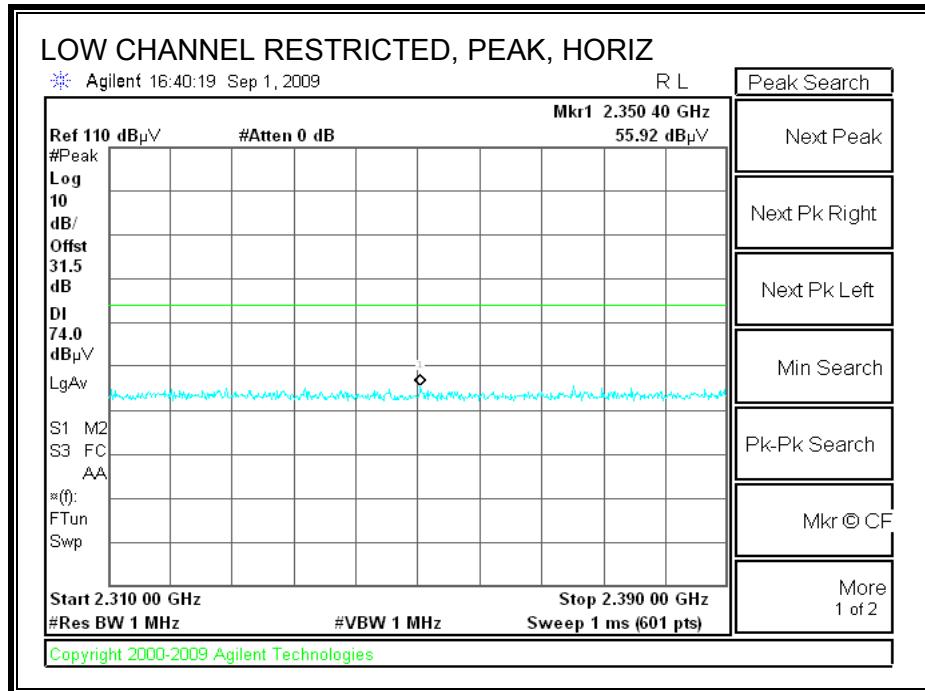



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

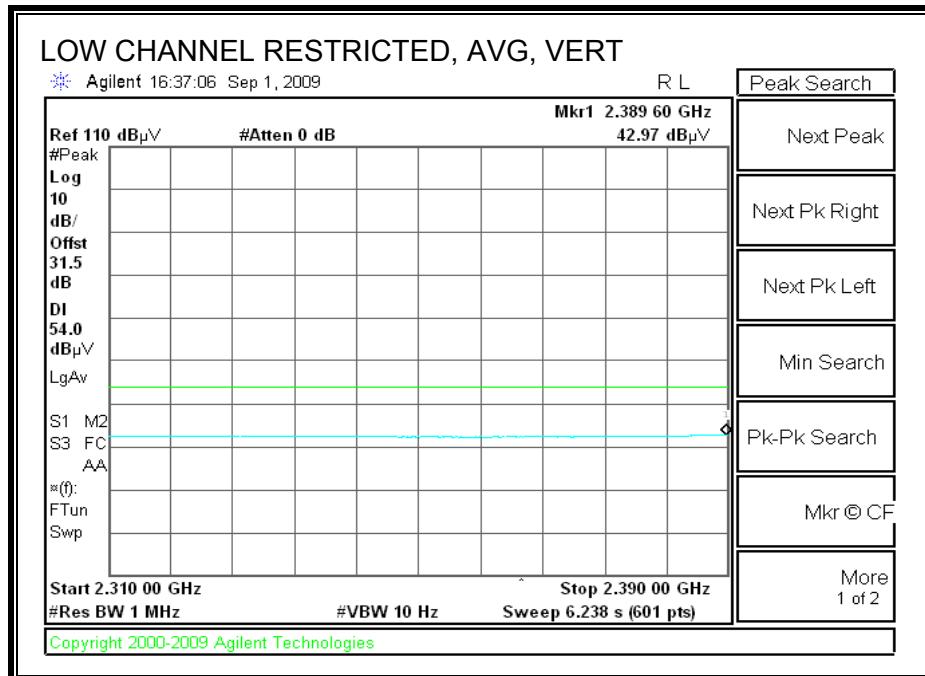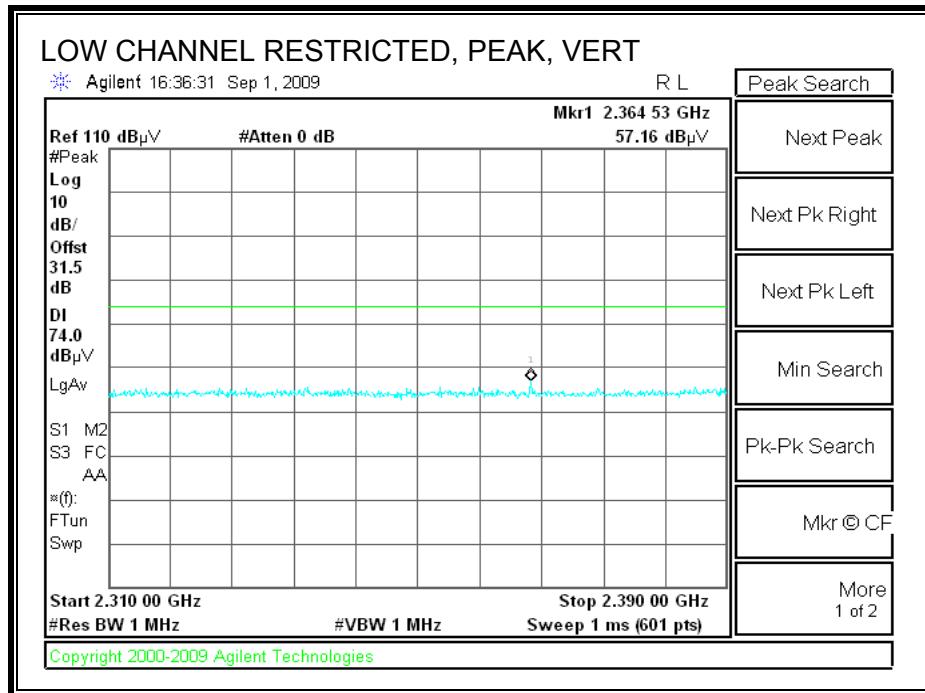

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

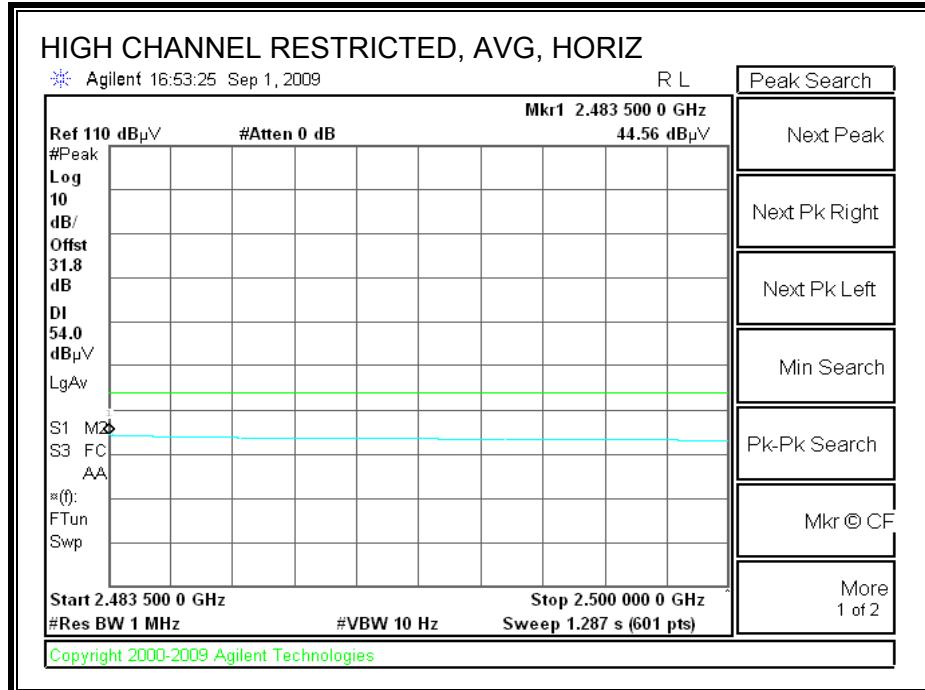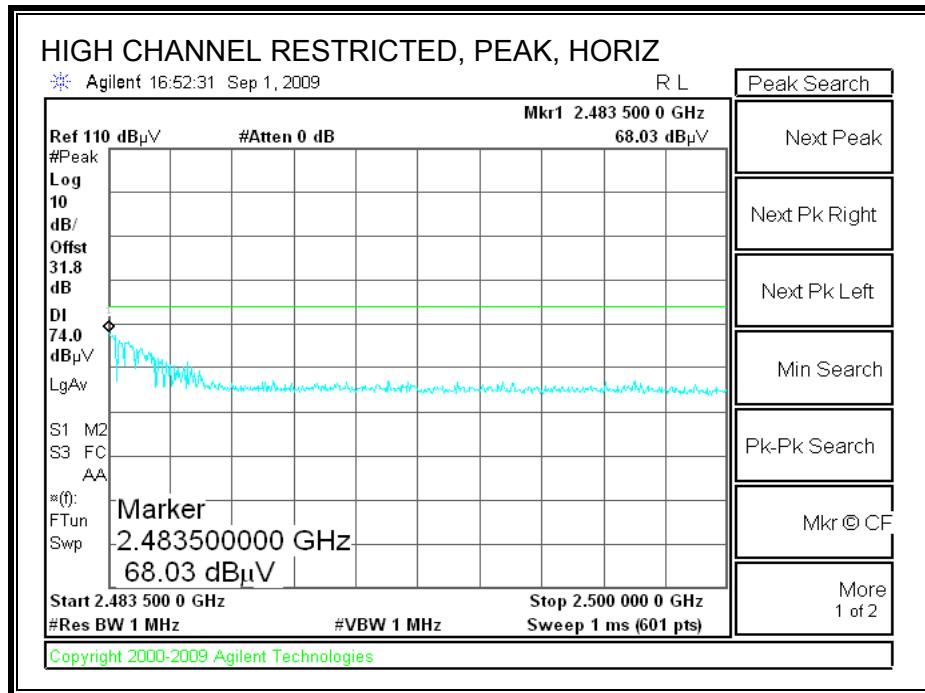

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

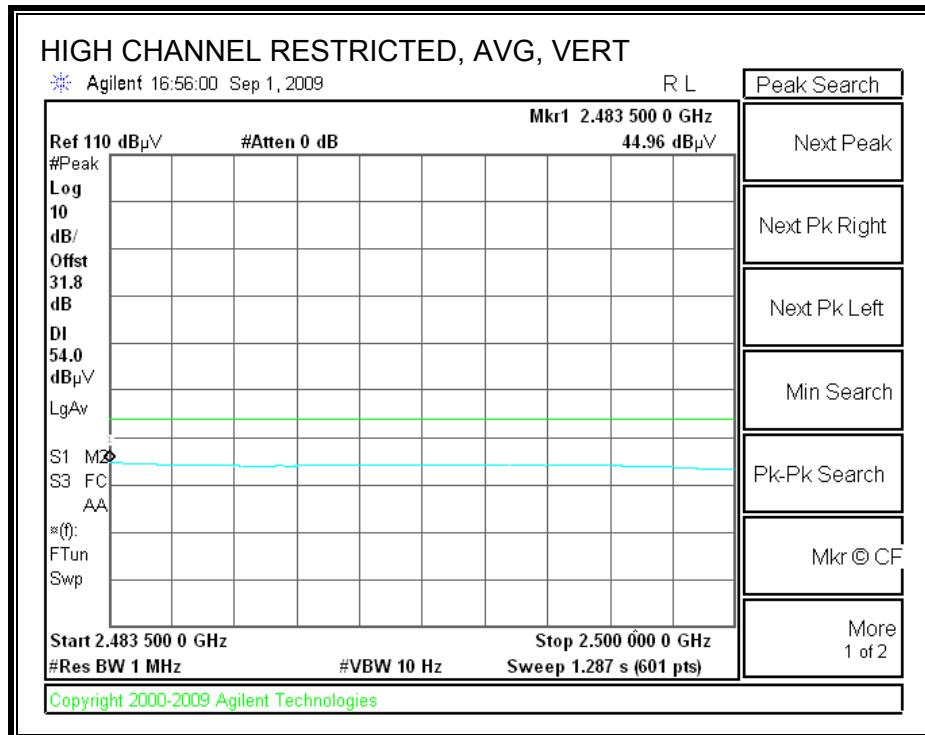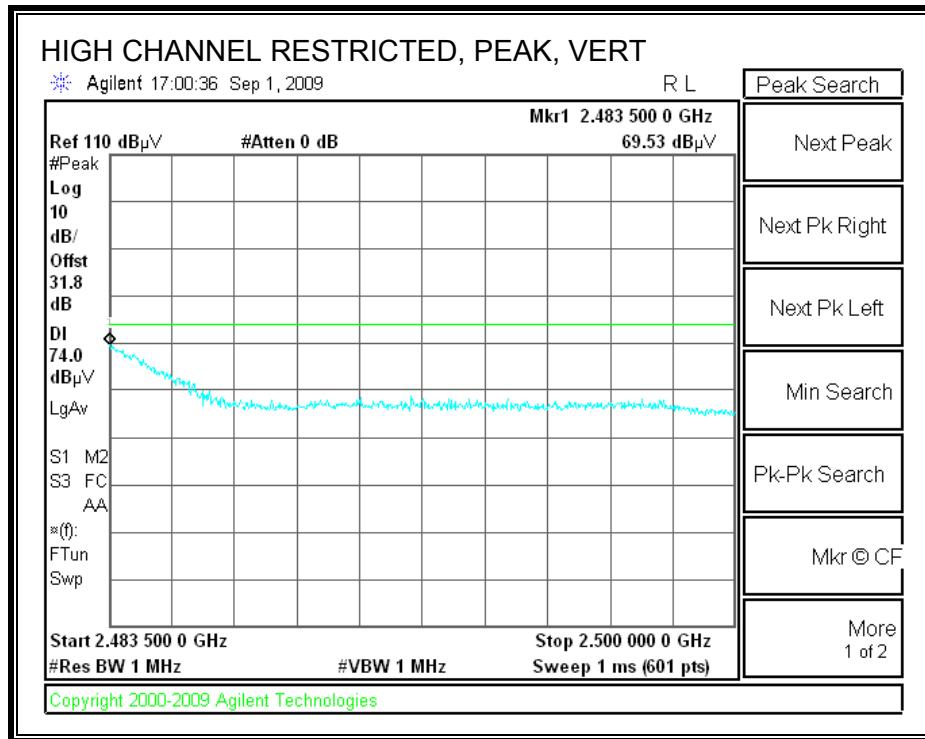

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																																																																																																																																																																
<p>Company: Atheros Project #: 09U12738 Date: 9/01/09 Test Engineer: Chin Pang Configuration: EUT (Single Antenna Port) and Antenna Mode: 8PSK, TX</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.205</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td>HPF</td> <td>Reject Filter</td> <td colspan="9"> <p>Peak Measurements RBW=VBW=1MHz</p> <p>Average Measurements RBW=1MHz ; VBW=10Hz</p> </td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td></td> <td>R_001</td> <td colspan="9"></td> </tr> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> <tr> <td colspan="15">Low Ch, 2402MHz</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>46.0</td> <td>37.8</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>49.6</td> <td>41.4</td> <td>74</td> <td>54</td> <td>-24.4</td> <td>-12.6</td> <td>V</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>45.5</td> <td>37.2</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>49.1</td> <td>40.8</td> <td>74</td> <td>54</td> <td>-24.9</td> <td>-13.2</td> <td>H</td> </tr> <tr> <td colspan="15">Mid Ch, 2441MHz</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>44.0</td> <td>35.0</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>47.7</td> <td>38.7</td> <td>74</td> <td>54</td> <td>-26.3</td> <td>-15.3</td> <td>V</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>40.0</td> <td>27.6</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.7</td> <td>36.3</td> <td>74</td> <td>54</td> <td>-25.3</td> <td>-17.7</td> <td>V</td> </tr> <tr> <td>4.882</td> <td>3.0</td> <td>44.2</td> <td>35.7</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>47.9</td> <td>39.4</td> <td>74</td> <td>54</td> <td>-26.1</td> <td>-14.6</td> <td>H</td> </tr> <tr> <td>7.323</td> <td>3.0</td> <td>39.5</td> <td>27.4</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.2</td> <td>36.1</td> <td>74</td> <td>54</td> <td>-25.8</td> <td>-17.9</td> <td>H</td> </tr> <tr> <td colspan="15">High Ch, 2480MHz</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>47.8</td> <td>37.5</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>51.7</td> <td>41.4</td> <td>74</td> <td>54</td> <td>-22.3</td> <td>-12.6</td> <td>V</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>39.6</td> <td>26.8</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.5</td> <td>35.7</td> <td>74</td> <td>54</td> <td>-25.5</td> <td>-18.3</td> <td>V</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>47.3</td> <td>37.2</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>51.2</td> <td>41.1</td> <td>74</td> <td>54</td> <td>-22.8</td> <td>-12.9</td> <td>H</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>39.5</td> <td>26.8</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.4</td> <td>35.7</td> <td>74</td> <td>54</td> <td>-25.6</td> <td>-18.3</td> <td>H</td> </tr> <tr> <td colspan="15">Rev. 11.10.08 Note: No other emissions were detected above the system noise floor.</td> </tr> <tr> <td>f</td> <td colspan="3">Measurement Frequency</td> <td>Amp</td> <td colspan="3">Preamp Gain</td> <td colspan="3"></td> <td>Avg Lim</td> <td colspan="3">Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td colspan="3">Distance to Antenna</td> <td>D Corr</td> <td colspan="3">Distance Correct to 3 meters</td> <td colspan="3"></td> <td>Pk Lim</td> <td colspan="3">Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td colspan="3">Analyzer Reading</td> <td>Avg</td> <td colspan="3">Average Field Strength @ 3 m</td> <td colspan="3"></td> <td>Avg Mar</td> <td colspan="3">Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td colspan="3">Antenna Factor</td> <td>Peak</td> <td colspan="3">Calculated Peak Field Strength</td> <td colspan="3"></td> <td>Pk Mar</td> <td colspan="3">Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td colspan="3">Cable Loss</td> <td>HPF</td> <td colspan="3"></td> <td colspan="3"></td> <td></td> <td colspan="3"></td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	<p>Peak Measurements RBW=VBW=1MHz</p> <p>Average Measurements RBW=1MHz ; VBW=10Hz</p>									3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001										f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low Ch, 2402MHz															4.804	3.0	46.0	37.8	32.7	5.8	-34.8	0.0	0.0	49.6	41.4	74	54	-24.4	-12.6	V	4.804	3.0	45.5	37.2	32.7	5.8	-34.8	0.0	0.0	49.1	40.8	74	54	-24.9	-13.2	H	Mid Ch, 2441MHz															4.882	3.0	44.0	35.0	32.7	5.8	-34.8	0.0	0.0	47.7	38.7	74	54	-26.3	-15.3	V	7.323	3.0	40.0	27.6	35.5	7.3	-34.1	0.0	0.0	48.7	36.3	74	54	-25.3	-17.7	V	4.882	3.0	44.2	35.7	32.7	5.8	-34.8	0.0	0.0	47.9	39.4	74	54	-26.1	-14.6	H	7.323	3.0	39.5	27.4	35.5	7.3	-34.1	0.0	0.0	48.2	36.1	74	54	-25.8	-17.9	H	High Ch, 2480MHz															4.960	3.0	47.8	37.5	32.8	5.9	-34.8	0.0	0.0	51.7	41.4	74	54	-22.3	-12.6	V	7.440	3.0	39.6	26.8	35.6	7.3	-34.1	0.0	0.0	48.5	35.7	74	54	-25.5	-18.3	V	4.960	3.0	47.3	37.2	32.8	5.9	-34.8	0.0	0.0	51.2	41.1	74	54	-22.8	-12.9	H	7.440	3.0	39.5	26.8	35.6	7.3	-34.1	0.0	0.0	48.4	35.7	74	54	-25.6	-18.3	H	Rev. 11.10.08 Note: No other emissions were detected above the system noise floor.															f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			CL	Cable Loss			HPF										
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																																																																																									
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205																																																																																																																																																																																																																																																																																																																																																																																									
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																																																																																																
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	<p>Peak Measurements RBW=VBW=1MHz</p> <p>Average Measurements RBW=1MHz ; VBW=10Hz</p>																																																																																																																																																																																																																																																																																																																																																																																											
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001																																																																																																																																																																																																																																																																																																																																																																																												
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																																																																																	
Low Ch, 2402MHz																																																																																																																																																																																																																																																																																																																																																																																																
4.804	3.0	46.0	37.8	32.7	5.8	-34.8	0.0	0.0	49.6	41.4	74	54	-24.4	-12.6	V																																																																																																																																																																																																																																																																																																																																																																																	
4.804	3.0	45.5	37.2	32.7	5.8	-34.8	0.0	0.0	49.1	40.8	74	54	-24.9	-13.2	H																																																																																																																																																																																																																																																																																																																																																																																	
Mid Ch, 2441MHz																																																																																																																																																																																																																																																																																																																																																																																																
4.882	3.0	44.0	35.0	32.7	5.8	-34.8	0.0	0.0	47.7	38.7	74	54	-26.3	-15.3	V																																																																																																																																																																																																																																																																																																																																																																																	
7.323	3.0	40.0	27.6	35.5	7.3	-34.1	0.0	0.0	48.7	36.3	74	54	-25.3	-17.7	V																																																																																																																																																																																																																																																																																																																																																																																	
4.882	3.0	44.2	35.7	32.7	5.8	-34.8	0.0	0.0	47.9	39.4	74	54	-26.1	-14.6	H																																																																																																																																																																																																																																																																																																																																																																																	
7.323	3.0	39.5	27.4	35.5	7.3	-34.1	0.0	0.0	48.2	36.1	74	54	-25.8	-17.9	H																																																																																																																																																																																																																																																																																																																																																																																	
High Ch, 2480MHz																																																																																																																																																																																																																																																																																																																																																																																																
4.960	3.0	47.8	37.5	32.8	5.9	-34.8	0.0	0.0	51.7	41.4	74	54	-22.3	-12.6	V																																																																																																																																																																																																																																																																																																																																																																																	
7.440	3.0	39.6	26.8	35.6	7.3	-34.1	0.0	0.0	48.5	35.7	74	54	-25.5	-18.3	V																																																																																																																																																																																																																																																																																																																																																																																	
4.960	3.0	47.3	37.2	32.8	5.9	-34.8	0.0	0.0	51.2	41.1	74	54	-22.8	-12.9	H																																																																																																																																																																																																																																																																																																																																																																																	
7.440	3.0	39.5	26.8	35.6	7.3	-34.1	0.0	0.0	48.4	35.7	74	54	-25.6	-18.3	H																																																																																																																																																																																																																																																																																																																																																																																	
Rev. 11.10.08 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																																																																																																																																																																																
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																																																																																																																				
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																																																																																																																				
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																																																																																																																				
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																																																																																				
CL	Cable Loss			HPF																																																																																																																																																																																																																																																																																																																																																																																												

9.4. RECEIVER ABOVE 1 GHz (DUAL ANTENNA CONFIGURATION)

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																																																																																														
<p>Company: Atheros Project #: 09U12738 Date: 9/1/2009 Test Engineer: Chin Pang Configuration: EUT/Antenna Mode: BT, RX</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.209</td> </tr> <tr> <td colspan="18">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="9">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td></td> <td colspan="9">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th colspan="2">Notes (V/H)</th> </tr> <tr> <th>Mid Ch</th> <th></th> </tr> <tr> <td>1.121</td> <td>3.0</td> <td>58.3</td> <td>39.7</td> <td>24.9</td> <td>2.5</td> <td>-38.1</td> <td>0.0</td> <td>0.0</td> <td>47.6</td> <td>28.9</td> <td>74</td> <td>54</td> <td>-26.4</td> <td>-25.1</td> <td>H</td> </tr> <tr> <td>1.493</td> <td>3.0</td> <td>59.2</td> <td>41.5</td> <td>26.1</td> <td>2.9</td> <td>-37.6</td> <td>0.0</td> <td>0.0</td> <td>50.7</td> <td>33.0</td> <td>74</td> <td>54</td> <td>-23.3</td> <td>-21.0</td> <td>H</td> </tr> <tr> <td>2.495</td> <td>3.0</td> <td>55.0</td> <td>34.7</td> <td>28.3</td> <td>3.9</td> <td>-36.3</td> <td>0.0</td> <td>0.0</td> <td>51.0</td> <td>30.7</td> <td>74</td> <td>54</td> <td>-23.0</td> <td>-23.3</td> <td>H</td> </tr> <tr> <td>1.498</td> <td>3.0</td> <td>57.3</td> <td>38.0</td> <td>26.1</td> <td>2.9</td> <td>-37.6</td> <td>0.0</td> <td>0.0</td> <td>48.8</td> <td>29.5</td> <td>74</td> <td>54</td> <td>-25.2</td> <td>-24.5</td> <td>V</td> </tr> <tr> <td>1.598</td> <td>3.0</td> <td>56.6</td> <td>36.4</td> <td>26.5</td> <td>3.0</td> <td>-37.4</td> <td>0.0</td> <td>0.0</td> <td>48.7</td> <td>28.5</td> <td>74</td> <td>54</td> <td>-25.3</td> <td>-25.5</td> <td>V</td> </tr> <tr> <td>2.500</td> <td>3.0</td> <td>56.4</td> <td>35.6</td> <td>28.3</td> <td>3.9</td> <td>-36.3</td> <td>0.0</td> <td>0.0</td> <td>52.4</td> <td>31.6</td> <td>74</td> <td>54</td> <td>-21.6</td> <td>-22.4</td> <td>V</td> </tr> <tr> <td colspan="18">Rev. 11.10.08 Note: No emissions were found within above 1 GHz of 20dB below the system noise floor.</td> </tr> <tr> <td>f</td> <td colspan="3">Measurement Frequency</td> <td>Amp</td> <td colspan="3">Preamp Gain</td> <td colspan="3"></td> <td>Avg Lim</td> <td colspan="5">Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td colspan="3">Distance to Antenna</td> <td>D Corr</td> <td colspan="3">Distance Correct to 3 meters</td> <td colspan="3"></td> <td>Pk Lim</td> <td colspan="5">Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td colspan="3">Analyzer Reading</td> <td>Avg</td> <td colspan="3">Average Field Strength @ 3 m</td> <td colspan="3"></td> <td>Avg Mar</td> <td colspan="5">Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td colspan="3">Antenna Factor</td> <td>Peak</td> <td colspan="3">Calculated Peak Field Strength</td> <td colspan="3"></td> <td>Pk Mar</td> <td colspan="5">Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td colspan="3">Cable Loss</td> <td>HPF</td> <td colspan="3">High Pass Filter</td> <td colspan="3"></td> <td></td> <td colspan="5"></td> </tr> </table>																		Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.209	Hi Frequency Cables																		3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz									3' cable 22807700	12' cable 22807600	20' cable 22807500						Average Measurements RBW=1MHz ; VBW=10Hz									f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		Mid Ch																	1.121	3.0	58.3	39.7	24.9	2.5	-38.1	0.0	0.0	47.6	28.9	74	54	-26.4	-25.1	H	1.493	3.0	59.2	41.5	26.1	2.9	-37.6	0.0	0.0	50.7	33.0	74	54	-23.3	-21.0	H	2.495	3.0	55.0	34.7	28.3	3.9	-36.3	0.0	0.0	51.0	30.7	74	54	-23.0	-23.3	H	1.498	3.0	57.3	38.0	26.1	2.9	-37.6	0.0	0.0	48.8	29.5	74	54	-25.2	-24.5	V	1.598	3.0	56.6	36.4	26.5	3.0	-37.4	0.0	0.0	48.7	28.5	74	54	-25.3	-25.5	V	2.500	3.0	56.4	35.6	28.3	3.9	-36.3	0.0	0.0	52.4	31.6	74	54	-21.6	-22.4	V	Rev. 11.10.08 Note: No emissions were found within above 1 GHz of 20dB below the system noise floor.																		f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit					Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit					Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit					AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit					CL	Cable Loss			HPF	High Pass Filter											
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																							
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.209																																																																																																																																																																																																																																																																																																																							
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																														
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																						
3' cable 22807700	12' cable 22807600	20' cable 22807500						Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																																																						
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																															
Mid Ch																																																																																																																																																																																																																																																																																																																														
1.121	3.0	58.3	39.7	24.9	2.5	-38.1	0.0	0.0	47.6	28.9	74	54	-26.4	-25.1	H																																																																																																																																																																																																																																																																																																															
1.493	3.0	59.2	41.5	26.1	2.9	-37.6	0.0	0.0	50.7	33.0	74	54	-23.3	-21.0	H																																																																																																																																																																																																																																																																																																															
2.495	3.0	55.0	34.7	28.3	3.9	-36.3	0.0	0.0	51.0	30.7	74	54	-23.0	-23.3	H																																																																																																																																																																																																																																																																																																															
1.498	3.0	57.3	38.0	26.1	2.9	-37.6	0.0	0.0	48.8	29.5	74	54	-25.2	-24.5	V																																																																																																																																																																																																																																																																																																															
1.598	3.0	56.6	36.4	26.5	3.0	-37.4	0.0	0.0	48.7	28.5	74	54	-25.3	-25.5	V																																																																																																																																																																																																																																																																																																															
2.500	3.0	56.4	35.6	28.3	3.9	-36.3	0.0	0.0	52.4	31.6	74	54	-21.6	-22.4	V																																																																																																																																																																																																																																																																																																															
Rev. 11.10.08 Note: No emissions were found within above 1 GHz of 20dB below the system noise floor.																																																																																																																																																																																																																																																																																																																														
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																																																		
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																																																		
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																																																		
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																		
CL	Cable Loss			HPF	High Pass Filter																																																																																																																																																																																																																																																																																																																									

9.5. WORST-CASE BELOW 1 GHz (DUAL ANTENNA CONFIGURATION)

SPURIOUS EMISSIONS 30 TO 1000 MHz

30-1000MHz Frequency Measurement Compliance Certification Services, Fremont 5m Chamber														
Test Engr:	Chin Pang													
Date:	09/01/09													
Project #:	09U12738													
Company:	Atheros													
EUT Description:	802.11b/g/n + BT2.1+EDR MISO combo													
EUT M/N:	AR5B195													
Test Target:	FCC Class B													
Mode Oper:	TX, BT													
f	Measurement Frequency			Amp	Preamp Gain				Margin	Margin vs. Limit				
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters									
Read	Analyzer Reading			Filter	Filter Insert Loss									
AF	Antenna Factor			Corr.	Calculated Field Strength									
CL	Cable Loss			Limit	Field Strength Limit									
f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes	
147.125	3.0	45.6	12.8	1.0	27.8	0.0	0.0	31.5	43.5	-12.0	V	EP		
221.168	3.0	48.1	11.9	1.2	27.4	0.0	0.0	33.9	46.0	-12.1	V	EP		
374.654	3.0	44.1	14.6	1.7	27.9	0.0	0.0	32.6	46.0	-13.4	V	EP		
443.897	3.0	46.5	15.8	1.8	28.3	0.0	0.0	35.9	46.0	-10.1	V	EP		
601.584	3.0	43.1	18.5	2.2	28.6	0.0	0.0	35.2	46.0	-10.8	V	EP		
99.723	3.0	49.3	9.3	0.8	28.2	0.0	0.0	31.2	43.5	-12.3	H	EP		
214.808	3.0	47.4	11.9	1.2	27.4	0.0	0.0	33.1	43.5	-10.4	H	EP		
221.288	3.0	52.0	11.9	1.2	27.4	0.0	0.0	37.8	46.0	-8.2	H	EP		
368.294	3.0	48.7	14.5	1.7	27.8	0.0	0.0	37.1	46.0	-8.9	H	EP		
443.897	3.0	44.0	15.8	1.8	28.3	0.0	0.0	33.4	46.0	-12.6	H	EP		
Rev. 1.27.09														
Note: No other emissions were detected above the system noise floor.														

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.20	54.21	--	36.89	0.00	63.61	53.61	-9.40	-16.72	L1
0.27	48.06	--	30.31	0.00	61.24	51.24	-13.18	-20.93	L1
5.68	40.85	--	31.76	0.00	60.00	50.00	-19.15	-18.24	L1
1.98	53.93	--	36.30	0.00	56.00	46.00	-2.07	-9.70	L2
0.27	47.94	--	30.63	0.00	61.24	51.24	-13.30	-20.61	L2
5.68	42.97	--	32.38	0.00	60.00	50.00	-17.03	-17.62	L2
6 Worst Data									

LINE 1 RESULTS

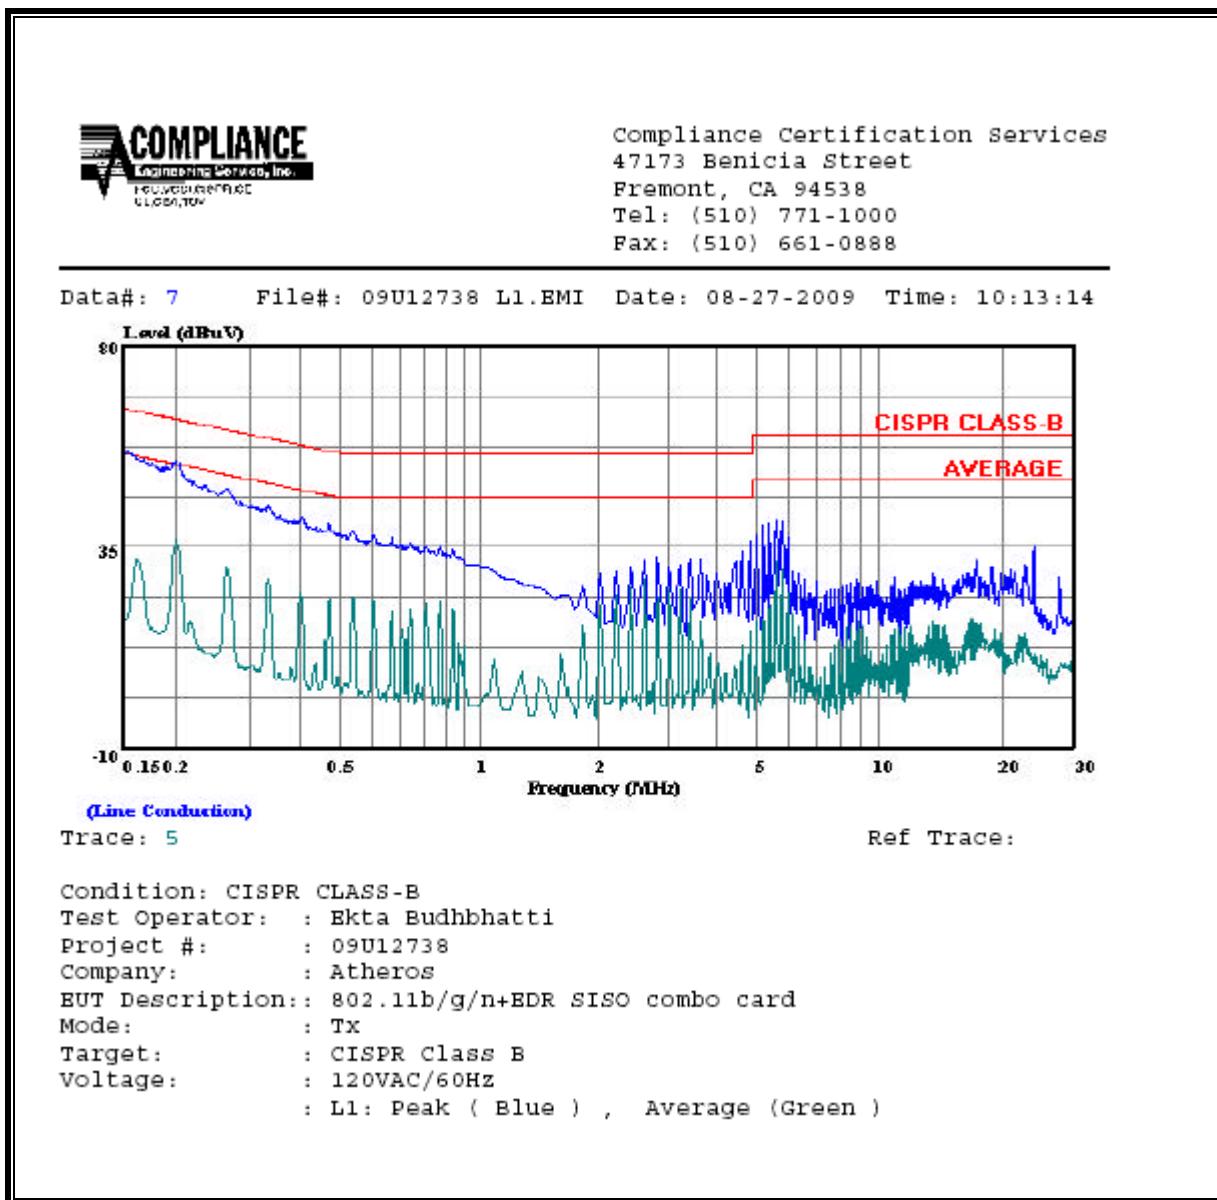

LINE 2 RESULTS

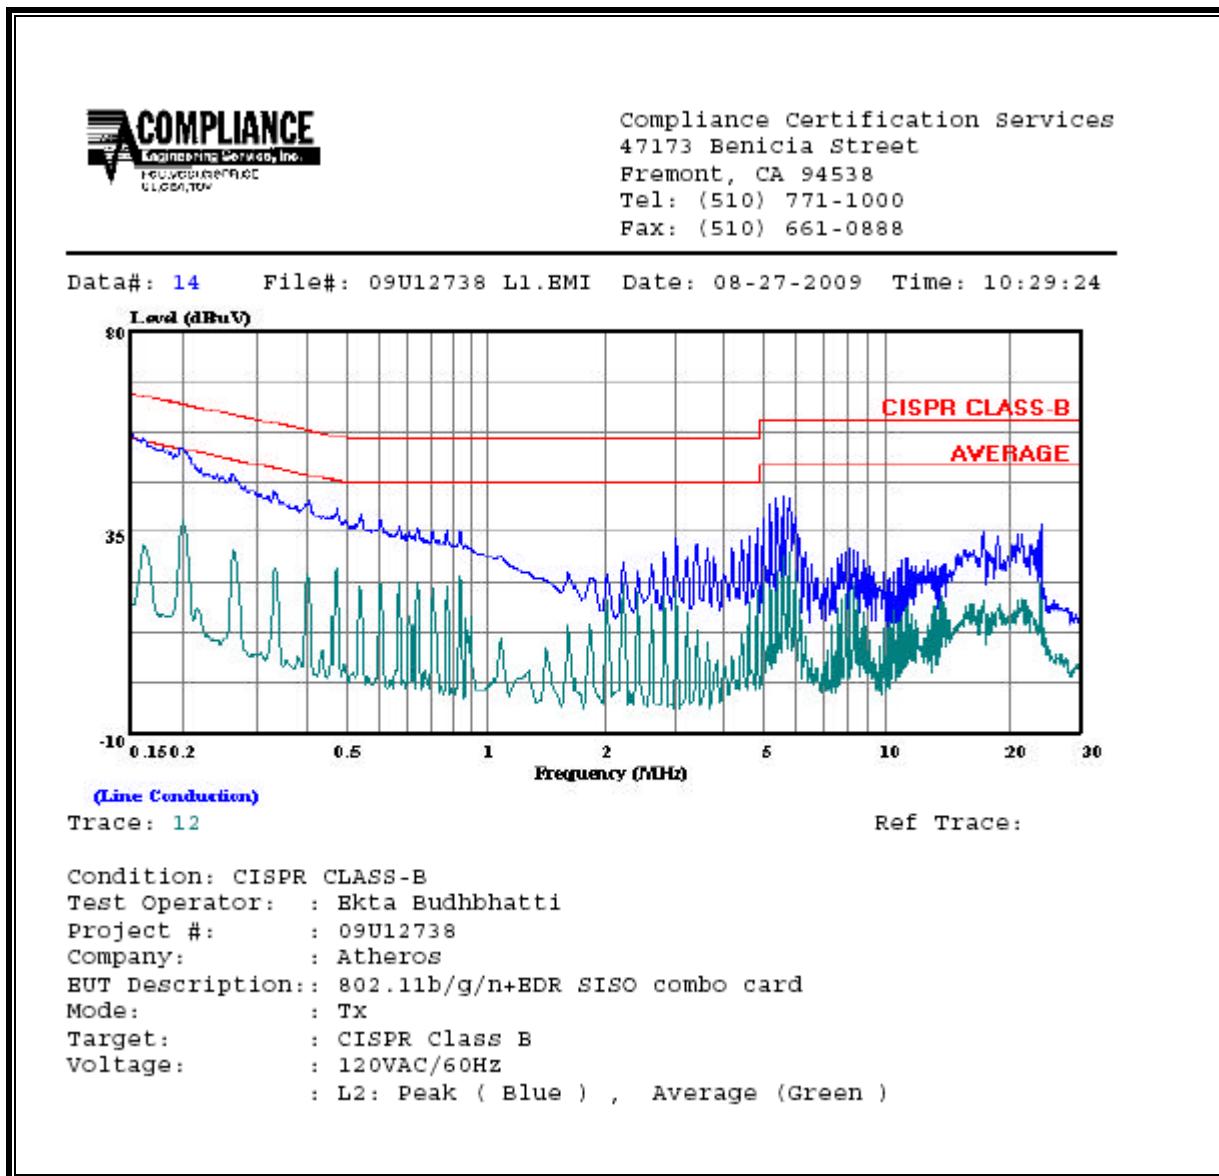

11. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/f	2.19/f		6
10–30	28	2.19/f		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes:

1. Frequency, f , is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μ T) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

DUAL ANTENNA

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m^2)	FCC Power Density (mW/cm^2)
2.4 GHz	Bluetooth	0.20	4.21	3.62	0.01	0.001

SINGLANT ANTENNA

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m^2)	FCC Power Density (mW/cm^2)
2.4 GHz	Bluetooth	0.20	4.61	3.62	0.01	0.001