

# IC SAR Test Report

APPLICANT : Qualcomm Atheros, Inc.  
EQUIPMENT : PCIe 802.11 abgn + USB BT Module  
BRAND NAME : Qualcomm Atheros  
MODEL NAME : AR5B22  
IC : 4104A-AR5B22  
: IC RSS-102 Issue 4 (2010)  
STANDARD : IEC 62209-2 (2010)  
: IEEE 1528-2003

The product was completely tested on Dec. 08, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



---

Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

---

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

IC : 4104A-AR5B22

Page Number : 1 of 42

Report Issued Date : Dec. 21, 2012

Report Version : Rev. 02

## **Table of Contents**

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>1. Statement of Compliance .....</b>                           | <b>4</b>  |
| <b>2. Administration Data .....</b>                               | <b>5</b>  |
| 2.1 Testing Laboratory.....                                       | 5         |
| 2.2 Applicant .....                                               | 5         |
| 2.3 Manufacturer .....                                            | 5         |
| 2.4 Application Details.....                                      | 5         |
| <b>3. General Information .....</b>                               | <b>6</b>  |
| 3.1 Description of Equipment Under Test (EUT) .....               | 6         |
| 3.2 Product Photos.....                                           | 7         |
| 3.3 Applied Standard.....                                         | 7         |
| 3.4 Device Category and SAR Limits .....                          | 7         |
| 3.5 Test Conditions.....                                          | 7         |
| <b>4. Specific Absorption Rate (SAR).....</b>                     | <b>8</b>  |
| 4.1 Introduction .....                                            | 8         |
| 4.2 SAR Definition.....                                           | 8         |
| <b>5. SAR Measurement System.....</b>                             | <b>9</b>  |
| 5.1 E-Field Probe .....                                           | 10        |
| 5.2 Data Acquisition Electronics (DAE) .....                      | 11        |
| 5.3 Robot .....                                                   | 11        |
| 5.4 Measurement Server.....                                       | 11        |
| 5.5 Phantom.....                                                  | 12        |
| 5.6 Device Holder.....                                            | 13        |
| 5.7 Data Storage and Evaluation .....                             | 14        |
| 5.8 Test Equipment List.....                                      | 16        |
| <b>6. Tissue Simulating Liquids.....</b>                          | <b>17</b> |
| <b>7. SAR Measurement Evaluation .....</b>                        | <b>22</b> |
| 7.1 Purpose of System Performance check .....                     | 22        |
| 7.2 System Setup.....                                             | 22        |
| 7.3 SAR System Verification Results .....                         | 24        |
| <b>8. EUT Testing Position .....</b>                              | <b>25</b> |
| <b>9. Measurement Procedures .....</b>                            | <b>26</b> |
| 9.1 Spatial Peak SAR Evaluation .....                             | 26        |
| 9.2 Area & Zoom Scan Procedures.....                              | 27        |
| 9.3 Volume Scan Procedures.....                                   | 27        |
| 9.4 SAR Averaged Methods .....                                    | 27        |
| 9.5 Power Drift Monitoring.....                                   | 27        |
| <b>10. SAR Test Configurations.....</b>                           | <b>28</b> |
| 10.1 Exposure Positions Consideration .....                       | 28        |
| 10.2 Conducted RF Output Power (Unit: dBm) .....                  | 30        |
| <b>11. SAR Test Results .....</b>                                 | <b>36</b> |
| 11.1 Test Records for Body SAR Test .....                         | 36        |
| 11.2 Simultaneous Transmission SAR Analysis and Measurements..... | 38        |
| <b>12. Uncertainty Assessment .....</b>                           | <b>39</b> |
| <b>13. References.....</b>                                        | <b>42</b> |

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of SAR Measurement**

**Appendix C. DASY Calibration Certificate**

**Appendix D. Product Photos**

**Appendix E. Test Setup Photos**



## Revision History

| REPORT NO. | VERSION | DESCRIPTION                                         | ISSUED DATE   |
|------------|---------|-----------------------------------------------------|---------------|
| CA2N1408   | Rev. 01 | Initial issue of report                             | Dec. 13, 2012 |
| CA2N1408   | Rev. 02 | Revised Uncertainty Assessment table in section 12. | Dec. 21, 2012 |
|            |         |                                                     |               |
|            |         |                                                     |               |
|            |         |                                                     |               |
|            |         |                                                     |               |
|            |         |                                                     |               |
|            |         |                                                     |               |

## **1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for **Qualcomm Atheros, Inc., PCIe 802.11 abgn + USB BT Module, AR5B22**, are as follows.

### **<Standalone SAR>**

| <b>Band</b>      | <b>Position</b>        | <b>SAR<sub>1g</sub><br/>(W/kg)</b> |
|------------------|------------------------|------------------------------------|
| <b>WLAN 2.4G</b> | <b>Body (0 cm Gap)</b> | <b>0.133</b>                       |
| <b>WLAN 5G</b>   | <b>Body (0 cm Gap)</b> | <b>1.37</b>                        |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in IC RSS-102 Issue 4 (2010), and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and IEC 62209-2 (2010).

## **2. Administration Data**

### **2.1 Testing Laboratory**

|                    |                                                                                                                                                                 |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                      |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |

### **2.2 Applicant**

|              |                                          |
|--------------|------------------------------------------|
| Company Name | Qualcomm ATHEROS, INC.                   |
| Address      | 1700 Technology Drive, San Jose, CA95110 |

### **2.3 Manufacturer**

|              |                                          |
|--------------|------------------------------------------|
| Company Name | Qualcomm Atheros, Inc.                   |
| Address      | 1700 Technology Drive, San Jose, CA95110 |

### **2.4 Application Details**

|                               |               |
|-------------------------------|---------------|
| Date of Start during the Test | Nov. 30, 2012 |
| Date of End during the Test   | Dec. 08, 2012 |

### **3. General Information**

#### **3.1 Description of Equipment Under Test (EUT)**

| Product Feature & Specification                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT</b>                                                                                                                                                                                                                                                                                                                                                                                                    | PCIe 802.11 abgn + USB BT Module                                                                                                                                                                                                   |
| <b>Brand Name</b>                                                                                                                                                                                                                                                                                                                                                                                             | Qualcomm Atheros                                                                                                                                                                                                                   |
| <b>Model Name</b>                                                                                                                                                                                                                                                                                                                                                                                             | AR5B22                                                                                                                                                                                                                             |
| <b>IC</b>                                                                                                                                                                                                                                                                                                                                                                                                     | 4104A-AR5B22                                                                                                                                                                                                                       |
| <b>Tx Frequency</b>                                                                                                                                                                                                                                                                                                                                                                                           | WLAN2.4G: 2412 MHz ~ 2462 MHz<br>WLAN5G: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz;<br>5500 MHz ~ 5700 MHz; 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz                                                                   |
| <b>Measure Maximum Average Output Power to Antenna</b>                                                                                                                                                                                                                                                                                                                                                        | 802.11b: 19.98 dBm<br>802.11g: 19.34 dBm<br>802.11n-HT20 (2.4GHz): 19.53 dBm<br>802.11n-HT40 (2.4GHz): 16.58 dBm<br>802.11a: 19.65 dBm<br>802.11n-HT20 (5GHz): 18.15 dBm<br>802.11n-HT40 (5GHz): 17.97 dBm<br>Bluetooth : 10.6 dBm |
| <b>Antenna Type</b>                                                                                                                                                                                                                                                                                                                                                                                           | SLOT Antenna                                                                                                                                                                                                                       |
| <b>Uplink Modulations</b>                                                                                                                                                                                                                                                                                                                                                                                     | 802.11b: DSSS (BPSK / QPSK / CCK)<br>802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>Bluetooth : GFSK<br>Bluetooth EDR : $\pi/4$ -DQPSK, 8-DPSK<br>Bluetooth v4.0+LE: GFSK                                                     |
| <b>EUT Stage</b>                                                                                                                                                                                                                                                                                                                                                                                              | Identical Prototype                                                                                                                                                                                                                |
| <b>Remark:</b> <ol style="list-style-type: none"> <li>1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.</li> <li>2. Voice call is not supported.</li> <li>3. BT Average power refer to ADT FCC test report FCC ID: PPD-AR5B225, Report No: RF991126E02-1</li> <li>4. 5600 MHz ~ 5650 MHz is notched.</li> </ol> |                                                                                                                                                                                                                                    |

### **3.2 Product Photos**

Please refer to Appendix D.

### **3.3 Applied Standard**

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- IC RSS-102 Issue 4(2010)
- IEC 62209-2(2010)
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v04
- FCC KDB 616217 D03 v01
- FCC KDB 248227 D01 v01r02

### **3.4 Device Category and SAR Limits**

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### **3.5 Test Conditions**

#### **3.5.1 Ambient Condition**

|                     |             |
|---------------------|-------------|
| Ambient Temperature | 20 to 24 °C |
| Humidity            | < 60 %      |

#### **3.5.2 Test Configuration**

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 5. SAR Measurement System

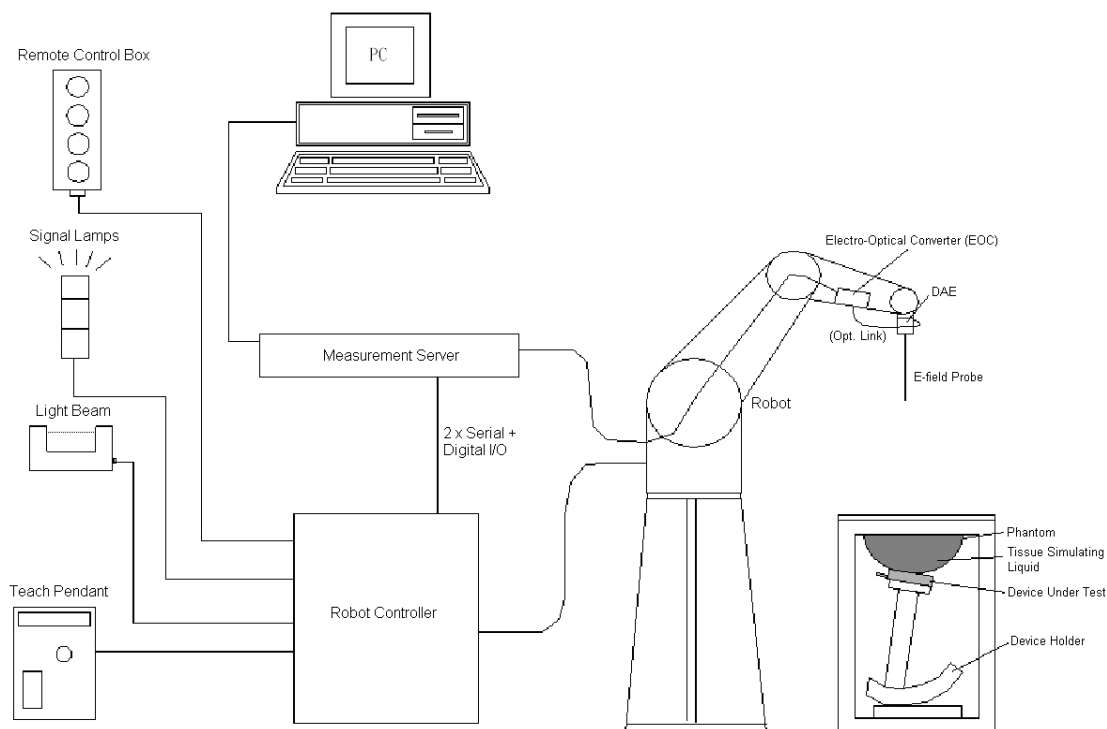

**Fig 5.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

## 5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### 5.1.1 E-Field Probe Specification

#### <ET3DV6 / ET3DV6R Probe >

|                      |                                                                                                                                                                                                                      |                                                                                                                               |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in optical fiber for surface detection system.<br>Built-in shielding against static charges.<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) | <br><b>Fig 5.2 Photo of ET3DV6/ET3DV6R</b> |
| <b>Frequency</b>     | 10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB                                                                                                                                                                             |                                                                                                                               |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.4$ dB in HSL (rotation normal to probe axis)                                                                                                              |                                                                                                                               |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                                                     |                                                                                                                               |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 16 mm)<br>Tip diameter: 6.8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.7 mm                                                                                       |                                                                                                                               |

#### <EX3DV4 / ES3DV4 Probe>

|                      |                                                                                                                                                             |                                                                                                                                |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) | <br><b>Fig 5.3 Photo of EX3DV4/ES3DV4</b> |
| <b>Frequency</b>     | 10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB                                                                                                                    |                                                                                                                                |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                         |                                                                                                                                |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB<br>(noise: typically $< 1$ $\mu$ W/g)                                                                     |                                                                                                                                |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                        |                                                                                                                                |

### 5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

## 5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.




**Fig 5.4 Photo of DAE**

## 5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

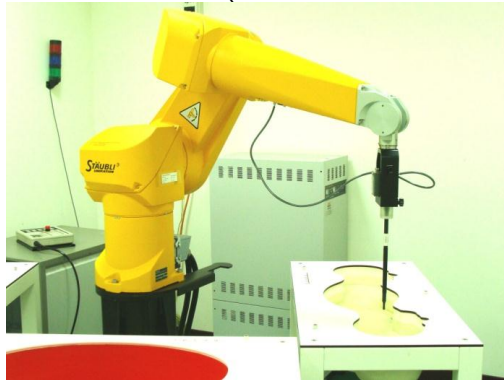

**Fig 5.5 Photo of DASY4**



**Fig 5.6 Photo of DASY5**

## 5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



**Fig 5.7 Photo of Server for DASY4**



**Fig 5.8 Photo of Server for DASY5**

## 5.5 Phantom

### <SAM Twin Phantom>

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| <b>Shell Thickness</b>   | 2 ± 0.2 mm;<br>Center ear point: 6 ± 0.2 mm                |
| <b>Filling Volume</b>    | Approx. 25 liters                                          |
| <b>Dimensions</b>        | Length: 1000 mm; Width: 500 mm;<br>Height: adjustable feet |
| <b>Measurement Areas</b> | Left Hand, Right Hand, Flat Phantom                        |



**Fig 5.9 Photo of SAM Phantom**

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### <ELI4 Phantom>

|                        |                                                  |
|------------------------|--------------------------------------------------|
| <b>Shell Thickness</b> | 2 ± 0.2 mm (sagging: <1%)                        |
| <b>Filling Volume</b>  | Approx. 30 liters                                |
| <b>Dimensions</b>      | Major ellipse axis: 600 mm<br>Minor axis: 400 mm |



**Fig 5.10 Photo of ELI4 Phantom**

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

### <Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

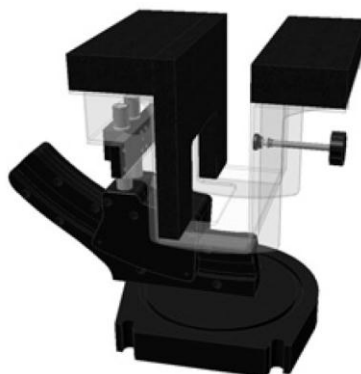


Fig 5.12 Laptop Extension Kit

## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-loss media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

|                            |                           |                                         |
|----------------------------|---------------------------|-----------------------------------------|
| <b>Probe parameters :</b>  | - Sensitivity             | $\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$ |
|                            | - Conversion factor       | $\text{ConvF}_i$                        |
|                            | - Diode compression point | $\text{dcp}_i$                          |
| <b>Device parameters :</b> | - Frequency               | $f$                                     |
|                            | - Crest factor            | $cf$                                    |
| <b>Media parameters :</b>  | - Conductivity            | $\sigma$                                |
|                            | - Density                 | $\rho$                                  |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $\text{SAR}$  = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g/cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



### 5.8 Test Equipment List

| Manufacturer | Name of Equipment                  | Type/Model    | Serial Number | Calibration   |               |
|--------------|------------------------------------|---------------|---------------|---------------|---------------|
|              |                                    |               |               | Last Cal.     | Due Date      |
| SPEAG        | 2450MHz System Validation Kit      | D2450V2       | 736           | Jul. 25, 2011 | Jul. 24, 2013 |
| SPEAG        | 5GHz System Validation Kit         | D5GHzV2       | 1006          | Jan. 18, 2012 | Jan. 17, 2013 |
| SPEAG        | Data Acquisition Electronics       | DAE4          | 1279          | May. 03, 2012 | May. 02, 2013 |
| SPEAG        | Data Acquisition Electronics       | DAE4          | 1338          | Jun. 12, 2012 | Jun. 11, 2013 |
| SPEAG        | Dosimetric E-Field Probe           | EX3DV4        | 3697          | Sep. 28, 2012 | Sep. 27, 2013 |
| SPEAG        | Dosimetric E-Field Probe           | EX3DV4        | 3792          | Jun. 21, 2012 | Jun. 20, 2013 |
| Wisewind     | Thermometer                        | ETP-101       | TM560         | Nov. 13, 2012 | Nov. 12, 2013 |
| Wisewind     | Thermometer                        | ETP-101       | TM685         | Nov. 13, 2012 | Nov. 12, 2013 |
| Wisewind     | Thermometer                        | HTC-1         | TM642         | Nov. 13, 2012 | Nov. 12, 2013 |
| Wisewind     | Thermometer                        | HTC-1         | TM281         | Nov. 13, 2012 | Nov. 12, 2013 |
| H.M.IRIS     | Thermometer                        | TH-08         | TM658         | Nov. 13, 2012 | Nov. 12, 2013 |
| SPEAG        | Device Holder                      | N/A           | N/A           | NCR           | NCR           |
| SPEAG        | ELI4 Phantom                       | QD OVA 002 AA | 1173          | NCR           | NCR           |
| SPEAG        | ELI4 Phantom                       | QD OVA 001 BB | 1026          | NCR           | NCR           |
| Agilent      | Network Analyzer                   | E5071C        | MY46101588    | May. 11, 2012 | May. 10, 2013 |
| Agilent      | ESG Vector Series Signal Generator | E4438C        | MY49070755    | Oct. 02, 2012 | Oct. 01, 2013 |
| Anritsu      | Power Meter                        | ML2495A       | 1132003       | Aug. 14, 2012 | Aug. 13, 2013 |
| Agilent      | Dual Directional Coupler           | 778D          | 50422         | Note 4        |               |
| Woken        | Attenuator 1                       | WK0602-XX     | N/A           | Note 4        |               |
| PE           | Attenuator 2                       | PE7005-10     | N/A           | Note 4        |               |
| PE           | Attenuator 3                       | PE7005- 3     | N/A           | Note 4        |               |
| Agilent      | Dielectric Probe Kit               | 85070D        | US01440205    | Note 5        |               |
| AR           | Power Amplifier                    | 5S1G4M2       | 0328767       | Note 6        |               |
| R&S          | Spectrum Analyzer                  | FSP           | 101131        | Jul. 23, 2012 | Jul. 22, 2013 |

**Table 5.1 Test Equipment List**

**Note:**

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 450824 D02, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D2450V2, SN: 736, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have 24dBm to the dipole. For system check, power amplifier is deemed not required for correct measurement; the power meter is critical and we do have calibration for it
7. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.



## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



**Fig 6.1 Photo of Liquid Height for Head SAR**



**Fig 6.2 Photo of Liquid Height for Body SAR**

The following table gives the recipes for tissue simulating liquid.

| Frequency<br>(MHz) | Water<br>(%) | Sugar<br>(%) | Cellulose<br>(%) | Salt<br>(%) | Preventol<br>(%) | DGBE<br>(%) | Conductivity<br>( $\sigma$ ) | Permittivity<br>( $\epsilon_r$ ) |
|--------------------|--------------|--------------|------------------|-------------|------------------|-------------|------------------------------|----------------------------------|
| 2450               | 68.6         | 0            | 0                | 0           | 0                | 31.4        | 1.95                         | 52.7                             |

**Table 6.1 Recipes of Tissue Simulating Liquid**

### Simulating Liquid for 5G, Manufactured by SPEAG

| Ingredients        | (% by weight) |
|--------------------|---------------|
| Water              | 64~78%        |
| Mineral oil        | 11~18%        |
| Emulsifiers        | 9~15%         |
| Additives and Salt | 2~3%          |

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

| Freq. (MHz) | Liquid Type | Temp. (°C) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date       |
|-------------|-------------|------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|------------|
| 2450        | Body        | 21.5       | 2.02                      | 53.936                        | 1.95                             | 52.7                                 | 3.59                   | 2.35                       | ±5        | 2012/11/30 |
| 2450        | Body        | 21.3       | 2.015                     | 53.957                        | 1.95                             | 52.7                                 | 3.33                   | 2.39                       | ±5        | 2012/12/8  |
| 5200        | Body        | 21.5       | 5.102                     | 47.486                        | 5.3                              | 49                                   | -3.74                  | -3.09                      | ±5        | 2012/11/30 |
| 5200        | Body        | 21.4       | 5.325                     | 47.518                        | 5.3                              | 49                                   | 0.47                   | -3.02                      | ±5        | 2012/12/7  |
| 5500        | Body        | 21.5       | 5.474                     | 47.019                        | 5.65                             | 48.6                                 | -3.12                  | -3.25                      | ±5        | 2012/11/30 |
| 5500        | Body        | 21.4       | 5.723                     | 46.972                        | 5.65                             | 48.6                                 | 1.29                   | -3.35                      | ±5        | 2012/12/7  |
| 5800        | Body        | 21.5       | 6.243                     | 46.387                        | 6                                | 48.2                                 | 4.05                   | -3.76                      | ±5        | 2012/12/2  |
| 5800        | Body        | 21.4       | 6.229                     | 46.417                        | 6                                | 48.2                                 | 3.82                   | -3.70                      | ±5        | 2012/12/7  |

**Table 6.2 Measuring Results for Simulating Liquid**

| CH  | Freq.<br>(MHz) | Liquid<br>Type | Conductivity<br>( $\sigma$ ) | Permittivity<br>( $\epsilon_r$ ) | Conductivity<br>Target ( $\sigma$ ) | Permittivity<br>Target ( $\epsilon_r$ ) | Delta ( $\sigma$ )<br>(%) | Delta ( $\epsilon_r$ )<br>(%) | Limit<br>(%) | Date       |
|-----|----------------|----------------|------------------------------|----------------------------------|-------------------------------------|-----------------------------------------|---------------------------|-------------------------------|--------------|------------|
| 1   | 2412           | Body           | 1.963                        | 54.02                            | 1.90                                | 52.7                                    | 3.32                      | 2.50                          | $\pm 5$      | 2012/11/30 |
| 6   | 2437           | Body           | 2.001                        | 53.956                           | 1.93                                | 52.7                                    | 3.68                      | 2.38                          | $\pm 5$      | 2012/11/30 |
| 11  | 2462           | Body           | 2.037                        | 53.92                            | 1.97                                | 52.7                                    | 3.40                      | 2.31                          | $\pm 5$      | 2012/11/30 |
| 36  | 5180           | Body           | 5.068                        | 47.485                           | 5.28                                | 49.0                                    | -4.02                     | -3.09                         | $\pm 5$      | 2012/11/30 |
| 38  | 5190           | Body           | 5.085                        | 47.485                           | 5.29                                | 49.0                                    | -3.88                     | -3.09                         | $\pm 5$      | 2012/11/30 |
| 40  | 5200           | Body           | 5.102                        | 47.486                           | 5.30                                | 49.0                                    | -3.74                     | -3.09                         | $\pm 5$      | 2012/11/30 |
| 44  | 5220           | Body           | 5.115                        | 47.430                           | 5.32                                | 49.0                                    | -3.85                     | -3.20                         | $\pm 5$      | 2012/11/30 |
| 46  | 5230           | Body           | 5.122                        | 47.402                           | 5.33                                | 49.0                                    | -3.90                     | -3.26                         | $\pm 5$      | 2012/11/30 |
| 48  | 5240           | Body           | 5.129                        | 47.374                           | 5.35                                | 49.0                                    | -4.13                     | -3.32                         | $\pm 5$      | 2012/11/30 |
| 52  | 5260           | Body           | 5.156                        | 47.327                           | 5.37                                | 48.9                                    | -3.99                     | -3.22                         | $\pm 5$      | 2012/11/30 |
| 54  | 5270           | Body           | 5.175                        | 47.308                           | 5.38                                | 48.9                                    | -3.81                     | -3.26                         | $\pm 5$      | 2012/11/30 |
| 56  | 5280           | Body           | 5.194                        | 47.289                           | 5.39                                | 48.9                                    | -3.63                     | -3.29                         | $\pm 5$      | 2012/11/30 |
| 60  | 5300           | Body           | 5.233                        | 47.251                           | 5.42                                | 48.9                                    | -3.45                     | -3.37                         | $\pm 5$      | 2012/11/30 |
| 62  | 5310           | Body           | 5.239                        | 47.247                           | 5.43                                | 48.9                                    | -3.52                     | -3.38                         | $\pm 5$      | 2012/11/30 |
| 64  | 5320           | Body           | 5.245                        | 47.243                           | 5.44                                | 48.9                                    | -3.59                     | -3.39                         | $\pm 5$      | 2012/11/30 |
| 100 | 5500           | Body           | 5.474                        | 47.019                           | 5.65                                | 48.6                                    | -3.12                     | -3.25                         | $\pm 5$      | 2012/11/30 |
| 102 | 5510           | Body           | 5.489                        | 47.006                           | 5.66                                | 48.6                                    | -3.03                     | -3.28                         | $\pm 5$      | 2012/11/30 |
| 104 | 5520           | Body           | 5.504                        | 46.994                           | 5.67                                | 48.6                                    | -2.93                     | -3.30                         | $\pm 5$      | 2012/11/30 |
| 108 | 5540           | Body           | 5.534                        | 46.969                           | 5.70                                | 48.6                                    | -2.92                     | -3.36                         | $\pm 5$      | 2012/11/30 |
| 112 | 5560           | Body           | 5.561                        | 46.925                           | 5.72                                | 48.5                                    | -2.79                     | -3.25                         | $\pm 5$      | 2012/11/30 |
| 116 | 5580           | Body           | 5.585                        | 46.862                           | 5.74                                | 48.5                                    | -2.71                     | -3.38                         | $\pm 5$      | 2012/11/30 |
| 118 | 5590           | Body           | 5.597                        | 46.831                           | 5.75                                | 48.5                                    | -2.67                     | -3.44                         | $\pm 5$      | 2012/11/30 |
| 120 | 5600           | Body           | 5.609                        | 46.799                           | 5.77                                | 48.5                                    | -2.80                     | -3.51                         | $\pm 5$      | 2012/11/30 |
| 124 | 5620           | Body           | 5.646                        | 46.780                           | 5.79                                | 48.4                                    | -2.48                     | -3.35                         | $\pm 5$      | 2012/11/30 |
| 128 | 5640           | Body           | 5.684                        | 46.760                           | 5.81                                | 48.4                                    | -2.17                     | -3.39                         | $\pm 5$      | 2012/11/30 |
| 132 | 5660           | Body           | 5.717                        | 46.739                           | 5.84                                | 48.4                                    | -2.11                     | -3.43                         | $\pm 5$      | 2012/11/30 |
| 134 | 5670           | Body           | 5.731                        | 46.727                           | 5.85                                | 48.4                                    | -2.04                     | -3.46                         | $\pm 5$      | 2012/11/30 |
| 136 | 5680           | Body           | 5.745                        | 46.716                           | 5.86                                | 48.4                                    | -1.97                     | -3.48                         | $\pm 5$      | 2012/11/30 |
| 140 | 5700           | Body           | 5.772                        | 46.694                           | 5.88                                | 48.3                                    | -1.83                     | -3.33                         | $\pm 5$      | 2012/11/30 |
| 149 | 5745           | Body           | 5.885                        | 46.733                           | 5.94                                | 48.3                                    | -0.93                     | -3.25                         | $\pm 5$      | 2012/11/30 |
| 151 | 5755           | Body           | 5.902                        | 46.716                           | 5.95                                | 48.3                                    | -0.81                     | -3.28                         | $\pm 5$      | 2012/11/30 |
| 153 | 5765           | Body           | 5.910                        | 46.674                           | 5.96                                | 48.2                                    | -0.84                     | -3.17                         | $\pm 5$      | 2012/11/30 |
| 157 | 5785           | Body           | 5.926                        | 46.590                           | 5.98                                | 48.2                                    | -0.90                     | -3.34                         | $\pm 5$      | 2012/11/30 |
| 159 | 5795           | Body           | 5.935                        | 46.548                           | 5.99                                | 48.2                                    | -0.92                     | -3.43                         | $\pm 5$      | 2012/11/30 |
| 161 | 5805           | Body           | 5.951                        | 46.515                           | 6.01                                | 48.2                                    | -0.98                     | -3.49                         | $\pm 5$      | 2012/11/30 |
| 165 | 5825           | Body           | 6.001                        | 46.470                           | 6.03                                | 48.2                                    | -0.49                     | -3.59                         | $\pm 5$      | 2012/11/30 |

| CH  | Freq. (MHz) | Liquid Type | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date      |
|-----|-------------|-------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|-----------|
| 36  | 5180        | Body        | 5.300                     | 47.493                        | 5.28                             | 49.0                                 | 0.37                   | -3.08                      | $\pm 5$   | 2012/12/2 |
| 38  | 5190        | Body        | 5.318                     | 47.490                        | 5.29                             | 49.0                                 | 0.53                   | -3.08                      | $\pm 5$   | 2012/12/2 |
| 40  | 5200        | Body        | 5.336                     | 47.488                        | 5.30                             | 49.0                                 | 0.69                   | -3.09                      | $\pm 5$   | 2012/12/2 |
| 44  | 5220        | Body        | 5.351                     | 47.426                        | 5.32                             | 49.0                                 | 0.59                   | -3.21                      | $\pm 5$   | 2012/12/2 |
| 46  | 5230        | Body        | 5.359                     | 47.395                        | 5.33                             | 49.0                                 | 0.54                   | -3.27                      | $\pm 5$   | 2012/12/2 |
| 48  | 5240        | Body        | 5.366                     | 47.364                        | 5.35                             | 49.0                                 | 0.31                   | -3.34                      | $\pm 5$   | 2012/12/2 |
| 52  | 5260        | Body        | 5.395                     | 47.311                        | 5.37                             | 48.9                                 | 0.46                   | -3.25                      | $\pm 5$   | 2012/12/2 |
| 54  | 5270        | Body        | 5.416                     | 47.289                        | 5.38                             | 48.9                                 | 0.66                   | -3.29                      | $\pm 5$   | 2012/12/2 |
| 56  | 5280        | Body        | 5.437                     | 47.267                        | 5.39                             | 48.9                                 | 0.86                   | -3.34                      | $\pm 5$   | 2012/12/2 |
| 60  | 5300        | Body        | 5.478                     | 47.222                        | 5.42                             | 48.9                                 | 1.07                   | -3.43                      | $\pm 5$   | 2012/12/2 |
| 62  | 5310        | Body        | 5.484                     | 47.216                        | 5.43                             | 48.9                                 | 1.00                   | -3.44                      | $\pm 5$   | 2012/12/2 |
| 64  | 5320        | Body        | 5.490                     | 47.210                        | 5.44                             | 48.9                                 | 0.92                   | -3.46                      | $\pm 5$   | 2012/12/2 |
| 100 | 5500        | Body        | 5.734                     | 46.943                        | 5.65                             | 48.6                                 | 1.49                   | -3.41                      | $\pm 5$   | 2012/12/2 |
| 102 | 5510        | Body        | 5.751                     | 46.929                        | 5.66                             | 48.6                                 | 1.61                   | -3.44                      | $\pm 5$   | 2012/12/2 |
| 104 | 5520        | Body        | 5.768                     | 46.916                        | 5.67                             | 48.6                                 | 1.72                   | -3.47                      | $\pm 5$   | 2012/12/2 |
| 108 | 5540        | Body        | 5.801                     | 46.888                        | 5.70                             | 48.6                                 | 1.78                   | -3.52                      | $\pm 5$   | 2012/12/2 |
| 112 | 5560        | Body        | 5.831                     | 46.839                        | 5.72                             | 48.5                                 | 1.94                   | -3.42                      | $\pm 5$   | 2012/12/2 |
| 116 | 5580        | Body        | 5.856                     | 46.769                        | 5.74                             | 48.5                                 | 2.02                   | -3.57                      | $\pm 5$   | 2012/12/2 |
| 118 | 5590        | Body        | 5.868                     | 46.734                        | 5.75                             | 48.5                                 | 2.06                   | -3.64                      | $\pm 5$   | 2012/12/2 |
| 120 | 5600        | Body        | 5.881                     | 46.699                        | 5.77                             | 48.5                                 | 1.92                   | -3.71                      | $\pm 5$   | 2012/12/2 |
| 124 | 5620        | Body        | 5.922                     | 46.673                        | 5.79                             | 48.4                                 | 2.27                   | -3.57                      | $\pm 5$   | 2012/12/2 |
| 128 | 5640        | Body        | 5.962                     | 46.648                        | 5.81                             | 48.4                                 | 2.62                   | -3.62                      | $\pm 5$   | 2012/12/2 |
| 132 | 5660        | Body        | 5.997                     | 46.619                        | 5.84                             | 48.4                                 | 2.69                   | -3.68                      | $\pm 5$   | 2012/12/2 |
| 134 | 5670        | Body        | 6.011                     | 46.604                        | 5.85                             | 48.4                                 | 2.76                   | -3.71                      | $\pm 5$   | 2012/12/2 |
| 136 | 5680        | Body        | 6.026                     | 46.588                        | 5.86                             | 48.4                                 | 2.83                   | -3.74                      | $\pm 5$   | 2012/12/2 |
| 140 | 5700        | Body        | 6.054                     | 46.557                        | 5.88                             | 48.3                                 | 2.96                   | -3.61                      | $\pm 5$   | 2012/12/2 |
| 149 | 5745        | Body        | 6.184                     | 46.600                        | 5.94                             | 48.3                                 | 4.10                   | -3.52                      | $\pm 5$   | 2012/12/2 |
| 151 | 5755        | Body        | 6.203                     | 46.583                        | 5.95                             | 48.3                                 | 4.24                   | -3.56                      | $\pm 5$   | 2012/12/2 |
| 153 | 5765        | Body        | 6.212                     | 46.539                        | 5.96                             | 48.2                                 | 4.22                   | -3.45                      | $\pm 5$   | 2012/12/2 |
| 157 | 5785        | Body        | 6.229                     | 46.452                        | 5.98                             | 48.2                                 | 4.17                   | -3.63                      | $\pm 5$   | 2012/12/2 |
| 159 | 5795        | Body        | 6.239                     | 46.409                        | 5.99                             | 48.2                                 | 4.15                   | -3.72                      | $\pm 5$   | 2012/12/2 |
| 161 | 5805        | Body        | 6.250                     | 46.374                        | 6.01                             | 48.2                                 | 3.99                   | -3.79                      | $\pm 5$   | 2012/12/2 |
| 165 | 5825        | Body        | 6.278                     | 46.324                        | 6.03                             | 48.2                                 | 4.12                   | -3.89                      | $\pm 5$   | 2012/12/2 |

| CH  | Freq. (MHz) | Liquid Type | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date      |
|-----|-------------|-------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|-----------|
| 36  | 5180        | Body        | 5.289                     | 47.521                        | 5.28                             | 49.0                                 | 0.17                   | -3.02                      | $\pm 5$   | 2012/12/7 |
| 38  | 5190        | Body        | 5.307                     | 47.520                        | 5.29                             | 49.0                                 | 0.32                   | -3.02                      | $\pm 5$   | 2012/12/7 |
| 40  | 5200        | Body        | 5.325                     | 47.518                        | 5.30                             | 49.0                                 | 0.47                   | -3.02                      | $\pm 5$   | 2012/12/7 |
| 44  | 5220        | Body        | 5.340                     | 47.455                        | 5.32                             | 49.0                                 | 0.38                   | -3.15                      | $\pm 5$   | 2012/12/7 |
| 46  | 5230        | Body        | 5.348                     | 47.424                        | 5.33                             | 49.0                                 | 0.34                   | -3.22                      | $\pm 5$   | 2012/12/7 |
| 48  | 5240        | Body        | 5.355                     | 47.392                        | 5.35                             | 49.0                                 | 0.09                   | -3.28                      | $\pm 5$   | 2012/12/7 |
| 52  | 5260        | Body        | 5.383                     | 47.339                        | 5.37                             | 48.9                                 | 0.24                   | -3.19                      | $\pm 5$   | 2012/12/7 |
| 54  | 5270        | Body        | 5.404                     | 47.317                        | 5.38                             | 48.9                                 | 0.45                   | -3.24                      | $\pm 5$   | 2012/12/7 |
| 56  | 5280        | Body        | 5.425                     | 47.295                        | 5.39                             | 48.9                                 | 0.65                   | -3.28                      | $\pm 5$   | 2012/12/7 |
| 60  | 5300        | Body        | 5.466                     | 47.251                        | 5.42                             | 48.9                                 | 0.85                   | -3.37                      | $\pm 5$   | 2012/12/7 |
| 62  | 5310        | Body        | 5.472                     | 47.245                        | 5.43                             | 48.9                                 | 0.77                   | -3.38                      | $\pm 5$   | 2012/12/7 |
| 64  | 5320        | Body        | 5.478                     | 47.239                        | 5.44                             | 48.9                                 | 0.70                   | -3.40                      | $\pm 5$   | 2012/12/7 |
| 100 | 5500        | Body        | 5.723                     | 46.972                        | 5.65                             | 48.6                                 | 1.29                   | -3.35                      | $\pm 5$   | 2012/12/7 |
| 102 | 5510        | Body        | 5.739                     | 46.958                        | 5.66                             | 48.6                                 | 1.40                   | -3.38                      | $\pm 5$   | 2012/12/7 |
| 104 | 5520        | Body        | 5.756                     | 46.945                        | 5.67                             | 48.6                                 | 1.52                   | -3.41                      | $\pm 5$   | 2012/12/7 |
| 108 | 5540        | Body        | 5.789                     | 46.917                        | 5.70                             | 48.6                                 | 1.56                   | -3.46                      | $\pm 5$   | 2012/12/7 |
| 112 | 5560        | Body        | 5.818                     | 46.868                        | 5.72                             | 48.5                                 | 1.71                   | -3.36                      | $\pm 5$   | 2012/12/7 |
| 116 | 5580        | Body        | 5.843                     | 46.797                        | 5.74                             | 48.5                                 | 1.79                   | -3.51                      | $\pm 5$   | 2012/12/7 |
| 118 | 5590        | Body        | 5.855                     | 46.761                        | 5.75                             | 48.5                                 | 1.83                   | -3.59                      | $\pm 5$   | 2012/12/7 |
| 120 | 5600        | Body        | 5.868                     | 46.726                        | 5.77                             | 48.5                                 | 1.70                   | -3.66                      | $\pm 5$   | 2012/12/7 |
| 124 | 5620        | Body        | 5.908                     | 46.701                        | 5.79                             | 48.4                                 | 2.04                   | -3.51                      | $\pm 5$   | 2012/12/7 |
| 128 | 5640        | Body        | 5.949                     | 46.677                        | 5.81                             | 48.4                                 | 2.39                   | -3.56                      | $\pm 5$   | 2012/12/7 |
| 132 | 5660        | Body        | 5.984                     | 46.651                        | 5.84                             | 48.4                                 | 2.47                   | -3.61                      | $\pm 5$   | 2012/12/7 |
| 134 | 5670        | Body        | 5.999                     | 46.637                        | 5.85                             | 48.4                                 | 2.55                   | -3.64                      | $\pm 5$   | 2012/12/7 |
| 136 | 5680        | Body        | 6.013                     | 46.623                        | 5.86                             | 48.4                                 | 2.61                   | -3.67                      | $\pm 5$   | 2012/12/7 |
| 140 | 5700        | Body        | 6.043                     | 46.595                        | 5.88                             | 48.3                                 | 2.77                   | -3.53                      | $\pm 5$   | 2012/12/7 |
| 149 | 5745        | Body        | 6.170                     | 46.632                        | 5.94                             | 48.3                                 | 3.87                   | -3.45                      | $\pm 5$   | 2012/12/7 |
| 151 | 5755        | Body        | 6.188                     | 46.614                        | 5.95                             | 48.3                                 | 4.00                   | -3.49                      | $\pm 5$   | 2012/12/7 |
| 153 | 5765        | Body        | 6.197                     | 46.570                        | 5.96                             | 48.2                                 | 3.98                   | -3.38                      | $\pm 5$   | 2012/12/7 |
| 157 | 5785        | Body        | 6.215                     | 46.482                        | 5.98                             | 48.2                                 | 3.93                   | -3.56                      | $\pm 5$   | 2012/12/7 |
| 159 | 5795        | Body        | 6.224                     | 46.439                        | 5.99                             | 48.2                                 | 3.91                   | -3.65                      | $\pm 5$   | 2012/12/7 |
| 161 | 5805        | Body        | 6.242                     | 46.404                        | 6.01                             | 48.2                                 | 3.86                   | -3.73                      | $\pm 5$   | 2012/12/7 |
| 165 | 5825        | Body        | 6.296                     | 46.355                        | 6.03                             | 48.2                                 | 4.41                   | -3.83                      | $\pm 5$   | 2012/12/7 |
| 1   | 2412        | Body        | 1.959                     | 54.05                         | 1.90                             | 52.7                                 | 3.11                   | 2.56                       | $\pm 5$   | 2012/12/8 |
| 6   | 2437        | Body        | 1.996                     | 53.98                         | 1.93                             | 52.7                                 | 3.42                   | 2.43                       | $\pm 5$   | 2012/12/8 |
| 11  | 2462        | Body        | 2.032                     | 53.94                         | 1.97                             | 52.7                                 | 3.15                   | 2.35                       | $\pm 5$   | 2012/12/8 |

**Table 6.3 Low/Middle/High Channel for Liquid Validation**

## 7. SAR Measurement Evaluation


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 7.2 System Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

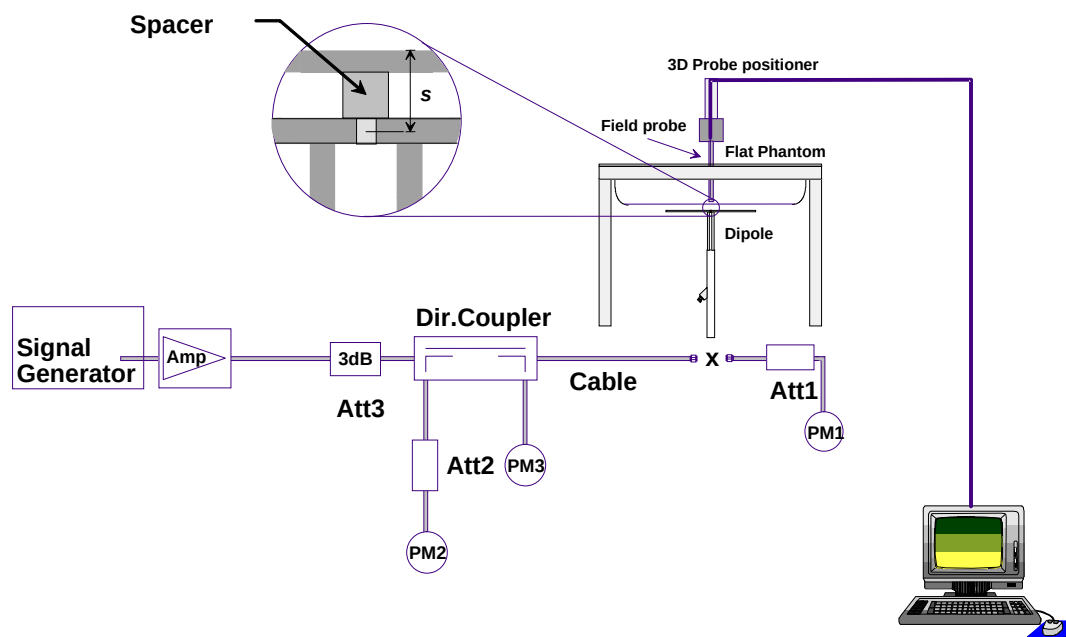

**Fig 7.1 System Setup for System Evaluation**

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

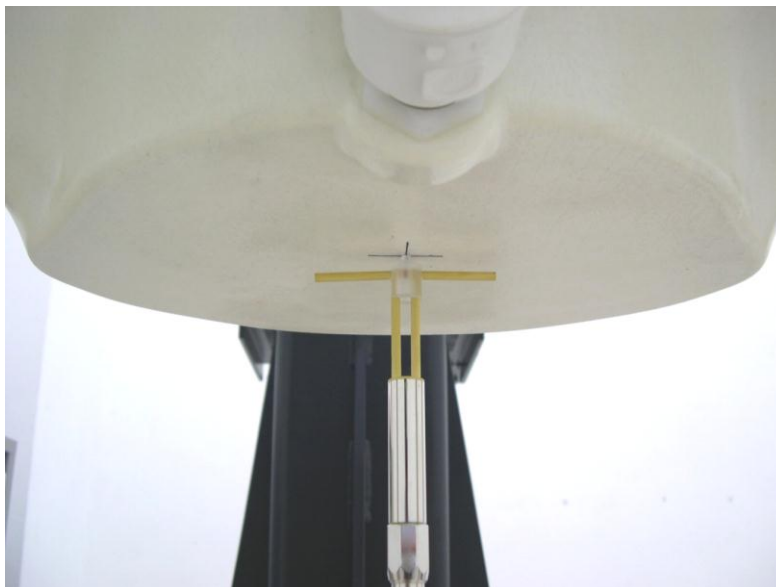

**Fig 7.2 Photo of Dipole Setup**

### **7.3 SAR System Verification Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Measurement Date | Frequency (MHz) | Liquid Type | Targeted SAR <sub>1g</sub> (W/kg) | Measured SAR <sub>1g</sub> (W/kg) | Normalized SAR <sub>1g</sub> (W/kg) | Deviation (%) |
|------------------|-----------------|-------------|-----------------------------------|-----------------------------------|-------------------------------------|---------------|
| 2012/11/30       | 2450            | Body        | 52.3                              | 13.3                              | 53.20                               | 1.72          |
| 2012/12/8        | 2450            | Body        | 52.3                              | 14.1                              | 56.40                               | 7.84          |
| 2012/11/30       | 5200            | Body        | 72.6                              | 7.49                              | 74.90                               | 3.17          |
| 2012/12/7        | 5200            | Body        | 72.6                              | 6.88                              | 68.80                               | -5.23         |
| 2012/11/30       | 5500            | Body        | 78.8                              | 8.18                              | 81.80                               | 3.81          |
| 2012/12/7        | 5500            | Body        | 78.8                              | 7.57                              | 75.70                               | -3.93         |
| 2012/12/2        | 5800            | Body        | 73.1                              | 7.25                              | 72.50                               | -0.82         |
| 2012/12/7        | 5800            | Body        | 73.1                              | 7.02                              | 70.20                               | -3.97         |

**Table 7.1 Target and Measurement SAR after Normalized**





## **8. EUT Testing Position**

This EUT was tested in five different positions. They are bottom face of tablet PC, Edge1, Edge2, Edge3, and Edge4. In these positions, the surface of EUT is touching with phantom 0 cm gap. Please refer to Appendix E for the test setup photos.

## **9. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix E demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **9.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## **9.2 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

## **9.3 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## **9.4 SAR Averaged Methods**

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.


## **9.5 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 10. SAR Test Configurations

### 10.1 Exposure Positions Consideration


<Tablet PC>

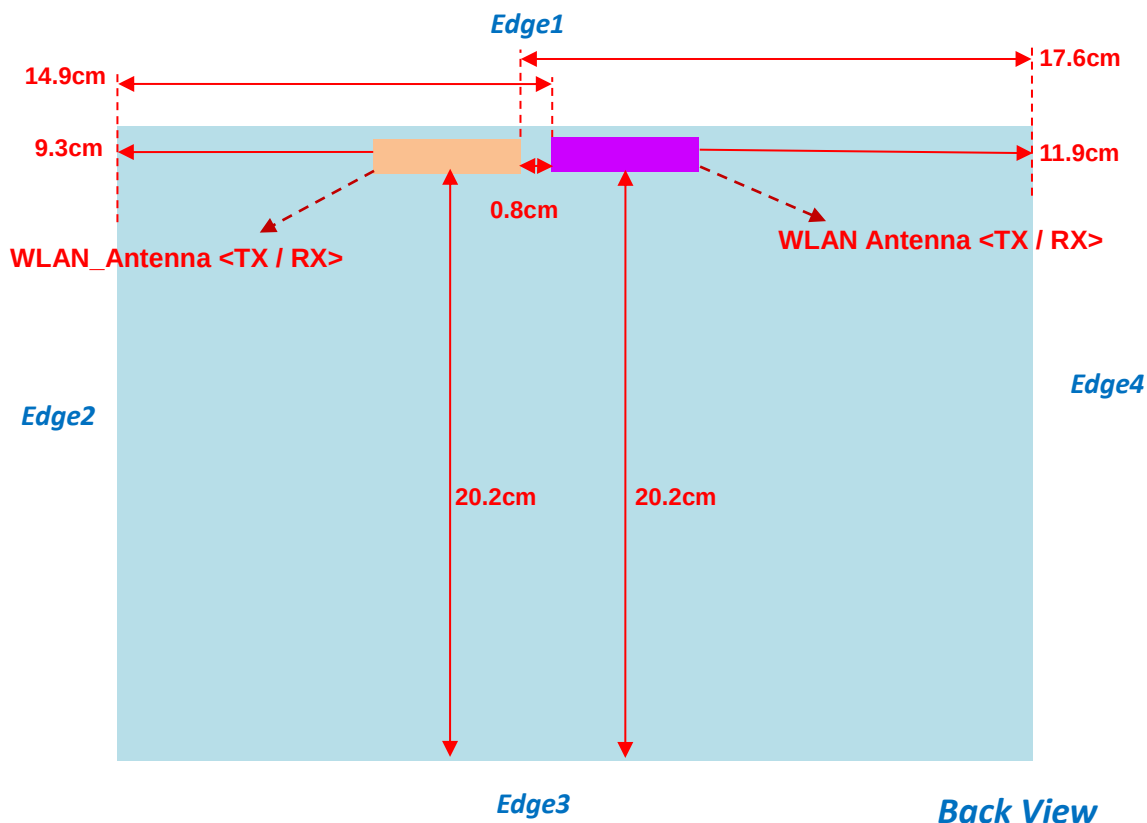

| Antenna                    | Wireless Interface              |
|----------------------------|---------------------------------|
| WLAN Main Antenna<Tx / Rx> | WLAN2.4G<br>WLAN5G<br>Bluetooth |
| WLAN Aux Antenna <Tx / Rx> | WLAN2.4G<br>WLAN5G              |

**Note:** Tablet pad Edge1 is tested due to WLAN antenna is along these edges.

<NB>

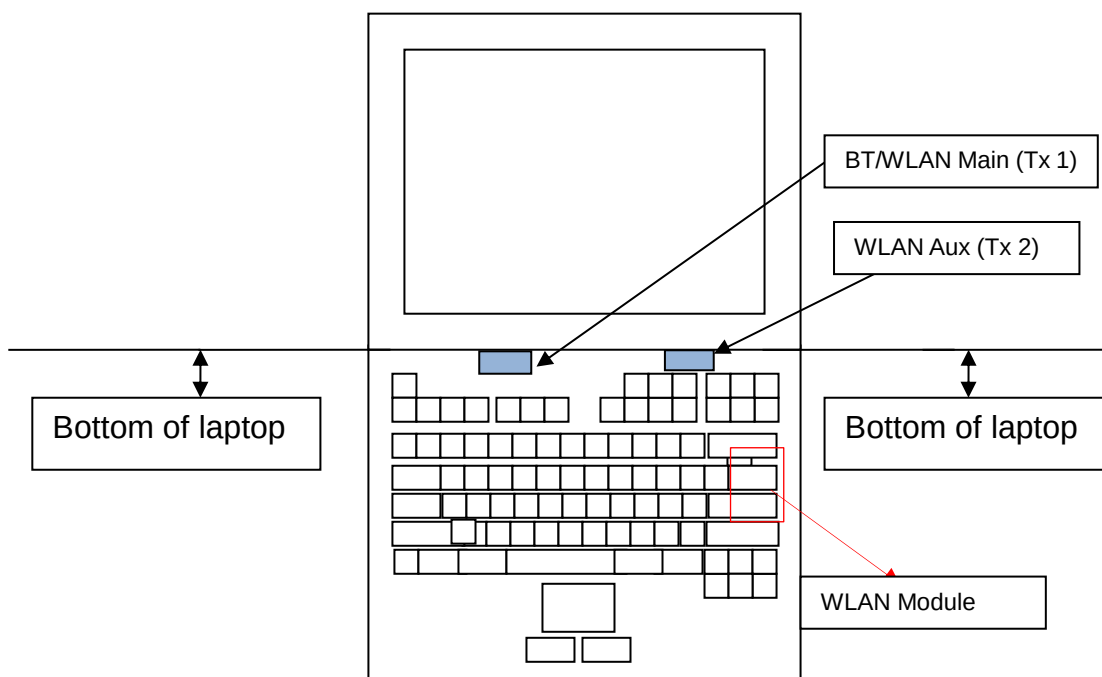

**Front View**

| Label  | Antenna                        | Length | Width  |
|--------|--------------------------------|--------|--------|
| Ant. 0 | BT/WLAN Main Antenna <Tx / Rx> | 2.6 cm | 1.6cm  |
| Ant. 1 | WLAN Aux. Antenna <Tx / Rx>    | 3.1 cm | 1.2 cm |

| Band \ Antenna    | Ant. 0 | Ant. 1 | Ant. 0+1 |
|-------------------|--------|--------|----------|
| Bluetooth         | Yes    | No     | No       |
| 2.4GHz 802. 11b/g | No     | Yes    | Yes      |
| 2.4GHz 802. 11n   | No     | No     | Yes      |
| 5GHz 802. 11a     | Yes    | Yes    | Yes      |
| 5GHz 802. 11n     | No     | No     | Yes      |

## 10.2 Conducted RF Output Power (Unit: dBm)

<WLAN 2.4G - Without Power Reduction>

<Ant. 1>

| WLAN 2.4G 802.11b Average Power (dBm) |                 |                 |                     |                 |       |       |
|---------------------------------------|-----------------|-----------------|---------------------|-----------------|-------|-------|
| Power vs. Channel                     |                 |                 | Power vs. Data Rate |                 |       |       |
| Channel                               | Frequency (MHz) | Data Rate (bps) | Channel             | Data Rate (bps) |       |       |
|                                       |                 | 1M              |                     | 2M              | 5.5M  | 11M   |
| CH 01                                 | 2412            | 16.63           | CH 06               | 16.88           | 16.85 | 16.80 |
| CH 06                                 | 2437            | 16.92           |                     |                 |       |       |
| CH 11                                 | 2462            | 16.24           |                     |                 |       |       |

| WLAN 2.4G 802.11g Average Power (dBm) |                 |                 |                     |                 |       |       |       |       |       |       |
|---------------------------------------|-----------------|-----------------|---------------------|-----------------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                     |                 |                 | Power vs. Data Rate |                 |       |       |       |       |       |       |
| Channel                               | Frequency (MHz) | Data Rate (bps) | Channel             | Data Rate (bps) |       |       |       |       |       |       |
|                                       |                 | 6M              |                     | 9M              | 12M   | 18M   | 24M   | 36M   | 48M   | 54M   |
| CH 01                                 | 2412            | 12.61           | CH 06               | 16.85           | 16.80 | 15.78 | 15.88 | 15.90 | 16.84 | 16.90 |
| CH 06                                 | 2437            | 17.00           |                     |                 |       |       |       |       |       |       |
| CH 11                                 | 2462            | 12.35           |                     |                 |       |       |       |       |       |       |

**Note:**

1. Per KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
2. Per KDB 248227, 11g output power is less than 1/4 dB higher than 11b mode, thus the SAR can be excluded.
3. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4 dB higher than those measured at the lowest data rate.

**<Ant. 0+1>**

| WLAN 2.4G 802.11b Average Power (dBm) |                 |                 |                     |                 |       |       |
|---------------------------------------|-----------------|-----------------|---------------------|-----------------|-------|-------|
| Power vs. Channel                     |                 |                 | Power vs. Data Rate |                 |       |       |
| Channel                               | Frequency (MHz) | Data Rate (bps) | Channel             | Data Rate (bps) |       |       |
|                                       |                 | 1M              |                     | 2M              | 5.5M  | 11M   |
| CH 01                                 | 2412            | 19.57           | CH 06               | 19.62           | 19.57 | 19.54 |
| CH 06                                 | 2437            | 19.98           |                     |                 |       |       |
| CH 11                                 | 2462            | 19.89           |                     |                 |       |       |

| WLAN 2.4G 802.11g Average Power (dBm) |                 |                 |                     |                 |       |       |       |       |       |       |
|---------------------------------------|-----------------|-----------------|---------------------|-----------------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                     |                 |                 | Power vs. Data Rate |                 |       |       |       |       |       |       |
| Channel                               | Frequency (MHz) | Data Rate (bps) | Channel             | Data Rate (bps) |       |       |       |       |       |       |
|                                       |                 | 6M              |                     | 9M              | 12M   | 18M   | 24M   | 36M   | 48M   | 54M   |
| CH 01                                 | 2412            | 15.79           | CH 06               | 19.31           | 19.27 | 19.28 | 19.24 | 19.20 | 19.21 | 19.17 |
| CH 06                                 | 2437            | 19.34           |                     |                 |       |       |       |       |       |       |
| CH 11                                 | 2462            | 15.17           |                     |                 |       |       |       |       |       |       |

| WLAN 2.4G 802.11n (BW 20MHz) Average Power (dBm) |                 |           |                     |           |       |       |       |       |       |       |
|--------------------------------------------------|-----------------|-----------|---------------------|-----------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                                |                 |           | Power vs. Data Rate |           |       |       |       |       |       |       |
| Channel                                          | Frequency (MHz) | MCS Index | Channel             | MCS Index |       |       |       |       |       |       |
|                                                  |                 | MCS8      |                     | MCS8      | MCS9  | MCS10 | MCS11 | MCS12 | MCS13 | MCS14 |
| CH 01                                            | 2412            | 15.79     | CH 06               | 19.48     | 19.42 | 19.38 | 19.31 | 19.25 | 19.20 | 19.14 |
| CH 06                                            | 2437            | 19.53     |                     |           |       |       |       |       |       |       |
| CH 11                                            | 2462            | 14.62     |                     |           |       |       |       |       |       |       |

| WLAN 2.4G 802.11n (BW 40MHz) Average Power (dBm) |                 |           |                     |           |       |       |       |       |       |       |
|--------------------------------------------------|-----------------|-----------|---------------------|-----------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                                |                 |           | Power vs. Data Rate |           |       |       |       |       |       |       |
| Channel                                          | Frequency (MHz) | MCS Index | Channel             | MCS Index |       |       |       |       |       |       |
|                                                  |                 | MCS8      |                     | MCS8      | MCS9  | MCS10 | MCS11 | MCS12 | MCS13 | MCS14 |
| CH 03                                            | 2422            | 12.29     | CH 06               | 16.55     | 16.51 | 16.48 | 16.43 | 16.38 | 16.34 | 16.30 |
| CH 06                                            | 2437            | 16.58     |                     |           |       |       |       |       |       |       |
| CH 09                                            | 2452            | 13.98     |                     |           |       |       |       |       |       |       |

**Note:**

- Per KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
- Per KDB 248227, 11g, 11n-HT20 and 11n-HT40 output power is less than 1/4 dB higher than 11b mode, thus the SAR can be excluded.
- For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4 dB higher than those measured at the lowest data rate.

**<Bluetooth>**

| Channel | Frequency (MHz) | Average power (dBm) |                |             |
|---------|-----------------|---------------------|----------------|-------------|
|         |                 | Mode                |                |             |
|         |                 | GFSK                | $\pi/4$ -DQPSK | 8-DPSK      |
| CH 0    | 2402            | 10.5                | 10.4           | 10.5        |
| CH 39   | 2441            | <b>10.6</b>         | <b>10.6</b>    | <b>10.6</b> |
| CH 78   | 2480            | 9.9                 | 9.8            | 9.8         |

| Channel | Frequency (MHz) | Average power (dBm) |  |
|---------|-----------------|---------------------|--|
|         |                 | Mode                |  |
|         |                 | BT v4.0 LE, GFSK    |  |
| CH 0    | 2402            | 9.38                |  |
| CH 19   | 2440            | 9.75                |  |
| CH 39   | 2480            | 9.32                |  |

**Note:** Per IC RSS 102, Bluetooth output power  $\leq 20\text{mw}$  thus stand-alone SAR is not required.



**<WLAN 5G>**
**<Ant. 1>**

| WLAN 5G 802.11a Average Power (dBm) |                 |                 |                     |                 |       |       |       |       |       |       |
|-------------------------------------|-----------------|-----------------|---------------------|-----------------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                   |                 |                 | Power vs. Data Rate |                 |       |       |       |       |       |       |
| Channel                             | Frequency (MHz) | Data Rate (bps) | Channel             | Data Rate (bps) |       |       |       |       |       |       |
|                                     |                 | 6M              |                     | 9M              | 12M   | 18M   | 24M   | 36M   | 48M   | 54M   |
| CH 36                               | 5180            | <b>11.47</b>    | CH 36               | 11.45           | 11.40 | 11.35 | 11.32 | 11.28 | 11.24 | 11.20 |
| CH 40                               | 5200            | 11.27           |                     |                 |       |       |       |       |       |       |
| CH 44                               | 5220            | 11.36           |                     |                 |       |       |       |       |       |       |
| CH 48                               | 5240            | 11.45           |                     |                 |       |       |       |       |       |       |
| CH 52                               | 5260            | 16.43           | CH 60               | 16.68           | 16.62 | 16.58 | 16.54 | 16.50 | 16.47 | 16.42 |
| CH 56                               | 5280            | 16.27           |                     |                 |       |       |       |       |       |       |
| CH 60                               | 5300            | <b>16.72</b>    |                     |                 |       |       |       |       |       |       |
| CH 64                               | 5320            | 14.32           |                     |                 |       |       |       |       |       |       |
| CH 100                              | 5500            | 11.44           | CH 104              | 14.48           | 14.43 | 14.38 | 14.32 | 14.28 | 14.24 | 14.19 |
| CH 104                              | 5520            | <b>14.53</b>    |                     |                 |       |       |       |       |       |       |
| CH 108                              | 5540            | 14.19           |                     |                 |       |       |       |       |       |       |
| CH 112                              | 5560            | 14.30           |                     |                 |       |       |       |       |       |       |
| CH 116                              | 5580            | 14.15           |                     |                 |       |       |       |       |       |       |
| CH 136                              | 5680            | 13.93           |                     |                 |       |       |       |       |       |       |
| CH 140                              | 5700            | 10.56           |                     |                 |       |       |       |       |       |       |
| CH 149                              | 5745            | 12.22           | CH 165              | 12.55           | 12.50 | 12.45 | 12.40 | 12.38 | 12.32 | 12.27 |
| CH 153                              | 5765            | 12.12           |                     |                 |       |       |       |       |       |       |
| CH 157                              | 5785            | 12.36           |                     |                 |       |       |       |       |       |       |
| CH 161                              | 5805            | 12.41           |                     |                 |       |       |       |       |       |       |
| CH 165                              | 5825            | <b>12.60</b>    |                     |                 |       |       |       |       |       |       |

**<Ant. 0+1>**

| WLAN 5G 802.11a Average Power (dBm) |                 |                 |                     |                 |       |       |       |       |       |       |
|-------------------------------------|-----------------|-----------------|---------------------|-----------------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                   |                 |                 | Power vs. Data Rate |                 |       |       |       |       |       |       |
| Channel                             | Frequency (MHz) | Data Rate (bps) | Channel             | Data Rate (bps) |       |       |       |       |       |       |
|                                     |                 | MCS8            |                     | MCS8            | MCS9  | MCS10 | MCS11 | MCS12 | MCS13 | MCS14 |
| CH 36                               | 5180            | 14.33           | CH 48               | 14.32           | 14.28 | 14.23 | 14.20 | 14.18 | 14.15 | 14.10 |
| CH 40                               | 5200            | 14.37           |                     |                 |       |       |       |       |       |       |
| CH 44                               | 5220            | 14.27           |                     |                 |       |       |       |       |       |       |
| CH 48                               | 5240            | <b>14.38</b>    |                     |                 |       |       |       |       |       |       |
| CH 52                               | 5260            | 19.37           | CH 60               | 19.60           | 19.54 | 19.50 | 19.45 | 19.40 | 19.37 | 19.33 |
| CH 56                               | 5280            | 19.64           |                     |                 |       |       |       |       |       |       |
| CH 60                               | 5300            | <b>19.65</b>    |                     |                 |       |       |       |       |       |       |
| CH 64                               | 5320            | 17.19           |                     |                 |       |       |       |       |       |       |
| CH 100                              | 5500            | 14.37           | CH 116              | 17.17           | 17.12 | 17.08 | 17.03 | 16.95 | 16.90 | 16.85 |
| CH 104                              | 5520            | 17.20           |                     |                 |       |       |       |       |       |       |
| CH 108                              | 5540            | 17.21           |                     |                 |       |       |       |       |       |       |
| CH 112                              | 5560            | 17.12           |                     |                 |       |       |       |       |       |       |
| CH 116                              | 5580            | <b>17.21</b>    |                     |                 |       |       |       |       |       |       |
| CH 136                              | 5680            | 16.79           |                     |                 |       |       |       |       |       |       |
| CH 140                              | 5700            | 13.34           |                     |                 |       |       |       |       |       |       |
| CH 149                              | 5745            | 14.90           | CH 165              | 15.60           | 16.55 | 16.50 | 16.47 | 16.43 | 16.38 | 16.33 |
| CH 153                              | 5765            | 15.30           |                     |                 |       |       |       |       |       |       |
| CH 157                              | 5785            | 15.06           |                     |                 |       |       |       |       |       |       |
| CH 161                              | 5805            | 15.63           |                     |                 |       |       |       |       |       |       |
| CH 165                              | 5825            | <b>15.66</b>    |                     |                 |       |       |       |       |       |       |

| WLAN 5G 802.11n (BW 20M) Average Power (dBm) |                 |              |                     |           |       |       |       |       |       |       |
|----------------------------------------------|-----------------|--------------|---------------------|-----------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                            |                 |              | Power vs. Data Rate |           |       |       |       |       |       |       |
| Channel                                      | Frequency (MHz) | MCS Index    | Channel             | MCS Index |       |       |       |       |       |       |
|                                              |                 | MCS8         |                     | MCS8      | MCS9  | MCS10 | MCS11 | MCS12 | MCS13 | MCS14 |
| CH 36                                        | 5180            | 14.02        | CH 44               | 14.11     | 14.07 | 14.01 | 13.97 | 13.92 | 13.88 | 13.84 |
| CH 40                                        | 5200            | 13.71        |                     |           |       |       |       |       |       |       |
| CH 44                                        | 5220            | <b>14.16</b> |                     |           |       |       |       |       |       |       |
| CH 48                                        | 5240            | 13.93        |                     |           |       |       |       |       |       |       |
| CH 52                                        | 5260            | <b>17.33</b> | CH 52               | 17.28     | 17.25 | 17.21 | 17.18 | 17.14 | 17.10 | 17.05 |
| CH 56                                        | 5280            | 14.88        |                     |           |       |       |       |       |       |       |
| CH 60                                        | 5300            | 17.30        |                     |           |       |       |       |       |       |       |
| CH 64                                        | 5320            | 17.19        |                     |           |       |       |       |       |       |       |
| CH 100                                       | 5500            | 15.48        | CH 116              | 18.10     | 18.04 | 18.00 | 17.98 | 17.92 | 17.88 | 17.84 |
| CH 104                                       | 5520            | 17.11        |                     |           |       |       |       |       |       |       |
| CH 108                                       | 5540            | 17.50        |                     |           |       |       |       |       |       |       |
| CH 112                                       | 5560            | 17.43        |                     |           |       |       |       |       |       |       |
| CH 116                                       | 5580            | <b>18.15</b> |                     |           |       |       |       |       |       |       |
| CH 136                                       | 5680            | 17.30        |                     |           |       |       |       |       |       |       |
| CH 140                                       | 5700            | 15.12        |                     |           |       |       |       |       |       |       |
| CH 149                                       | 5745            | 16.01        | CH 165              | 16.90     | 16.85 | 16.80 | 16.74 | 16.70 | 16.58 | 16.62 |
| CH 153                                       | 5765            | 16.65        |                     |           |       |       |       |       |       |       |
| CH 157                                       | 5785            | 16.88        |                     |           |       |       |       |       |       |       |
| CH 161                                       | 5805            | 16.95        |                     |           |       |       |       |       |       |       |
| CH 165                                       | 5825            | <b>16.96</b> |                     |           |       |       |       |       |       |       |

| WLAN 5G 802.11n (BW 40M) Average Power (dBm) |                 |              |                     |           |       |        |       |       |       |       |
|----------------------------------------------|-----------------|--------------|---------------------|-----------|-------|--------|-------|-------|-------|-------|
| Power vs. Channel                            |                 |              | Power vs. Data Rate |           |       |        |       |       |       |       |
| Channel                                      | Frequency (MHz) | MCS Index    | Channel             | MCS Index |       |        |       |       |       |       |
|                                              |                 | MCS8         |                     | MCS8      | MCS9  | MCS10  | MCS11 | MCS12 | MCS13 | MCS14 |
| CH 38                                        | 5190            | 12.39        | CH 46               | 16.15     | 16.08 | 169.11 | 16.03 | 16.07 | 15.88 | 15.99 |
| CH 46                                        | 5230            | <b>16.25</b> |                     |           |       |        |       |       |       |       |
| CH 54                                        | 5270            | <b>17.97</b> | CH 54               | 17.94     | 17.90 | 17.88  | 17.84 | 17.82 | 17.78 | 17.73 |
| CH 62                                        | 5310            | 12.28        |                     |           |       |        |       |       |       |       |
| CH 102                                       | 5510            | 11.51        | CH 110              | 17.88     | 17.82 | 17.78  | 17.72 | 17.68 | 17.66 | 17.62 |
| CH 110                                       | 5550            | <b>17.91</b> |                     |           |       |        |       |       |       |       |
| CH 134                                       | 5670            | 14.79        |                     |           |       |        |       |       |       |       |
| CH 151                                       | 5755            | <b>16.93</b> | CH 151              | 16.87     | 16.84 | 16.80  | 16.76 | 16.72 | 16.70 | 16.67 |
| CH 159                                       | 5795            | 16.92        |                     |           |       |        |       |       |       |       |

**Note:**

1. Per KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
2. Per KDB 248227, 11n average output power is higher than 1/4 dB higher than 11a mode, SAR will be verified.
3. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4 dB higher than those measured at the lowest data rate.

## 11. SAR Test Results

### 11.1 Test Records for Body SAR Test

#### <WLAN 2.4G>

| Plot No. | Band     | Mode    | Test Position | Gap (cm) | Ant.    | Ch. | Freq. (MHz) | Average Power (dBm) | Power Drift (dB) | SAR <sub>1g</sub> (W/kg) |
|----------|----------|---------|---------------|----------|---------|-----|-------------|---------------------|------------------|--------------------------|
| 31       | WLAN2.4G | 802.11b | Bottom Face   | 0cm      | Ant 1   | 6   | 2437        | 16.92               | 0.085            | 0.062                    |
| 32       | WLAN2.4G | 802.11b | Edge1         | 0cm      | Ant 1   | 6   | 2437        | 16.92               | -0.062           | 0.121                    |
| 33       | WLAN2.4G | 802.11b | Bottom        | 0cm      | Ant 1   | 6   | 2437        | 16.92               | 0.16             | 0.133                    |
| 1        | WLAN2.4G | 802.11b | Bottom Face   | 0cm      | Ant 0+1 | 6   | 2437        | 19.77               | 0.01             | 0.045                    |
| 2        | WLAN2.4G | 802.11b | Edge1         | 0cm      | Ant 0+1 | 6   | 2437        | 19.77               | -0.02            | 0.115                    |
| 3        | WLAN2.4G | 802.11b | Bottom        | 0cm      | Ant 0+1 | 6   | 2437        | 19.77               | 0.086            | 0.079                    |

#### <WLAN 5G>

| Plot No. | Band   | Mode         | Test Position | Gap (cm) | Ant.    | Ch. | Freq. (MHz) | Average Power (dBm) | Power Drift (dB) | SAR <sub>1g</sub> (W/kg) |
|----------|--------|--------------|---------------|----------|---------|-----|-------------|---------------------|------------------|--------------------------|
| 34       | WLAN5G | 802.11a      | Bottom Face   | 0cm      | Ant 1   | 36  | 5180        | 11.47               | -0.154           | 0.23                     |
| 35       | WLAN5G | 802.11a      | Edge 1        | 0cm      | Ant 1   | 36  | 5180        | 11.47               | -0.07            | 0.243                    |
| 36       | WLAN5G | 802.11a      | Bottom        | 0cm      | Ant 1   | 36  | 5180        | 11.47               | -0.059           | 0.264                    |
| 6        | WLAN5G | 802.11a      | Bottom Face   | 0cm      | Ant 0+1 | 48  | 5240        | 14.38               | -0.15            | 0.196                    |
| 7        | WLAN5G | 802.11a      | Edge1         | 0cm      | Ant 0+1 | 48  | 5240        | 14.38               | -0.164           | 0.241                    |
| 9        | WLAN5G | 802.11n-HT40 | Edge 1        | 0cm      | Ant 0+1 | 46  | 5230        | 16.25               | -0.12            | 0.509                    |
| 8        | WLAN5G | 802.11a      | Bottom        | 0cm      | Ant 0+1 | 48  | 5240        | 14.38               | 0.16             | 0.121                    |
| 37       | WLAN5G | 802.11a      | Bottom Face   | 0cm      | Ant 1   | 60  | 5300        | 16.72               | 0.058            | 0.338                    |
| 38       | WLAN5G | 802.11a      | Edge 1        | 0cm      | Ant 1   | 60  | 5300        | 16.72               | 0.194            | 0.377                    |
| 39       | WLAN5G | 802.11a      | Bottom        | 0cm      | Ant 1   | 60  | 5300        | 16.72               | 0.099            | 0.236                    |
| 10       | WLAN5G | 802.11a      | Bottom Face   | 0cm      | Ant 0+1 | 60  | 5300        | 19.65               | -0.06            | 0.581                    |
| 11       | WLAN5G | 802.11a      | Edge 1        | 0cm      | Ant 0+1 | 60  | 5300        | 19.65               | 0.14             | 0.628                    |
| 12       | WLAN5G | 802.11a      | Bottom        | 0cm      | Ant 0+1 | 60  | 5300        | 19.65               | 0.169            | 0.277                    |
| 40       | WLAN5G | 802.11a      | Bottom Face   | 0cm      | Ant 1   | 104 | 5520        | 14.53               | 0.14             | 0.333                    |
| 41       | WLAN5G | 802.11a      | Edge 1        | 0cm      | Ant 1   | 104 | 5520        | 14.53               | -0.16            | 0.297                    |
| 42       | WLAN5G | 802.11a      | Bottom        | 0cm      | Ant 1   | 104 | 5520        | 14.53               | 0.162            | 0.281                    |
| 13       | WLAN5G | 802.11a      | Bottom Face   | 0cm      | Ant 0+1 | 116 | 5580        | 17.21               | 0.12             | 0.316                    |
| 14       | WLAN5G | 802.11a      | Edge1         | 0cm      | Ant 0+1 | 116 | 5580        | 17.21               | -0.121           | 0.91                     |
| 16       | WLAN5G | 802.11a      | Edge1         | 0cm      | Ant 0+1 | 108 | 5540        | 17.21               | -0.157           | 0.686                    |
| 17       | WLAN5G | 802.11a      | Edge1         | 0cm      | Ant 0+1 | 136 | 5680        | 16.79               | 0.05             | 0.631                    |
| 18       | WLAN5G | 802.11n-HT20 | Edge 1        | 0cm      | Ant 0+1 | 116 | 5580        | 18.15               | -0.15            | 1.12                     |
| 19       | WLAN5G | 802.11n-HT20 | Edge 1        | 0cm      | Ant 0+1 | 108 | 5540        | 17.50               | -0.1             | 1.01                     |
| 20       | WLAN5G | 802.11n-HT20 | Edge 1        | 0cm      | Ant 0+1 | 132 | 5660        | 17.31               | 0.11             | 0.708                    |
| 22       | WLAN5G | 802.11n-HT40 | Edge 1        | 0cm      | Ant 0+1 | 118 | 5590        | 17.91               | -0.12            | 0.876                    |
| 21       | WLAN5G | 802.11n-HT40 | Edge 1        | 0cm      | Ant 0+1 | 102 | 5510        | 11.51               | -0.05            | 0.226                    |
| 46       | WLAN5G | 802.11n-HT40 | Edge 1        | 0cm      | Ant 0+1 | 134 | 5670        | 14.79               | -0.1             | 0.514                    |
| 15       | WLAN5G | 802.11a      | Bottom        | 0cm      | Ant 0+1 | 116 | 5580        | 17.21               | -0.123           | 0.189                    |

| Plot No.  | Band          | Mode                | Test Position | Gap (cm)   | Ant.           | Ch.        | Freq. (MHz) | Average Power (dBm) | Power Drift (dB) | SAR1g (W/kg) |
|-----------|---------------|---------------------|---------------|------------|----------------|------------|-------------|---------------------|------------------|--------------|
| 43        | WLAN5G        | 802.11a             | Bottom Face   | 0cm        | Ant 1          | 165        | 5825        | 12.60               | 0.03             | 0.29         |
| 44        | WLAN5G        | 802.11a             | Edge 1        | 0cm        | Ant 1          | 165        | 5825        | 12.60               | 0.083            | 0.348        |
| <b>45</b> | <b>WLAN5G</b> | <b>802.11a</b>      | <b>Bottom</b> | <b>0cm</b> | <b>Ant 1</b>   | <b>165</b> | <b>5825</b> | <b>12.60</b>        | <b>0.03</b>      | <b>0.385</b> |
| 23        | WLAN5G        | 802.11a             | Bottom Face   | 0cm        | Ant 0+1        | 165        | 5825        | 15.66               | 0.025            | 0.086        |
| 24        | WLAN5G        | 802.11a             | Edge 1        | 0cm        | Ant 0+1        | 165        | 5825        | 15.66               | -0.061           | 0.703        |
| 26        | WLAN5G        | 802.11n-HT20        | Edge 1        | 0cm        | Ant 0+1        | 165        | 5825        | 16.96               | -0.068           | 1            |
| 27        | WLAN5G        | 802.11n-HT20        | Edge 1        | 0cm        | Ant 0+1        | 153        | 5765        | 16.65               | -0.057           | 1.12         |
| 28        | WLAN5G        | 802.11n-HT20        | Edge 1        | 0cm        | Ant 0+1        | 157        | 5785        | 16.88               | -0.074           | 1.11         |
| <b>29</b> | <b>WLAN5G</b> | <b>802.11n-HT40</b> | <b>Edge 1</b> | <b>0cm</b> | <b>Ant 0+1</b> | <b>151</b> | <b>5755</b> | <b>16.93</b>        | <b>-0.02</b>     | <b>1.37</b>  |
| 30        | WLAN5G        | 802.11n-HT40        | Edge 1        | 0cm        | Ant 0+1        | 159        | 5795        | 16.92               | -0.04            | 1.35         |
| 25        | WLAN5G        | 802.11a             | Bottom        | 0cm        | Ant 0+1        | 165        | 5825        | 15.66               | 0.032            | 0.224        |

**Note: 1.** Per KDB 447498, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

**11.2 Simultaneous Transmission SAR Analysis and Measurements**

| No. | Applicable Simultaneous Transmission Combination |
|-----|--------------------------------------------------|
| 1.  | WLAN + BT                                        |

**Note:**

1. WLAN Main and BT share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either WLAN2.4G or WLAN5G according to the network signal condition; therefore they will not transmit simultaneously.
3. Per IC RSS 102, Bluetooth output power  $\leq 20\text{mw}$  therefore, stand-alone SAR is not required.

**Test Engineer :** Michael Yang and Ted Sun

## **12. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

| <b>Uncertainty Distributions</b>   | <b>Normal</b> | <b>Rectangular</b> | <b>Triangular</b> | <b>U-Shape</b> |
|------------------------------------|---------------|--------------------|-------------------|----------------|
| Multi-plying Factor <sup>(a)</sup> | $1/k^{(b)}$   | $1/\sqrt{3}$       | $1/\sqrt{6}$      | $1/\sqrt{2}$   |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 12.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables:

| Error Description                             | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Ci (10g) | Standard Uncertainty (1g) | Standard Uncertainty (10g) |
|-----------------------------------------------|------------------------|--------------------------|---------|---------|----------|---------------------------|----------------------------|
| <b>Measurement System</b>                     |                        |                          |         |         |          |                           |                            |
| Probe Calibration                             | 6.0                    | Normal                   | 1       | 1       | 1        | ± 6.0 %                   | ± 6.0 %                    |
| Axial Isotropy                                | 4.7                    | Rectangular              | √3      | 0.7     | 0.7      | ± 1.9 %                   | ± 1.9 %                    |
| Hemispherical Isotropy                        | 9.6                    | Rectangular              | √3      | 0.7     | 0.7      | ± 3.9 %                   | ± 3.9 %                    |
| Linearity                                     | 4.7                    | Rectangular              | √3      | 1       | 1        | ± 2.7 %                   | ± 2.7 %                    |
| Probe Modulation Response                     | 2.4                    | Rectangular              | √3      | 1       | 1        | ± 1.4 %                   | ± 1.4 %                    |
| System Detection Limits                       | 1.0                    | Rectangular              | √3      | 1       | 1        | ± 0.6 %                   | ± 0.6 %                    |
| Boundary Effects                              | 2.0                    | Rectangular              | √3      | 1       | 1        | ± 1.2 %                   | ± 1.2 %                    |
| Readout Electronics                           | 0.3                    | Normal                   | 1       | 1       | 1        | ± 0.3 %                   | ± 0.3 %                    |
| Response Time                                 | 0.8                    | Rectangular              | √3      | 1       | 1        | ± 0.5 %                   | ± 0.5 %                    |
| Integration Time                              | 2.6                    | Rectangular              | √3      | 1       | 1        | ± 1.5 %                   | ± 1.5 %                    |
| RF Ambient Noise                              | 3.0                    | Rectangular              | √3      | 1       | 1        | ± 1.7 %                   | ± 1.7 %                    |
| RF Ambient Reflections                        | 3.0                    | Rectangular              | √3      | 1       | 1        | ± 1.7 %                   | ± 1.7 %                    |
| Probe Positioner                              | 0.8                    | Rectangular              | √3      | 1       | 1        | ± 0.5 %                   | ± 0.5 %                    |
| Probe Positioning                             | 6.7                    | Rectangular              | √3      | 1       | 1        | ± 3.9 %                   | ± 3.9 %                    |
| Post-processing                               | 4.0                    | Rectangular              | √3      | 1       | 1        | ± 2.3 %                   | ± 2.3 %                    |
| <b>Test Sample Related</b>                    |                        |                          |         |         |          |                           |                            |
| Device Positioning                            | 3.6                    | Normal                   | 1       | 1       | 1        | ± 3.6 %                   | ± 3.6 %                    |
| Device Holder                                 | 2.9                    | Normal                   | 1       | 1       | 1        | ± 2.9 %                   | ± 2.9 %                    |
| Measurement SAR Drift                         | 5.0                    | Rectangular              | √3      | 1       | 1        | ± 2.9 %                   | ± 2.9 %                    |
| Power Scaling                                 | 0.0                    | Rectangular              | √3      | 1       | 1        | ± 0.0 %                   | ± 0.0 %                    |
| <b>Phantom and Setup</b>                      |                        |                          |         |         |          |                           |                            |
| Phantom Uncertainty                           | 4.0                    | Rectangular              | √3      | 1       | 1        | ± 2.3 %                   | ± 2.3 %                    |
| Liquid Conductivity (Meas.)                   | 2.5                    | Normal                   | 1       | 0.78    | 0.71     | ± 2.0 %                   | ± 1.8 %                    |
| Liquid Conductivity (Target)                  | 5.0                    | Rectangular              | √3      | 0.64    | 0.43     | ± 1.8 %                   | ± 1.2 %                    |
| Liquid Permittivity (Meas.)                   | 2.5                    | Normal                   | 1       | 0.26    | 0.26     | ± 0.7 %                   | ± 0.7 %                    |
| Liquid Permittivity (Target)                  | 5.0                    | Rectangular              | √3      | 0.6     | 0.49     | ± 1.7 %                   | ± 1.4 %                    |
| Liquid conductivity – temperature uncertainty | 1.7                    | Rectangular              | √3      | 0.78    | 0.71     | ± 0.8 %                   | ± 0.7 %                    |
| Liquid permittivity – temperature uncertainty | 0.3                    | Rectangular              | √3      | 0.23    | 0.26     | ± 0.0 %                   | ± 0.0 %                    |
| <b>Combined Standard Uncertainty</b>          |                        |                          |         |         |          | ± 11.9 %                  | ± 11.6 %                   |
| <b>Coverage Factor for 95 %</b>               |                        |                          |         |         |          | K=2                       |                            |
| <b>Expanded Uncertainty</b>                   |                        |                          |         |         |          | ± 23.7 %                  | ± 23.1 %                   |

**Table 12.2 Uncertainty Budget of DASY for frequency range 30 MHz to 3 GHz  
According to IEC 62209-2/2010**



| Error Description                             | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Ci (10g) | Standard Uncertainty (1g) | Standard Uncertainty (10g) |
|-----------------------------------------------|------------------------|--------------------------|---------|---------|----------|---------------------------|----------------------------|
| <b>Measurement System</b>                     |                        |                          |         |         |          |                           |                            |
| Probe Calibration                             | 6.55                   | Normal                   | 1       | 1       | 1        | ± 6.55 %                  | ± 6.55 %                   |
| Axial Isotropy                                | 4.7                    | Rectangular              | √3      | 0.7     | 0.7      | ± 1.9 %                   | ± 1.9 %                    |
| Hemispherical Isotropy                        | 9.6                    | Rectangular              | √3      | 0.7     | 0.7      | ± 3.9 %                   | ± 3.9 %                    |
| Linearity                                     | 4.7                    | Rectangular              | √3      | 1       | 1        | ± 2.7 %                   | ± 2.7 %                    |
| Probe Modulation Response                     | 2.4                    | Rectangular              | √3      | 1       | 1        | ± 1.4 %                   | ± 1.4 %                    |
| Boundary Effects                              | 2.0                    | Rectangular              | √3      | 1       | 1        | ± 1.2 %                   | ± 1.2 %                    |
| System Detection Limits                       | 1.0                    | Rectangular              | √3      | 1       | 1        | ± 0.6 %                   | ± 0.6 %                    |
| Readout Electronics                           | 0.3                    | Normal                   | 1       | 1       | 1        | ± 0.3 %                   | ± 0.3 %                    |
| Response Time                                 | 0.8                    | Rectangular              | √3      | 1       | 1        | ± 0.5 %                   | ± 0.5 %                    |
| Integration Time                              | 2.6                    | Rectangular              | √3      | 1       | 1        | ± 1.5 %                   | ± 1.5 %                    |
| RF Ambient Noise                              | 3.0                    | Rectangular              | √3      | 1       | 1        | ± 1.7 %                   | ± 1.7 %                    |
| RF Ambient Reflections                        | 3.0                    | Rectangular              | √3      | 1       | 1        | ± 1.7 %                   | ± 1.7 %                    |
| Probe Positioner                              | 0.8                    | Rectangular              | √3      | 1       | 1        | ± 0.5 %                   | ± 0.5 %                    |
| Probe Positioning                             | 6.7                    | Rectangular              | √3      | 1       | 1        | ± 3.9 %                   | ± 3.9 %                    |
| Post-processing                               | 4.0                    | Rectangular              | √3      | 1       | 1        | ± 2.3 %                   | ± 2.3 %                    |
| <b>Test Sample Related</b>                    |                        |                          |         |         |          |                           |                            |
| Device Positioning                            | 3.6                    | Normal                   | 1       | 1       | 1        | ± 3.6 %                   | ± 3.6 %                    |
| Device Holder                                 | 2.9                    | Normal                   | 1       | 1       | 1        | ± 2.9 %                   | ± 2.9 %                    |
| Measurement SAR Drift                         | 5.0                    | Rectangular              | √3      | 1       | 1        | ± 2.9 %                   | ± 2.9 %                    |
| Power Scaling                                 | 0.0                    | Rectangular              | √3      | 1       | 1        | ± 0.0 %                   | ± 0.0 %                    |
| <b>Phantom and Setup</b>                      |                        |                          |         |         |          |                           |                            |
| Phantom Uncertainty                           | 4.0                    | Rectangular              | √3      | 1       | 1        | ± 2.3 %                   | ± 2.3 %                    |
| Liquid Conductivity (Meas.)                   | 2.5                    | Normal                   | 1       | 0.78    | 0.71     | ± 2.0 %                   | ± 1.8 %                    |
| Liquid Conductivity (Target)                  | 5.0                    | Rectangular              | √3      | 0.64    | 0.43     | ± 1.8 %                   | ± 1.2 %                    |
| Liquid Permittivity (Meas.)                   | 2.5                    | Normal                   | 1       | 0.26    | 0.26     | ± 0.7 %                   | ± 0.7 %                    |
| Liquid Permittivity (Target)                  | 5.0                    | Rectangular              | √3      | 0.6     | 0.49     | ± 1.7 %                   | ± 1.4 %                    |
| Liquid conductivity – temperature uncertainty | 1.7                    | Rectangular              | √3      | 0.78    | 0.71     | ± 0.8 %                   | ± 0.7 %                    |
| Liquid permittivity – temperature uncertainty | 0.3                    | Rectangular              | √3      | 0.23    | 0.26     | ± 0.0 %                   | ± 0.0 %                    |
| <b>Combined Standard Uncertainty</b>          |                        |                          |         |         |          | ± 12.2 %                  | ± 11.9 %                   |
| <b>Coverage Factor for 95 %</b>               |                        |                          |         |         |          | K=2                       |                            |
| <b>Expanded Uncertainty</b>                   |                        |                          |         |         |          | ± 24.3 %                  | ± 23.7 %                   |

**Table 12.3 Uncertainty Budget of DASY for frequency range 3 GHz to 6 GHz  
According to IEC 62209-2/2010**

### **13. References**

- [1] IC RSS-102 Issue 4, "Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands)", March 2010
- [2] IEC 62209-2, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices. Human models, instrumentation, and procedures. Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 616217 D03 v01, "SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers", November 2009



## ***Appendix A. Plots of System Performance Check***

The plots are shown as follows.



## ***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.



## **Appendix C.     DASYS Calibration Certificate**

The DASYS calibration certificates are shown as follows.