



A D T

# FCC DoC TEST REPORT

**REPORT NO. :** FD980924H03

**MODEL NO. :** AR5BBU12

**RECEIVED :** Sep. 24, 2009

**TESTED :** Oct. 01 to 02, 2009

**ISSUED :** Oct. 28, 2009

**APPLICANT :** Atheros Communications, Inc.

**ADDRESS :** 5480 Great America Parkway, Santa Clara, CA  
95054

**ISSUED BY :** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB LOCATION :** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced, except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



Testing Laboratory  
2022



LAB CODE: 200838-0



A D T

## Table of Contents

1	CERTIFICATION .....	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.2	ANTENNA SPECIFICATIONS.....	6
3.3	GENERAL DESCRIPTION OF TEST MODE .....	6
3.4	DESCRIPTION OF SUPPORT UNITS.....	7
3.5	CONFIGURATION OF SYSTEM UNDER TEST .....	7
4	EMISSION TEST.....	8
4.1	CONDUCTED EMISSION MEASUREMENT .....	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	8
4.1.2	TEST INSTRUMENTS .....	8
4.1.3	TEST PROCEDURE .....	9
4.1.4	DEVIATION FROM TEST STANDARD .....	9
4.1.5	TEST SETUP .....	9
4.1.6	EUT OPERATING CONDITIONS.....	10
4.1.7	TEST RESULTS.....	11
4.2	RADIATED EMISSION MEASUREMENT .....	13
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	13
4.2.2	TEST INSTRUMENTS .....	14
4.2.3	TEST PROCEDURE .....	15
4.2.4	DEVIATION FROM TEST STANDARD .....	15
4.2.5	TEST SETUP .....	16
4.2.6	EUT OPERATING CONDITIONS.....	16
4.2.7	TEST RESULTS (MODE 1).....	17
4.2.8	TEST RESULTS (MODE 2).....	19
4.2.9	TEST RESULTS (MODE 3).....	21
5	INFORMATION ON THE TESTING LABORATORIES .....	23
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	24



A D T

## 1 CERTIFICATION

**PRODUCT :** Bluetooth v2.1+EDR USB module  
**BRAND NAME :** Atheros  
**MODEL NO. :** AR5BBU12  
**APPLICANT :** Atheros Communications, Inc.  
**TESTED :** Oct. 01 to 02, 2009  
**TEST SAMPLE :** R&D SAMPLE  
**STANDARDS :** FCC Part 15, Subpart B, Class B  
ANSI C63.4-2003  
CISPR 22: 1997, Class B  
ICES-003: 2004, Class B

The above equipment (Model: AR5BBU12) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Sunny Wen, DATE: Oct. 28, 2009  
( Sunny Wen, Specialist )

**TECHNICAL  
ACCEPTANCE** : Hank Chung, DATE: Oct. 28, 2009  
( Hank Chung, Deputy Manager )

**APPROVED BY** : May Chen, DATE: Oct. 28, 2009  
( May Chen, Deputy Manager )



A D T

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15 Subpart B, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -16.79dB at 0.209MHz
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -0.26 dB at 204.00 MHz
ICES-003: Class B			

### NOTE:

The limit for radiated test was performed according to CISPR 22, which was specified in FCC PART 15 Subpart B 15.109(g). Also the limits of ICES-003: 2004 and CISPR 22 are same.

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz ~18GHz)	2.49 dB



A D T

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth v2.1+EDR USB module
MODEL NO.	AR5BBU12
POWER SUPPLY	DC 3.3 from host equipment
POWER CORD	NA
DATA CABLE SUPPLIED	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

##### NOTE:

1. The EUT was pre-tested under the following modes:

Test Mode	Description	Antenna Type
Mode A	X-Y plane	PIFA
Mode B	X-Z plane	
<b>Mode C</b>	<b>Y-Z plane</b>	
Mode D	X-Y plane	Printed
Mode E	X-Z plane	
<b>Mode F</b>	<b>Y-Z plane</b>	
Mode G	X-Y plane	Chip
<b>Mode H</b>	<b>X-Z plane</b>	
Mode I	Y-Z plane	

From the above modes, the worst emission levels were found in **Mode C, F & H**. Therefore only the test data of the modes were recorded in this report individually.

2. The above EUT information was declared by the manufacturer and for more detailed feature descriptions, please refer to the manufacturer's specifications or User's Manual.



A D T

## 3.2 ANTENNA SPECIFICATIONS

There are three antennas provided to this EUT, please refer to the following table:

Brand	Model No.	Antenna Connector	Antenna Type	Antenna Gain with cable loss (dBi)	Cable Loss (dB)	Cable Length (mm)
Wistron	81-EBJ15.005 (Aux)	IPEX	PIFA	3.62	1.15	300
Atheros	308-00001-000	NA	Printed	0	NA	NA
fractus	FR05-S1-N-0-001	NA	Chip	2.2	NA	NA

## 3.3 GENERAL DESCRIPTION OF TEST MODE

The EUT was tested under following test mode:

Conducted test	
Test Mode	Description
Mode 1	PIFA Antenna
Radiated test	
Test Mode	Description
Mode 1	PIFA Antenna
Mode 2	Printed Antenna
Mode 3	Chip Antenna



### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	LENOVO	0769	NA	NA
2	TEST TOOL	Atheros	NA	NA	NA

No.	Signal cable description
1	NA
2	Signal cable 0.15m.

Note: 1. All power cords of the above support units are unshielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

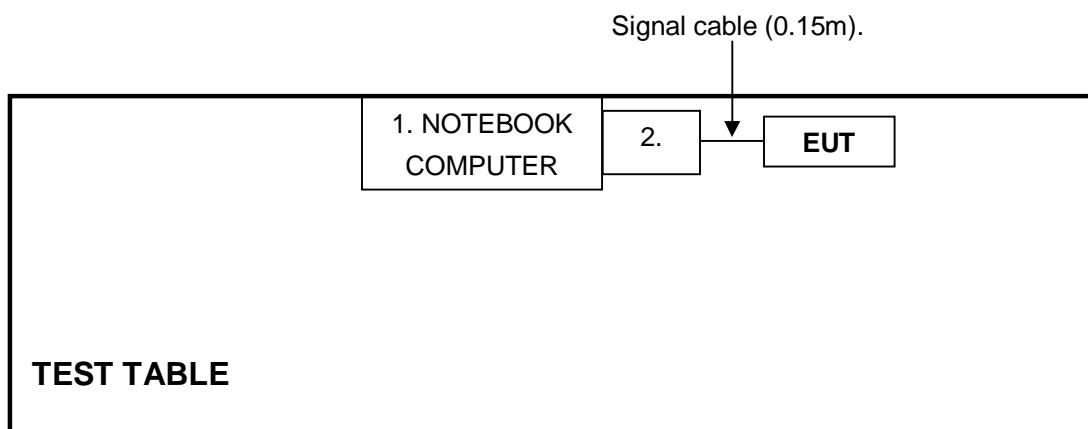



A D T

## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

##### TEST STANDARD:

FCC Part 15, Subpart B (Section: 15.107)

ICES-003: 2004 (Class A: section 5.2)

(Class B: section 5.3)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

**NOTE:** (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 23, 2009	Mar. 22, 2010
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100071	Nov. 26, 2008	Nov. 25, 2009
Line-Impedance Stabilization Network (for EUT)	ESH3-Z5	848773/004	Nov. 05, 2008	Nov. 04, 2009
RF Cable (JYEBAO)	5DFB	COBCAB-001	Aug. 15, 2009	Aug. 14, 2010
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

#### 4.1.3 TEST PROCEDURE


The basic test procedure was in accordance with ANSI C63.4-2003 (section 7), CISPR 22 (section 9) and ICES-003: 2004 (section 4).

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

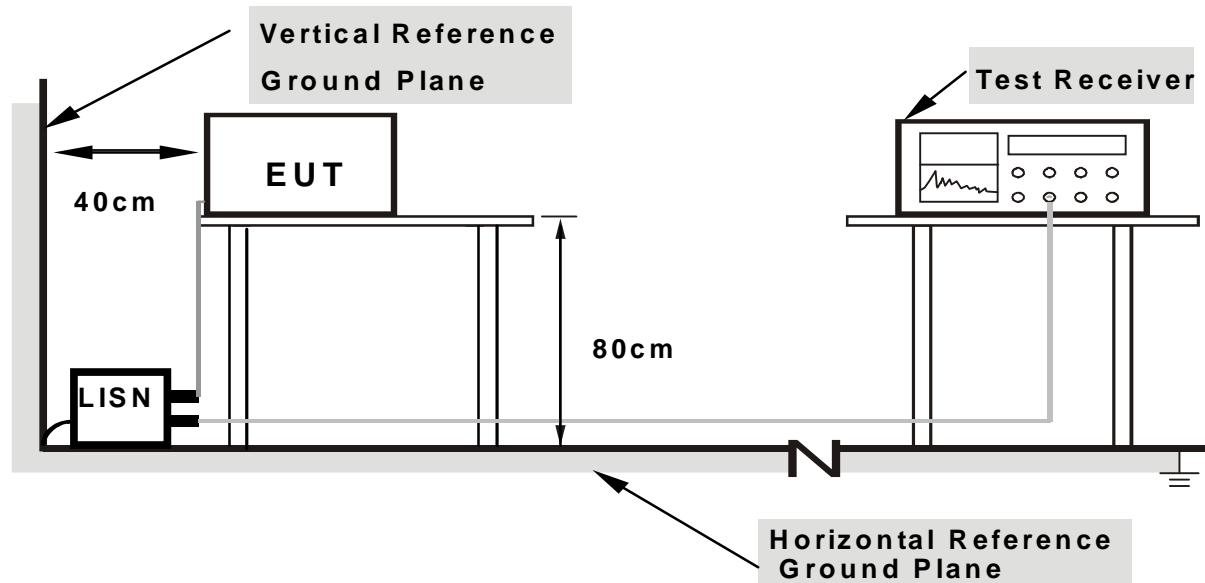

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Connect the EUT with the support unit 1 (Notebook Computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program "BtUSB\_V1\_0\_B7" to enable EUT under transmission condition continuously.


## 4.1.7 TEST RESULTS

INPUT POWER (SYSTEM)	120Vac, 60 Hz	6DB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 63%RH, 965 hPa	PHASE	Line (L)
TESTED BY	Wen Yu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.18	46.29	-	46.47	-	63.26	53.26	-16.79	-
2	0.279	0.18	38.48	-	38.66	-	60.85	50.85	-22.18	-
3	0.486	0.23	36.13	-	36.36	-	56.24	46.24	-19.88	-
4	3.109	0.58	32.03	-	32.61	-	56.00	46.00	-23.39	-
5	3.384	0.59	32.45	-	33.04	-	56.00	46.00	-22.96	-
6	5.043	0.69	37.48	-	38.17	-	60.00	50.00	-21.83	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

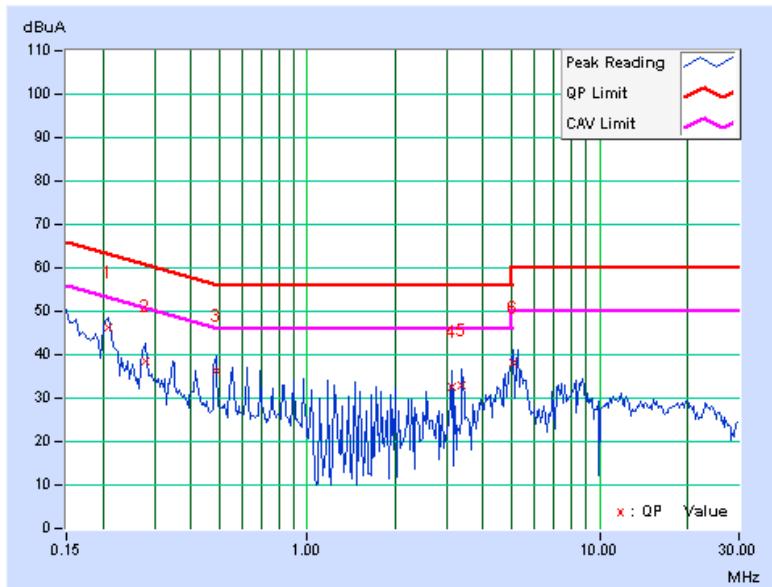




A D T

<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>6dB BANDWIDTH</b>	9 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 63%RH, 965 hPa	<b>PHASE</b>	Neutral (N)
<b>TESTED BY</b>	Wen Yu		

No	Freq. Factor	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.11	46.03	-	46.14	-	63.26	53.26	-17.12	-
2	0.345	0.12	36.42	-	36.54	-	59.07	49.07	-22.53	-
3	0.485	0.16	34.05	-	34.21	-	56.26	46.26	-22.04	-
4	0.552	0.19	35.24	-	35.43	-	56.00	46.00	-20.57	-
5	3.660	0.53	32.51	-	33.04	-	56.00	46.00	-22.96	-
6	5.250	0.61	37.12	-	37.73	-	60.00	50.00	-22.27	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

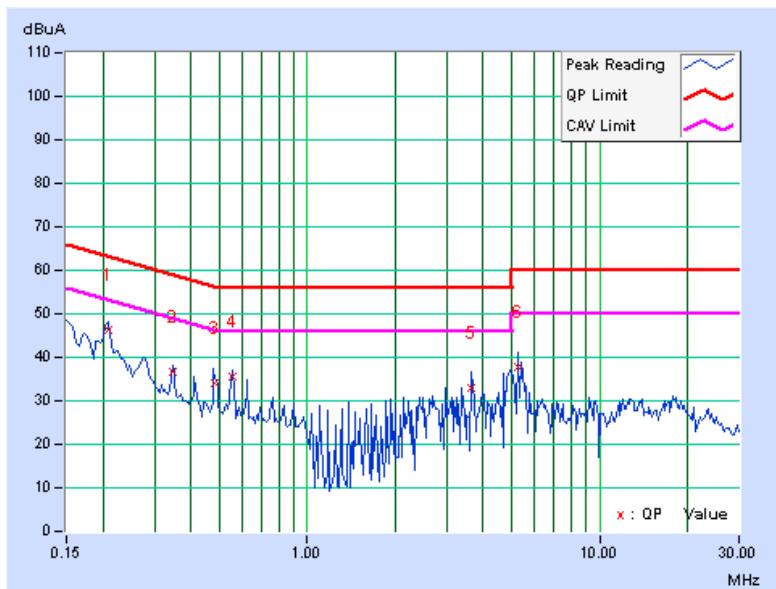



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### TEST STANDARD:

FCC Part 15, Subpart B (Section: 15.109)

CISPR 22: 1997 (section 6)

ICES-003: 2004 (Class A: Section 5.4/Class B: Section 5.5)

**FOR FREQUENCY BELOW 1000 MHz (47 CFR Part 15 Subpart B)**

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
30 – 88	90	39.1	100	40.0
88 – 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46.0
Above 960	300	49.5	500	54.0

**FOR FREQUENCY BELOW 1000 MHz (CISPR 22)**

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m	dBuV/m	dBuV/m	dBuV/m
30 – 230	40		30	
230 - 1000	47		37	

**Note:** The limit for radiated test was performed according to CISPR 22, which was specified in FCC PART 15 Subpart B 15.109(g) and ICES-003 clause 7.

#### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

**Note:** (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



A D T

## FREQUENCY RANGE OF RADIATED MEASUREMENT

### (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 24 , 2009	Apr. 23 , 2010
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 09, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Aug. 28, 2009	Aug. 28, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 29, 2009	Apr. 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Sep. 26, 2009	Sep. 25, 2010
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 14, 2009	Aug. 13, 2010
RF Cable	8D	STCCAB-001	Sep. 26, 2009	Sep. 25, 2010
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.



### 4.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4-2003 (section 8), CISPR 22 (section 10) and ICES-003: 2004 (section 4).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters (3 meters -above 1GHz) meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference-receiving antenna.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

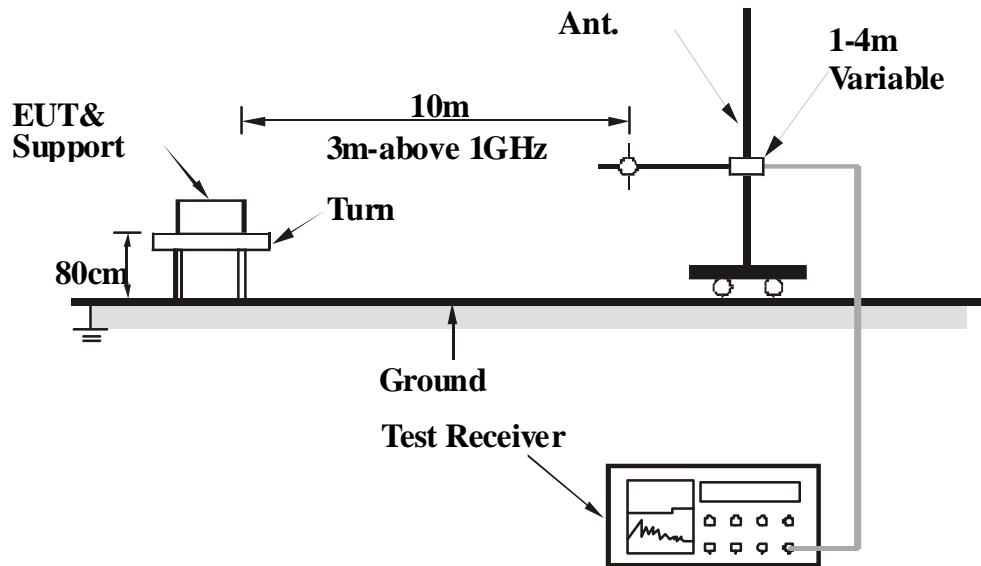

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



A D T

#### 4.2.7 TEST RESULTS (MODE 1)

<b>FREQUENCY RANGE</b>	Below 1000MHz	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	29deg. C, 69%RH 965hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TESTED BY</b>	Frank Liu		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 10 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.00	27.16 QP	30.00	-2.84	4.00 H	8	14.79	12.37
2	167.90	24.96 QP	30.00	-5.04	3.92 H	235	10.32	14.64
3	180.00	27.46 QP	30.00	-2.54	3.90 H	75	14.38	13.08
4	204.00	29.73 QP	30.00	-0.27	4.00 H	220	17.72	12.01
5	216.00	28.54 QP	30.00	-1.46	4.00 H	163	16.09	12.45
6	240.00	30.57 QP	37.00	-6.43	3.71 H	90	17.24	13.33
7	296.60	27.66 QP	37.00	-9.34	3.73 H	57	11.81	15.85
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 10 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.10	27.91 QP	30.00	-2.09	1.39 V	92	15.56	12.35
2	204.10	23.90 QP	30.00	-6.10	1.01 V	160	11.89	12.01
3	222.20	22.73 QP	30.00	-7.27	1.00 V	20	10.05	12.68
4	240.00	25.88 QP	37.00	-11.12	1.00 V	145	12.55	13.33
5	370.70	26.19 QP	37.00	-10.81	1.00 V	0	8.40	17.79
6	627.25	32.13 QP	37.00	-4.87	1.52 V	261	7.99	24.14

**REMARKS:** 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)  
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

<b>FREQUENCY RANGE</b>	1000~12500MHz	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 68%RH 965hPa	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>TESTED BY</b>	Phoenix Huang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	43.65 PK	74.00	-30.35	1.33 H	5	7.37	36.28
2	4960.00	31.90 AV	54.00	-22.10	1.33 H	5	-4.38	36.28
3	9920.00	51.85 PK	74.00	-22.15	1.09 H	67	6.10	45.75
4	9920.00	40.98 AV	54.00	-13.02	1.09 H	67	-4.77	45.75

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	43.57 PK	74.00	-30.43	1.38 V	264	7.29	36.28
2	4960.00	31.66 AV	54.00	-22.34	1.38 V	264	-4.62	36.28
3	9920.00	52.98 PK	74.00	-21.02	1.08 V	241	7.23	45.75
4	9920.00	41.24 AV	54.00	-12.76	1.08 V	241	-4.51	45.75

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

## 4.2.8 TEST RESULTS (MODE 2)

<b>FREQUENCY RANGE</b>	Below 1000MHz	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	29deg. C, 69%RH 965hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TESTED BY</b>	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.00	27.34 QP	30.00	-2.66	4.00 H	123	14.97	12.37
2	167.90	24.13 QP	30.00	-5.87	3.11 H	214	9.49	14.64
3	180.00	27.52 QP	30.00	-2.48	3.82 H	67	14.44	13.08
4	204.00	29.66 QP	30.00	-0.34	3.56 H	219	17.65	12.01
5	216.00	28.64 QP	30.00	-1.36	4.00 H	123	16.19	12.45
6	240.00	30.66 QP	37.00	-6.34	3.71 H	73	17.33	13.33
7	296.60	27.34 QP	37.00	-9.66	3.64 H	72	11.49	15.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.10	27.33 QP	30.00	-2.67	1.31 V	84	14.98	12.35
2	204.10	23.64 QP	30.00	-6.36	1.05 V	73	11.63	12.01
3	222.20	22.68 QP	30.00	-7.32	1.02 V	35	10.00	12.68
4	240.00	25.79 QP	37.00	-11.21	1.03 V	133	12.46	13.33
5	370.70	26.26 QP	37.00	-10.74	1.02 V	37	8.47	17.79
6	627.25	32.29 QP	37.00	-4.71	1.22 V	231	8.15	24.14

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

<b>FREQUENCY RANGE</b>	1000~12500MHz	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 68%RH 965hPa	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>TESTED BY</b>	Phoenix Huang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	42.85 PK	74.00	-31.15	1.28 H	8	6.57	36.28
2	4960.00	31.66 AV	54.00	-22.34	1.28 H	8	-4.62	36.28
3	9920.00	52.34 PK	74.00	-21.66	1.37 H	241	6.59	45.75
4	9920.00	41.13 AV	54.00	-12.87	1.37 H	241	-4.62	45.75

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	43.25 PK	74.00	-30.75	1.25 V	246	6.97	36.28
2	4960.00	31.09 AV	54.00	-22.91	1.25 V	246	-5.19	36.28
3	9920.00	53.09 PK	74.00	-20.91	1.08 V	54	7.34	45.75
4	9920.00	41.22 AV	54.00	-12.78	1.08 V	54	-4.53	45.75

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

## 4.2.9 TEST RESULTS (MODE 3)

<b>FREQUENCY RANGE</b>	Below 1000MHz	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	29deg. C, 69%RH 965hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TESTED BY</b>	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.00	27.66 QP	30.00	-2.34	4.00 H	159	15.29	12.37
2	167.90	24.93 QP	30.00	-5.07	3.16 H	244	10.29	14.64
3	180.00	27.82 QP	30.00	-2.18	3.74 H	154	14.74	13.08
4	<b>204.00</b>	<b>29.74 QP</b>	<b>30.00</b>	<b>-0.26</b>	<b>3.62 H</b>	<b>243</b>	<b>17.73</b>	<b>12.01</b>
5	216.00	28.87 QP	30.00	-1.13	3.64 H	164	16.42	12.45
6	240.00	30.13 QP	37.00	-6.87	3.59 H	84	16.80	13.33
7	296.60	27.89 QP	37.00	-9.11	3.72 H	64	12.04	15.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.10	27.33 QP	30.00	-2.67	1.31 V	84	14.98	12.35
2	204.10	23.64 QP	30.00	-6.36	1.05 V	73	11.63	12.01
3	222.20	22.68 QP	30.00	-7.32	1.02 V	35	10.00	12.68
4	240.00	25.79 QP	37.00	-11.21	1.03 V	133	12.46	13.33
5	370.70	26.26 QP	37.00	-10.74	1.02 V	37	8.47	17.79
6	627.25	32.29 QP	37.00	-4.71	1.22 V	231	8.15	24.14

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

<b>FREQUENCY RANGE</b>	1000~12500MHz	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 68%RH 965hPa	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>TESTED BY</b>	Phoenix Huang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	44.00 PK	74.00	-30.00	1.39 H	20	7.72	36.28
2	4960.00	32.68 AV	54.00	-21.32	1.39 H	20	-3.60	36.28
3	9920.00	52.80 PK	74.00	-21.20	1.28 H	105	7.05	45.75
4	9920.00	41.84 AV	54.00	-12.16	1.28 H	105	-3.91	45.75

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4960.00	43.54 PK	74.00	-30.46	1.22 V	65	7.26	36.28
2	4960.00	33.25 AV	54.00	-20.75	1.22 V	65	-3.03	36.28
3	9920.00	53.32 PK	74.00	-20.68	1.35 V	211	7.57	45.75
4	9920.00	41.21 AV	54.00	-12.79	1.35 V	211	-4.54	45.75

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA (MOU)
<b>Russia</b>	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232  
Fax: 886-3-3185050

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## 6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---