



**FCC CFR47 CLASS II PERMISSIVE CHANGE
CERTIFICATION
TEST REPORT**

FOR

PCI EXPRESS 802.11 A/B/G TRANSCEIVER

MODEL NUMBER: AR5BXB6

FCC ID: PPD-AR5BXB6-M

REPORT NUMBER: 05U3760-1A3

ISSUE DATE: NOVEMBER 07, 2005

Prepared for
**ATHEROS COMMUNICATIONS, INC.
5480 GREAT AMERICA PARKWAY
SANTA CLARA, CA 95054, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A	10/21/05	Initial Issue	Thu Chan
A2	10/28/05	Updated antenna info under Section 5.2 Item 6; removed g turbo result; added Section 7.4	Thu Chan
A3	11/07/05	Corrected typo on g mode power reading in Section 7.1.1.	Thu Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. DESCRIPTION OF CLASS II CHANGE	6
5.3. SOFTWARE AND FIRMWARE	7
5.4. WORST-CASE CONFIGURATION AND MODE.....	7
5.5. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND	11
7.1.1. AVERAGE POWER.....	11
7.2. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND	12
7.2.1. AVERAGE POWER.....	12
7.3. RADIATED EMISSIONS.....	13
7.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	13
7.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND	16
7.3.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND	31
7.3.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	32
7.4. POWERLINE CONDUCTED EMISSIONS	36
8. SETUP PHOTOS	40

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Atheros Communications, Inc.
5480 Great America Parkway
Santa Clara, CA 95054, USA

EUT DESCRIPTION: PCI EXPRESS 802.11 A/B/G TRANSCEIVER

MODEL: AR5BXB6

SERIAL NUMBER: 1159P000021

DATE TESTED: OCTOBER 11-19, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g transceiver

The radio module is manufactured by Atheros Communications Inc.

5.2. DESCRIPTION OF CLASS II CHANGE

The changes filed under this application include:

1. Added internal shield wall

This change provides a grounded wall within the shield cavity between the Ar5424 device and the 5GHz receiver input to suppress interference from harmonics of the PCI Express bus signals. The PCB design was changed only to open a window in the solder mask material over the ground plane so that the shield can be soldered to the PCB original ground plane during manufacture;

2. Removed eccosorb attached to inside of shield cover above AR5424 I.C. This material previously provided some suppression of the PCI-Express bus harmonic. This is no longer need due to shield wall addition (#1 above);

3. Added R159 51ohm resistor in series with C17 at the terminated input of the LNA;

4. Changed some trace routing in the digital circuits (not RF section) for BT_Active and Rx_Clear signals;

5. Changed reset circuit RC values to 47kohms (R6) and 0.1uF (C1) located in digital section (not RF).

6. Add new antenna models:

Hitachi HTL017 & HFT40

Tyco: TIAN01 & TBN001

WNC: WNC001, 81.EDZ15.001/2, 81.EE115.001-4

Full antenna details are included in separate exhibit.

The highest gain of the new antenna models is: WNC001 for 2.4GHz with a maximum gain of 1.8dBi and HTL017 for 5.8GHz Band, with a maximum gain of 3.2dBi.

5.3. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Atheros Radio Test, Revision 5.3 Build #11.

The test utility software used during testing was ART-V5_3_b11.

5.4. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2462 MHz.

The worst-case data rate for this channel is determined to be 6 Mb/s.

Thus all emissions tests were made in the 802.11b mode, 2412MHz to 2462 MHz, at 1 Mb/s. and 802.11a/g mode at 6Mb/s.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	IBM	Thinkpad	ZZ-27004	DoC
AC Adapter	IBM	08K8202	NA	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	No
2	DC	1	DC	Un-shielded	1m	No

TEST SETUP

The EUT was tested with a host laptop computer connected via an express-card extension board. Test s/w exercised the radio card.

SETUP DIAGRAM FOR TESTS

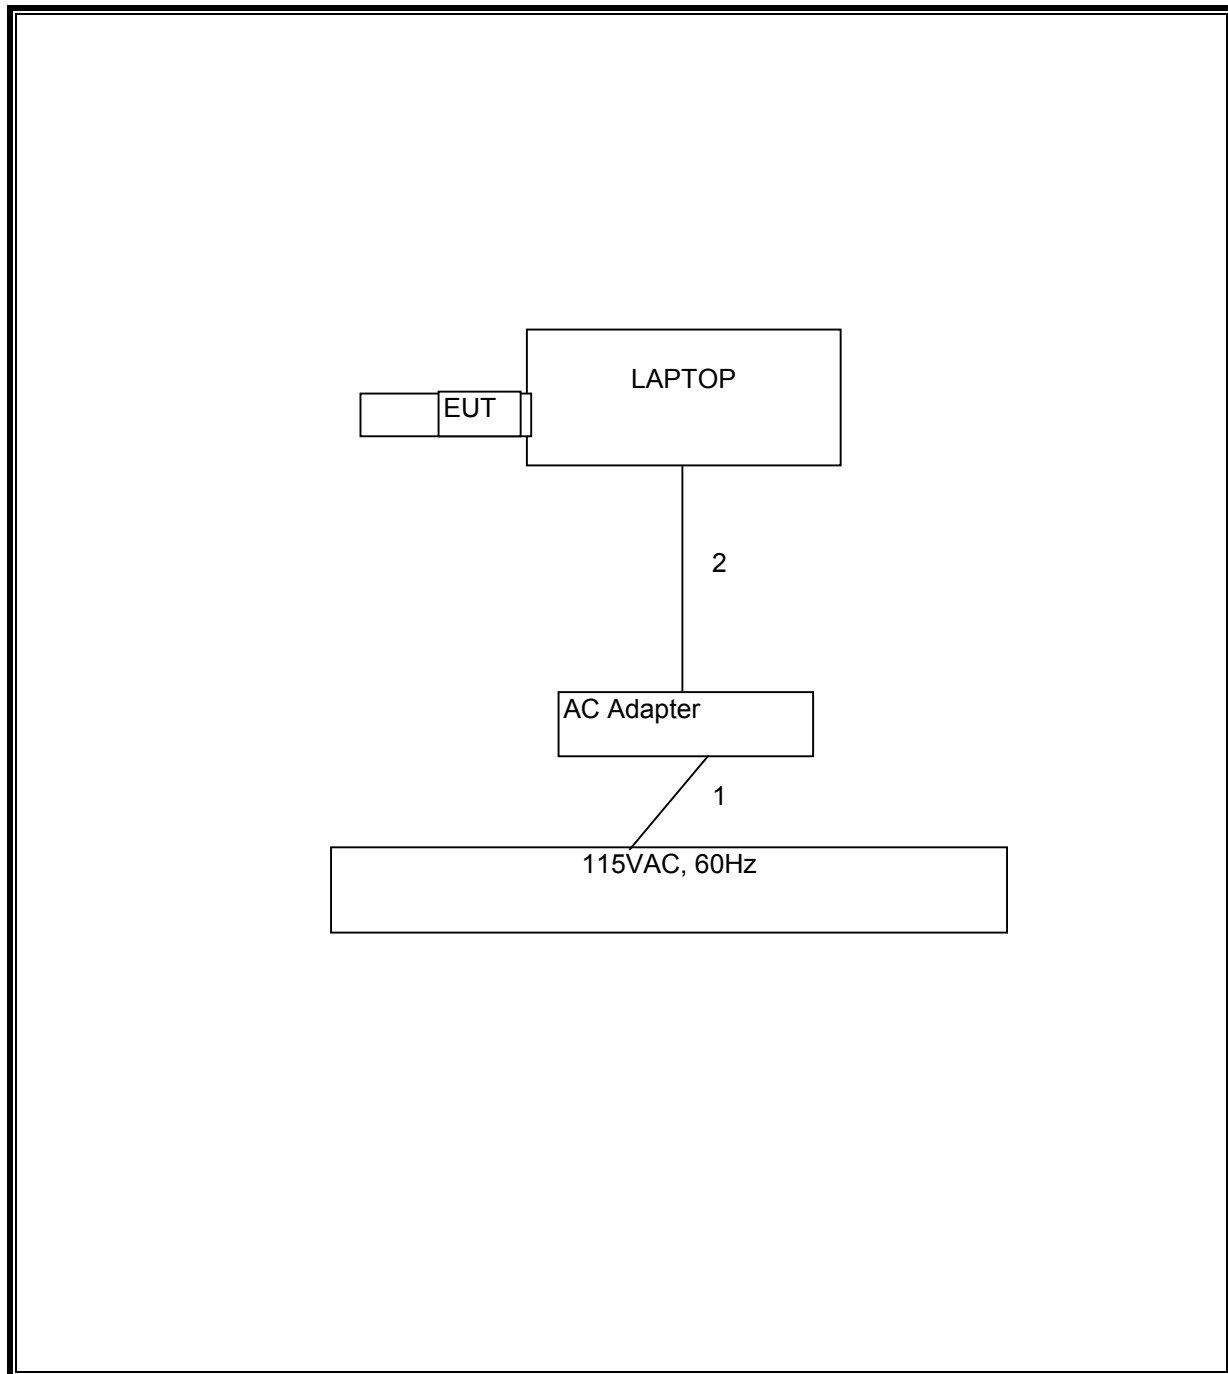

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/2006
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	1/6/2006
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42070220	7/29/2006
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	4/22/2006
Antenna, Horn 18 ~ 26 GHz	ARA	MWH-1826/B	1049	912/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2006
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
Antenna, Bilog 30MHz ~ 2Ghz	Solar	JB1	A121003	3/3/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/29/2006
RF Filter Section	HP	85420E	3705A00256	3/29/2006
7.6GHz HPF	MicroTronic	HPM13195	1	CNR
4.0GHz HPF	MicroTronic	HPM13351	3	CNR
Power Meter	R & S	NRVD	DE 12893	10/21/06
Power Sensor, 18 GHz, 300 mW	R&S	NRV-Z51	DE 13013	10/20/06

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.40
Middle	2437	17.42
High	2462	17.59

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.03
Middle	2437	19.20
High	2462	14.70

7.2. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND

7.2.1. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5745	17.83
Middle	5785	17.70
High	5825	17.50

7.3. RADIATED EMISSIONS

7.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

DELTA METHOD RESULTS


B-Mode			Fundamental (dBuV/m)		Reading (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
CHANNEL	Average Power (dBm)	Delta (dBc)	Peak	Average	Peak	Average	Peak	Average	Peak	Average
2412	17.5	55.47	105.41	101.89	49.94	46.42	74	54	-24.06	-7.58
2462	17.5	55.68	108.51	105.23	52.83	49.55	74	54	-21.17	-4.45

G-Mode			Fundamental (dBuV/m)		Reading (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
CHANNEL	Average Power (dBm)	Delta (dBc)	Peak	Average	Peak	Average	Peak	Average	Peak	Average
2412	16	41.67	105.35	95.53	63.68	53.86	74	54	-10.32	-0.14
2462	14.5	46.58	110.71	99.83	64.13	53.25	74	54	-9.87	-0.75


FUNDAMENTAL (b MODE, LOW CHANNEL, PEAK)

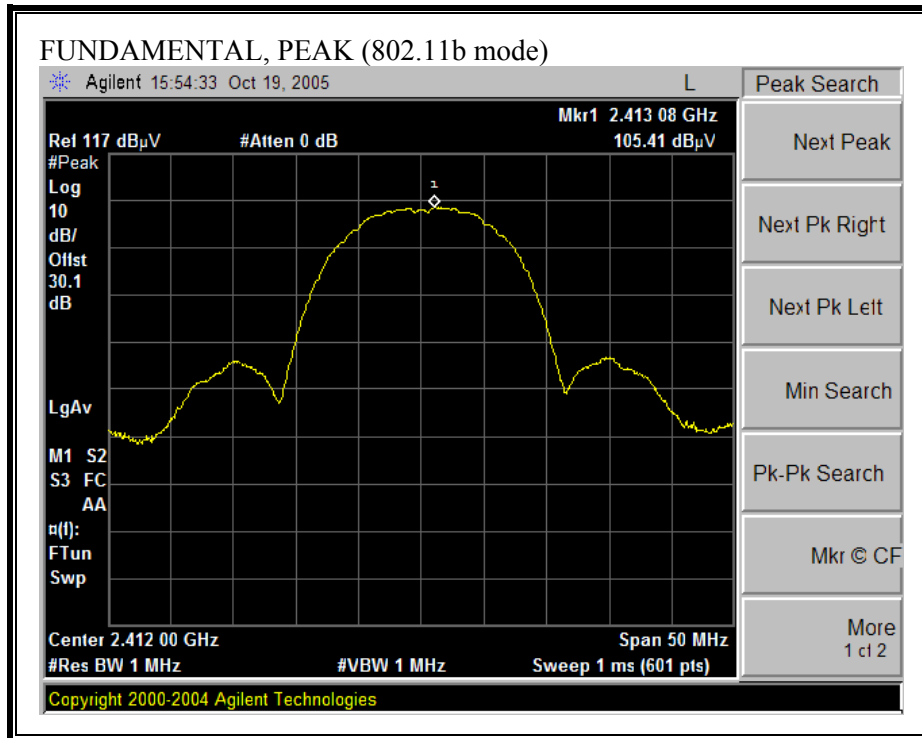


FUNDAMENTAL (b MODE, LOW CHANNEL, AVERAGE)

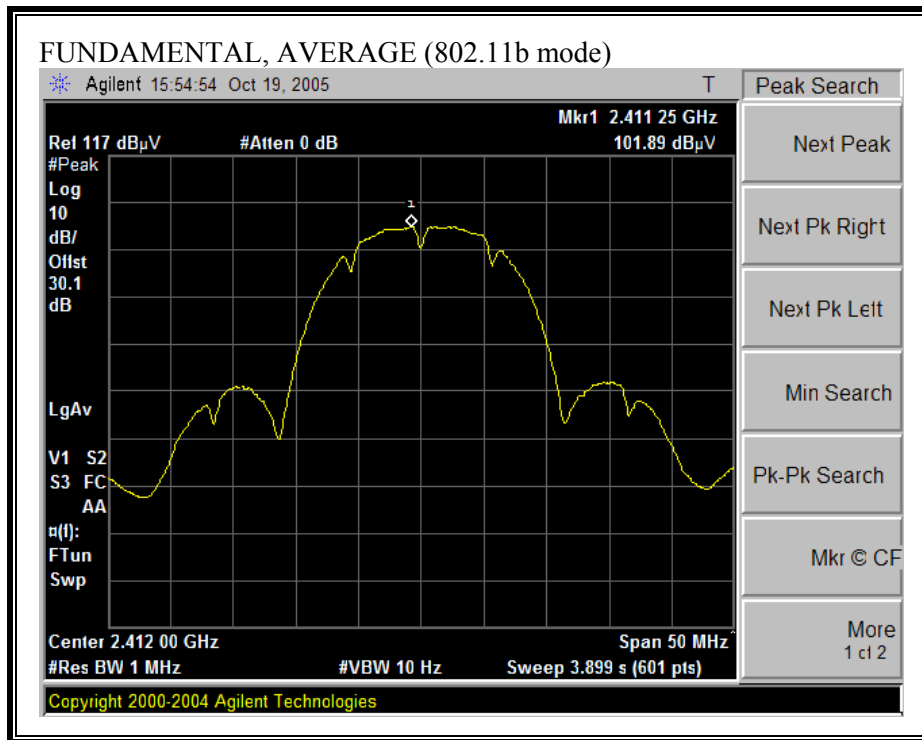


DELTA CONDUCTED BANDEDGE (b MODE, LOW CHANNEL)

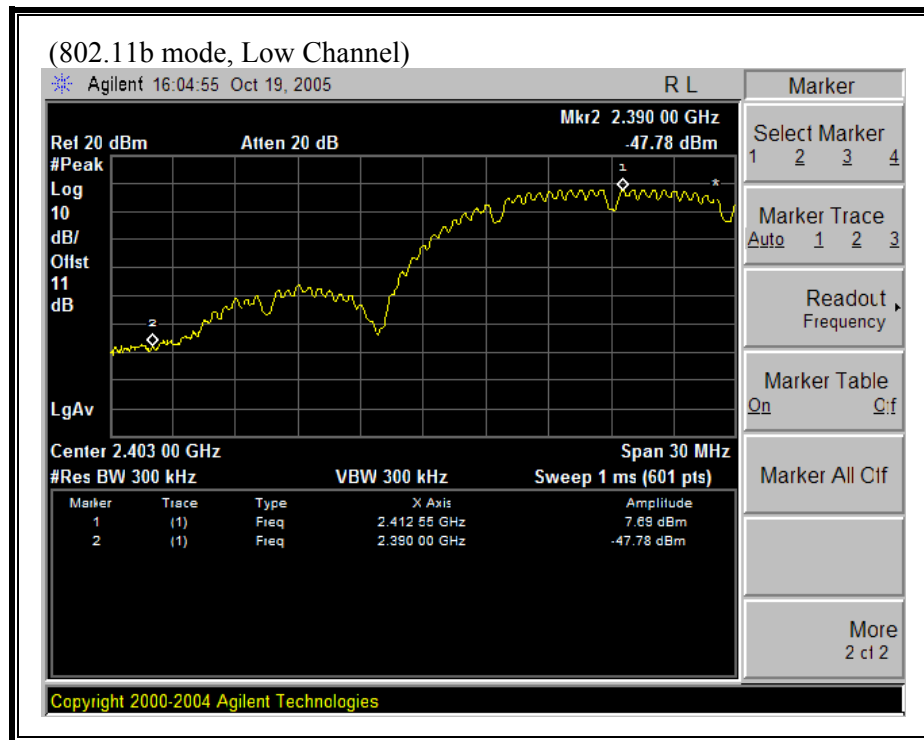


FUNDAMENTAL (b MODE, HIGH CHANNEL, PEAK)

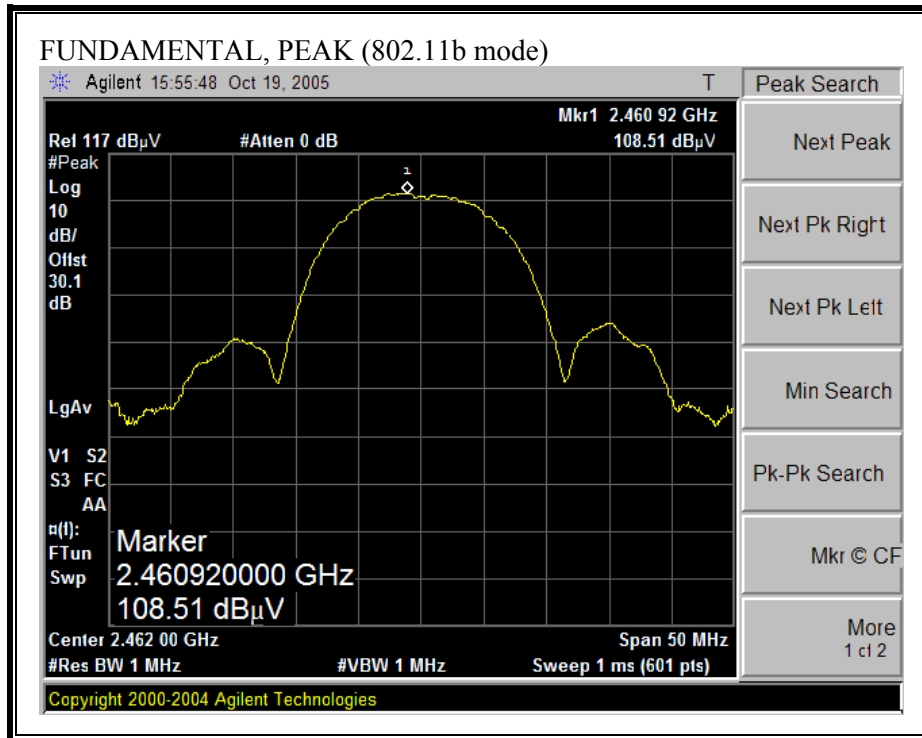

FUNDAMENTAL (b MODE, HIGH CHANNEL, AVERAGE)

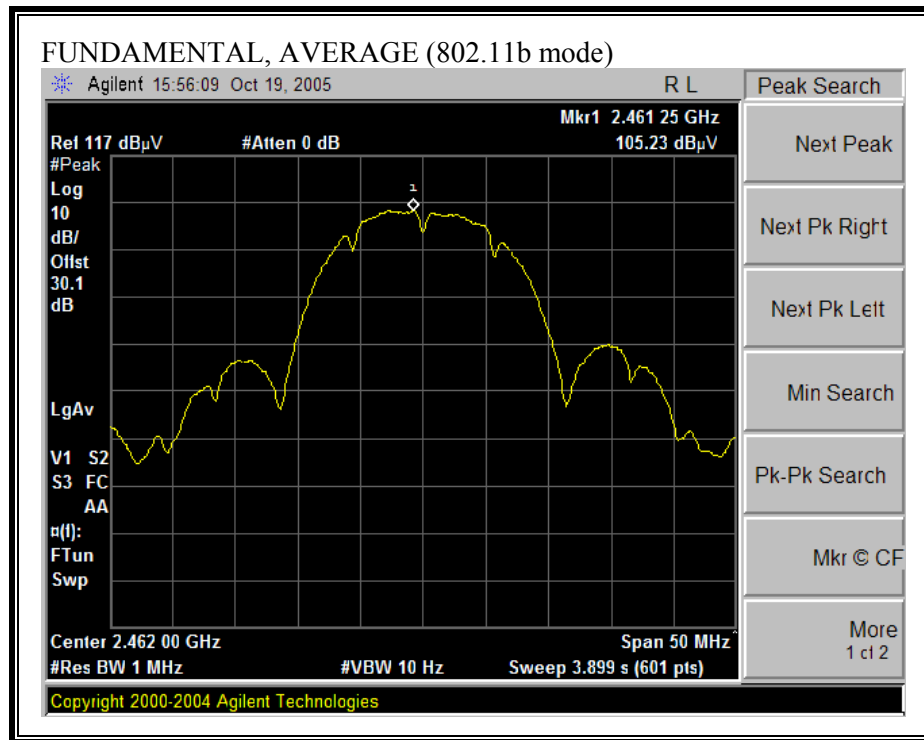


DELTA CONDUCTED BANDEDGE (b MODE, HIGH CHANNEL)

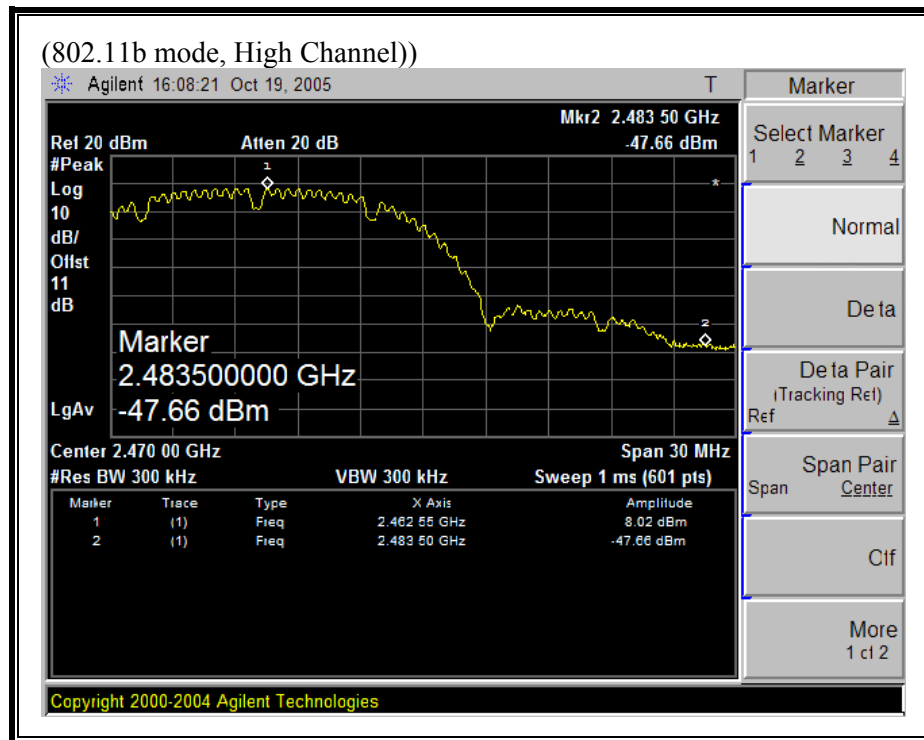


HARMONICS AND SPURIOUS EMISSIONS (b MODE)

10/19/2005 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang Project #:05U3760-1 Company:Atheros EUT Descrip.:Mini PCI Express 802.11 a/b/g Transceiver EUT M/N:AR5BXB6-M Test Target:FCC 15.247 Mode Oper:TX, b mode																
Test Equipment:																
Horn 1-18GHz T60; S/N: 2238 @3m			Pre-amplifier 1-26GHz T144 Miteq 3008A00931			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit FCC 15.205				
Hi Frequency Cables																
2 foot cable			3 foot cable Chin 197538001			12 foot cable Chin 200354001			HPF HPF_4.0GHz			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Ch, 2412MHz																
4.824	3.0	56.2	52.5	33.6	3.2	-36.5	0.0	0.6	57.1	53.4	74	54	-16.9	-0.6	V	
4.824	3.0	56.0	51.5	33.6	3.2	-36.5	0.0	0.6	56.9	52.4	74	54	-17.1	-1.6	H	
Mid Ch, 2437MHz																
4.874	3.0	57.0	52.9	33.7	3.2	-36.5	0.0	0.6	58.0	53.9	74	54	-16.0	-0.1	V	
7.311	3.0	49.0	43.5	36.2	3.6	-36.2	0.0	0.6	53.2	47.7	74	54	-20.8	-6.3	V	
4.874	3.0	55.0	51.0	33.7	3.2	-36.5	0.0	0.6	56.0	52.0	74	54	-18.0	-2.0	H	
7.311	3.0	51.4	40.0	36.2	3.6	-36.2	0.0	0.6	55.6	44.2	74	54	-18.4	-9.8	H	
High Ch, 2462MHz																
4.924	3.0	54.5	51.0	33.7	3.2	-36.5	0.0	0.6	55.6	52.1	74	54	-18.4	-1.9	V	
7.386	3.0	50.0	42.5	36.2	3.6	-36.2	0.0	0.6	54.3	46.8	74	54	-19.7	-7.2	V	
4.924	3.0	53.0	50.1	33.7	3.2	-36.5	0.0	0.6	54.1	51.2	74	54	-19.9	-2.8	H	
7.386	3.0	50.1	44.0	36.2	3.6	-36.2	0.0	0.6	54.4	48.3	74	54	-19.6	-5.7	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											


FUNDAMENTAL (g MODE, LOW CHANNEL, PEAK)

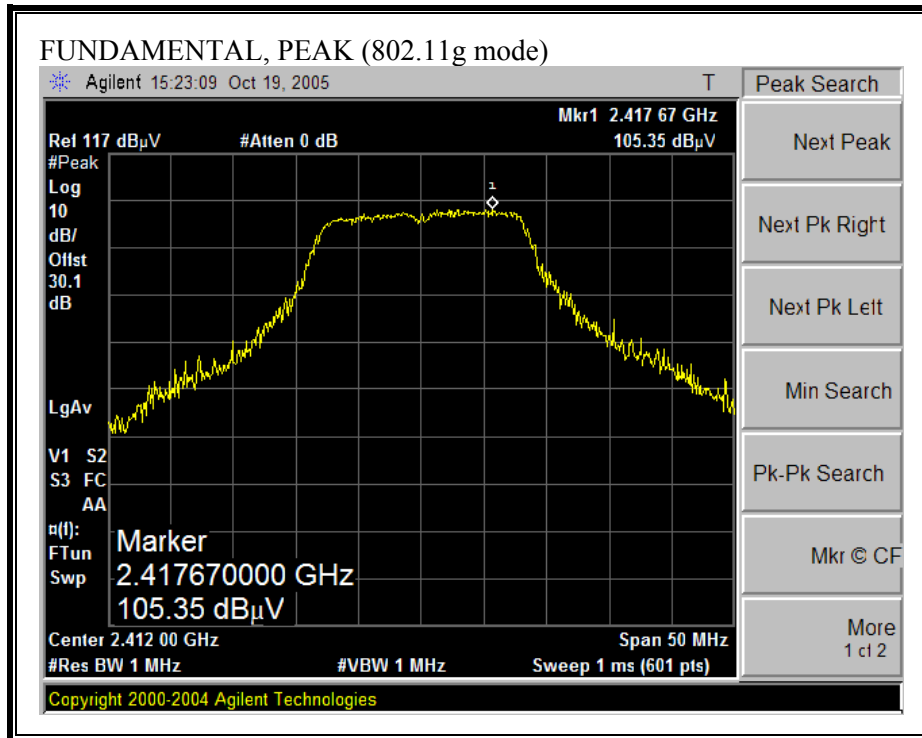


FUNDAMENTAL (g MODE, LOW CHANNEL, AVERAGE)

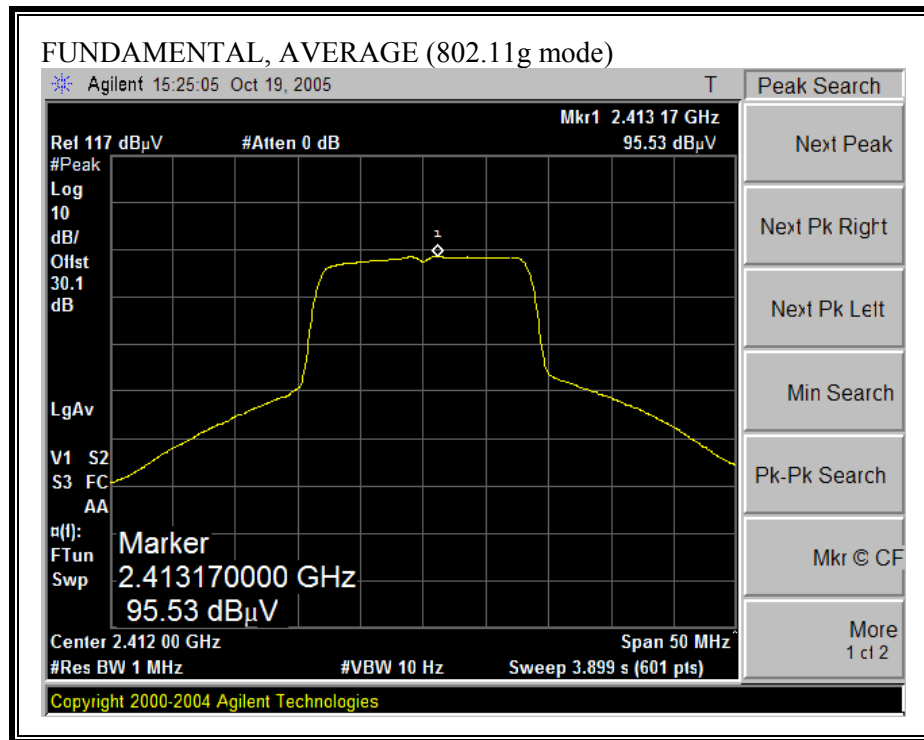


DELTA CONDUCTED BANDEDGE (g MODE, LOW CHANNEL)

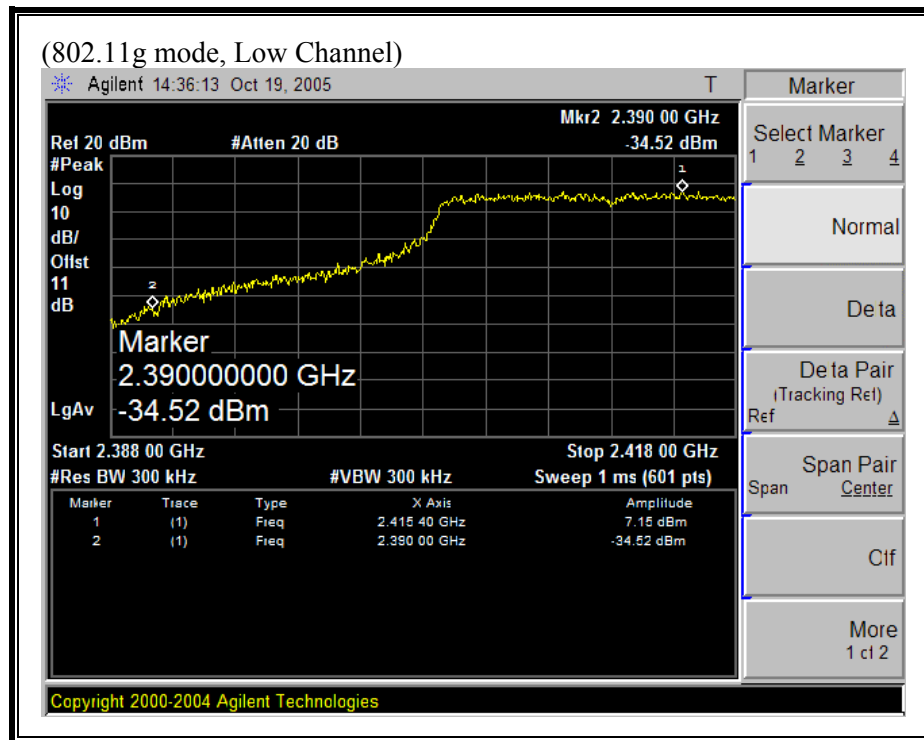


FUNDAMENTAL (g MODE, HIGH CHANNEL, PEAK)

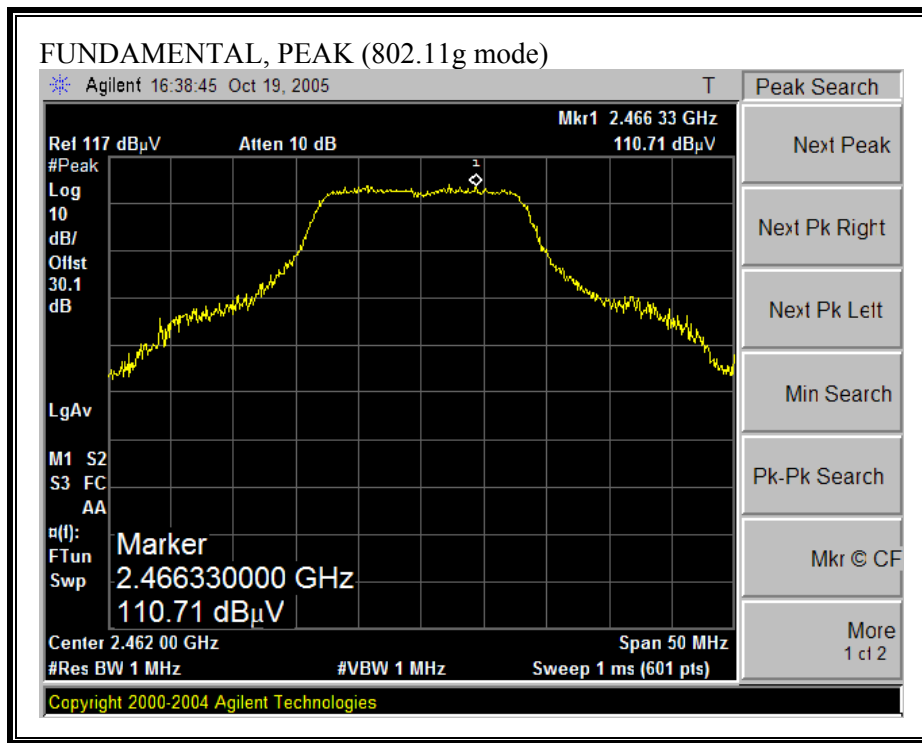

FUNDAMENTAL (g MODE, HIGH CHANNEL, AVERAGE)

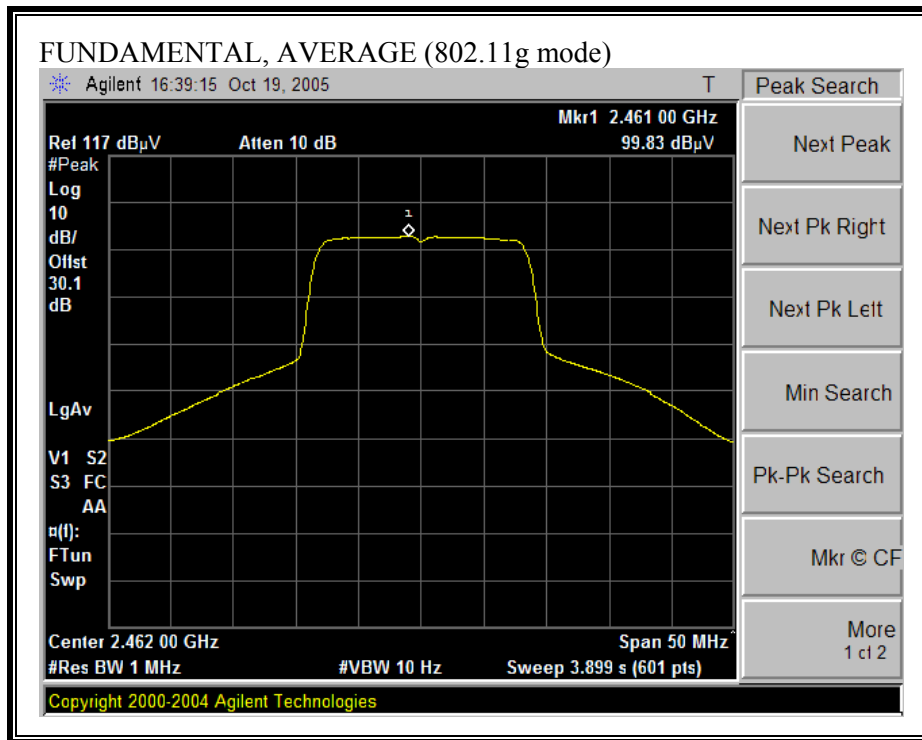

DELTA CONDUCTED BANDEDGE (g MODE, LOW CHANNEL)

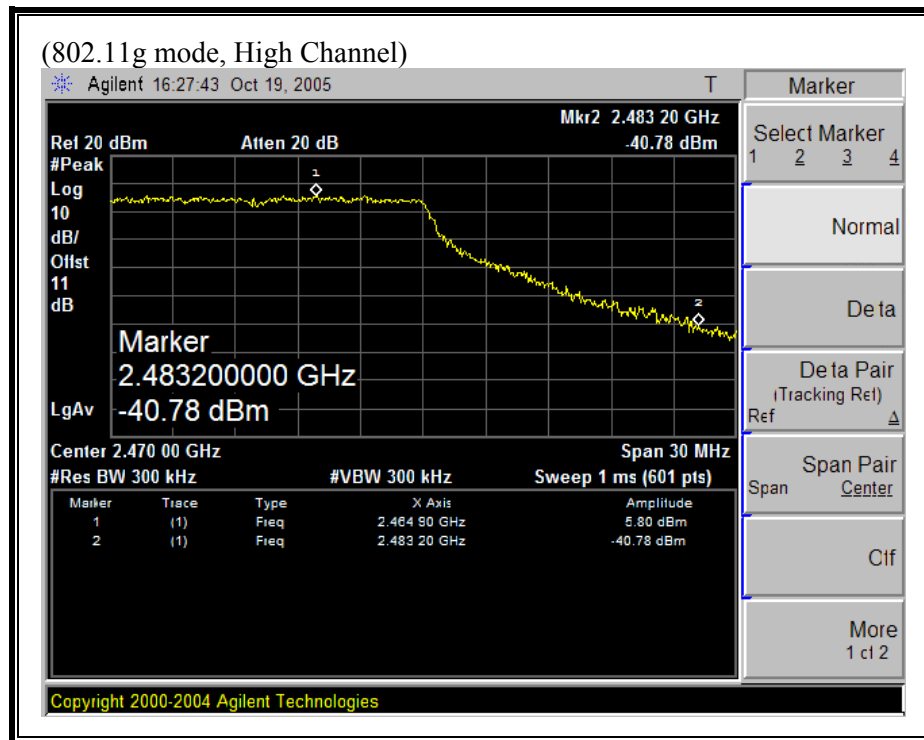

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

10/19/2005 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr:Chin Pang Project #:05U3760-1 Company:Atheros EUT Descrip.:Mini PCI Express 802.11 a/b/g Transceiver EUT M/N:AR5BXB6 Test Target:FCC 15.247 Mode Oper:TX, g mode															
Test Equipment:															
Horn 1-18GHz T60; S/N: 2238 @3m		Pre-amplifier 1-26GHz T144 Miteq 3008A00931		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.205							
Hi Frequency Cables															
2 foot cable		3 foot cable Chin 197538001		12 foot cable Chin 200354001		HPF HPF_4.0GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch, 2412MHz															
4.824	3.0	58.0	43.0	33.6	3.2	-36.5	0.0	0.6	58.9	43.9	74	54	-15.1	-10.1	V
4.824	3.0	58.5	44.0	33.6	3.2	-36.5	0.0	0.6	59.4	44.9	74	54	-14.6	-9.1	H
Mid Ch, 2437MHz															
4.874	3.0	62.0	47.0	33.7	3.2	-36.5	0.0	0.6	63.0	48.0	74	54	-11.0	-6.0	V
7.311	3.0	52.0	40.0	36.2	3.6	-36.2	0.0	0.6	56.2	44.2	74	54	-17.8	-9.8	V
4.874	3.0	59.5	46.5	33.7	3.2	-36.5	0.0	0.6	60.5	47.5	74	54	-13.5	-6.5	H
7.311	3.0	54.0	40.5	36.2	3.6	-36.2	0.0	0.6	58.2	44.7	74	54	-15.8	-9.3	H
High Ch, 2462MHz															
4.924	3.0	58.0	45.0	33.7	3.2	-36.5	0.0	0.6	59.1	46.1	74	54	-14.9	-7.9	V
7.386	3.0	48.0	38.0	36.2	3.6	-36.2	0.0	0.6	52.3	42.3	74	54	-21.7	-11.7	V
4.924	3.0	60.5	47.0	33.7	3.2	-36.5	0.0	0.6	61.6	48.1	74	54	-12.4	-5.9	H
7.386	3.0	51.0	39.0	36.2	3.6	-36.2	0.0	0.6	55.3	43.3	74	54	-18.7	-10.7	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

7.3.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

10/12/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: Chin Pang Project #: 05U3760-1 Company: Atheros Communications, Inc. EUT Descrip.: Mini PCI Express 802.11 a/b/g Transceiver EUT M/N: AR5BXB6 Test Target: FCC 15.407 Mode Oper: TX, a mode															
Test Equipment:															
Horn 1-18GHz T60; S/N: 2238 @3m		Pre-amplifier 1-26GHz T34 HP 8449B		Pre-amplifier 26-40GHz		Horn > 18GHz T39; ARA 18-26GHz; S/N: 1013		Limit FCC 15.205							
Hi Frequency Cables															
2 foot cable		3 foot cable Chin 197538001		12 foot cable Chin 200354001		HPF HPF_7.6GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch, 5745MHz															
11.490	3.0	52.0	38.4	38.2	4.4	-32.5	0.0	0.7	62.8	49.2	74	54	-11.2	-4.8	V
11.490	3.0	53.6	41.0	38.2	4.4	-32.5	0.0	0.7	64.4	51.8	74	54	-9.6	-2.2	H
Mid Ch, 5785MHz															
11.570	3.0	54.0	40.0	38.2	4.4	-32.5	0.0	0.7	64.8	50.8	74	54	-9.2	-3.2	V
11.570	3.0	55.0	40.5	38.2	4.4	-32.5	0.0	0.7	65.8	51.3	74	54	-8.2	-2.7	H
High Ch, 5825MHz															
11.650	3.0	56.1	41.5	38.3	4.4	-32.5	0.0	0.7	67.0	52.4	74	54	-7.0	-1.6	V
11.650	3.0	57.0	42.6	38.3	4.4	-32.5	0.0	0.7	67.9	53.5	74	54	-6.1	-0.5	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

7.3.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

B mode, SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA\

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 05U3760-1
Company: : Atheros
EUT: : MiniPCI Express 802.11 a/b/g
 : Transceiver
Model No. : AR5BXB6
Configuration : EUT/Laptop
Target of Test : FCC Class B
Mode of Operation: TX (Worst Case)
 : 2.4GHz Band

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	115.360	19.69	14.60	34.29	43.50	-9.21	Peak
2	204.600	22.64	13.91	36.55	43.50	-6.95	Peak
3	264.740	17.95	14.39	32.34	46.00	-13.66	Peak
4	304.510	15.94	15.78	31.72	46.00	-14.28	Peak
5	518.880	13.29	20.54	33.83	46.00	-12.17	Peak
6	904.940	13.23	25.99	39.22	46.00	-6.78	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 05U3760-1
Company: : Atheros
EUT: : MiniPCI Express 802.11 a/b/g
 : Transceiver
Model No. : AR5BXB6
Configuration : EUT/Laptop
Target of Test : FCC Class B
Mode of Operation: TX (Worst Case)
 : 2.4GHz Band

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	115.360	17.67	14.60	32.27	43.50	-11.23	Peak
2	204.600	17.52	13.91	31.43	43.50	-12.07	Peak
3	305.480	14.86	15.80	30.66	46.00	-15.34	Peak
4	507.240	14.29	20.31	34.60	46.00	-11.40	Peak
5	803.090	13.61	24.59	38.20	46.00	-7.80	Peak
6	948.590	12.89	26.45	39.34	46.00	-6.66	Peak

A mode, SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA\

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 05U3760-1
Company: : Atheros
EUT: : MiniPCI Express 802.11 a/b/g
 : Transceiver
Model No. : AR5BXB6
Configuration : EUT/Laptop
Target of Test : FCC Class B
Mode of Operation: TX (Worst Case)
 : 5 GHz Band

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	119.240	18.23	15.05	33.28	43.50	-10.22	Peak
2	184.230	19.87	12.86	32.73	43.50	-10.77	Peak
3	251.160	15.11	13.93	29.04	46.00	-16.96	Peak
4	506.270	15.10	20.29	35.39	46.00	-10.61	Peak
5	800.180	11.80	24.58	36.38	46.00	-9.62	Peak
6	904.940	16.02	25.99	42.01	46.00	-3.99	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 05U3760-1
Company: : Atheros
EUT: : MiniPCI Express 802.11 a/b/g
 : Transceiver
Model No. : AR5BXB6
Configuration : EUT/Laptop
Target of Test : FCC Class B
Mode of Operation: TX (Worst Case)
 : 5 GHz Band

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	130.880	14.16	15.09	29.25	43.50	-14.25	Peak
2	189.080	16.30	12.93	29.23	43.50	-14.27	Peak
3	405.390	16.44	18.18	34.62	46.00	-11.38	Peak
4	507.240	15.22	20.31	35.53	46.00	-10.47	Peak
5	732.280	12.62	23.65	36.27	46.00	-9.73	Peak
6	921.430	12.37	26.12	38.49	46.00	-7.51	Peak

7.4. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.21	57.02	--	46.53	0.00	63.05	53.05	-6.03	-6.52	L1
0.32	44.31	--	35.25	0.00	59.71	49.71	-15.40	-14.46	L1
19.95	37.96	--	29.28	0.00	60.00	50.00	-22.04	-20.72	L1
0.22	53.54	--	42.65	0.00	63.01	53.01	-9.47	-10.36	L2
0.32	41.48	--	32.05	0.00	59.66	49.66	-18.18	-17.61	L2
20.06	31.84	--	21.95	0.00	60.00	50.00	-28.16	-28.05	L2
6 Worst Data									

LINE 1 RESULTS

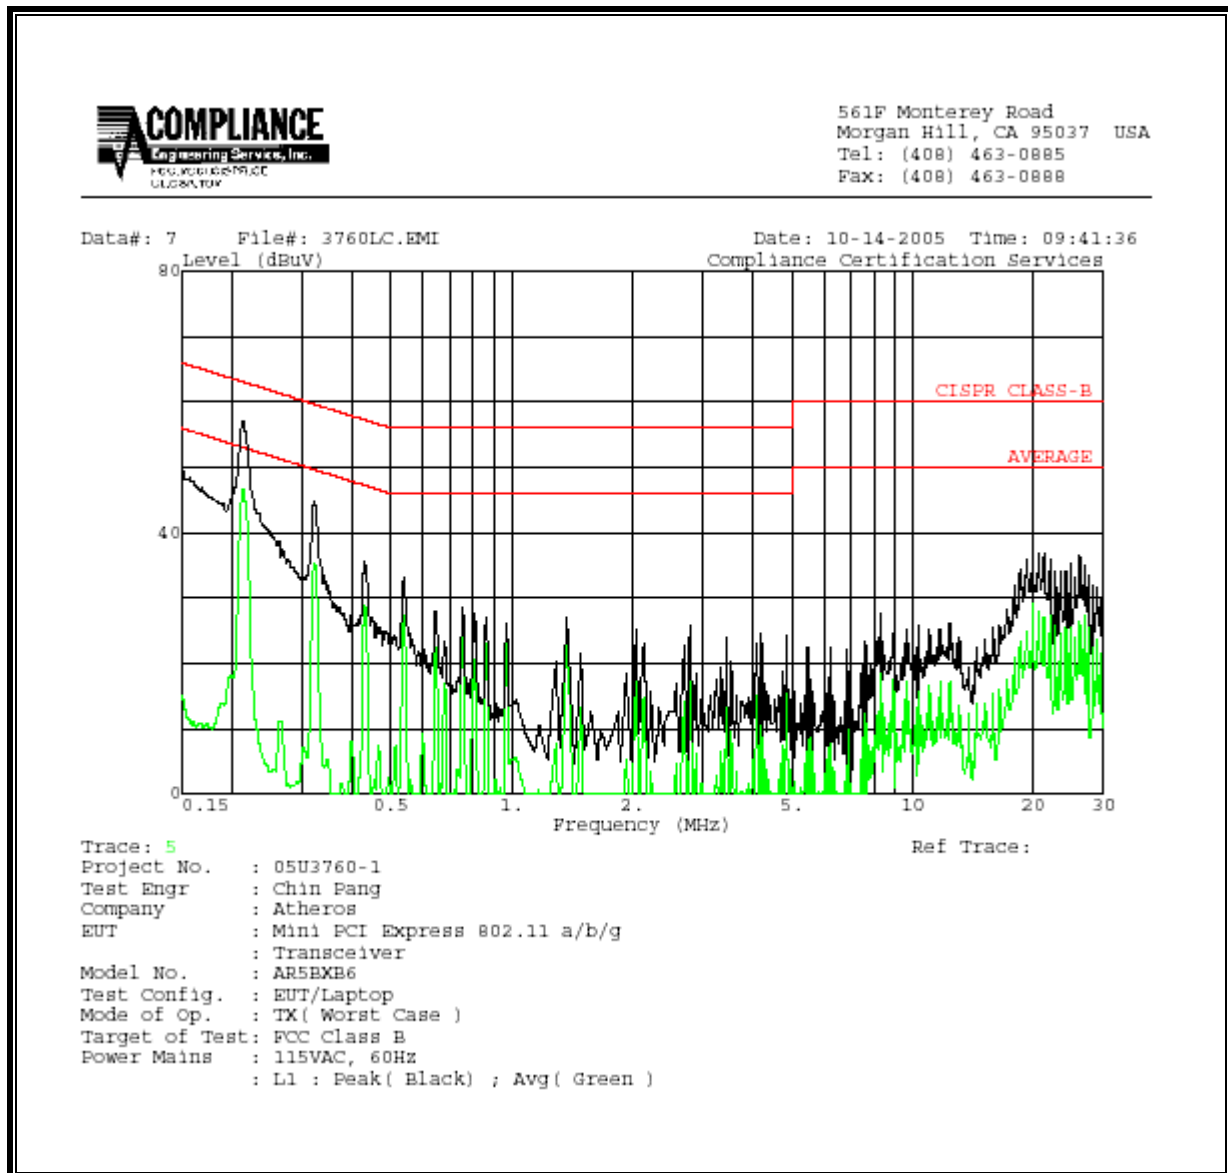


LINE 2 RESULTS

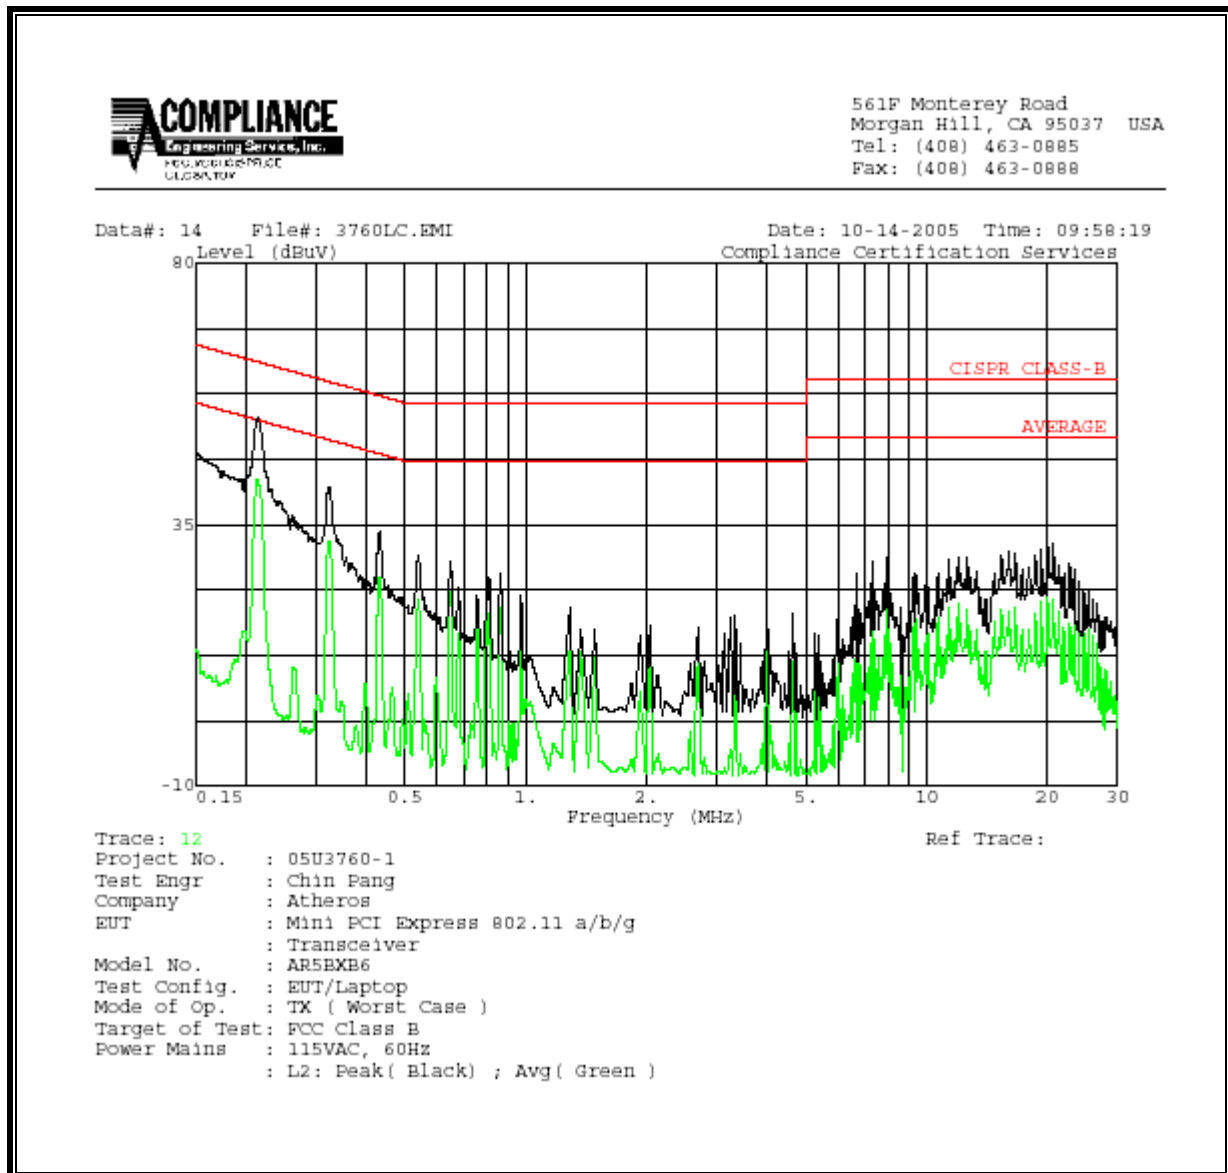

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP

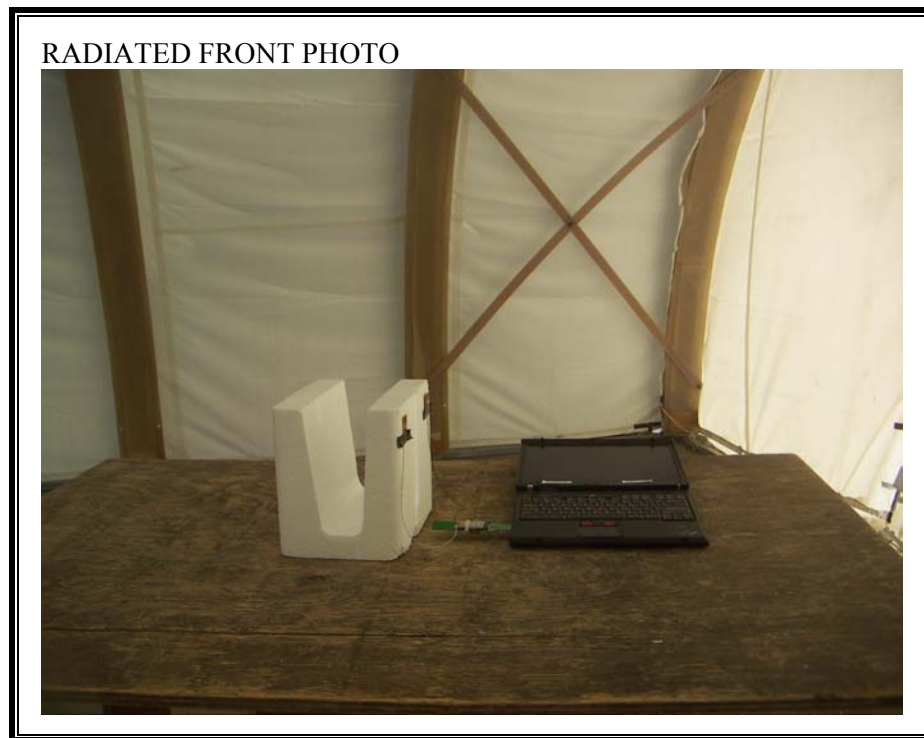

RADIATED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



LINE CONDUCTED BACK PHOTO



END OF REPORT