

FCC Test Report

Equipment : 2x2 802.11a/b/g/n +BT Module(SiP)
Brand Name : Qualcomm Atheros
Model No. : QCA6234
FCC ID : PPD-QCA6234
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
5250 MHz – 5350 MHz
5470 MHz – 5725 MHz
FCC Classification : NII
Applicant : Dell Inc.
Manufacturer : One Dell Way, Round Rock, Texas 78682, USA

The product sample received on Sep. 17, 2013 and completely tested on Sep. 25, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information.....	6
1.5	Measurement Uncertainty	6
2	TEST CONFIGURATION OF EUT	7
2.1	The Worst Case Measurement Configuration.....	7
2.2	Test Setup Diagram	8
3	TRANSMITTER TEST RESULT	9
3.1	RF Output Power.....	9
3.2	Transmitter Radiated Bandedge Emissions.....	13
3.3	Transmitter Radiated Unwanted Emissions	21
4	TEST EQUIPMENT AND CALIBRATION DATA	76

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.1	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.407(a)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm] 5150-5250MHz:12.93 5250-5350MHz:12.99 5470-5725MHz:12.96	Power [dBm] 5150-5250MHz:17 5250-5350MHz:24 5470-5725MHz:24	Complied
3.2	15.407(b)	Transmitter Bandedge Emissions	Restricted Bands [dBuV/m at 1m]: 5728.100MHz 65.77 (Margin 17.77dB) - PK 51.30 (Margin 12.24dB) - AV	Non-Restricted Bands: ≤ -27 dBm (77.84dBuV/m@1m) Restricted Bands: FCC 15.209	Complied
3.3	15.407(b)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 1m]: 62.980MHz 35.16 (Margin 4.84dB) – PK	Non-Restricted Bands: ≤ -27 dBm (68.3dBuV/m@3m) Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
5150-5250	a	5180-5240	36-48 [4]	2	12.93
5250-5350		5260-5320	52-64 [4]	2	12.99
5470-5725		5500-5700	100-140 [8]	2	12.96
5150-5250	n (HT20)	5180-5240	36-48 [4]	2	12.92
5250-5350		5260-5320	52-64 [4]	2	12.89
5470-5725		5500-5700	100-140 [8]	2	12.92
5150-5250	n (HT40)	5190-5230	38-46 [2]	2	11.44
5250-5350		5270-5310	54-62 [2]	2	12.63
5470-5725		5510-5670	102-134 [3]	2	12.95

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☒	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	Chip	2.20

1.1.3 EUT Operational Condition

Supply Voltage	☒ AC mains	☒ DC	
Type of DC Source	☐ Internal DC supply	☒ External DC adapter	☒ Li-on Battery

1.2 Support Equipment

Support Equipment- Radiated Emission Test			
No.	Equipment	Brand Name	Model Name
1	AC Adaptor (For Tablet PC use)	DELL	HA10USNM130
2	Tablet PC (Built in Qualcomm Atheros module)	DELL	T01D.../T01D001 ("..." Can be 0-9, A-Z or blank)

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 789033 v01r03
- ♦ FCC KDB 662911 v02

1.4 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456 FAX : 886-3-327-0973	
Test Condition		Test Site No.	Test Engineer
Radiated Emission		03CH03-HY	Eddie
		Test Environment	
		22.6°C / 53.2%	

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))


Measurement Uncertainty			
Test Item		Uncertainty	Limit
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
User Position	☐ EUT will be placed in fixed position. ☒ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is X. ☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode	☒ 1. EUT with AC Power test		
Modulation Mode	11a, HT20, HT40		
Orthogonal Planes of EUT	X Plane 	Y Plane 	Z Plane 

2.2 Test Setup Diagram

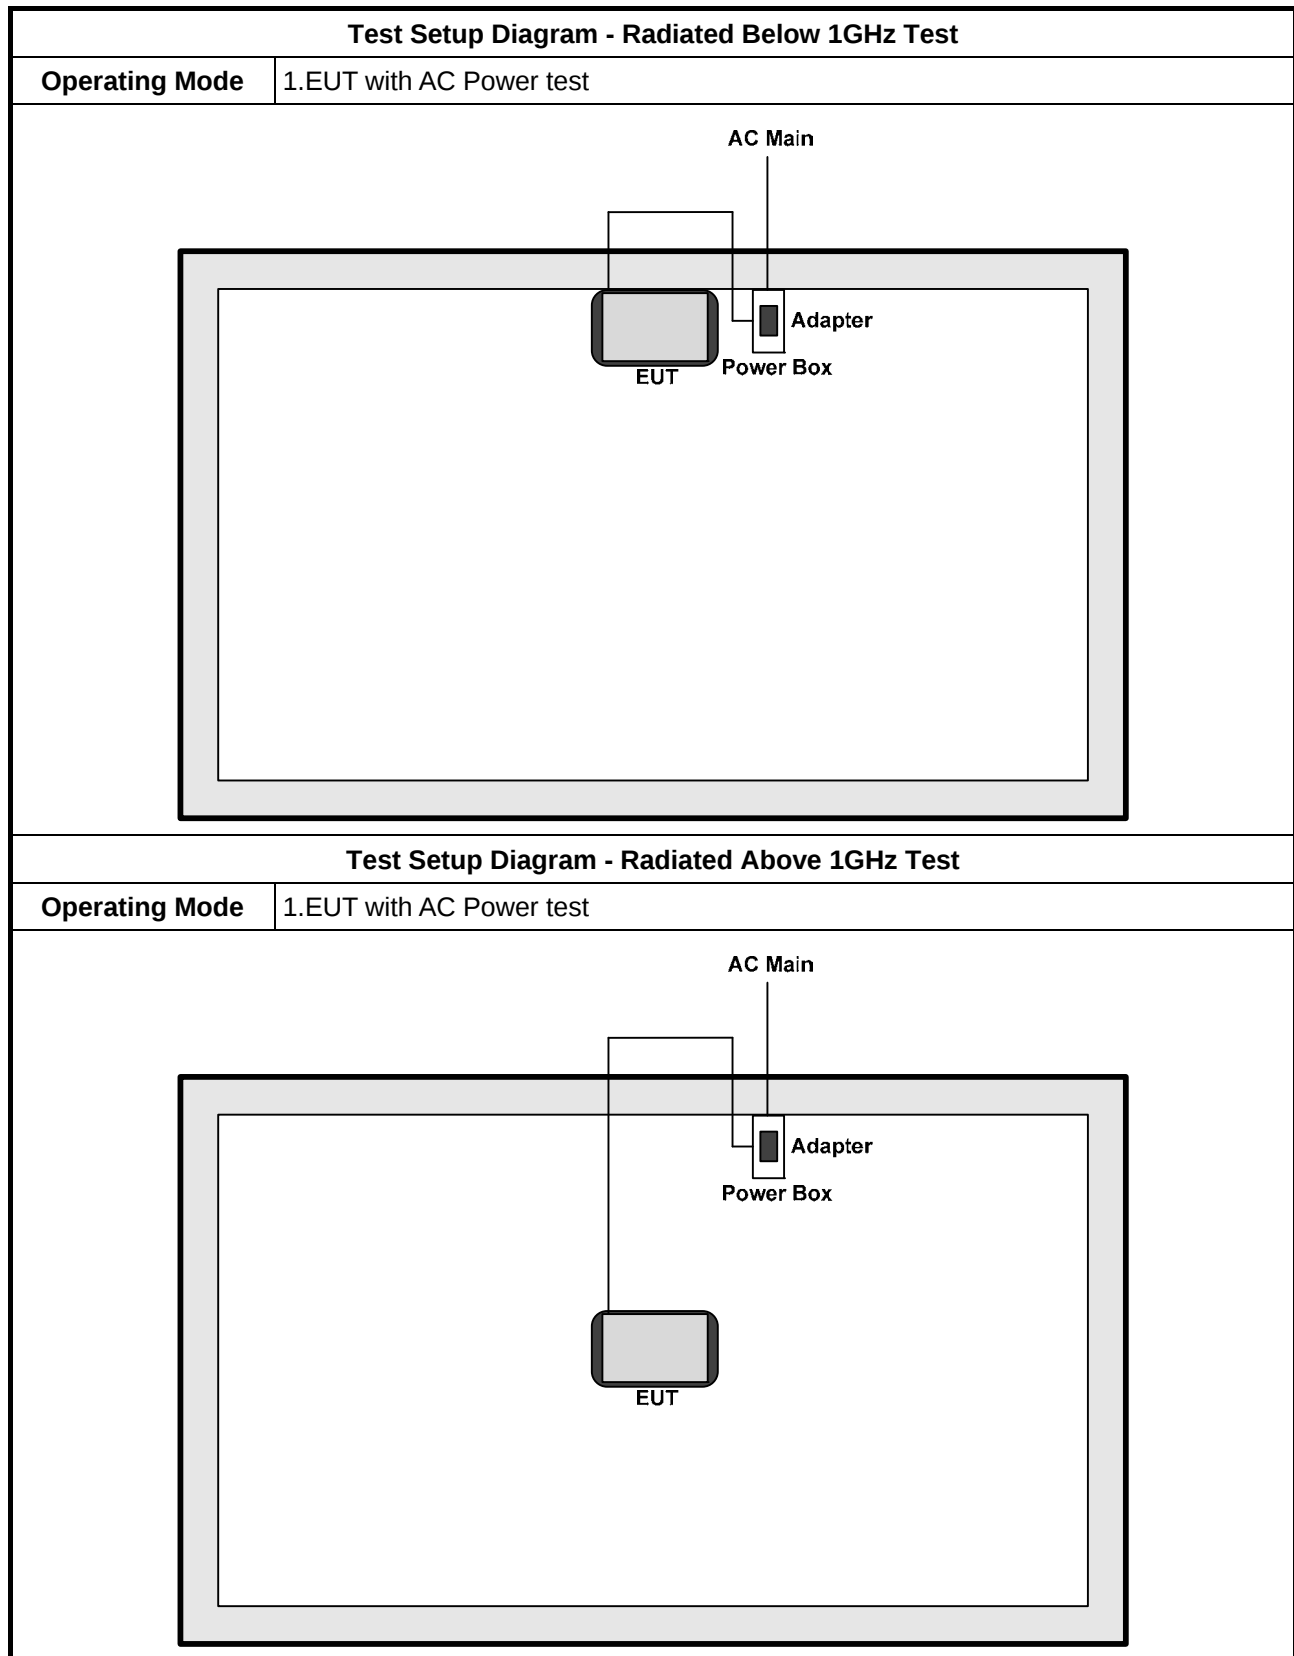

3 Transmitter Test Result

3.1 RF Output Power

3.1.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.725-5.825 GHz band:
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
LE-LAN Devices	
☒	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☒	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☒	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	Point-to-multipoint systems (P2M): the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	Point-to-point systems (P2P): the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. If e.i.r.p. > 36 dBm, $G_{TX} \leq P_{Out}$
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
☒	Maximum Conducted Output Power
	[duty cycle $\geq 98\%$ or external video / power trigger]
☒	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle $< 98\%$ and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method PM (using an RF average power meter).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☒	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.1.4 Test Setup

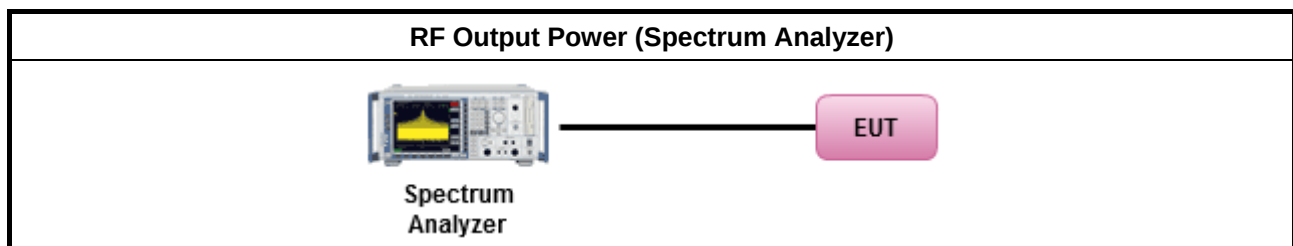

3.1.5 Directional Gain for Power Measurement

Directional Gain (DG) Result				
Transmit Chains No.	1	2	-	-
Maximum G_{ANT} (dBi)	2.20	2.20	-	-
Modulation Mode	N_{TX}	N_{SS} (Min.)	Array Gain (dB)	Power DG (dBi) Note ³
11a,6-54Mbps	2	2	-	2.20
HT20,M8-M15	2	2	0	2.20
HT40, M8-M15	2	2	0	2.20

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N_{TX})$
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G_{1/20}} + \dots + 10^{G_{N/20}}) / N_{TX}]$
All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G_{1/10}} + \dots + 10^{G_{N/10}}) / N_{TX}]$

Note 3: For Spatial Multiplexing, Directional Gain (DG) = $G_{ANT} + 10 \log(N_{TX}/N_{SS})$,
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
Directional Gain (DG) = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows:
Array Gain = 0 dB (i.e., no array gain) for $N_{TX} \leq 4$;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX} ;

3.1.6 Test Result of Maximum Conducted Output Power



Maximum Conducted Output Power Result								
Condition			RF Output Power (dBm)					
Modulation Mode	N_{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Sum Chain	Power Limit	DG (dBi)	EIRP Power
11a	2	5180	10.75	8.88	12.93	17.00	2.20	15.13
11a	2	5200	9.99	9.31	12.67	17.00	2.20	14.87
11a	2	5240	9.97	9.84	12.92	17.00	2.20	15.12
HT20	2	5180	10.45	9.30	12.92	17.00	2.20	15.12
HT20	2	5200	10.59	8.42	12.65	17.00	2.20	14.85
HT20	2	5240	10.11	9.71	12.92	17.00	2.20	15.12
HT40	2	5190	5.62	3.91	7.86	17.00	2.20	10.06
HT40	2	5230	8.91	7.90	11.44	17.00	2.20	13.64
Result			Complied					

Maximum Conducted Output Power Result								
Condition			RF Output Power (dBm)					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Sum Chain	Power Limit	DG (dBi)	EIRP Power
11a	2	5260	9.98	9.63	12.82	24.00	2.20	15.02
11a	2	5300	10.89	8.59	12.90	24.00	2.20	15.10
11a	2	5320	10.79	8.98	12.99	24.00	2.20	15.19
HT20	2	5260	10.25	9.47	12.89	24.00	2.20	15.09
HT20	2	5300	10.54	8.52	12.66	24.00	2.20	14.86
HT20	2	5320	10.73	8.48	12.76	24.00	2.20	14.96
HT40	2	5270	9.72	9.51	12.63	24.00	2.20	14.83
HT40	2	5310	3.57	3.11	6.36	24.00	2.20	8.56
Result			Complied					


Maximum Conducted Output Power Result								
Condition			RF Output Power (dBm)					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Sum Chain	Power Limit	DG (dBi)	EIRP Power
11a	2	5500	10.32	8.91	12.68	24.00	2.20	14.88
11a	2	5580	10.15	9.19	12.71	24.00	2.20	14.91
11a	2	5700	10.00	9.90	12.96	24.00	2.20	15.16
HT20	2	5500	10.37	9.27	12.87	24.00	2.20	15.07
HT20	2	5580	9.85	9.35	12.62	24.00	2.20	14.82
HT20	2	5700	10.13	9.67	12.92	24.00	2.20	15.12
HT40	2	5510	7.51	6.24	9.93	24.00	2.20	12.13
HT40	2	5550	10.19	9.67	12.95	24.00	2.20	15.15
HT40	2	5670	10.17	9.58	12.90	24.00	2.20	15.10
Result			Complied					

3.2 Transmitter Radiated Bandedge Emissions

3.2.1 Transmitter Radiated Bandedge Emissions Limit

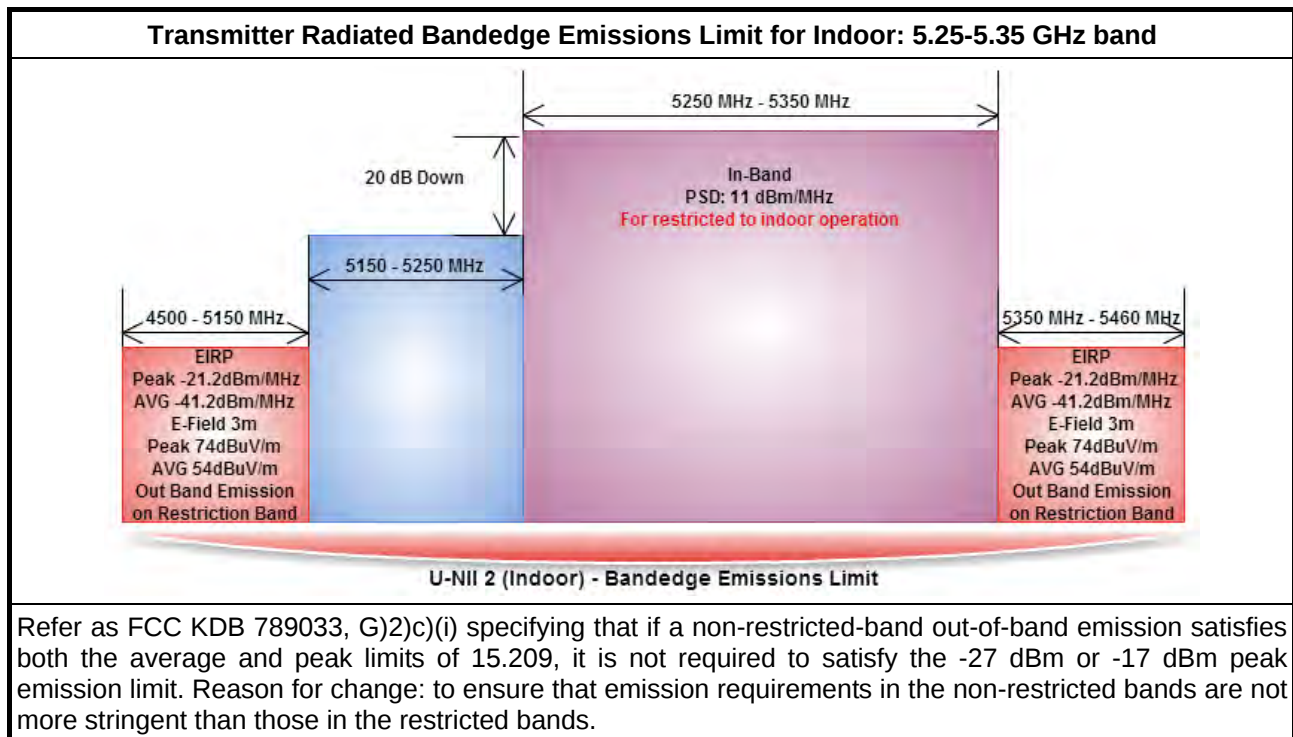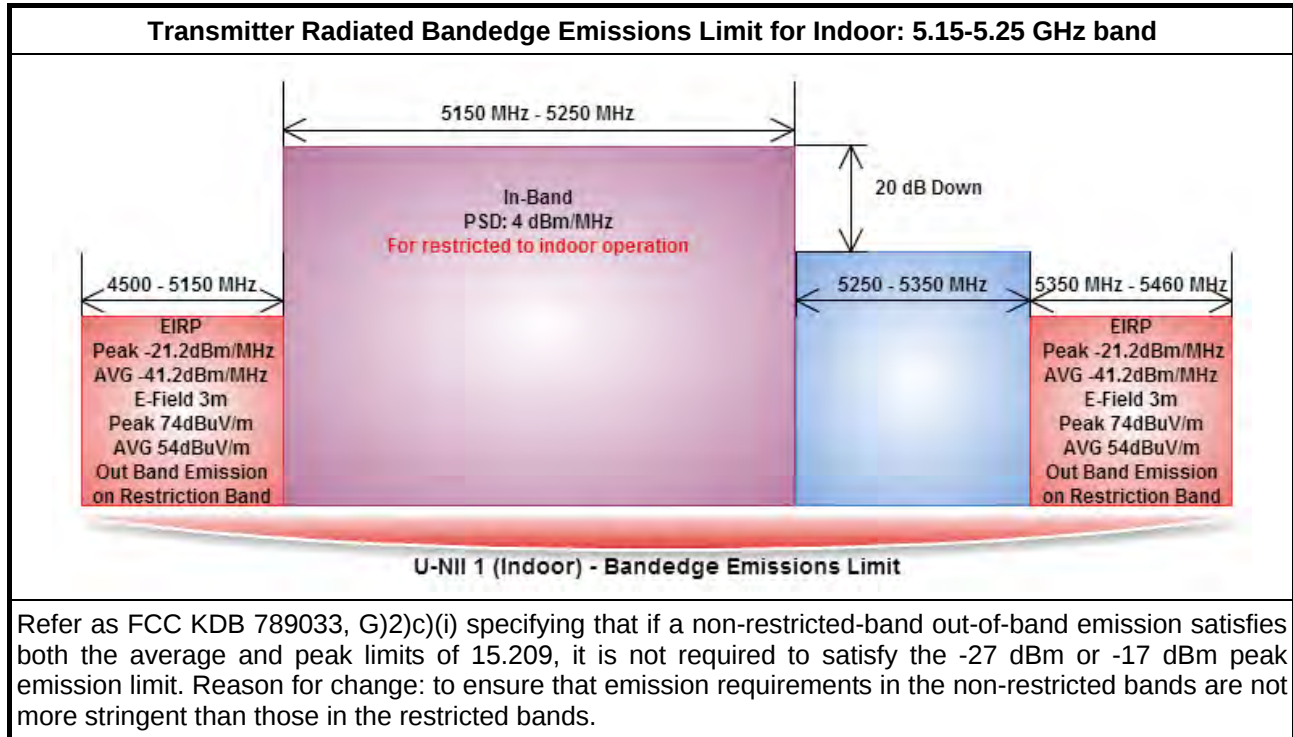

Transmitter Radiated Bandedge Emissions Limit for indoor/outdoor: 5.25-5.35 GHz band

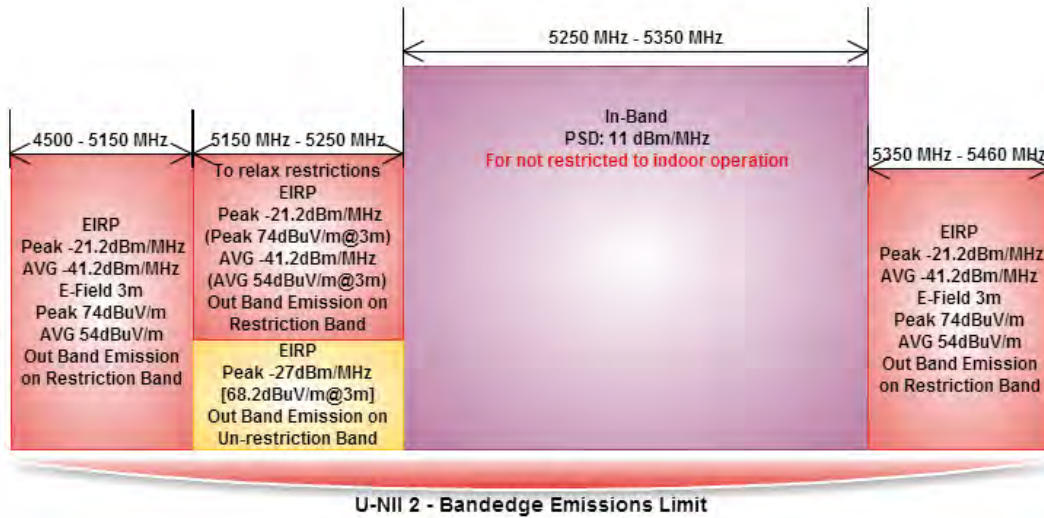

Refer as FCC KDB 789033, G)2)c)(i) specifying that if a non-restricted-band out-of-band emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm or -17 dBm peak emission limit. Reason for change: to ensure that emission requirements in the non-restricted bands are not more stringent than those in the restricted bands.

Transmitter Radiated Bandedge Emissions Limit: 5.47-5.725 GHz band



Refer as FCC KDB 789033, G)2)c)(i) specifying that if a non-restricted-band out-of-band emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm or -17 dBm peak emission limit. Reason for change: to ensure that emission requirements in the non-restricted bands are not more stringent than those in the restricted bands.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☐	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
☐	☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band). ☐ Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
☐	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
☐	☐ Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band). ☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
☐	☐ Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging). ☐ Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW). ☒ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time. ☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. ☒ Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit. ☐ Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	Refer as FCC KDB 789033, clause H)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.2.4 Test Setup

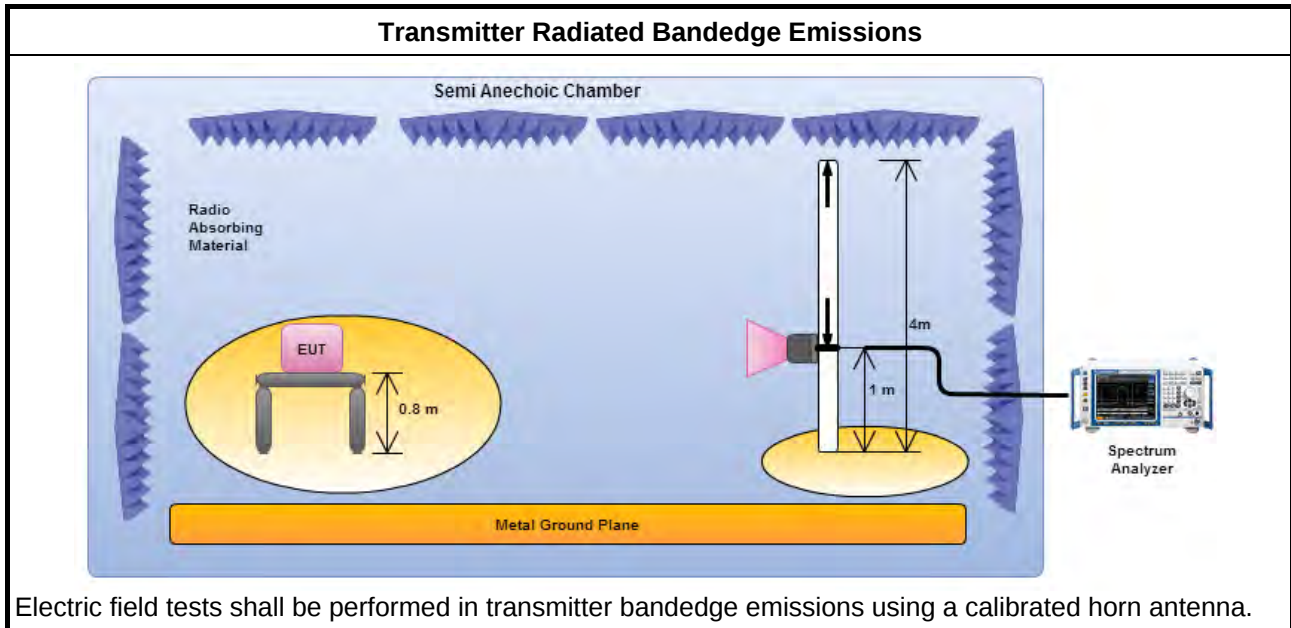

3.2.5 Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	2	5180	1	5135.800	65.06	83.54	5147.800	50.97	63.54	H
11a	2	5240	1	5132.100	63.74	83.54	5147.400	51.03	63.54	H
HT20, M8-15	2	5180	1	5137.800	64.92	83.54	5147.800	50.86	63.54	H
HT20, M8-15	2	5240	1	5135.700	63.94	83.54	5149.800	51.01	63.54	H
HT40, M8-15	2	5190	1	5102.090	65.34	83.54	5149.500	50.82	63.54	H
HT40, M8-15	2	5230	1	5134.200	64.10	83.54	5148.600	50.98	63.54	H

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5250-5350MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	2	5260	1	5397.000	63.36	83.54	5385.000	50.55	63.54	H
11a	2	5320	1	5398.300	64.68	83.54	5350.300	50.62	63.54	H
HT20, M8-15	2	5260	1	5355.000	63.20	83.54	5356.200	50.71	63.54	H
HT20, M8-15	2	5320	1	5365.900	64.27	83.54	5381.900	50.52	63.54	H
HT40, M8-15	2	5270	1	5374.500	63.71	83.54	5382.600	50.36	63.54	H
HT40, M8-15	2	5310	1	5360.380	63.86	83.54	5355.790	50.34	63.54	H

Note 1: Measurement worst emissions of receive antenna polarization.


U-NII 5470-5725MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	2	5500	1	5436.000	64.07	83.54	5469.200	50.22	63.54	H
11a	2	5700	1	5738.120	65.77	83.54	5728.100	51.30	63.54	H
HT20, M8-15	2	5500	1	5462.240	64.23	83.54	5434.000	50.22	63.54	H
HT20, M8-15	2	5700	1	5745.620	65.60	77.84	-	-	-	H
HT40, M8-15	2	5510	1	5469.900	63.66	83.54	5470.000	50.73	63.54	H
HT40, M8-15	2	5670	1	5733.000	64.13	77.84	-	-	-	H

Note 1: Measurement worst emissions of receive antenna polarization.




5150-5250MHz - Transmitter Radiated Bandedge Emissions Plots (with Antenna)


11a-(Lowest Ch.)

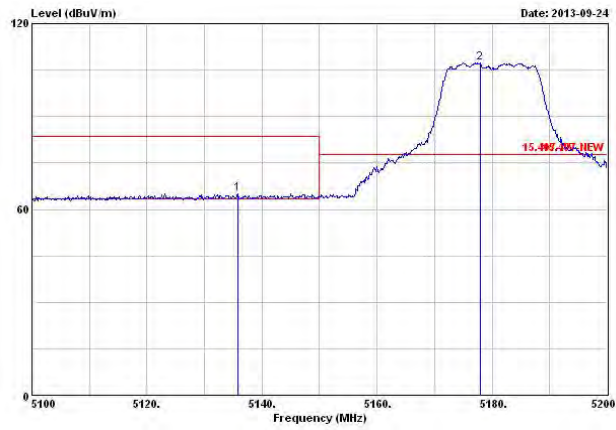


11a-(Highest Ch.)

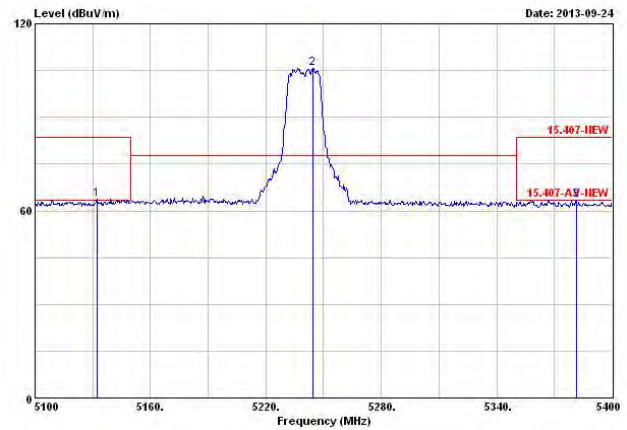


HT20-(Lowest Ch.)

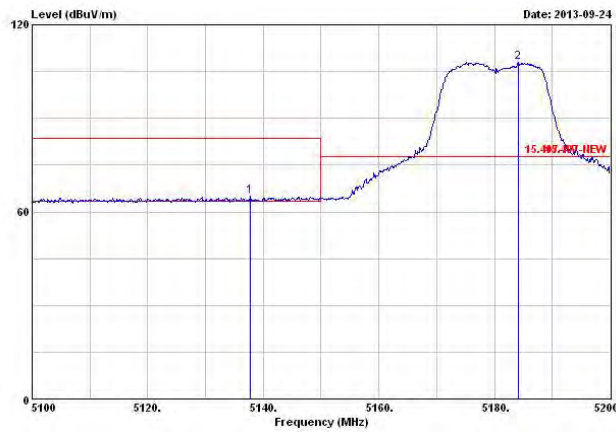


HT20-(Highest Ch.)

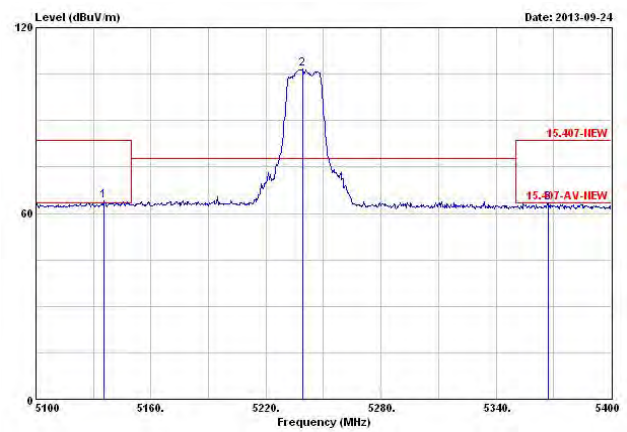

HT40-(Lowest Ch.)

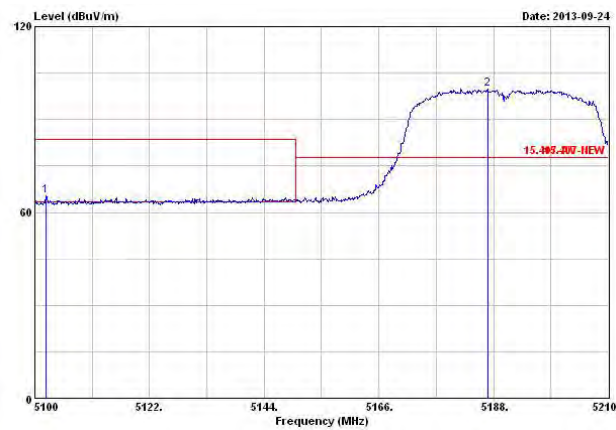


HT40-(Highest Ch.)

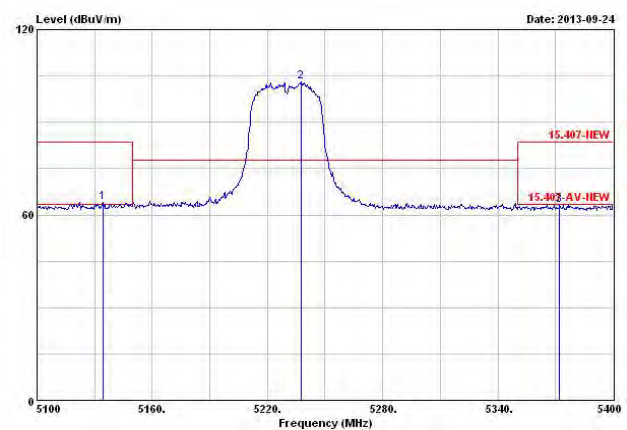


5250-5350MHz - Transmitter Radiated Bandedge Emissions Plots (with Antenna)


11a-(Lowest Ch.)

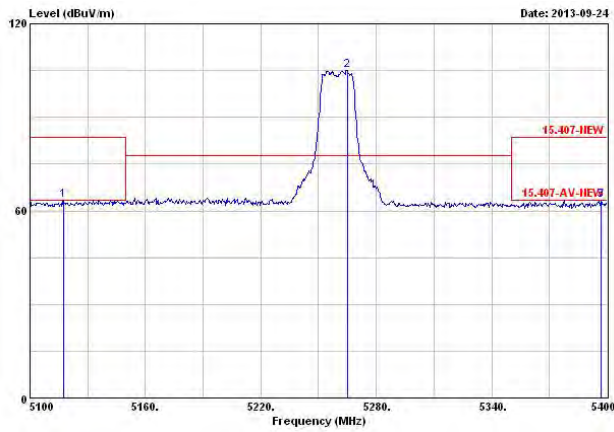


11a-(Highest Ch.)

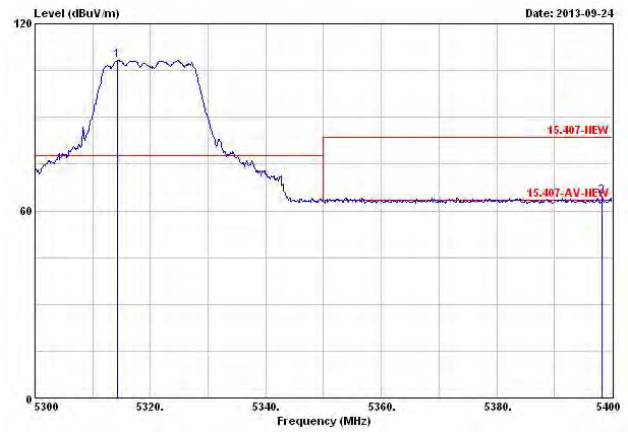


HT20-(Lowest Ch.)

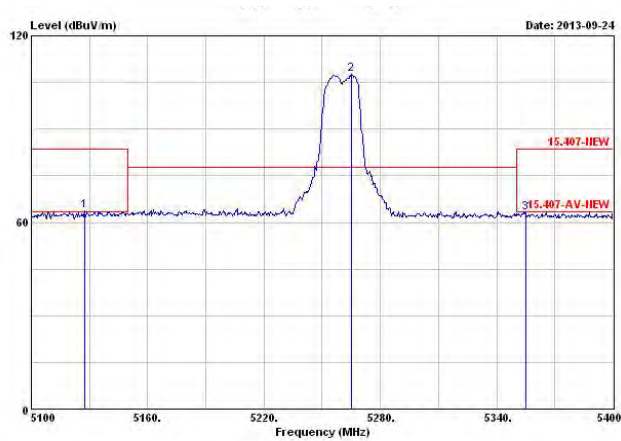


HT20-(Highest Ch.)

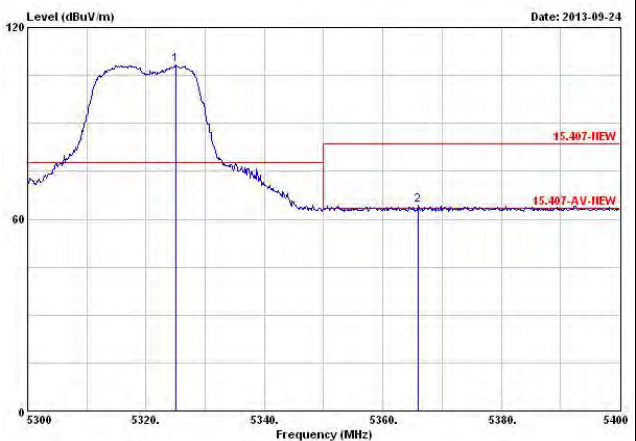

HT40-(Lowest Ch.)

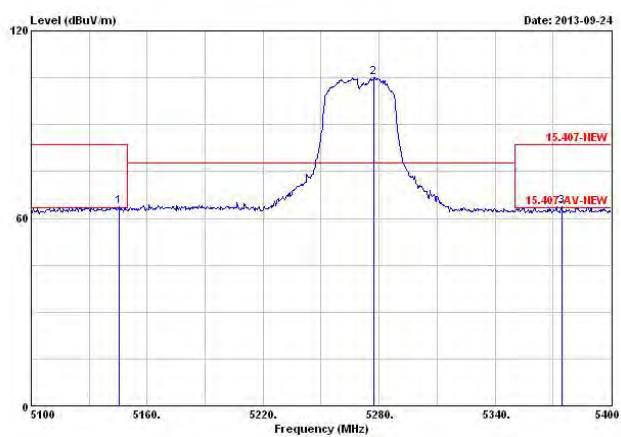


HT40-(Highest Ch.)

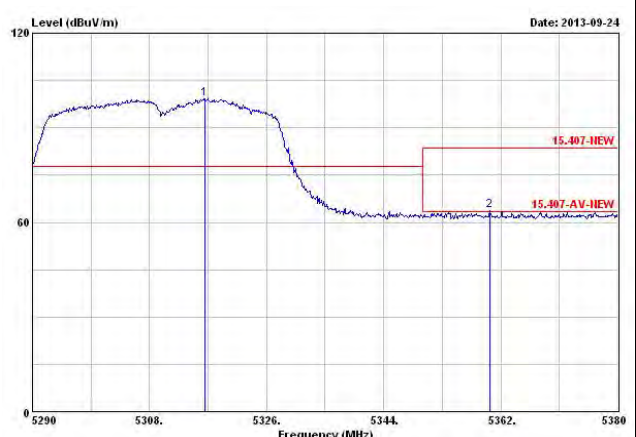




5470-5725MHz - Transmitter Radiated Bandedge Emissions Plots (with Antenna)


11a-(Lowest Ch.)

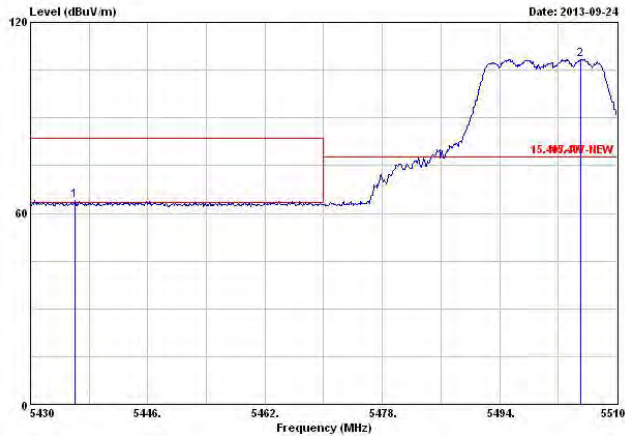


11a-(Highest Ch.)

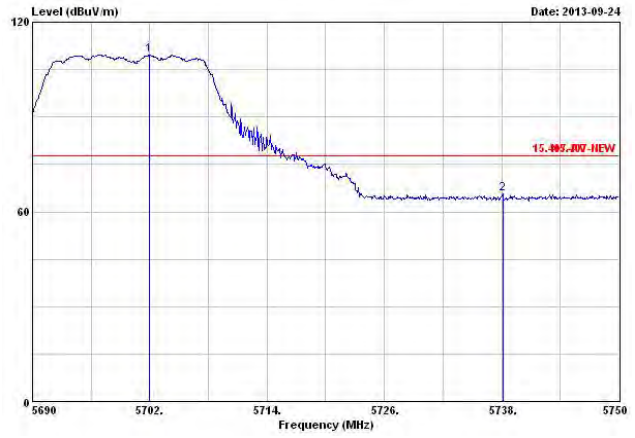


HT20-(Lowest Ch.)

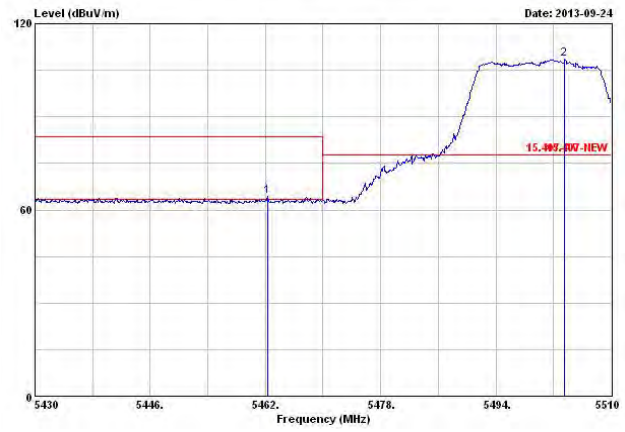


HT20-(Highest Ch.)

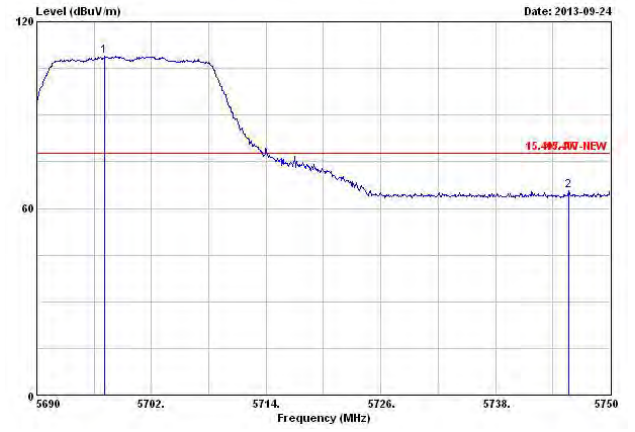

HT40-(Lowest Ch.)

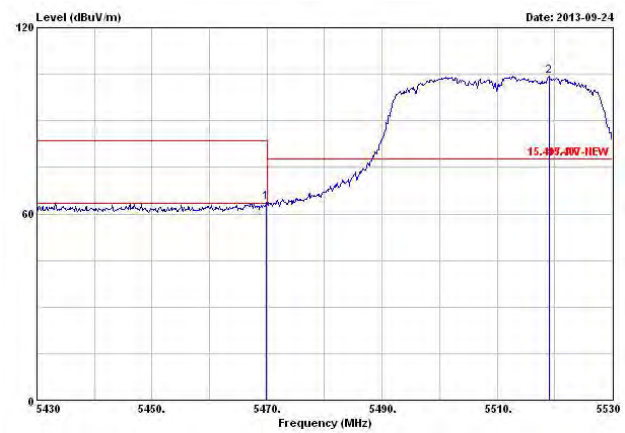

HT40-(Highest Ch.)

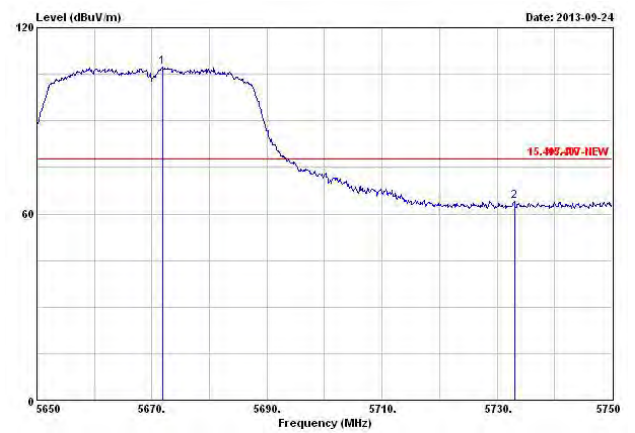

3.3 Transmitter Radiated Unwanted Emissions

3.3.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range above 18 GHz - 40GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
☒	Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
☐	Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
☐	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.


3.3.4 Test Setup

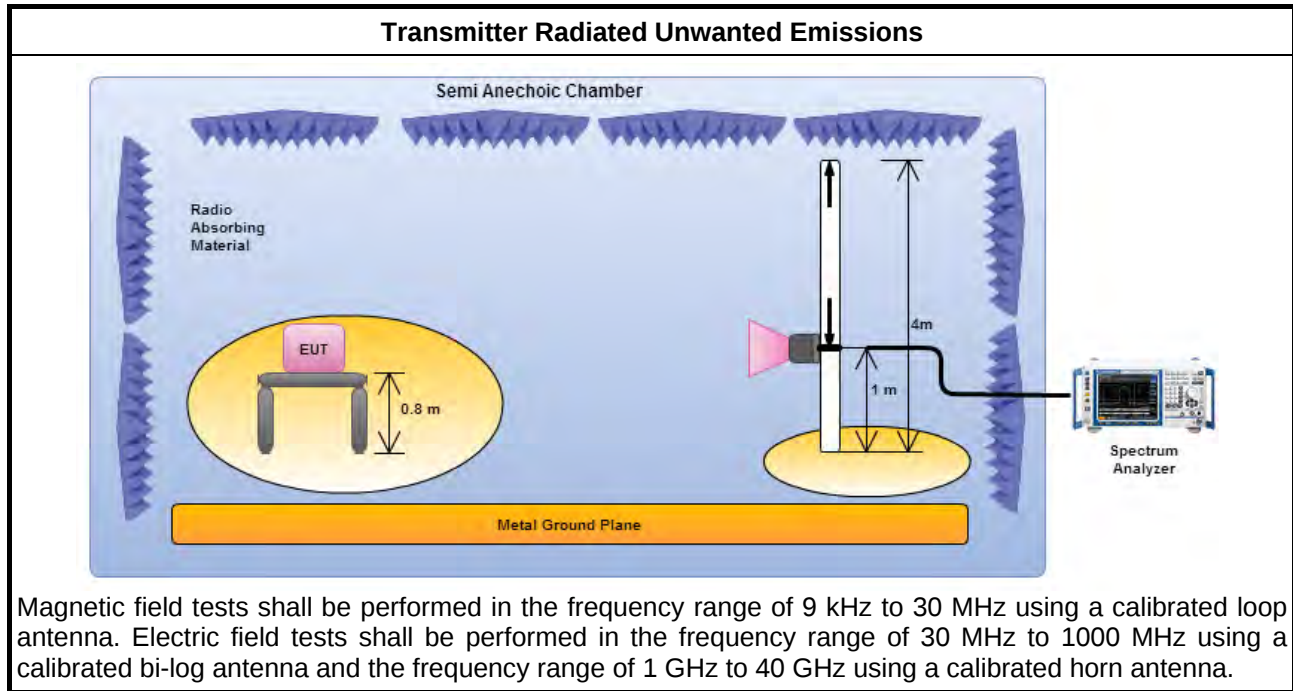

3.3.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.3.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

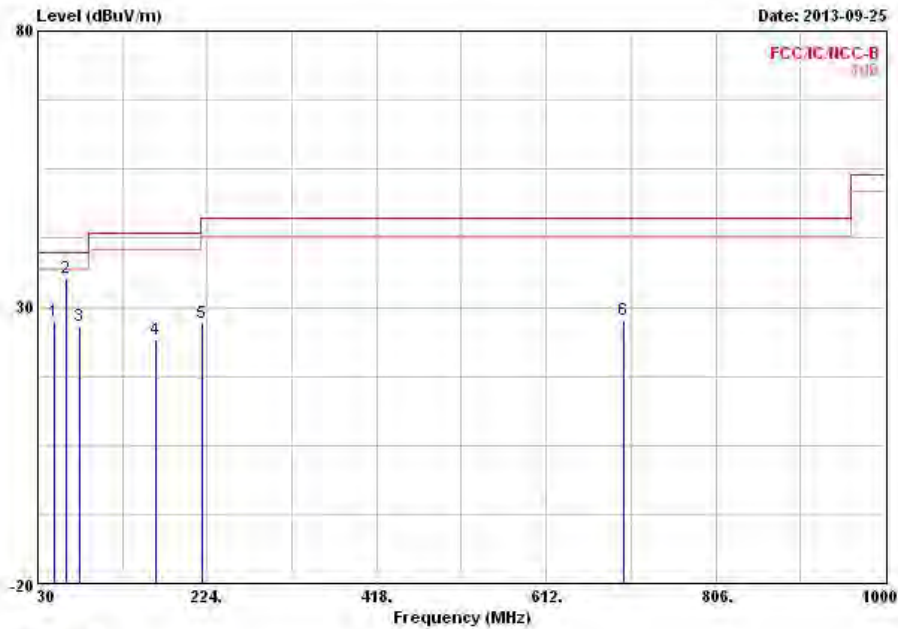Transmitter Radiated Unwanted Emissions (Below 1GHz)																																																																																																										
Operating Mode		1				Polarization			V																																																																																																	
Operating Function		EUT with AC Power test																																																																																																								
Level (dBuV/m)  Date: 2013-09-25 FCC IC NCC-B																																																																																																										
<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preamplifier</th><th>Remark</th><th>Ant Pos</th><th>Table Pos</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>48.430</td><td>27.41</td><td>-12.59</td><td>40.00</td><td>44.96</td><td>9.05</td><td>0.98</td><td>27.58</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>62.980</td><td>35.16</td><td>-4.84</td><td>40.00</td><td>54.86</td><td>6.70</td><td>1.13</td><td>27.53</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>78.500</td><td>26.49</td><td>-13.51</td><td>40.00</td><td>45.59</td><td>7.09</td><td>1.28</td><td>27.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>164.830</td><td>24.16</td><td>-19.34</td><td>43.50</td><td>39.51</td><td>9.92</td><td>1.86</td><td>27.13</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>218.180</td><td>27.10</td><td>-18.90</td><td>46.00</td><td>42.32</td><td>9.55</td><td>2.17</td><td>26.94</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>700.270</td><td>27.69</td><td>-18.31</td><td>46.00</td><td>32.83</td><td>18.82</td><td>3.98</td><td>27.94</td><td>Peak</td><td>---</td><td>---</td></tr></table>												Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	1	48.430	27.41	-12.59	40.00	44.96	9.05	0.98	27.58	Peak	---	---	2	62.980	35.16	-4.84	40.00	54.86	6.70	1.13	27.53	Peak	---	---	3	78.500	26.49	-13.51	40.00	45.59	7.09	1.28	27.47	Peak	---	---	4	164.830	24.16	-19.34	43.50	39.51	9.92	1.86	27.13	Peak	---	---	5	218.180	27.10	-18.90	46.00	42.32	9.55	2.17	26.94	Peak	---	---	6	700.270	27.69	-18.31	46.00	32.83	18.82	3.98	27.94	Peak	---	---
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg																																																																																															
1	48.430	27.41	-12.59	40.00	44.96	9.05	0.98	27.58	Peak	---	---																																																																																															
2	62.980	35.16	-4.84	40.00	54.86	6.70	1.13	27.53	Peak	---	---																																																																																															
3	78.500	26.49	-13.51	40.00	45.59	7.09	1.28	27.47	Peak	---	---																																																																																															
4	164.830	24.16	-19.34	43.50	39.51	9.92	1.86	27.13	Peak	---	---																																																																																															
5	218.180	27.10	-18.90	46.00	42.32	9.55	2.17	26.94	Peak	---	---																																																																																															
6	700.270	27.69	-18.31	46.00	32.83	18.82	3.98	27.94	Peak	---	---																																																																																															
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																																																										

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	EUT with AC Power test		

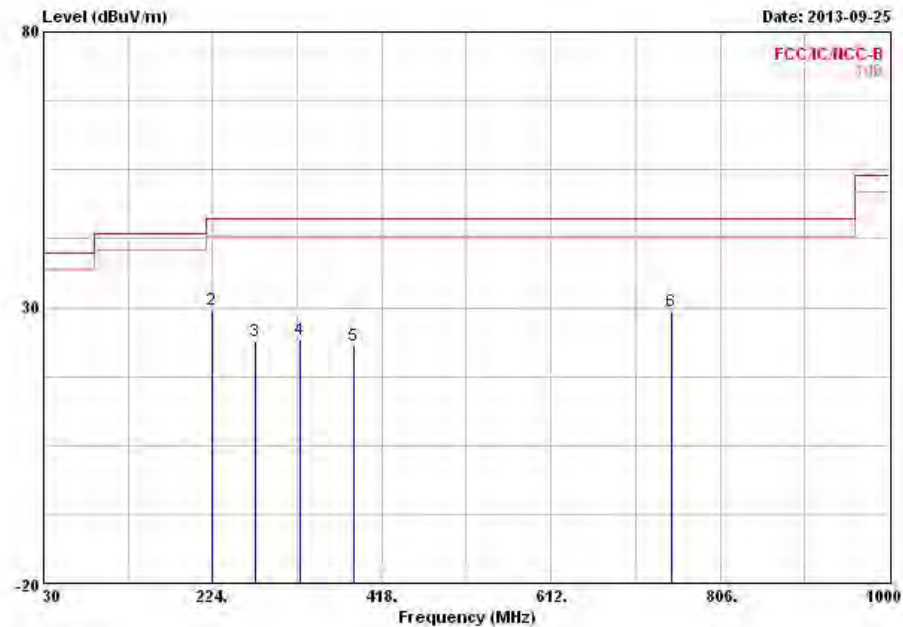


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	19.98	-20.02	40.00	27.97	18.85	0.77	27.61	Peak	---	---
2	223.030	29.68	-16.32	46.00	44.56	9.85	2.19	26.92	Peak	---	---
3	273.470	23.83	-22.17	46.00	35.23	12.92	2.43	26.75	Peak	---	---
4	323.910	24.29	-21.71	46.00	34.72	13.70	2.68	26.81	Peak	---	---
5	385.020	23.17	-22.83	46.00	32.43	15.05	2.92	27.23	Peak	---	---
6	749.740	29.29	-16.71	46.00	33.45	19.54	4.17	27.87	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.3.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz

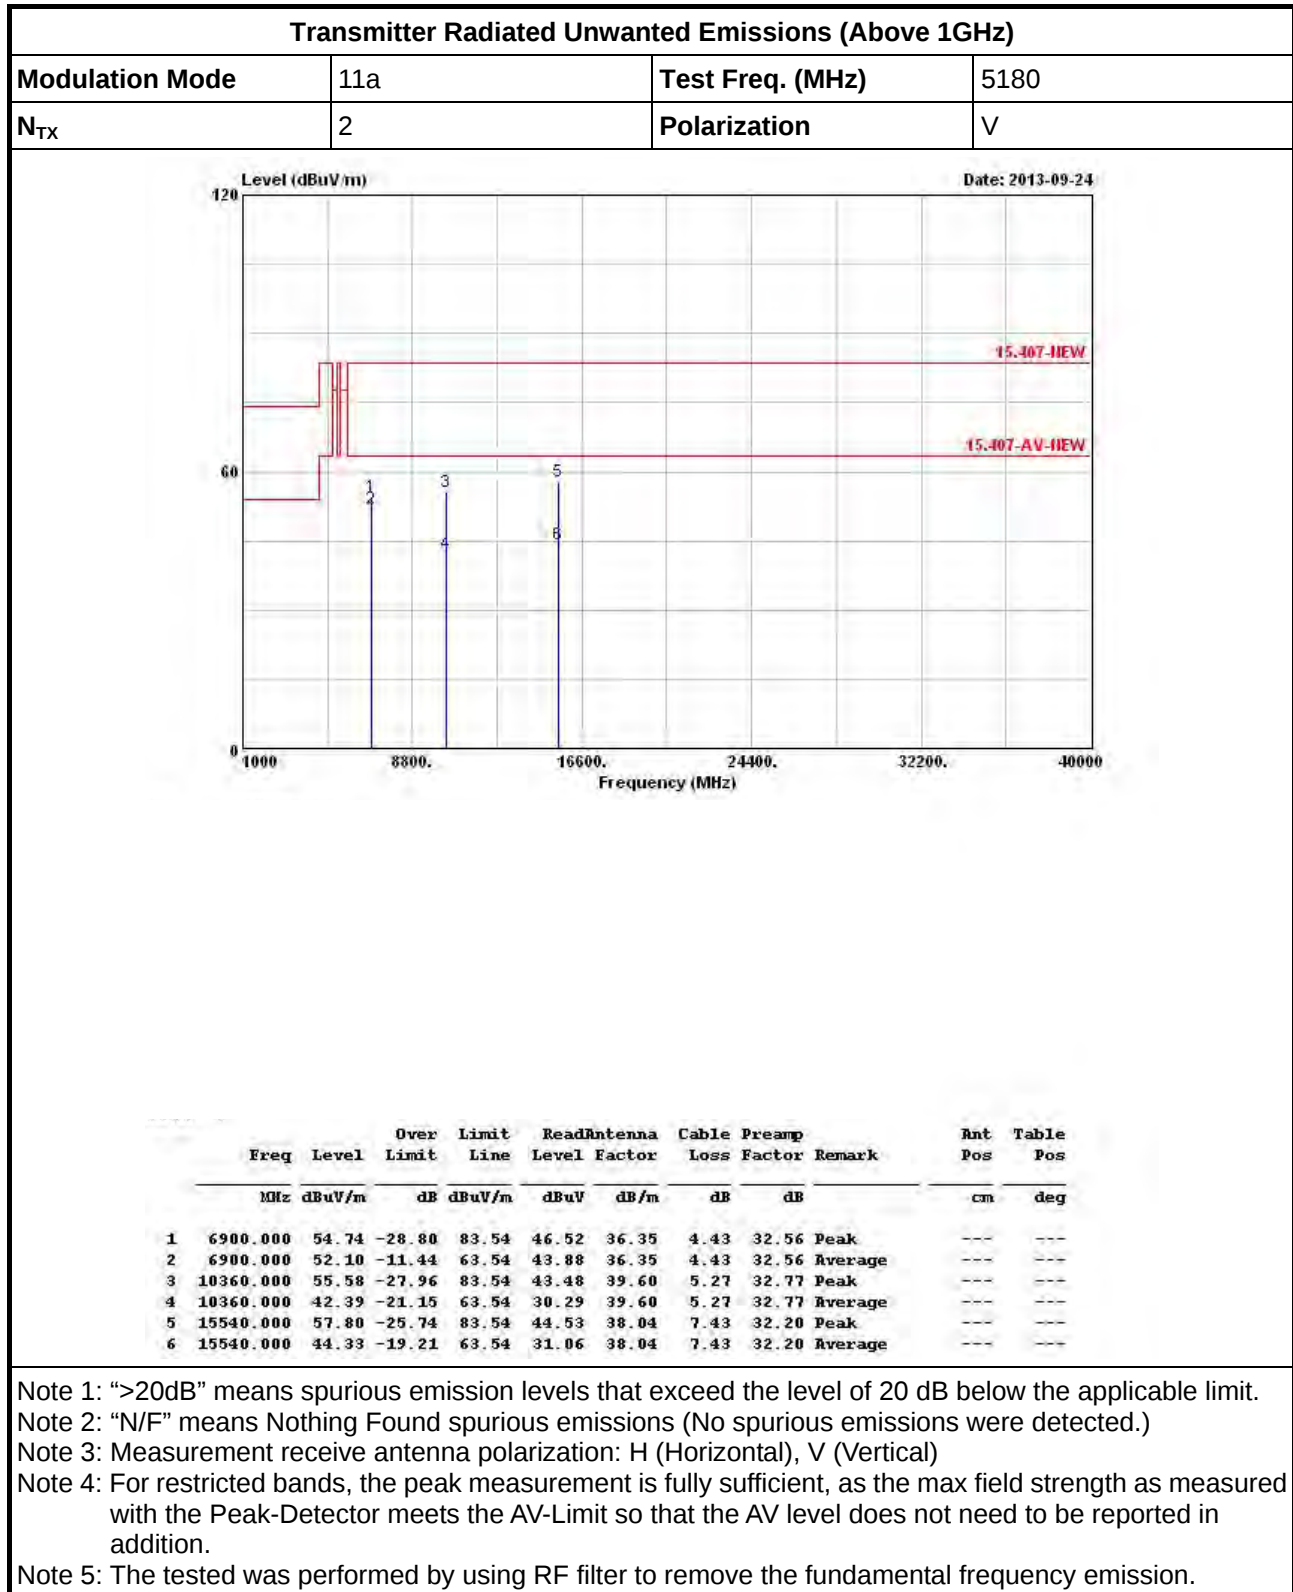

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N_{TX}	2	Polarization	H

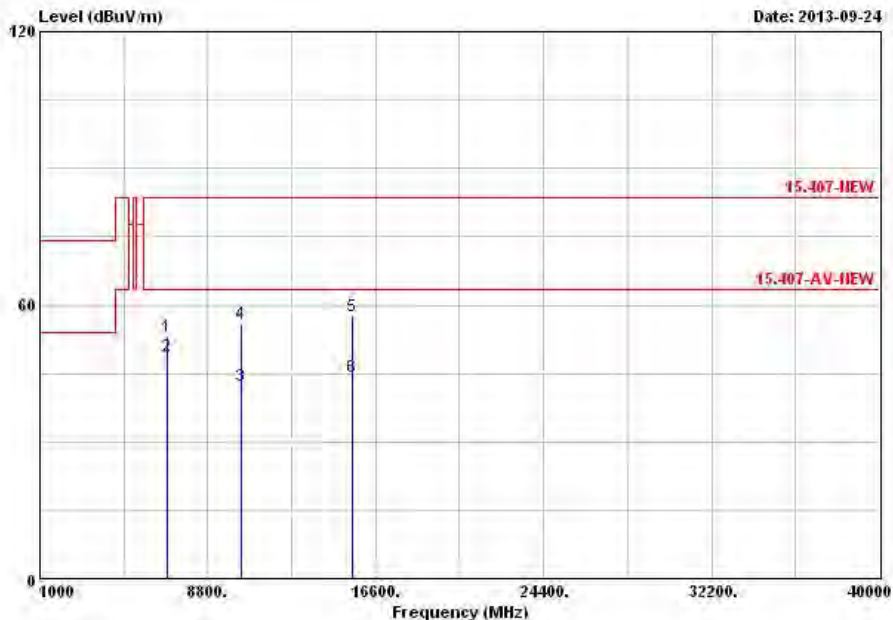

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6900.000	52.88	-30.66	83.54	44.66	36.35	4.43	32.56	Peak	---
2	6900.000	48.89	-14.65	63.54	40.67	36.35	4.43	32.56	Average	---
3	10360.000	42.38	-21.16	63.54	30.28	39.60	5.27	32.77	Average	---
4	10360.000	55.89	-27.65	83.54	43.79	39.60	5.27	32.77	Peak	---
5	15540.000	57.58	-25.96	83.54	44.31	38.04	7.43	32.20	Peak	---
6	15540.000	44.21	-19.33	63.54	30.94	38.04	7.43	32.20	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	2	Polarization	V

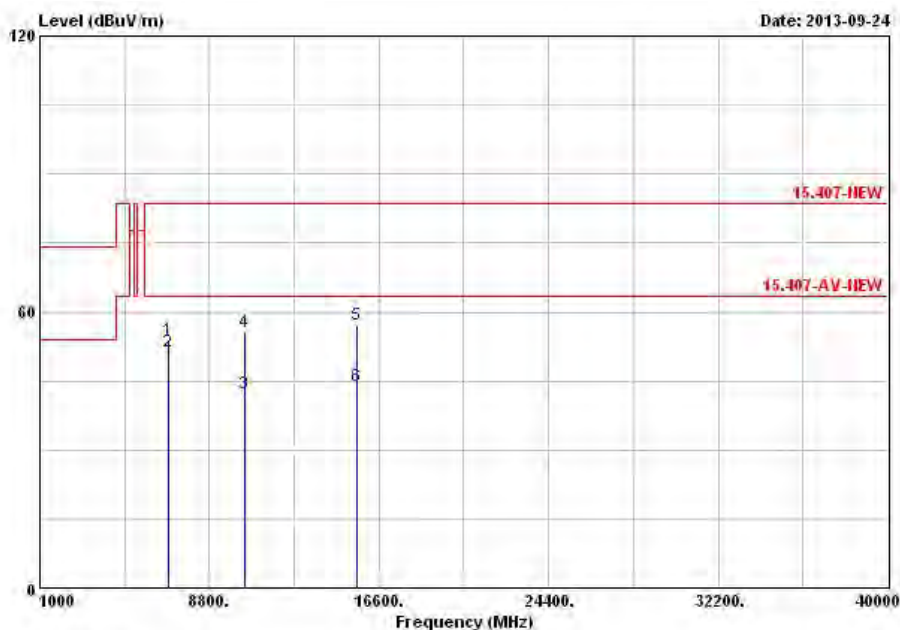

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6933.000	54.00	-29.54	83.54	45.72	36.43	4.42	32.57	Peak	---	---
2	6933.000	51.49	-12.05	63.54	43.21	36.43	4.42	32.57	Average	---	---
3	10400.000	42.22	-21.32	63.54	30.09	39.60	5.26	32.73	Average	---	---
4	10400.000	55.62	-27.92	83.54	43.49	39.60	5.26	32.73	Peak	---	---
5	15600.000	57.12	-26.42	83.54	43.96	37.91	7.47	32.22	Peak	---	---
6	15600.000	43.98	-19.56	63.54	30.82	37.91	7.47	32.22	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	2	Polarization	H

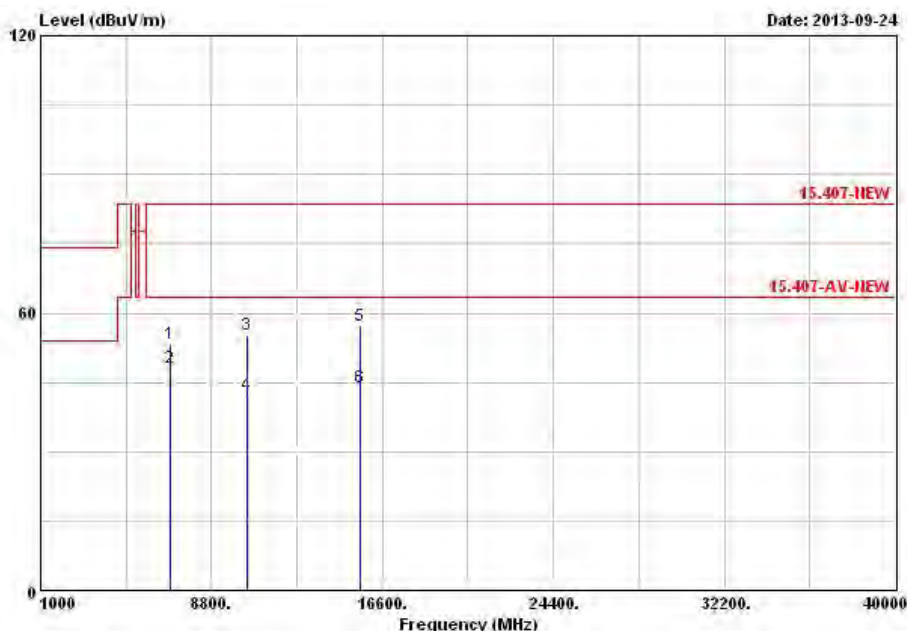

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6933.000	53.26	-30.28	83.54	44.98	36.43	4.42	32.57	Peak	---	---
2	6933.000	48.20	-15.34	63.54	39.92	36.43	4.42	32.57	Average	---	---
3	10400.000	55.31	-28.23	83.54	43.18	39.60	5.26	32.73	Peak	---	---
4	10400.000	42.36	-21.18	63.54	30.23	39.60	5.26	32.73	Average	---	---
5	15600.000	57.34	-26.20	83.54	44.18	37.91	7.47	32.22	Peak	---	---
6	15600.000	44.02	-19.52	63.54	30.86	37.91	7.47	32.22	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	2	Polarization	V

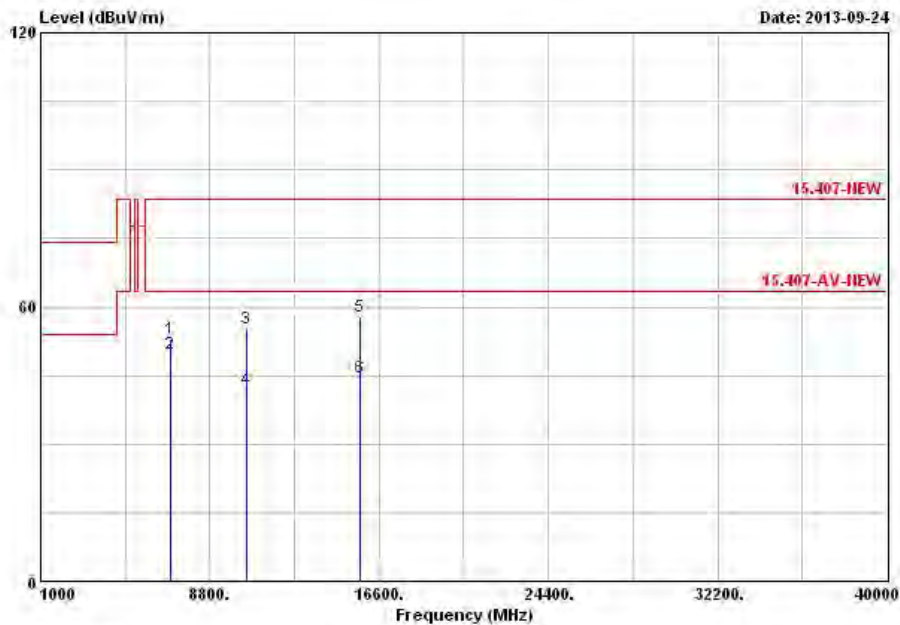

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6986.000	53.06	-30.48	83.54	44.68	36.56	4.40	32.58 Peak	---	---
2	6986.000	49.65	-13.89	63.54	41.27	36.56	4.40	32.58 Average	---	---
3	10480.000	55.26	-28.28	83.54	43.10	39.60	5.23	32.67 Peak	---	---
4	10480.000	41.93	-21.61	63.54	29.77	39.60	5.23	32.67 Average	---	---
5	15720.000	57.83	-25.71	83.54	44.80	37.70	7.58	32.25 Peak	---	---
6	15720.000	44.43	-19.11	63.54	31.40	37.70	7.58	32.25 Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	2	Polarization	H

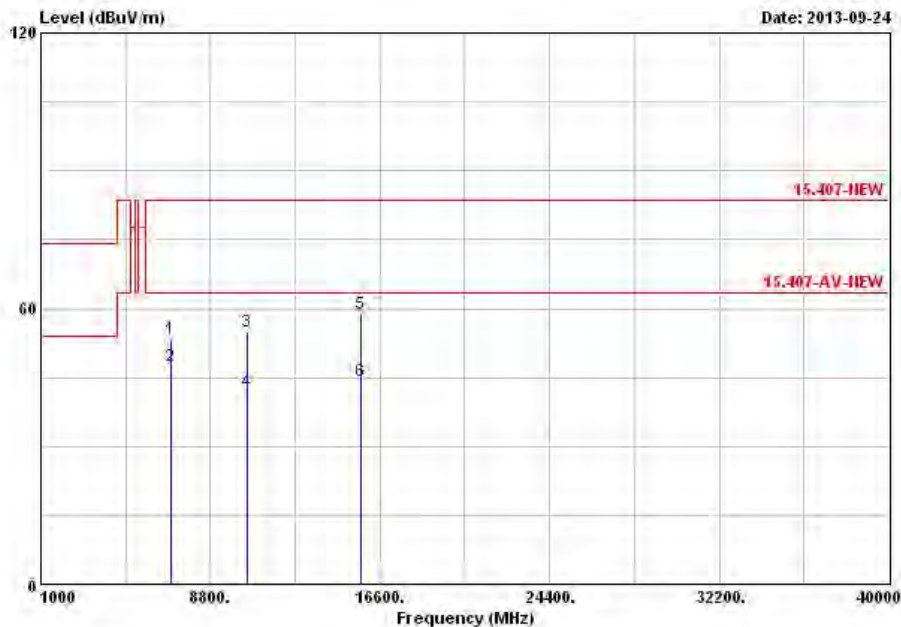

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6986.000	53.36	-30.18	83.54	44.98	36.56	4.40	32.58	Peak	---
2	6986.000	47.34	-16.20	63.54	38.96	36.56	4.40	32.58	Average	---
3	10480.000	54.85	-28.69	83.54	42.69	39.60	5.23	32.67	Peak	---
4	10480.000	41.88	-21.66	63.54	29.72	39.60	5.23	32.67	Average	---
5	15720.000	58.89	-24.65	83.54	45.86	37.70	7.58	32.25	Peak	---
6	15720.000	44.32	-19.22	63.54	31.29	37.70	7.58	32.25	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	2	Polarization	V

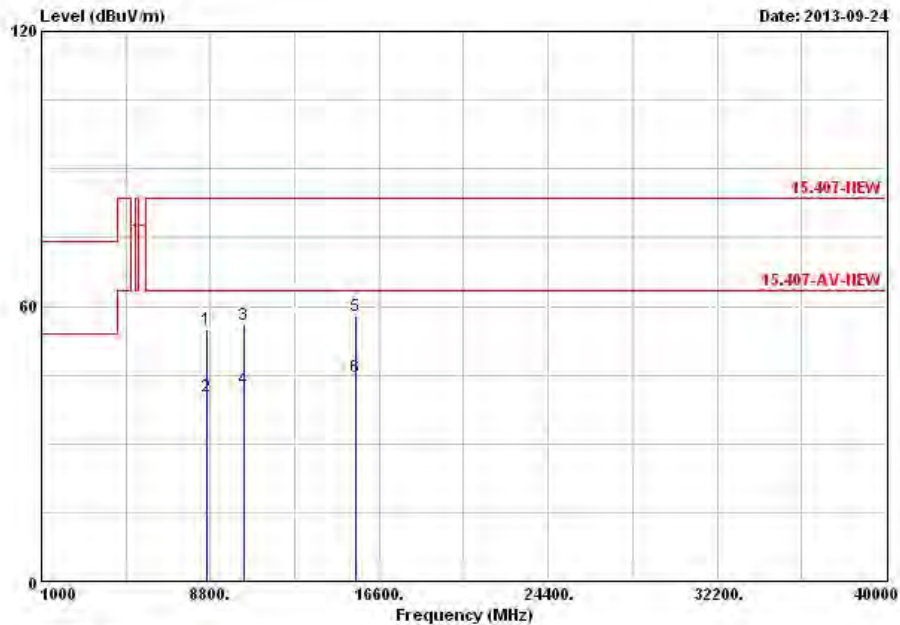

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8640.000	54.91	-28.63	83.54	44.84	38.54	4.39	32.86	Peak	---
2	8640.000	40.29	-23.25	63.54	30.22	38.54	4.39	32.86	Average	---
3	10363.210	55.95	-27.59	83.54	43.85	39.60	5.27	32.77	Peak	---
4	10363.210	41.98	-21.56	63.54	29.88	39.60	5.27	32.77	Average	---
5	15536.790	57.78	-25.76	83.54	44.51	38.04	7.43	32.20	Peak	---
6	15536.790	44.39	-19.15	63.54	31.12	38.04	7.43	32.20	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	2	Polarization	H

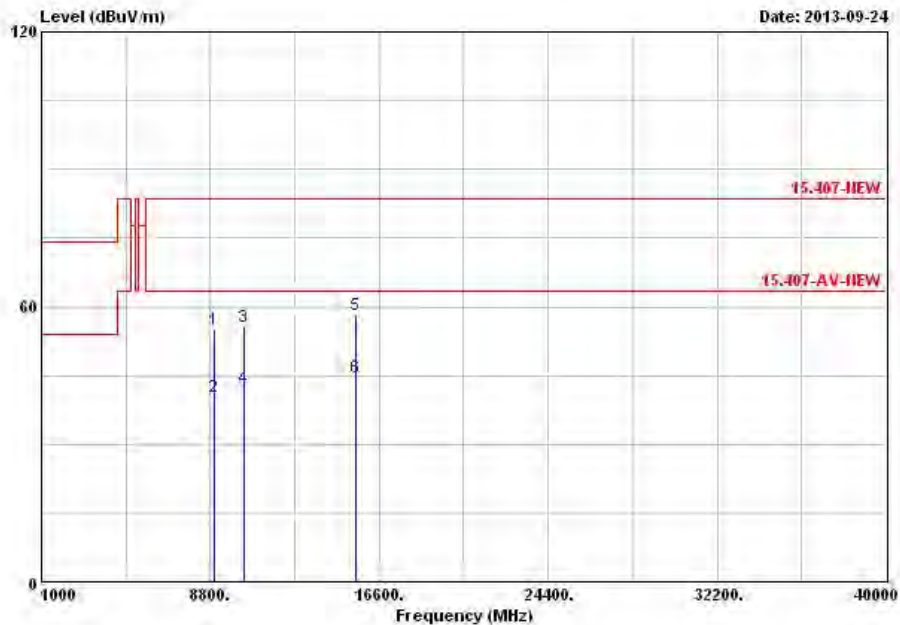

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8964.000	55.02	-28.52	83.54	44.68	38.16	5.14	32.96	Peak	---
2	8964.000	40.47	-23.07	63.54	30.13	38.16	5.14	32.96	Average	---
3	10360.000	55.54	-28.00	83.54	43.44	39.60	5.27	32.77	Peak	---
4	10360.000	42.16	-21.38	63.54	30.06	39.60	5.27	32.77	Average	---
5	15540.000	58.29	-25.25	83.54	45.02	38.04	7.43	32.20	Peak	---
6	15540.000	44.42	-19.12	63.54	31.15	38.04	7.43	32.20	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	2	Polarization	V

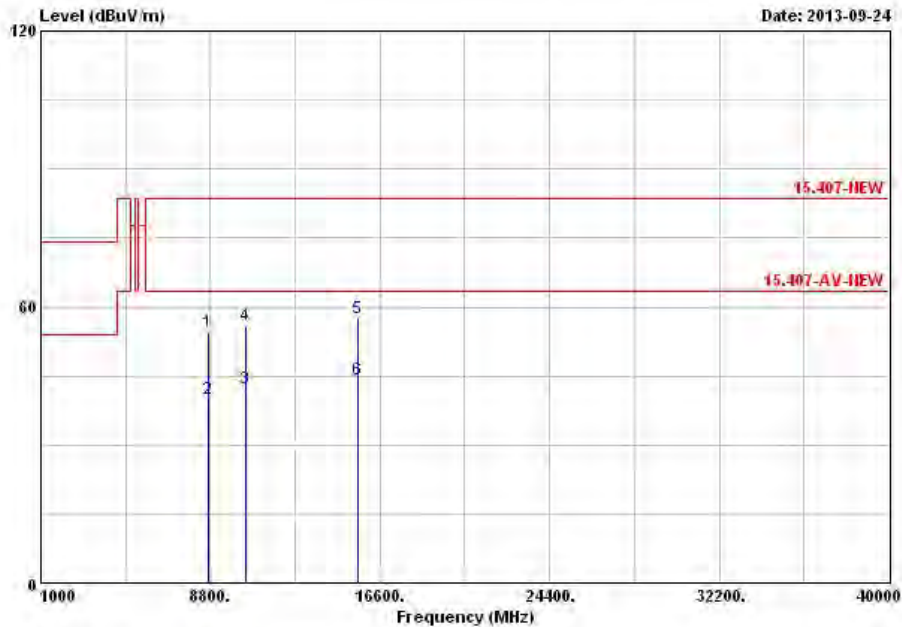

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8708.000	54.51	-29.03	83.54	44.35	38.46	4.58	32.88	Peak	---	---
2	8708.000	40.13	-23.41	63.54	29.97	38.46	4.58	32.88	Average	---	---
3	10396.790	42.33	-21.21	63.54	30.20	39.60	5.26	32.73	Average	---	---
4	10396.790	55.85	-27.69	83.54	43.72	39.60	5.26	32.73	Peak	---	---
5	15603.210	57.59	-25.95	83.54	44.43	37.91	7.47	32.22	Peak	---	---
6	15603.210	44.19	-19.35	63.54	31.03	37.91	7.47	32.22	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	2	Polarization	H

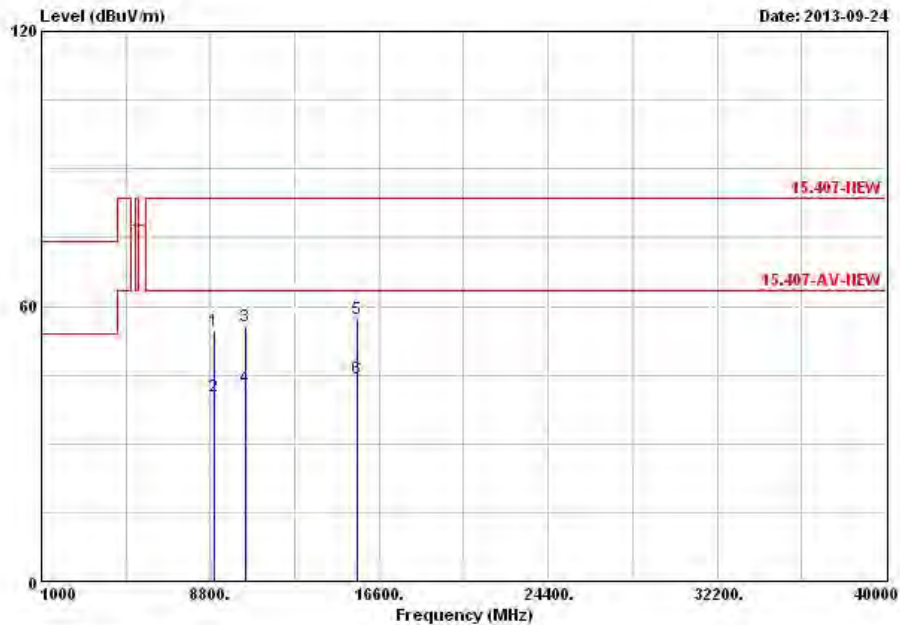

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	9000.000	54.74	-28.80	83.54	44.39	38.10	5.23	32.98	Peak	---
2	9000.000	40.42	-23.12	63.54	30.07	38.10	5.23	32.98	Average	---
3	10403.210	55.66	-27.88	83.54	43.53	39.60	5.26	32.73	Peak	---
4	10403.210	42.21	-21.33	63.54	30.08	39.60	5.26	32.73	Average	---
5	15603.210	57.33	-26.21	83.54	44.17	37.91	7.47	32.22	Peak	---
6	15603.210	44.32	-19.22	63.54	31.16	37.91	7.47	32.22	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	2	Polarization	V

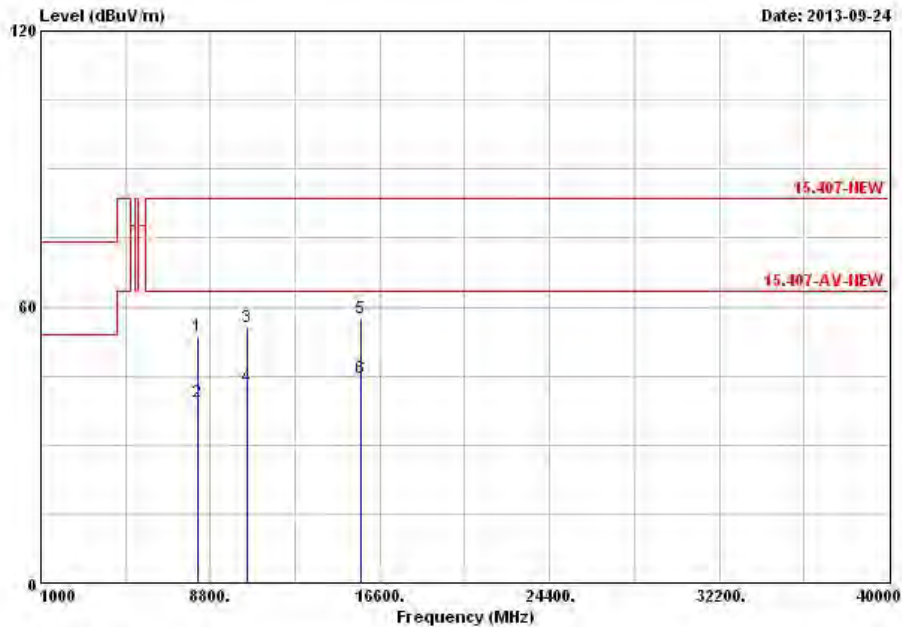

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8240.000	53.51	-30.03	83.54	44.20	38.23	3.88	32.80	Peak	---	---
2	8240.000	39.19	-24.35	63.54	29.88	38.23	3.88	32.80	Average	---	---
3	10483.210	55.64	-27.90	83.54	43.48	39.60	5.23	32.67	Peak	---	---
4	10483.210	42.48	-21.06	63.54	30.32	39.60	5.23	32.67	Average	---	---
5	15716.790	57.61	-25.93	83.54	44.58	37.70	7.58	32.25	Peak	---	---
6	15716.790	44.64	-18.90	63.54	31.61	37.70	7.58	32.25	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	2	Polarization	H

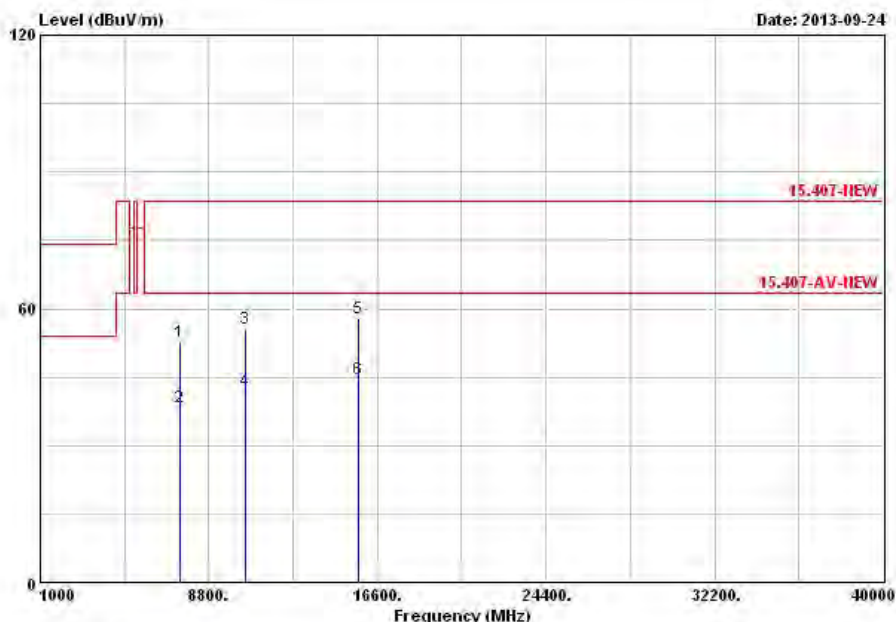

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7452.000	52.84	-30.70	83.54	44.13	37.25	4.17	32.71	Peak	---	---
2	7452.000	38.50	-25.04	63.54	29.79	37.25	4.17	32.71	Average	---	---
3	10480.000	55.53	-28.01	83.54	43.37	39.60	5.23	32.67	Peak	---	---
4	10480.000	41.86	-21.68	63.54	29.70	39.60	5.23	32.67	Average	---	---
5	15720.000	57.75	-25.79	83.54	44.72	37.70	7.58	32.25	Peak	---	---
6	15720.000	44.63	-18.91	63.54	31.60	37.70	7.58	32.25	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5190
N_{TX}	2	Polarization	V

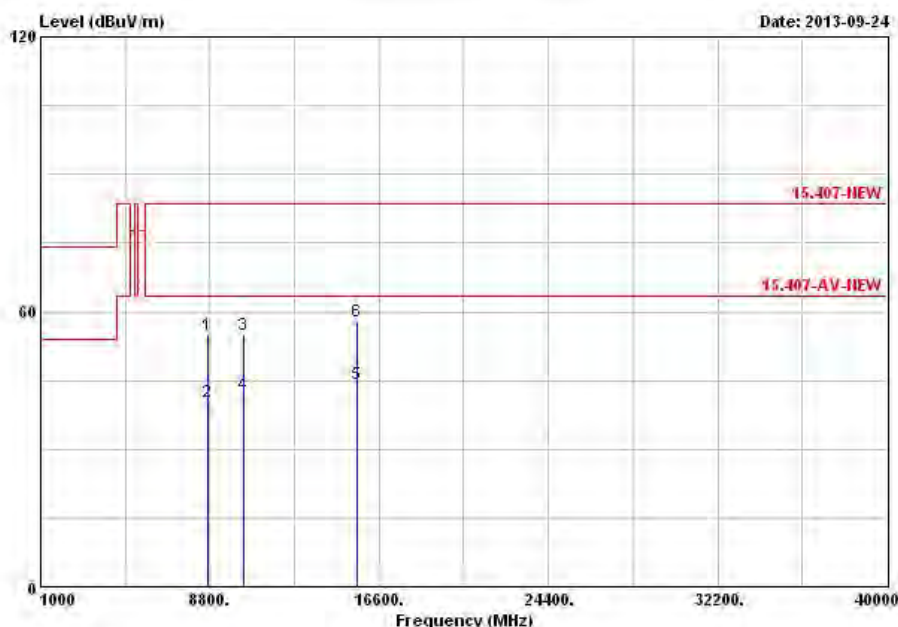

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8676.000	55.06	-28.48	83.54	44.97	38.48	4.48	32.87	Peak	---	---
2	8676.000	40.18	-23.36	63.54	30.09	38.48	4.48	32.87	Average	---	---
3	10380.000	55.01	-28.53	83.54	42.90	39.60	5.26	32.75	Peak	---	---
4	10380.000	42.04	-21.50	63.54	29.93	39.60	5.26	32.75	Average	---	---
5	15566.790	44.24	-19.30	63.54	30.99	37.98	7.47	32.20	Average	---	---
6	15566.790	57.97	-25.57	83.54	44.72	37.98	7.47	32.20	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5190
N_{TX}	2	Polarization	H

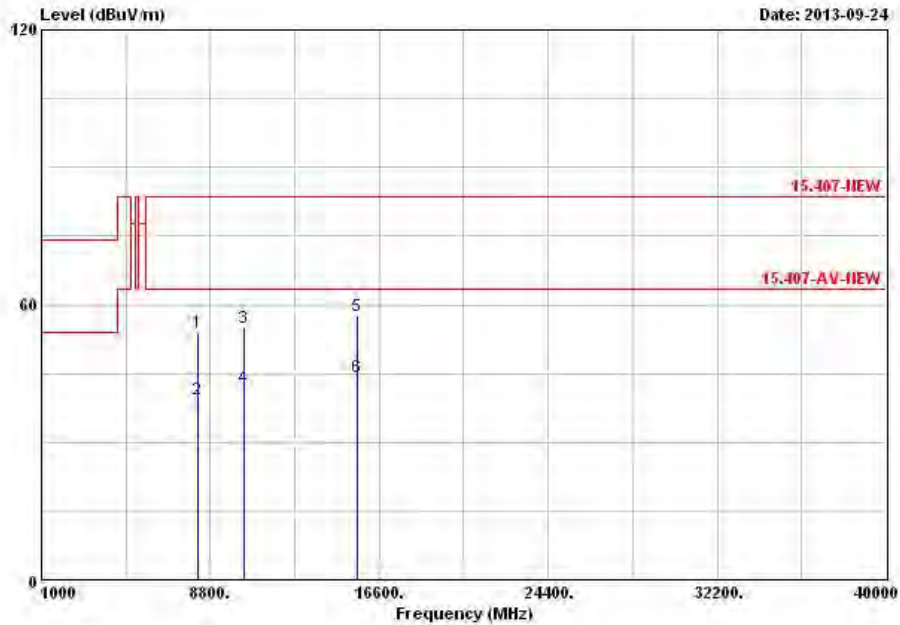

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8220.000	54.02	-29.52	83.54	44.76	38.20	3.86	32.80	Peak	---
2	8220.000	39.20	-24.34	63.54	29.94	38.20	3.86	32.80	Average	---
3	10383.210	54.99	-28.55	83.54	42.88	39.60	5.26	32.75	Peak	---
4	10383.210	42.10	-21.44	63.54	29.99	39.60	5.26	32.75	Average	---
5	15566.790	57.45	-26.09	83.54	44.20	37.98	7.47	32.20	Peak	---
6	15566.790	44.13	-19.41	63.54	30.88	37.98	7.47	32.20	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	2	Polarization	V

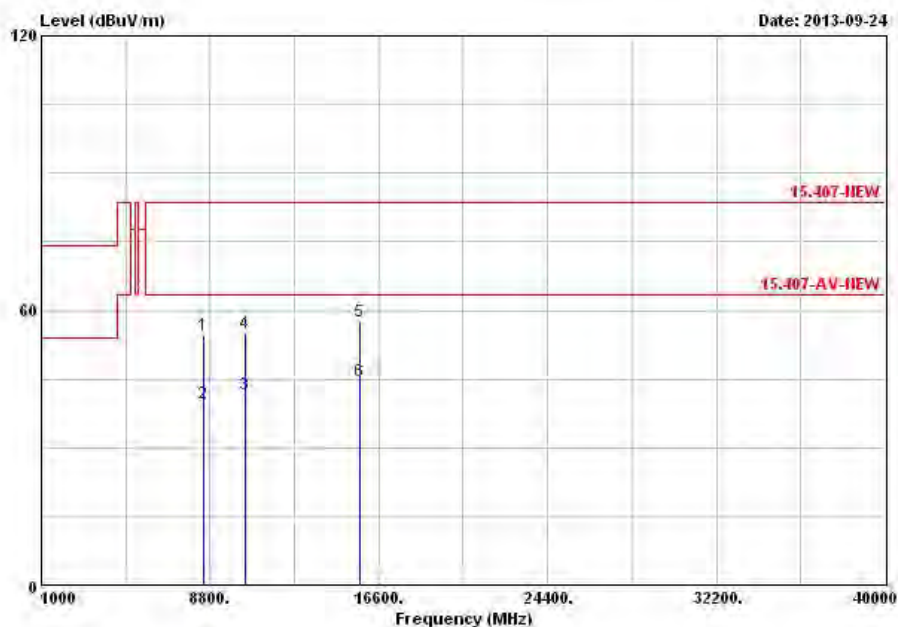

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8524.000	54.69	-28.85	83.54	44.74	38.66	4.11	32.82	Peak	---
2	8524.000	39.69	-23.85	63.54	29.74	38.66	4.11	32.82	Average	---
3	10456.790	41.77	-21.77	63.54	29.61	39.60	5.25	32.69	Average	---
4	10456.790	54.81	-28.73	83.54	42.65	39.60	5.25	32.69	Peak	---
5	15690.000	57.43	-26.11	83.54	44.33	37.76	7.58	32.24	Peak	---
6	15690.000	44.50	-19.04	63.54	31.40	37.76	7.58	32.24	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	2	Polarization	H

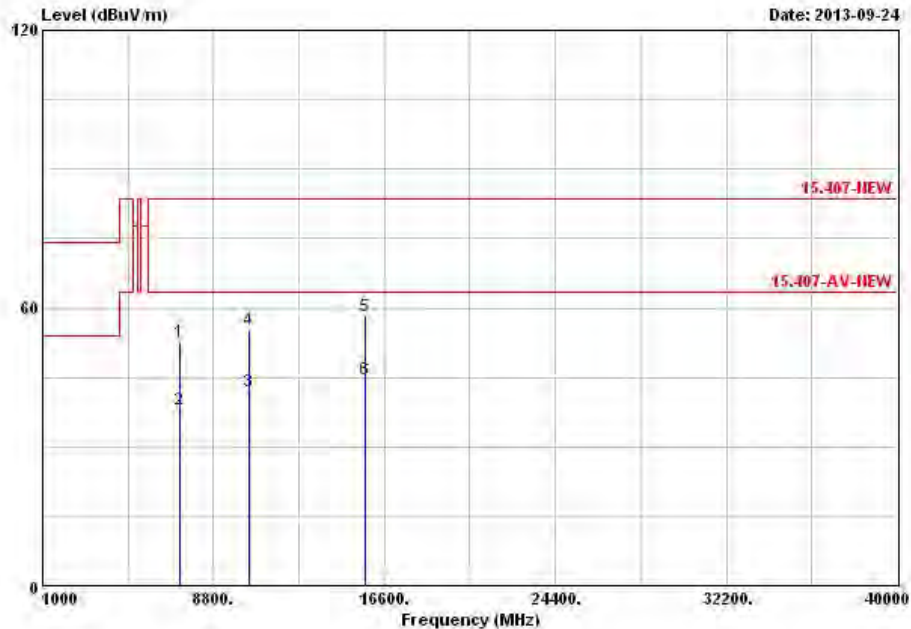

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7252.000	52.65	-30.89	83.54	44.07	36.96	4.27	32.65	Peak	---	---
2	7252.000	38.18	-25.36	63.54	29.60	36.96	4.27	32.65	Average	---	---
3	10456.790	41.82	-21.72	63.54	29.66	39.60	5.25	32.69	Average	---	---
4	10456.790	55.34	-28.20	83.54	43.18	39.60	5.25	32.69	Peak	---	---
5	15690.000	58.10	-25.44	83.54	45.00	37.76	7.58	32.24	Peak	---	---
6	15690.000	44.58	-18.96	63.54	31.48	37.76	7.58	32.24	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

3.3.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5250-5350MHz

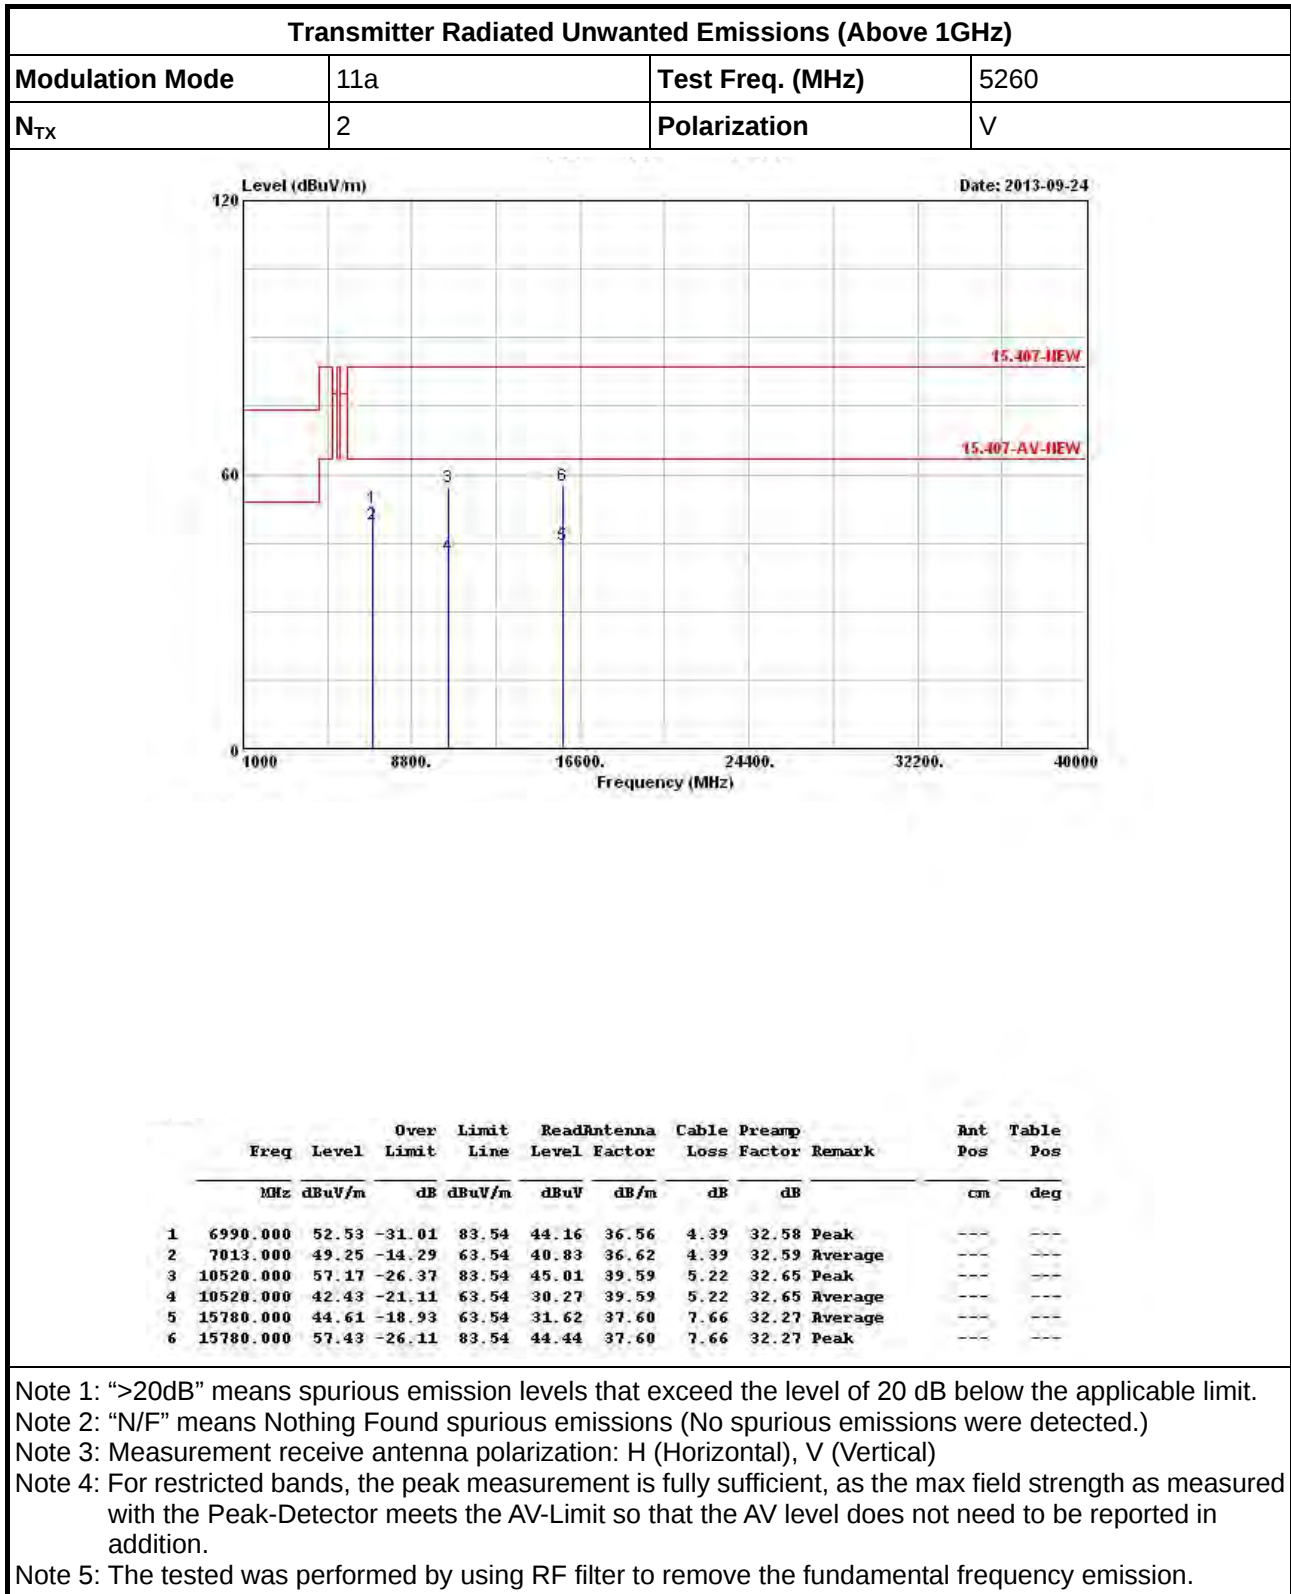

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5260
N_{TX}	2	Polarization	H

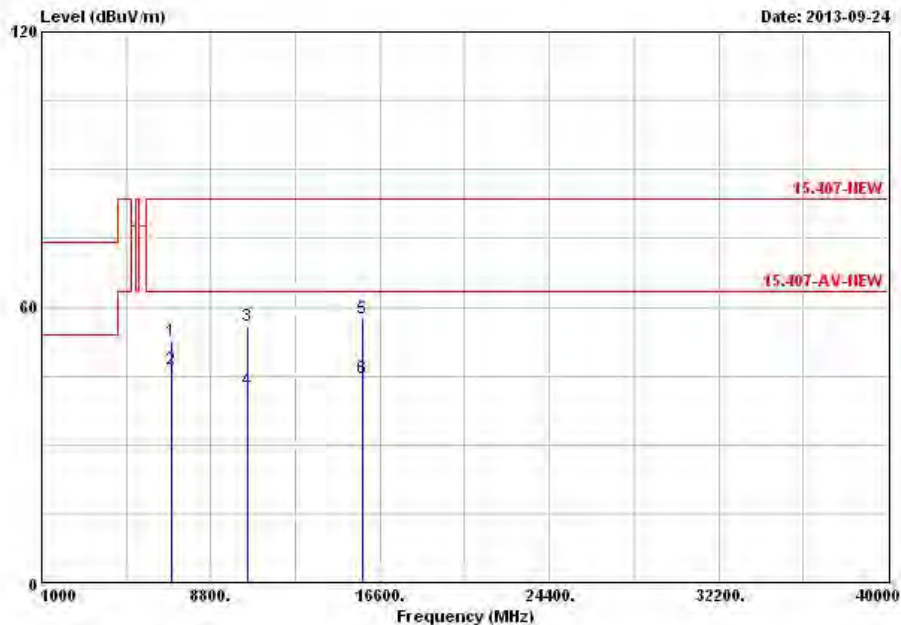

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7013.000	52.81	-30.73	83.54	44.39	36.62	4.39	32.59	Peak	---	---
2	7013.000	46.59	-16.95	63.54	38.17	36.62	4.39	32.59	Average	---	---
3	10520.000	56.04	-27.50	83.54	43.88	39.59	5.22	32.65	Peak	---	---
4	10520.000	41.81	-21.73	63.54	29.65	39.59	5.22	32.65	Average	---	---
5	15780.000	57.63	-25.91	83.54	44.64	37.60	7.66	32.27	Peak	---	---
6	15780.000	44.47	-19.07	63.54	31.48	37.60	7.66	32.27	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5300
N_{TX}	2	Polarization	V

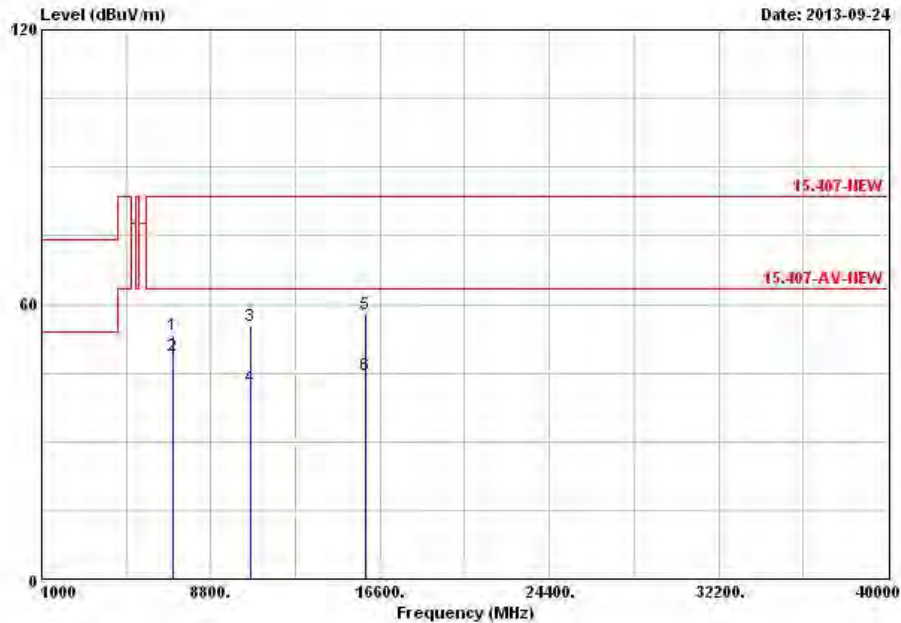

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7066.000	53.44	-30.10	83.54	44.99	36.70	4.35	32.60	Peak	---
2	7066.000	48.67	-14.87	63.54	40.22	36.70	4.35	32.60	Average	---
3	10600.000	55.15	-28.39	83.54	43.14	39.52	5.10	32.61	Peak	---
4	10600.000	41.79	-21.75	63.54	29.78	39.52	5.10	32.61	Average	---
5	15900.000	57.75	-25.79	83.54	44.89	37.39	7.77	32.30	Peak	---
6	15900.000	44.49	-19.05	63.54	31.63	37.39	7.77	32.30	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5300
N_{TX}	2	Polarization	H

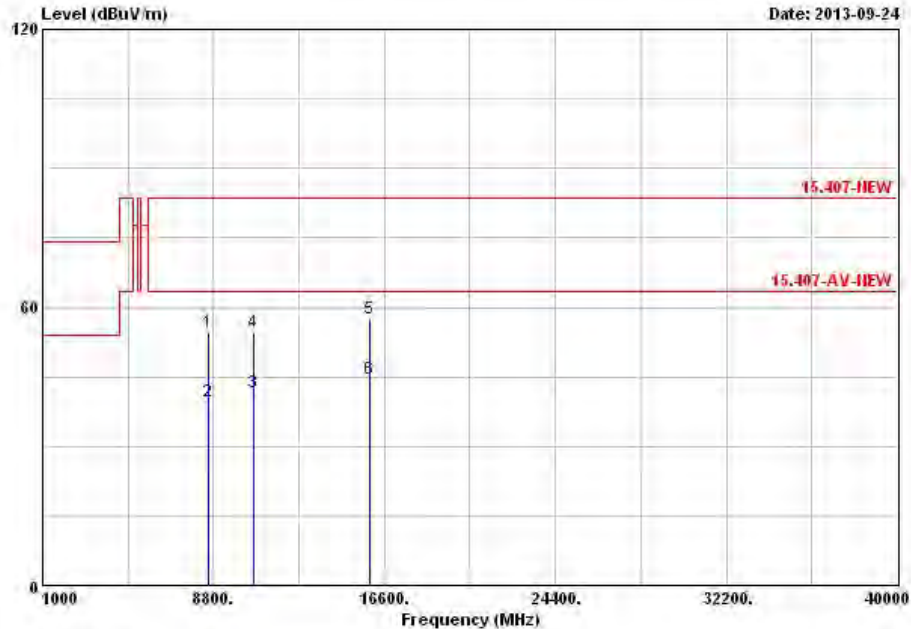

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8550.000	54.49	-29.05	83.54	44.48	38.64	4.20	32.83	Peak	---
2	8550.000	39.82	-23.72	63.54	29.81	38.64	4.20	32.83	Average	---
3	10600.000	41.77	-21.77	63.54	29.76	39.52	5.10	32.61	Average	---
4	10600.000	54.64	-28.90	83.54	42.63	39.52	5.10	32.61	Peak	---
5	15900.000	57.47	-26.07	83.54	44.61	37.39	7.77	32.30	Peak	---
6	15900.000	44.48	-19.06	63.54	31.62	37.39	7.77	32.30	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5320
N_{TX}	2	Polarization	V

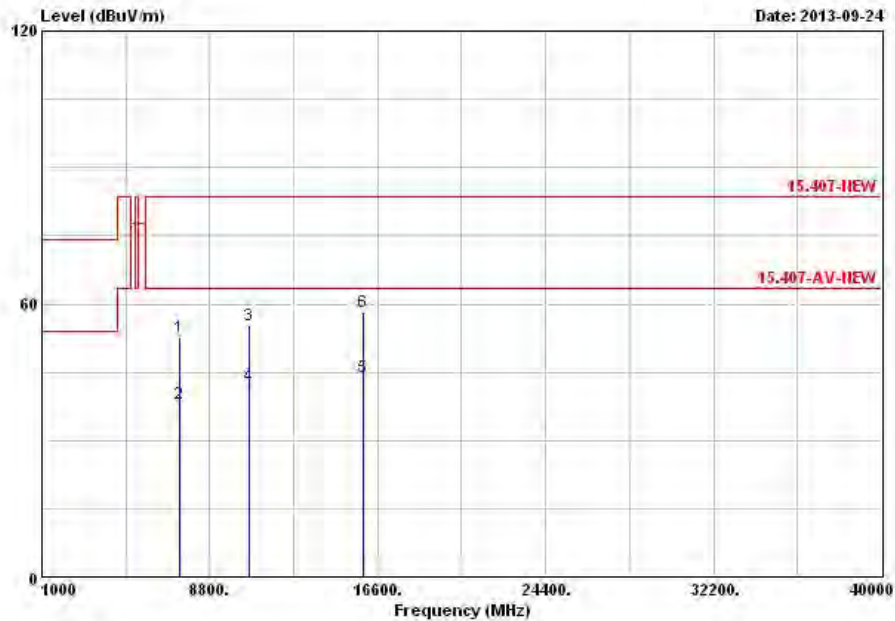

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7382.000	52.59	-30.95	83.54	43.96	37.13	4.19	32.69	Peak	---
2	7382.000	38.03	-25.51	63.54	29.40	37.13	4.19	32.69	Average	---
3	10640.000	55.15	-28.39	83.54	43.20	39.49	5.04	32.58	Peak	---
4	10640.000	42.01	-21.53	63.54	30.06	39.49	5.04	32.58	Average	---
5	15960.000	43.92	-19.62	63.54	31.13	37.26	7.85	32.32	Average	---
6	15960.000	58.07	-25.47	83.54	45.28	37.26	7.85	32.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5320
N_{TX}	2	Polarization	H

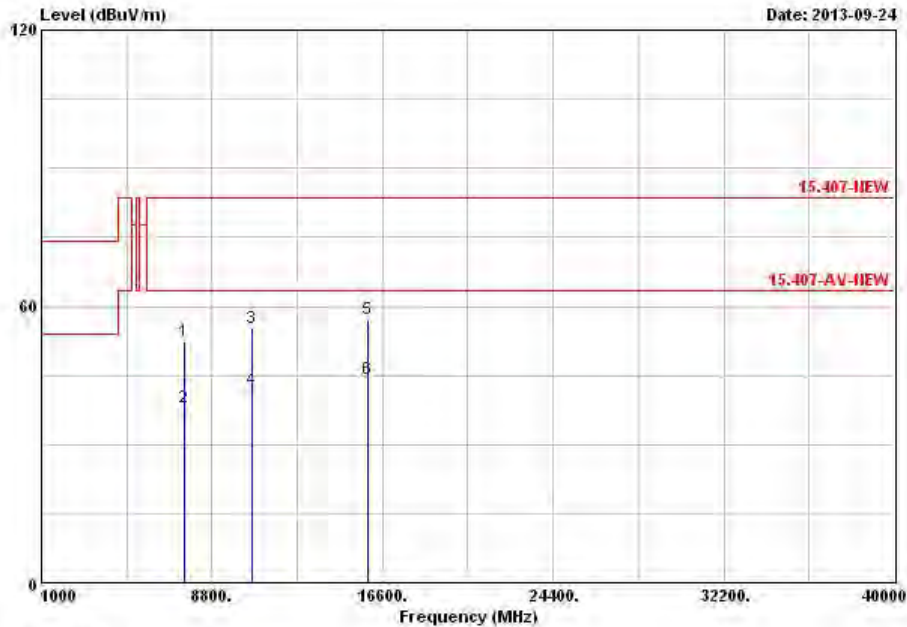

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7510.000	52.25	-31.29	83.54	43.52	37.32	4.13	32.72	Peak	---	---
2	7510.000	37.95	-25.59	63.54	29.22	37.32	4.13	32.72	Average	---	---
3	10640.000	55.38	-28.16	83.54	43.43	39.49	5.04	32.58	Peak	---	---
4	10640.000	42.07	-21.47	63.54	30.12	39.49	5.04	32.58	Average	---	---
5	15960.000	57.28	-26.26	83.54	44.49	37.26	7.85	32.32	Peak	---	---
6	15960.000	44.07	-19.47	63.54	31.28	37.26	7.85	32.32	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5260
N_{TX}	2	Polarization	V

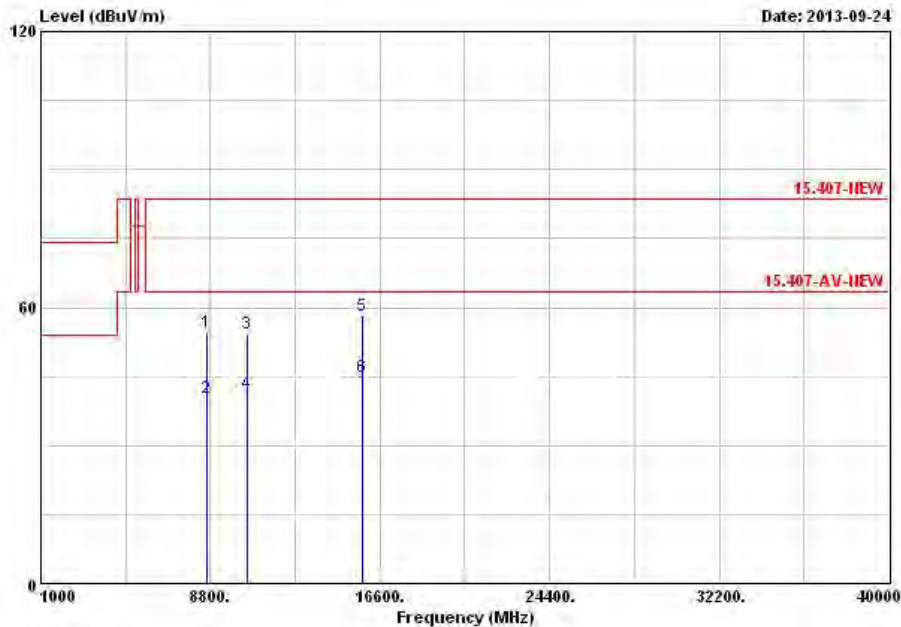

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8620.000	54.61	-28.93	83.54	44.60	38.56	4.30	32.85	Peak	---
2	8620.000	40.17	-23.37	63.54	30.16	38.56	4.30	32.85	Average	---
3	10520.000	54.35	-29.19	83.54	42.19	39.59	5.22	32.65	Peak	---
4	10520.000	41.35	-22.19	63.54	29.19	39.59	5.22	32.65	Average	---
5	15780.000	58.06	-25.48	83.54	45.07	37.60	7.66	32.27	Peak	---
6	15780.000	44.85	-18.69	63.54	31.86	37.60	7.66	32.27	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5260
N_{TX}	2	Polarization	H

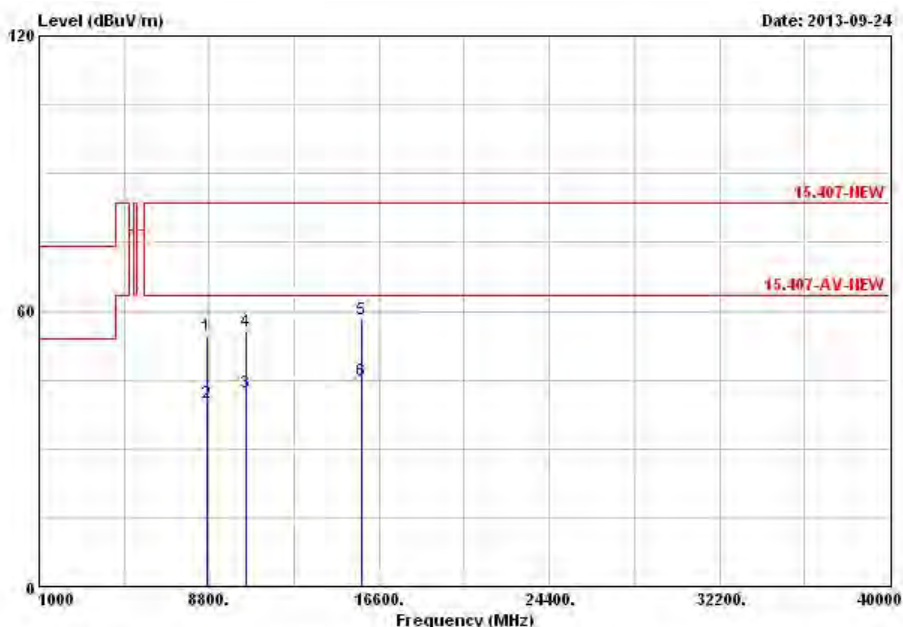

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8696.000	54.55	-28.99	83.54	44.49	38.46	4.48	32.88	Peak	---
2	8696.000	40.07	-23.47	63.54	30.01	38.46	4.48	32.88	Average	---
3	10516.790	42.44	-21.10	63.54	30.28	39.59	5.22	32.65	Average	---
4	10516.790	55.50	-28.04	83.54	43.34	39.59	5.22	32.65	Peak	---
5	15783.210	58.25	-25.29	83.54	45.29	37.57	7.66	32.27	Peak	---
6	15783.210	44.90	-18.64	63.54	31.94	37.57	7.66	32.27	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5300
N_{TX}	2	Polarization	V

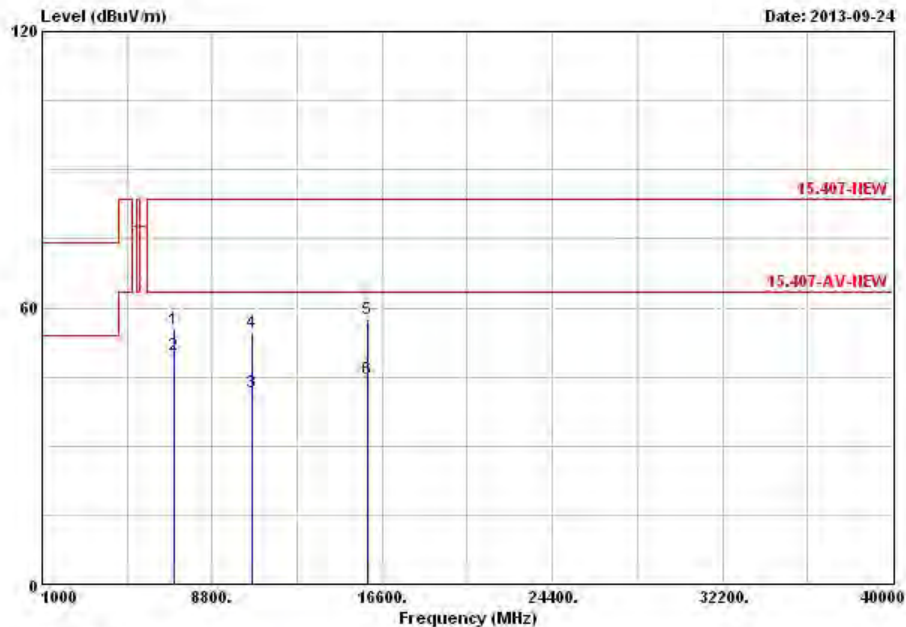

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7064.000	55.12	-28.42	83.54	46.65	36.70	4.37	32.60	Peak	---
2	7064.000	49.74	-13.80	63.54	41.27	36.70	4.37	32.60	Average	---
3	10600.000	41.76	-21.78	63.54	29.75	39.52	5.10	32.61	Average	---
4	10600.000	54.61	-28.93	83.54	42.60	39.52	5.10	32.61	Peak	---
5	15903.210	57.41	-26.13	83.54	44.58	37.36	7.77	32.30	Peak	---
6	15903.210	44.64	-18.90	63.54	31.81	37.36	7.77	32.30	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5300
N_{TX}	2	Polarization	H

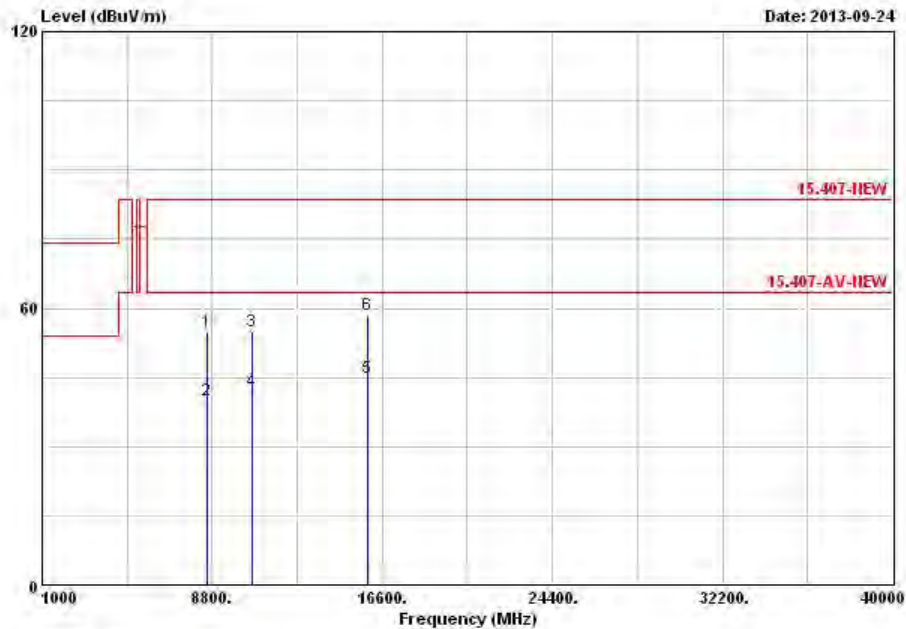

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8592.000	54.81	-28.73	83.54	44.77	38.58	4.30	32.84	Peak	---	---
2	8592.000	40.15	-23.39	63.54	30.11	38.58	4.30	32.84	Average	---	---
3	10603.210	55.06	-28.48	83.54	43.03	39.52	5.10	32.59	Peak	---	---
4	10603.210	41.85	-21.69	63.54	29.82	39.52	5.10	32.59	Average	---	---
5	15896.790	44.76	-18.78	63.54	31.90	37.39	7.77	32.30	Average	---	---
6	15896.790	58.42	-25.12	83.54	45.56	37.39	7.77	32.30	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5320
N_{TX}	2	Polarization	V

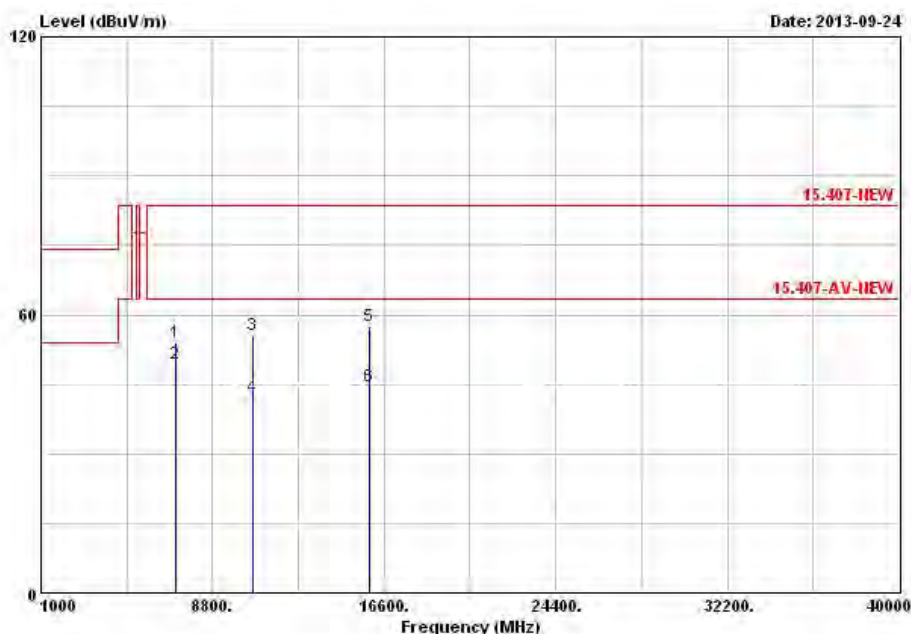

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7092.000	54.01	-29.53	83.54	45.55	36.72	4.35	32.61	Peak	---	---
2	7092.000	49.44	-14.10	63.54	40.98	36.72	4.35	32.61	Average	---	---
3	10640.000	55.60	-27.94	83.54	43.65	39.49	5.04	32.58	Peak	---	---
4	10640.000	42.24	-21.30	63.54	30.29	39.49	5.04	32.58	Average	---	---
5	15958.400	57.56	-25.98	83.54	44.77	37.26	7.85	32.32	Peak	---	---
6	15958.400	44.40	-19.14	63.54	31.61	37.26	7.85	32.32	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5320
N_{TX}	2	Polarization	H

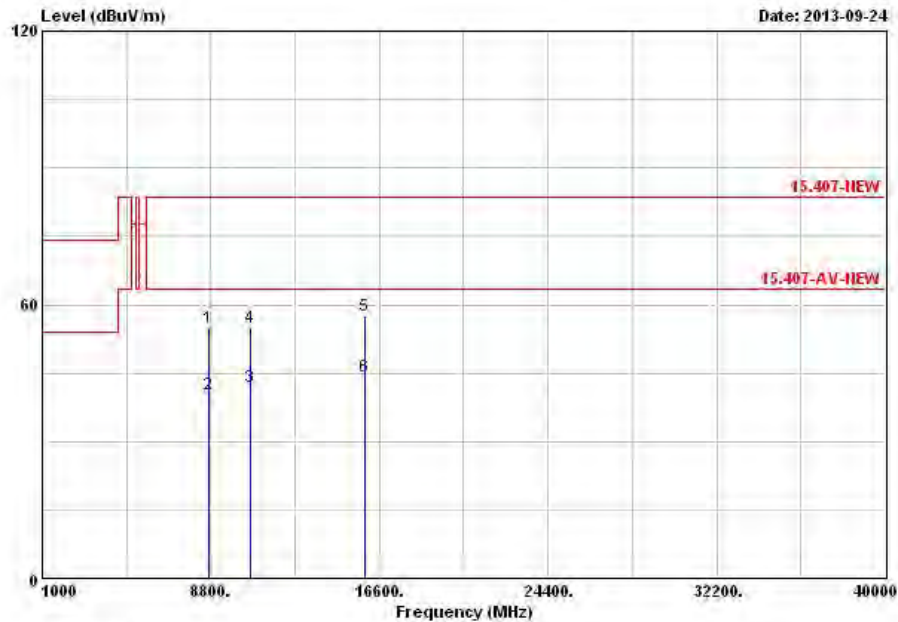

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8708.000	54.96	-28.58	83.54	44.80	38.46	4.58	32.88	Peak	---
2	8708.000	40.20	-23.34	63.54	30.04	38.46	4.58	32.88	Average	---
3	10636.790	42.02	-21.52	63.54	30.07	39.49	5.04	32.58	Average	---
4	10636.790	54.86	-28.68	83.54	42.91	39.49	5.04	32.58	Peak	---
5	15960.000	57.68	-25.86	83.54	44.89	37.26	7.85	32.32	Peak	---
6	15960.000	44.31	-19.23	63.54	31.52	37.26	7.85	32.32	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5270
N _{TX}	2	Polarization	V

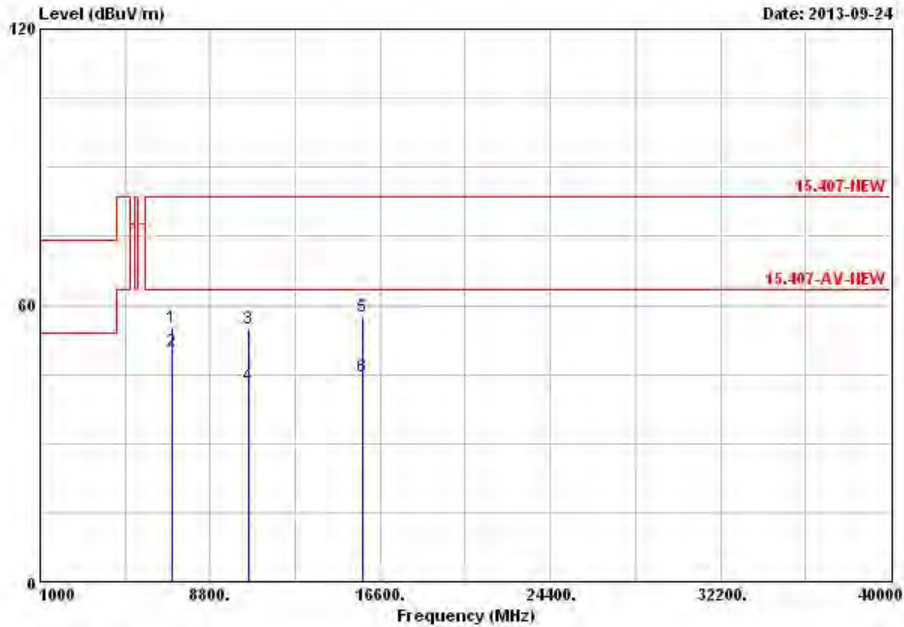

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7024.000	55.28	-28.26	83.54	46.86	36.62	4.39	32.59	Peak	---
2	7024.000	50.09	-13.45	63.54	41.67	36.62	4.39	32.59	Average	---
3	10543.210	55.00	-28.54	83.54	42.91	39.57	5.16	32.64	Peak	---
4	10543.210	42.57	-20.97	63.54	30.48	39.57	5.16	32.64	Average	---
5	15810.000	57.68	-25.86	83.54	44.72	37.54	7.70	32.28	Peak	---
6	15810.000	44.70	-18.84	63.54	31.74	37.54	7.70	32.28	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5270
N_{TX}	2	Polarization	H

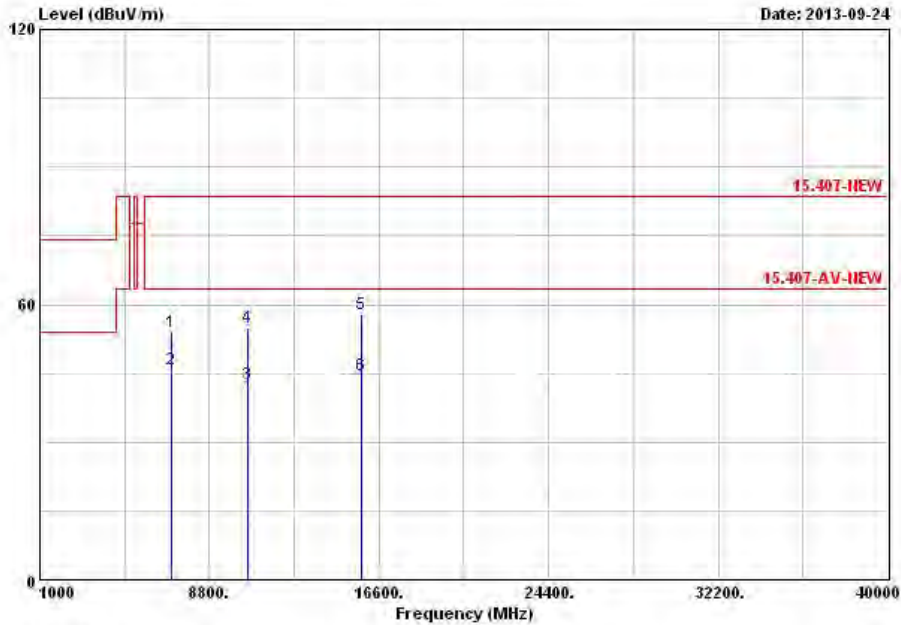

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7024.000	53.94	-29.60	83.54	45.52	36.62	4.39	32.59	Peak	---
2	7024.000	45.93	-17.61	63.54	37.51	36.62	4.39	32.59	Average	---
3	10536.790	42.74	-20.80	63.54	30.65	39.57	5.16	32.64	Average	---
4	10536.790	54.85	-28.69	83.54	42.76	39.57	5.16	32.64	Peak	---
5	15806.790	57.84	-25.70	83.54	44.88	37.54	7.70	32.28	Peak	---
6	15806.790	44.63	-18.91	63.54	31.67	37.54	7.70	32.28	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5310
N_{TX}	2	Polarization	V

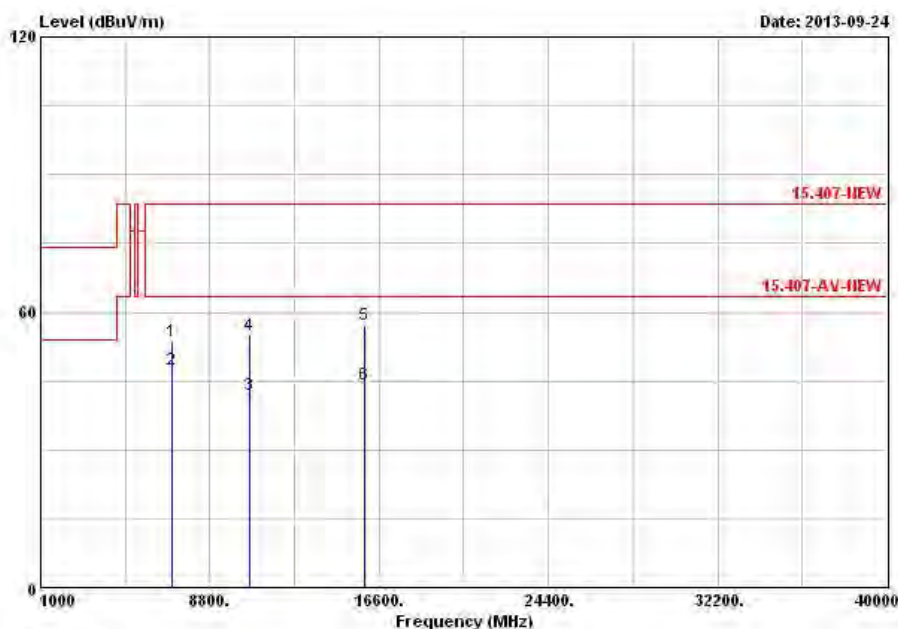

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7080.000	53.65	-29.89	83.54	45.18	36.72	4.35	32.60	Peak	---
2	7080.000	47.42	-16.12	63.54	38.95	36.72	4.35	32.60	Average	---
3	10616.790	42.05	-21.49	63.54	30.10	39.50	5.04	32.59	Average	---
4	10616.790	55.05	-28.49	83.54	43.10	39.50	5.04	32.59	Peak	---
5	15930.000	57.31	-26.23	83.54	44.49	37.32	7.81	32.31	Peak	---
6	15930.000	44.26	-19.28	63.54	31.44	37.32	7.81	32.31	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5310
N_{TX}	2	Polarization	H

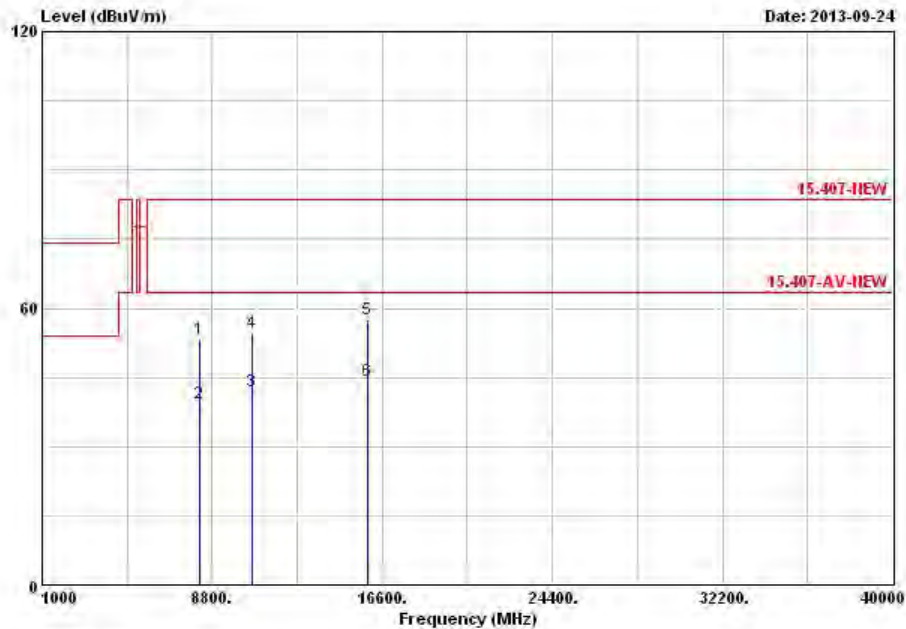

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8212.000	53.20	-30.34	83.54	43.97	38.17	3.86	32.80	Peak	---	---
2	8212.000	39.28	-24.26	63.54	30.05	38.17	3.86	32.80	Average	---	---
3	10616.790	41.88	-21.66	63.54	29.93	39.50	5.04	32.59	Average	---	---
4	10616.790	54.72	-28.82	83.54	42.77	39.50	5.04	32.59	Peak	---	---
5	15930.000	57.53	-26.01	83.54	44.71	37.32	7.81	32.31	Peak	---	---
6	15930.000	44.33	-19.21	63.54	31.51	37.32	7.81	32.31	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

3.3.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5470-5725MHz

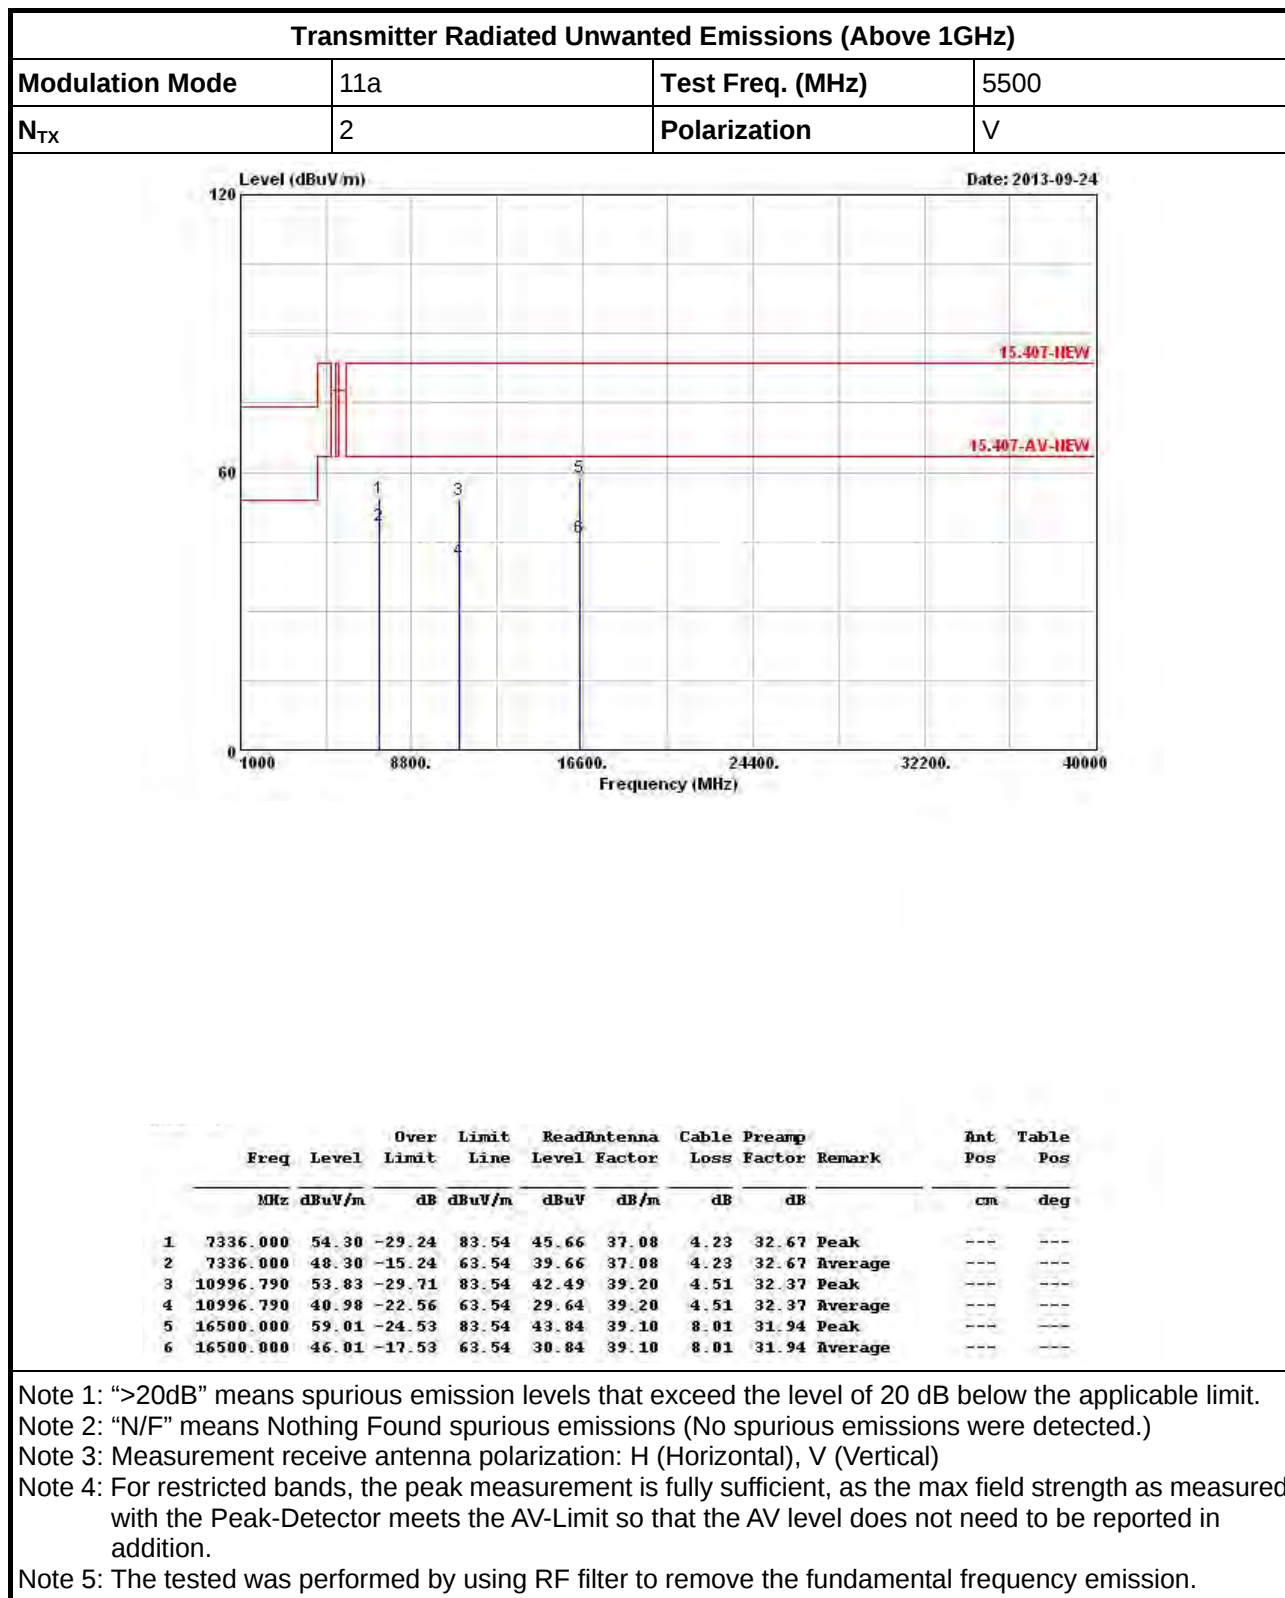

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5500
N_{TX}	2	Polarization	H

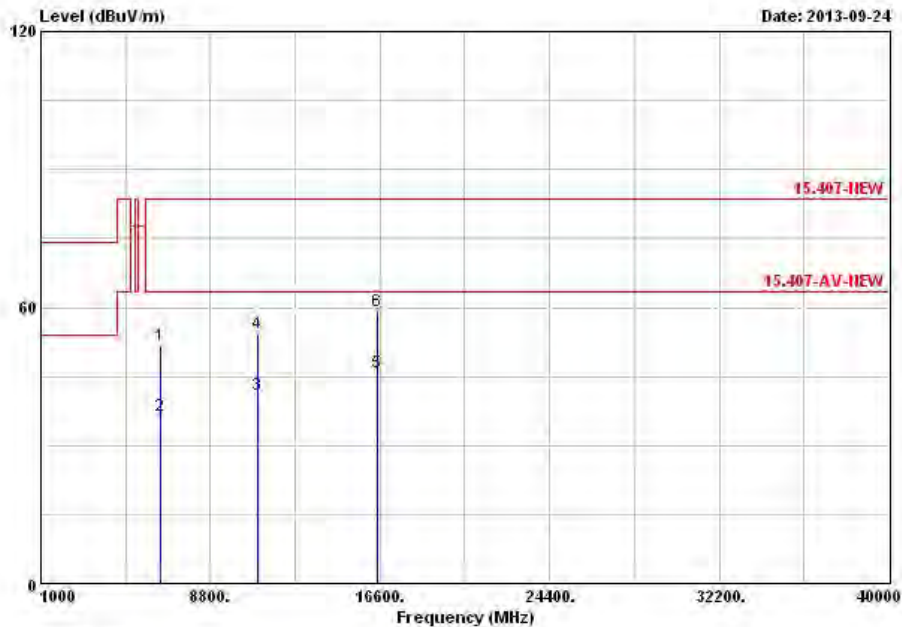

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6532.000	51.86	-31.68	83.54	44.35	35.44	4.56	32.49 Peak	---	---
2	6532.000	36.46	-27.08	63.54	28.95	35.44	4.56	32.49 Average	---	---
3	11000.000	40.89	-22.65	63.54	29.55	39.20	4.51	32.37 Average	---	---
4	11000.000	54.32	-29.22	83.54	42.98	39.20	4.51	32.37 Peak	---	---
5	16503.210	45.91	-17.63	63.54	30.71	39.10	8.04	31.94 Average	---	---
6	16503.210	59.24	-24.30	83.54	44.04	39.10	8.04	31.94 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5580
N_{TX}	2	Polarization	V

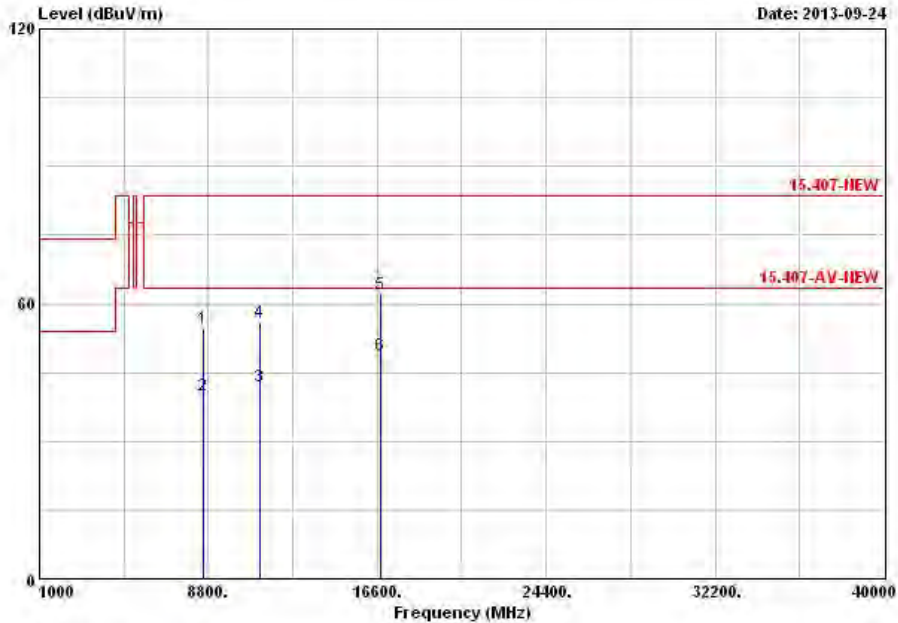

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8535.820	54.56	-28.98	83.54	44.62	38.66	4.11	32.83	Peak	---
2	8535.820	39.90	-23.64	63.54	29.96	38.66	4.11	32.83	Average	---
3	11156.790	42.02	-21.52	63.54	30.36	39.47	4.55	32.36	Average	---
4	11156.790	55.87	-27.67	83.54	44.21	39.47	4.55	32.36	Peak	---
5	16740.460	62.04	-21.50	83.54	45.10	40.40	8.18	31.64	Peak	---
6	16740.460	48.71	-14.83	63.54	31.77	40.40	8.18	31.64	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5580
N_{TX}	2	Polarization	H

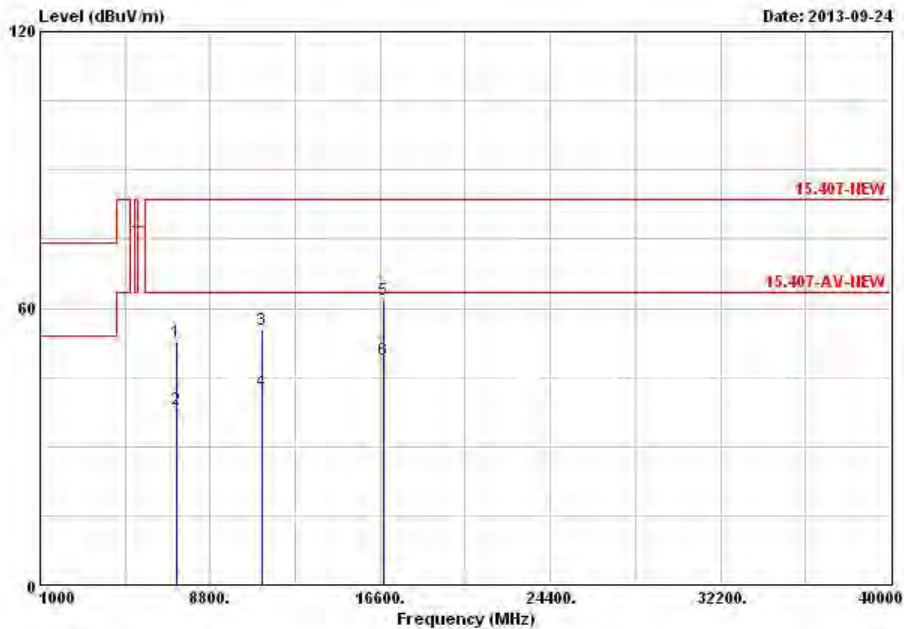

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Preamp Loss Factor	Remark	Ant Pos	Table Pos		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm deg		
1	7264.000	52.61	-30.93	83.54	44.06	36.96	4.25	32.66	Peak	---	---
2	7264.000	37.92	-25.62	63.54	29.37	36.96	4.25	32.66	Average	---	---
3	11160.000	55.21	-28.33	83.54	43.51	39.50	4.56	32.36	Peak	---	---
4	11160.000	42.05	-21.49	63.54	30.35	39.50	4.56	32.36	Average	---	---
5	16740.000	61.93	-21.61	83.54	44.99	40.40	8.18	31.64	Peak	---	---
6	16740.000	48.70	-14.84	63.54	31.76	40.40	8.18	31.64	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5700
N_{TX}	2	Polarization	V

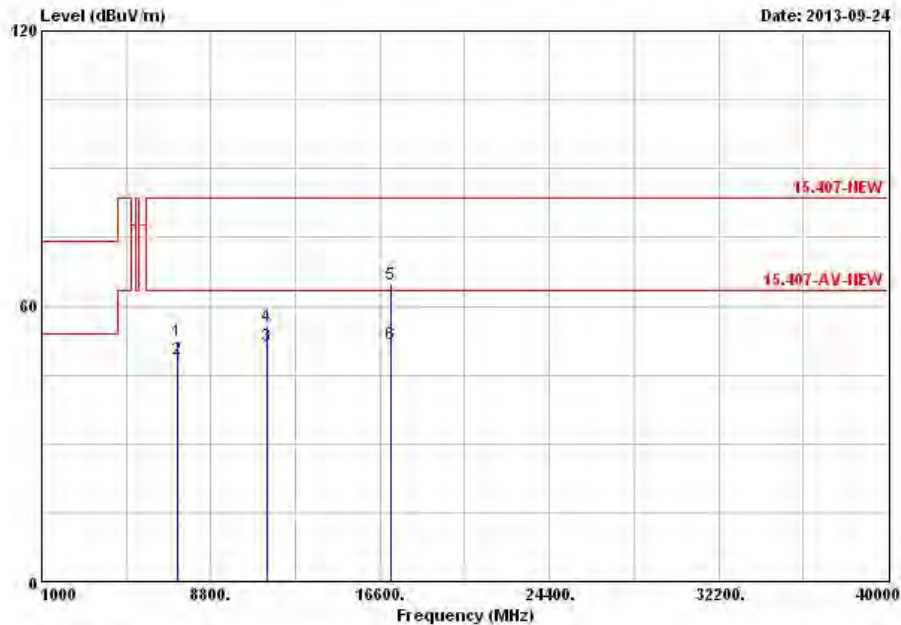

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7271.385	52.51	-31.03	83.54	43.93	36.99	4.25	32.66	Peak	---
2	7271.390	48.33	-15.21	63.54	39.75	36.99	4.25	32.66	Average	---
3	11382.100	51.26	-12.28	63.54	39.12	39.89	4.60	32.35	Average	---
4	11382.100	55.70	-27.84	83.54	43.56	39.89	4.60	32.35	Peak	---
5	17100.000	64.75	-18.79	83.54	44.88	42.66	8.55	31.34	Peak	---
6	17100.000	51.61	-11.93	63.54	31.74	42.66	8.55	31.34	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5700
N_{TX}	2	Polarization	H

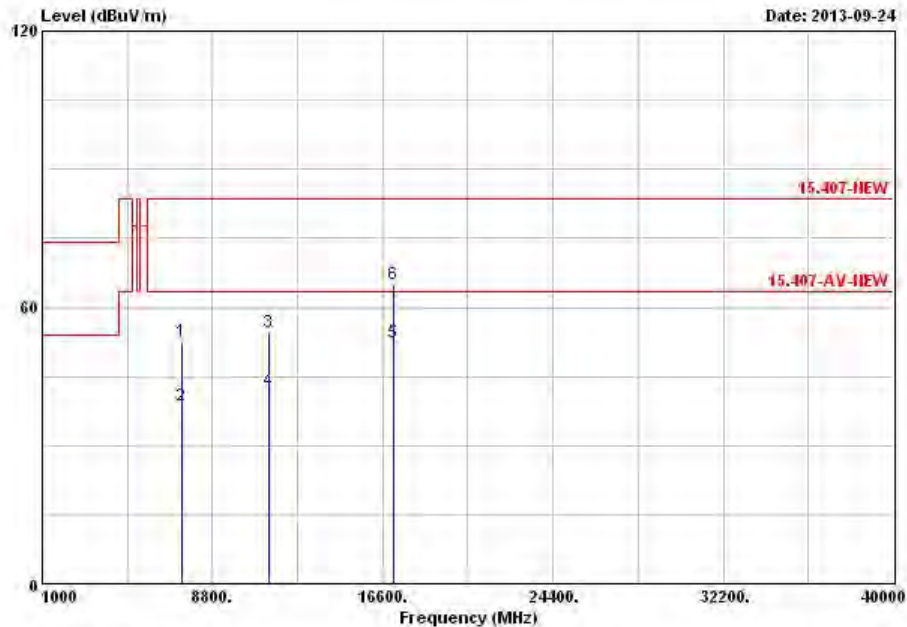

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7380.000	52.70	-30.84	83.54	44.07	37.13	4.19	32.69	Peak	---
2	7380.000	38.56	-24.98	63.54	29.93	37.13	4.19	32.69	Average	---
3	11400.000	54.72	-28.82	83.54	42.54	39.92	4.61	32.35	Peak	---
4	11400.000	41.93	-21.61	63.54	29.75	39.92	4.61	32.35	Average	---
5	17128.010	52.30	-11.24	63.54	32.08	42.95	8.62	31.35	Average	---
6	17128.010	65.16	-18.38	83.54	44.94	42.95	8.62	31.35	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5500
N_{TX}	2	Polarization	V

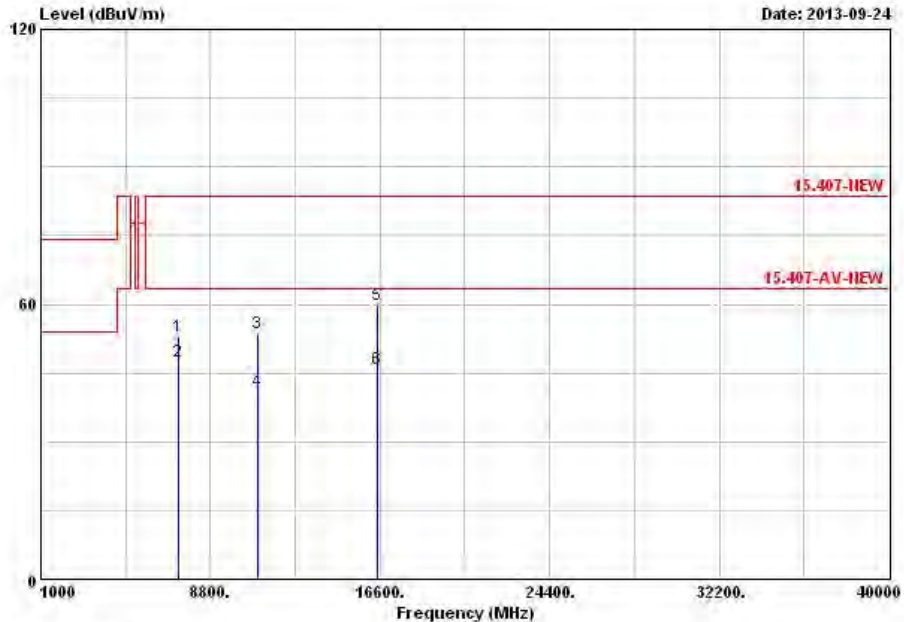

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7332.000	52.95	-30.59	83.54	44.33	37.06	4.23	32.67	Peak	---	---
2	@ 7332.000	47.56	-15.98	63.54	38.94	37.06	4.23	32.67	Average	---	---
3	11003.210	53.59	-29.95	83.54	42.25	39.20	4.51	32.37	Peak	---	---
4	11003.210	40.93	-22.61	63.54	29.59	39.20	4.51	32.37	Average	---	---
5	16500.000	59.87	-23.67	83.54	44.70	39.10	8.01	31.94	Peak	---	---
6	16500.000	45.96	-17.58	63.54	30.79	39.10	8.01	31.94	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5500
N_{TX}	2	Polarization	H

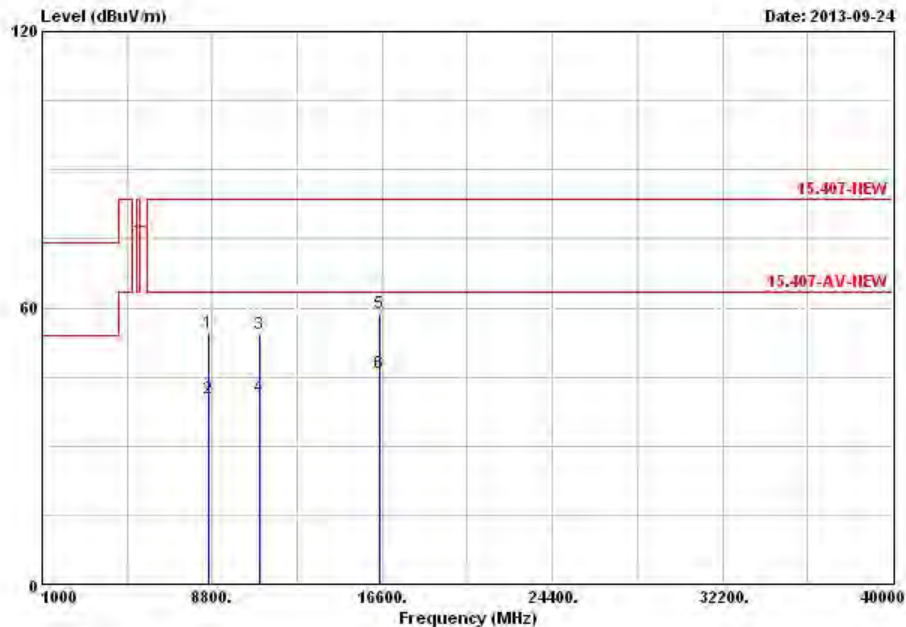

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8620.000	54.54	-29.00	83.54	44.53	38.56	4.30	32.85	Peak	---	---
2	8620.000	40.22	-23.32	63.54	30.21	38.56	4.30	32.85	Average	---	---
3	11000.000	54.18	-29.36	83.54	42.84	39.20	4.51	32.37	Peak	---	---
4	11000.000	40.79	-22.75	63.54	29.45	39.20	4.51	32.37	Average	---	---
5	16496.790	58.96	-24.58	83.54	43.79	39.10	8.01	31.94	Peak	---	---
6	16496.790	46.00	-17.54	63.54	30.83	39.10	8.01	31.94	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5580
N_{TX}	2	Polarization	V

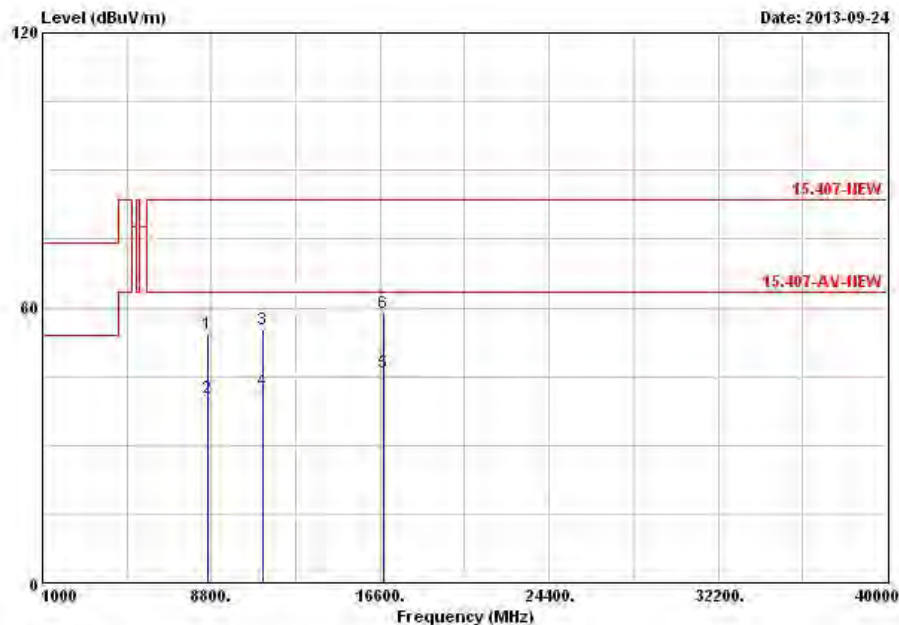

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8648.000	54.41	-29.13	83.54	44.36	38.52	4.39	32.86	Peak	---
2	8648.000	40.32	-23.22	63.54	30.27	38.52	4.39	32.86	Average	---
3	11163.210	55.35	-28.19	83.54	43.65	39.50	4.56	32.36	Peak	---
4	11163.210	42.05	-21.49	63.54	30.35	39.50	4.56	32.36	Average	---
5	16740.000	45.88	-17.66	63.54	28.94	40.40	8.18	31.64	Average	---
6	16740.000	58.98	-24.56	83.54	42.04	40.40	8.18	31.64	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5580
N_{TX}	2	Polarization	H

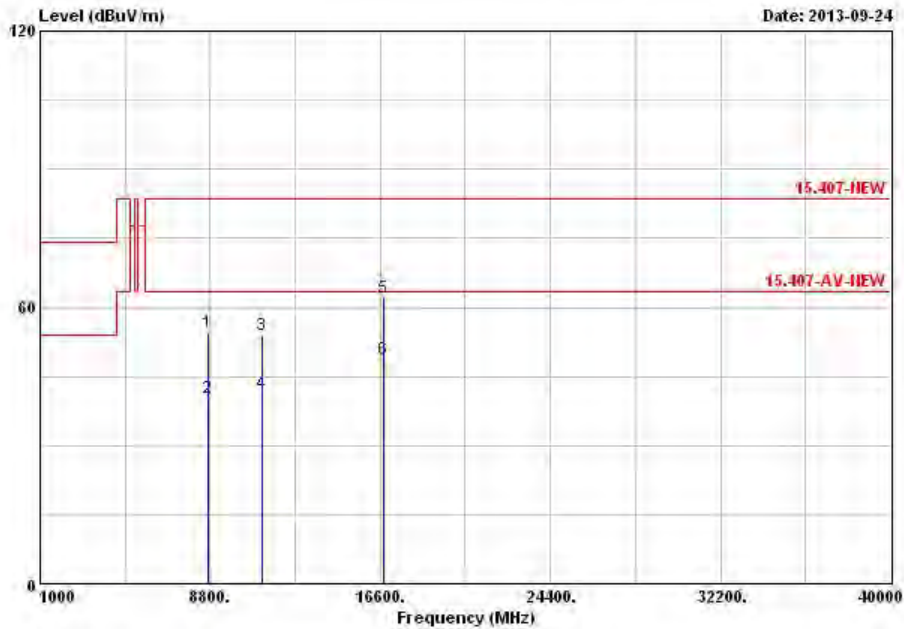

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable Preamp	Loss Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8696.000	54.61	-28.93	83.54	44.55	38.46	4.48	32.88	Peak	---
2	8696.000	40.17	-23.37	63.54	30.11	38.46	4.48	32.88	Average	---
3	11160.000	54.12	-29.42	83.54	42.42	39.50	4.56	32.36	Peak	---
4	11160.000	41.37	-22.17	63.54	29.67	39.50	4.56	32.36	Average	---
5	16736.790	62.17	-21.37	83.54	45.23	40.40	8.18	31.64	Peak	---
6	16736.790	48.80	-14.74	63.54	31.86	40.40	8.18	31.64	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5700
N_{TX}	2	Polarization	V

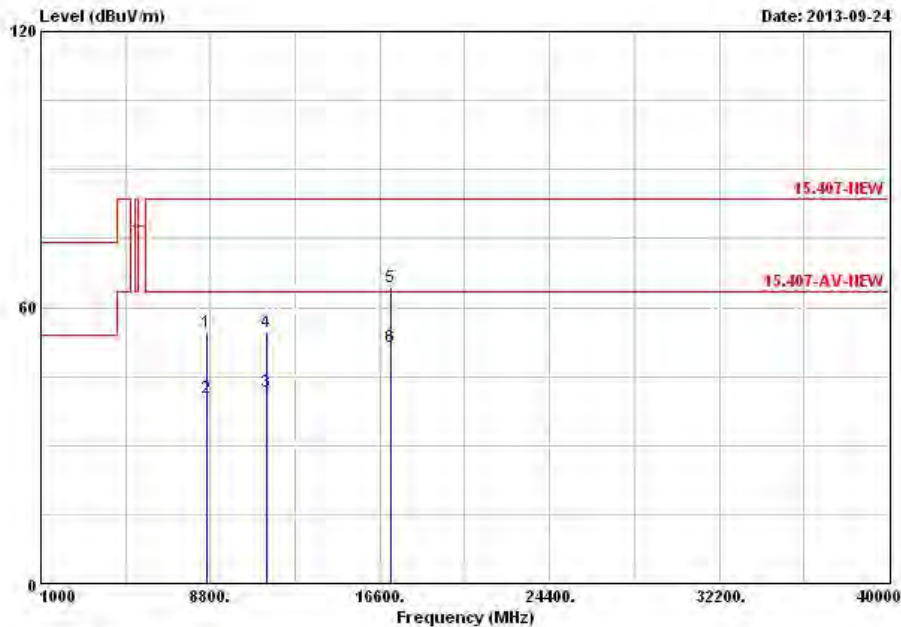

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8660.000	54.75	-28.79	83.54	44.72	38.50	4.39	32.86	Peak	---
2	8660.000	40.18	-23.36	63.54	30.15	38.50	4.39	32.86	Average	---
3	11403.210	41.54	-22.00	63.54	29.36	39.92	4.61	32.35	Average	---
4	11403.210	54.52	-29.02	83.54	42.34	39.92	4.61	32.35	Peak	---
5	17096.790	64.47	-19.07	83.54	44.60	42.66	8.55	31.34	Peak	---
6	17096.790	51.36	-12.18	63.54	31.49	42.66	8.55	31.34	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5700
N_{TX}	2	Polarization	H

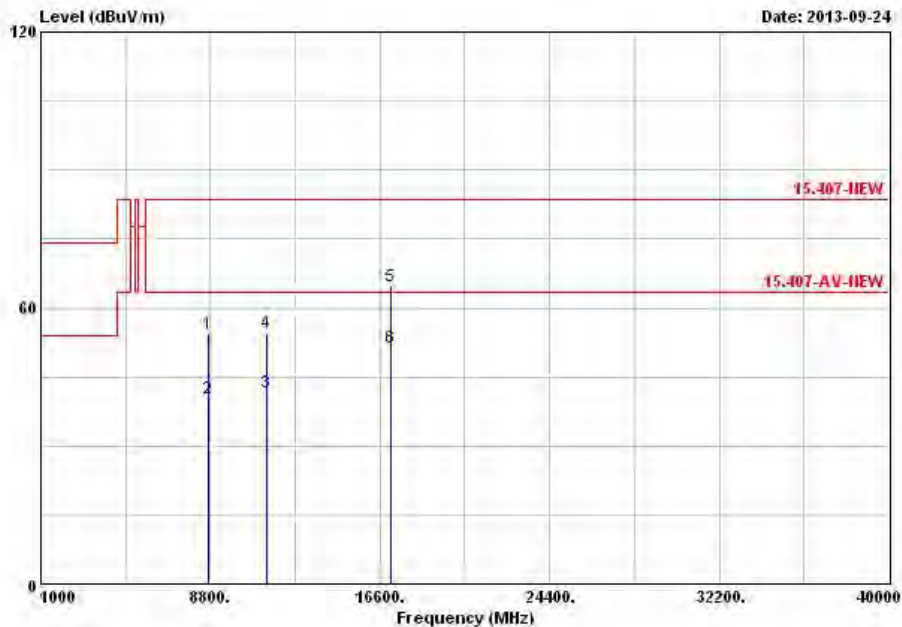

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		deg
1	8676.000	54.22	-29.32	83.54	44.13	38.48	4.48	32.87	Peak	---
2	8676.000	40.22	-23.32	63.54	30.13	38.48	4.48	32.87	Average	---
3	11396.790	41.59	-21.95	63.54	29.41	39.92	4.61	32.35	Average	---
4	11396.790	54.55	-28.99	83.54	42.37	39.92	4.61	32.35	Peak	---
5	17103.210	64.79	-18.75	83.54	44.92	42.66	8.55	31.34	Peak	---
6	17103.210	51.41	-12.13	63.54	31.54	42.66	8.55	31.34	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5510
N_{TX}	2	Polarization	V

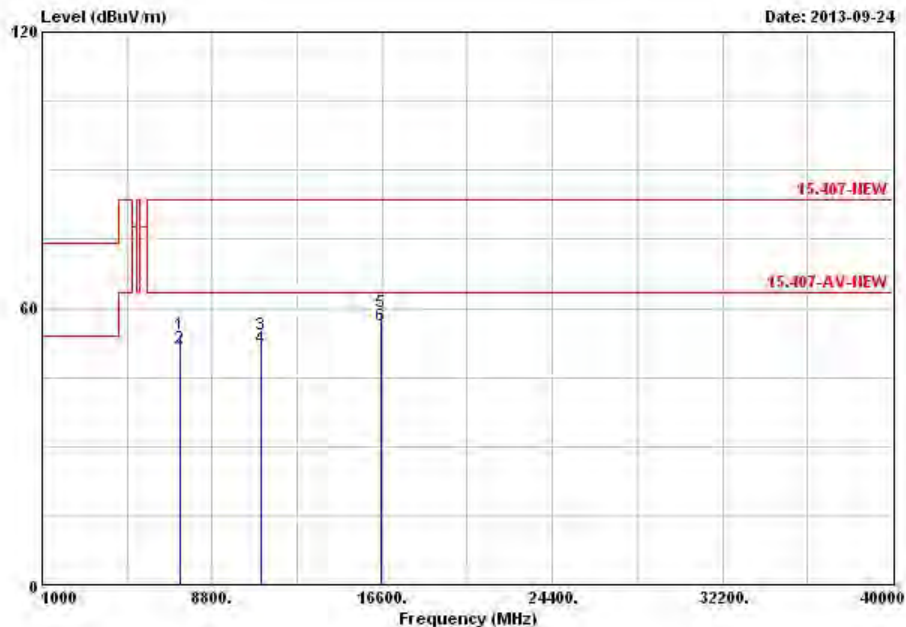

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7344.000	54.29	-29.25	83.54	45.68	37.08	4.21	32.68	Peak	---	---
2	7344.000	51.47	-12.07	63.54	42.86	37.08	4.21	32.68	Average	---	---
3	11018.380	54.26	-29.28	83.54	42.88	39.23	4.52	32.37	Peak	---	---
4	11018.380	51.46	-12.08	63.54	40.08	39.23	4.52	32.37	Average	---	---
5	16530.620	59.26	-24.28	83.54	43.84	39.29	8.04	31.91	Peak	---	---
6	16530.620	56.19	-7.35	63.54	40.77	39.29	8.04	31.91	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5510
N_{TX}	2	Polarization	H

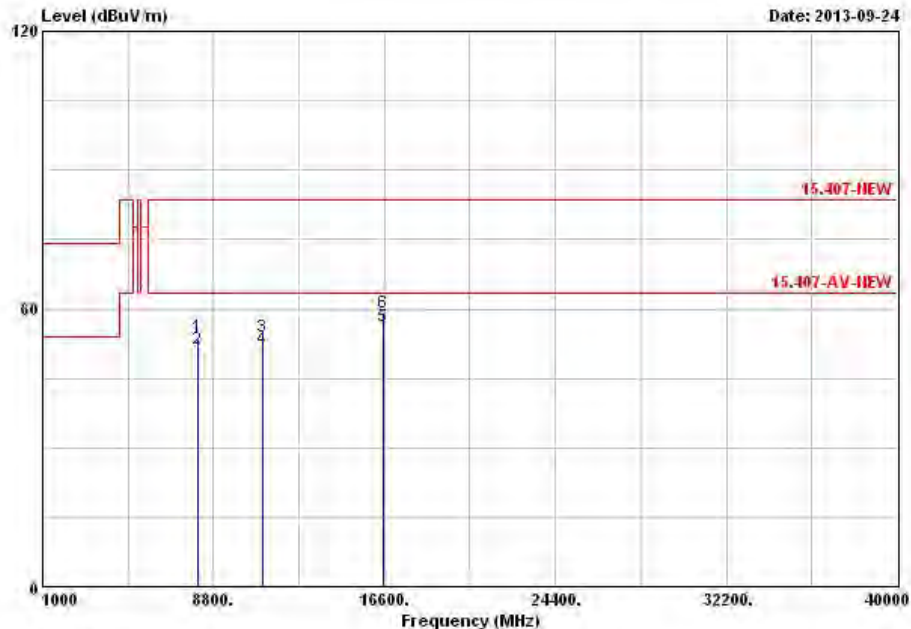

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8100.000	54.08	-29.46	83.54	45.10	37.99	3.79	32.80	Peak	---	---
2	8100.000	51.48	-12.06	63.54	42.50	37.99	3.79	32.80	Average	---	---
3	11020.380	53.95	-29.59	83.54	42.57	39.23	4.52	32.37	Peak	---	---
4	11020.380	51.39	-12.15	63.54	40.01	39.23	4.52	32.37	Average	---	---
5	16530.000	56.11	-7.43	63.54	40.69	39.29	8.04	31.91	Average	---	---
6	16530.000	59.22	-24.32	83.54	43.80	39.29	8.04	31.91	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5550
N_{TX}	2	Polarization	V

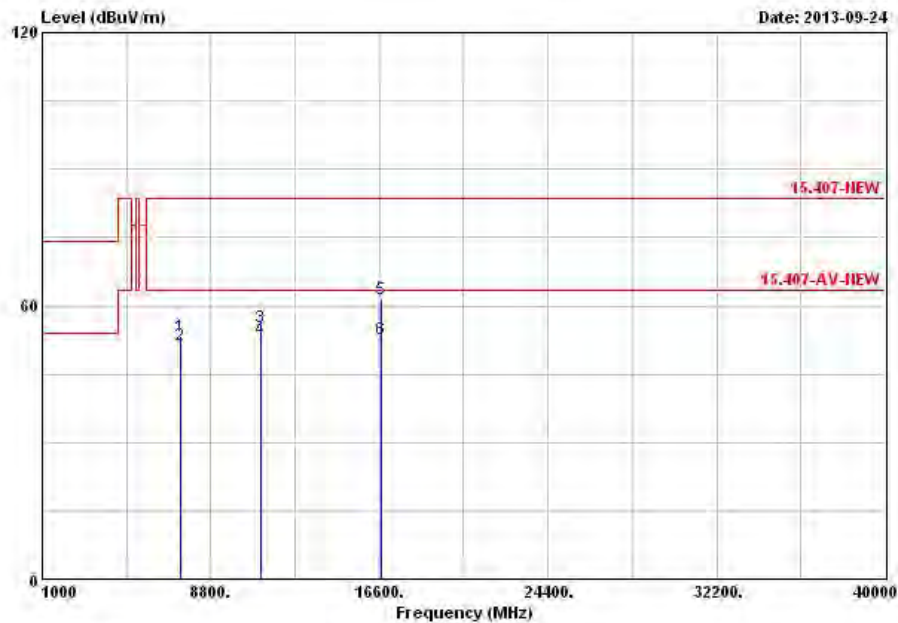

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7398.000	53.29	-30.25	83.54	44.63	37.16	4.19	32.69	Peak	---
2	7398.000	51.36	-12.18	63.54	42.70	37.16	4.19	32.69	Average	---
3	11102.620	55.39	-28.15	83.54	43.83	39.38	4.54	32.36	Peak	---
4	11102.620	52.76	-10.78	63.54	41.20	39.38	4.54	32.36	Average	---
5	16652.620	61.45	-22.09	83.54	45.14	39.94	8.11	31.74	Peak	---
6	16652.620	52.71	-10.83	63.54	36.40	39.94	8.11	31.74	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5550
N_{TX}	2	Polarization	H

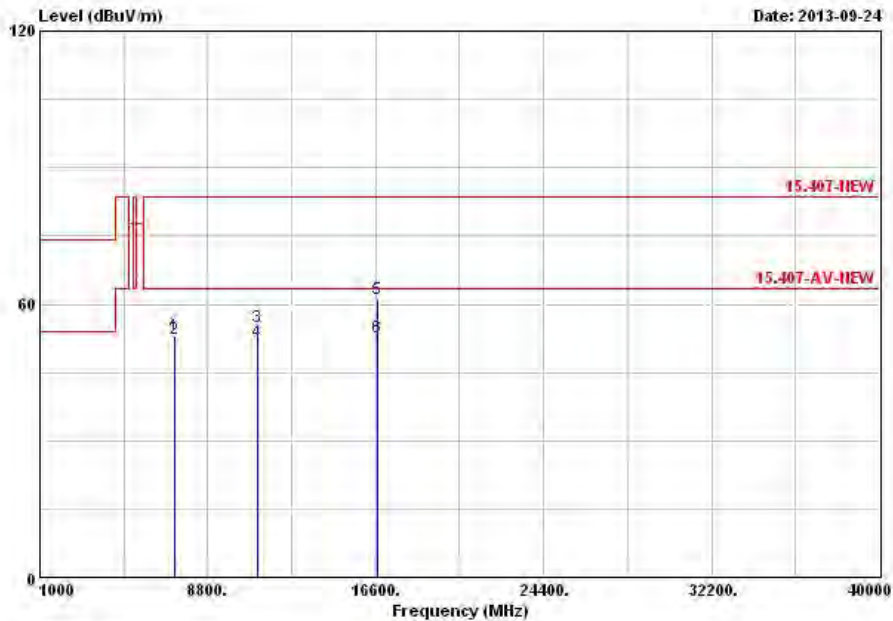

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7278.000	53.01	-30.53	83.54	44.43	36.99	4.25	32.66	Peak	---
2	7278.000	52.21	-11.33	63.54	43.63	36.99	4.25	32.66	Average	---
3	11100.620	55.04	-28.50	83.54	43.48	39.38	4.54	32.36	Peak	---
4	11100.620	51.82	-11.72	63.54	40.26	39.38	4.54	32.36	Average	---
5	16650.620	61.22	-22.32	83.54	44.91	39.94	8.11	31.74	Peak	---
6	16650.620	52.70	-10.84	63.54	36.39	39.94	8.11	31.74	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5670
N_{TX}	2	Polarization	V

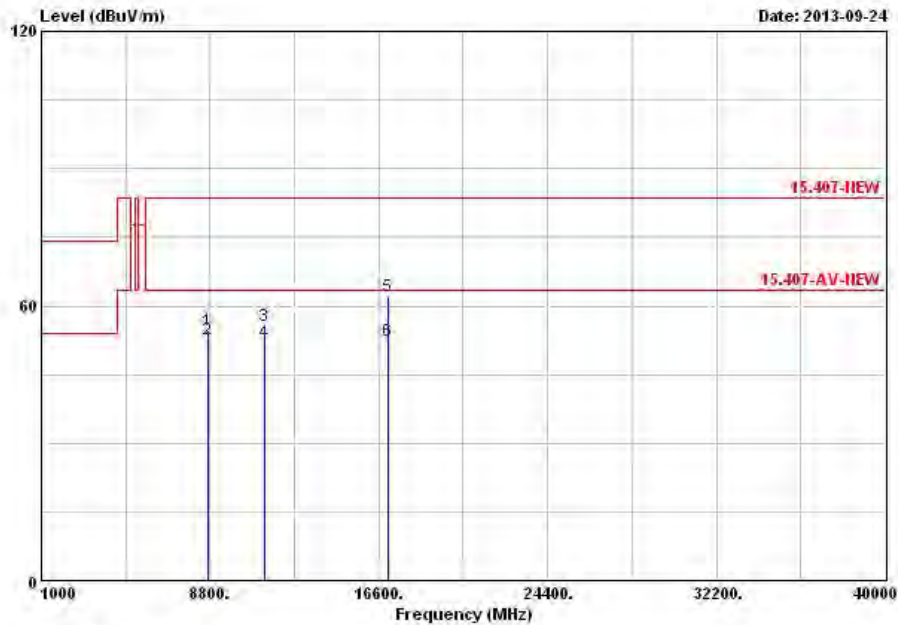

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8700.000	54.69	-28.85	83.54	44.63	38.46	4.48	32.88	Peak	---
2	8700.000	52.53	-11.01	63.54	42.47	38.46	4.48	32.88	Average	---
3	11340.780	55.57	-27.97	83.54	43.53	39.80	4.59	32.35	Peak	---
4	11340.780	52.19	-11.35	63.54	40.15	39.80	4.59	32.35	Average	---
5	17008.000	62.25	-21.29	83.54	43.30	41.94	8.33	31.32	Peak	---
6	17008.000	52.48	-11.06	63.54	33.53	41.94	8.33	31.32	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5670
N_{TX}	2	Polarization	H

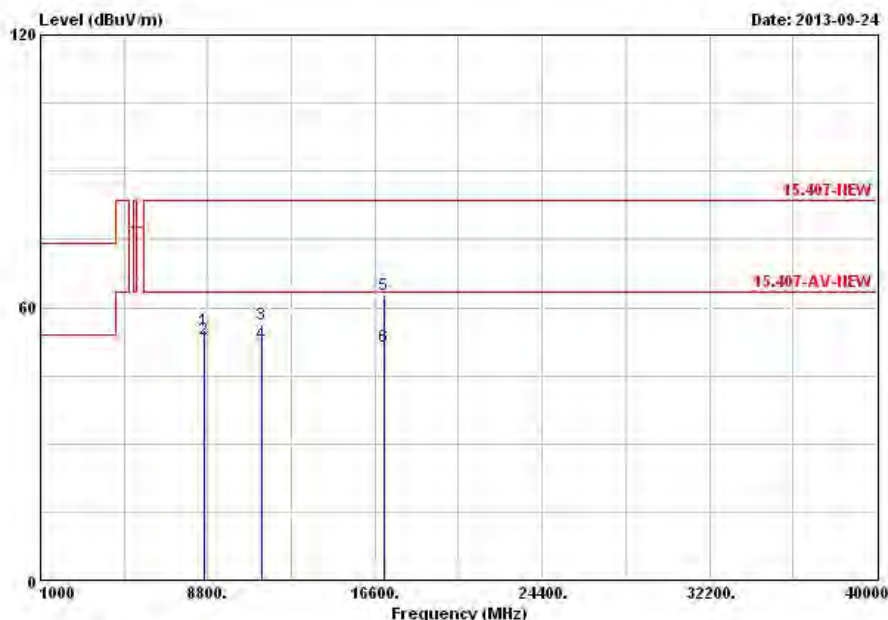

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8658.000	54.95	-28.59	83.54	44.90	38.52	4.39	32.86	Peak	---
2	8658.000	53.14	-10.40	63.54	43.09	38.52	4.39	32.86	Average	---
3	11338.780	56.14	-27.40	83.54	44.10	39.80	4.59	32.35	Peak	---
4	11338.780	52.11	-11.43	63.54	40.07	39.80	4.59	32.35	Average	---
5	17010.000	62.74	-20.80	83.54	43.72	41.94	8.40	31.32	Peak	---
6	17010.000	51.52	-12.02	63.54	32.50	41.94	8.40	31.32	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: The tested was performed by using RF filter to remove the fundamental frequency emission.

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 01, 2012	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 03, 2013	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02364	1GHz ~ 26.5GHz	May. 06, 2013	Radiation (03CH03-HY)
Receiver	R&S	ESU26	1302.6005.26	20Hz ~ 26.5GHz	Apr. 02, 2013	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9MHz ~ 1GHz	Jan. 17, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 17, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060572	18GHz ~ 40GHz	Jan. 20, 2013	Radiation (03CH03-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.