



TEST REPORT

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel : 82-31-285-0894 Fax : 82-505-299-8311 www.kctl.co.kr		Report No.: KR18-SPF0005 Page (1) of (111)	
1. Client ◦ Name : Qualcomm Atheros, Inc. ◦ Address : 1700 Technology Drive, San Jose, CA 95110 ◦ Date of Receipt : 2018-06-15			
2. Use of Report : -			
3. Product Name : 2x2 802.11A/B/G/N/AC WiFi + Bluetooth Module ◦ Model Number : QCNFA324 ◦ Manufacturer and Country of Origin : Qualcomm Atheros, Inc. / USA			
4. Host Product Name : Notebook PC ◦ Host Model Number : NP750QUA ◦ Manufacturer : Samsung Electronics Co., Ltd.			
5. FCC ID : PPD-QCNFA324			
6. Date of Test : 2018-06-28 to 2018-07-24			
7. Test method used : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication			
8. Test Results : Refer to the test result in the test report			
Affirmation	Tested by Name : Kyounghoo, Min (Signature)		Technical Manager Name : Cheonsig, Choi (Signature)
	2018-07-25		
KCTL Inc. As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.			

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel : 82-31-285-0894 Fax : 82-505-299-8311 www.kctl.co.kr	Report No.: KR18-SPF0005 Page (2) of (111)	
---	--	---

REPORT REVISION HISTORY

Date	Revision	Page No
2018-07-25	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

Contents

1. Client information.....	4
2. Laboratory information.....	5
3. Identification of Sample	6
4. Test Result Summary.....	9
5. Report Overview.....	10
6. Test Lab Declaration or Comments.....	10
7. Applicant Declaration or Comments.....	10
8. The SAR Measurement System	11
9. System Verification	15
10. Operation Configurations.....	20
11. SAR Measurement Procedures	21
12. Test Equipment Information	23
13. RF Average Conducted Output Power.....	24
14. SAR Test Results.....	30
15. Test System Verification Results	40
16. Test Results.....	46
Appendix A. Calibration certificate	59
Appendix B. EUT Photo.....	102
Appendix C. Test Photo	106

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel : 82-31-285-0894 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SPF0005
Page (4) of (111)

KCTL

1. Client information

Client: Qualcomm Atheros, Inc.
Address: 1700 Technology Drive, San Jose, CA 95110
Telephone number: +886-2-879-35028
Contact person: Stanley Lin / slin@qti.qualcomm.com

Manufacturer: Qualcomm Atheros, Inc.
Address: 1700 Technology Drive, San Jose, CA 95110

KCTL

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel : 82-31-285-0894 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SPF0005
Page (5) of (111)

KCTL

2. Laboratory information

Address

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea

TEL: 82-31-285-0894 FAX: 82-505-299-8311

Certificate

KOLAS No.: KT231


FCC Site Designation No.: KR0040

FCC Site Registration No.: 687132

VCCI Site Registration No.: R-3327, G-198, C-3706, T-1849

IC Site Registration No.: 8035A

SITE MAP

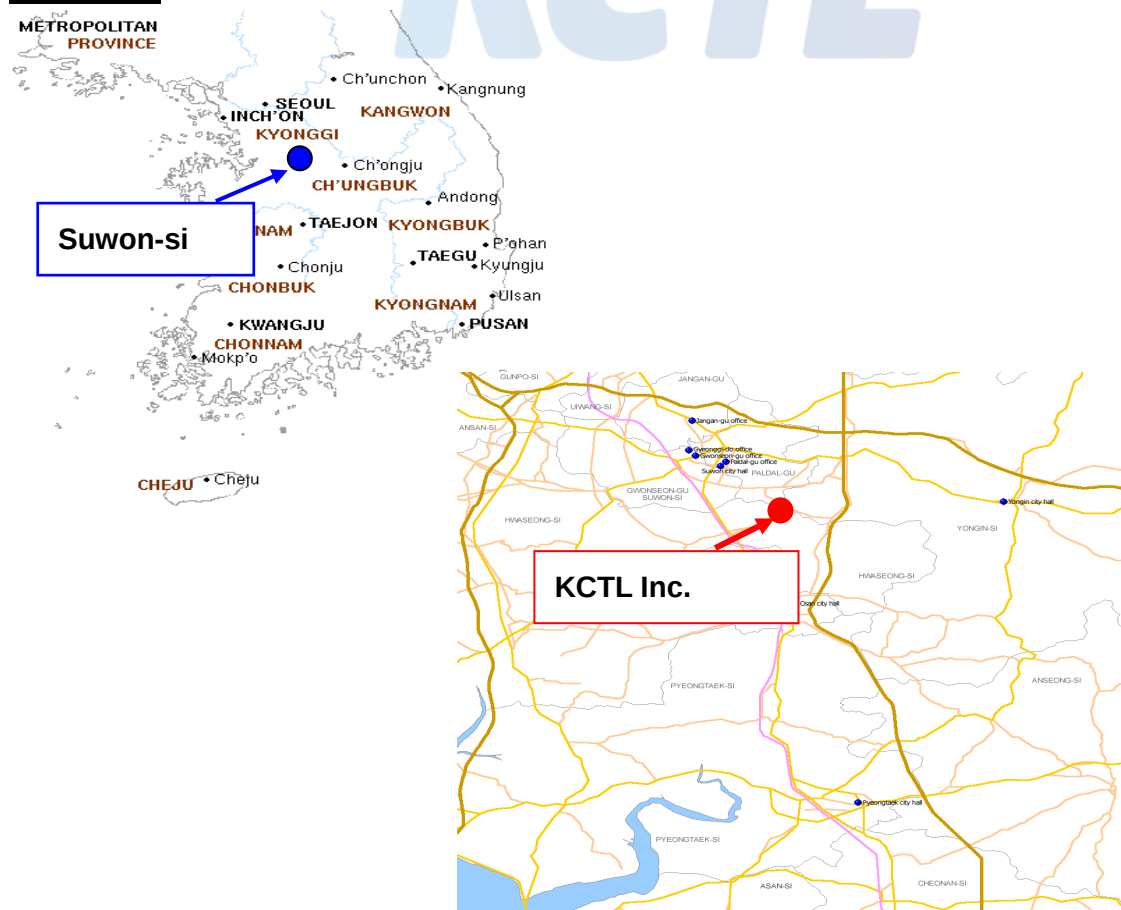

This test report shall not be reproduced, except in full, without the written approval.

KCTL-TIA002-004/1

3. Identification of Sample

3.1 Basic description

Product Name	2x2 802.11A/B/G/N/AC WiFi + Bluetooth Module
Product Model Number	QCNFA324
Product Manufacturer	Qualcomm Atheros, Inc.
Host Product Name	Notebook PC
Host Model Number	NP750QUA
Host Manufacturer	Samsung Electronics Co., Ltd.
Host Serial Number	0WLD91ZK600067L
Mode of Operation	WLAN 2.4 GHz / 5 GHz, Bluetooth
Max. Power	WLAN 2.4 GHz : 15.00 dBm WLAN 5 GHz : 11.50 dBm Bluetooth: 11.00 dBm
Tx Freq. Range	WLAN 2.4 GHz : 2 412 MHz ~ 2 462 MHz WLAN 5.2 GHz : 5 180 MHz ~ 5 240 MHz WLAN 5.3 GHz : 5 260 MHz ~ 5 320 MHz WLAN 5.6 GHz : 5 500 MHz ~ 5 720 MHz WLAN 5.8 GHz : 5 745 MHz ~ 5 825 MHz Bluetooth: 2 402 MHz ~ 2 480 MHz
Rx Freq. Range	WLAN 2.4 GHz : 2 412 MHz ~ 2 462 MHz WLAN 5.2 GHz : 5 180 MHz ~ 5 240 MHz WLAN 5.3 GHz : 5 260 MHz ~ 5 320 MHz WLAN 5.6 GHz : 5 500 MHz ~ 5 720 MHz WLAN 5.8 GHz : 5 745 MHz ~ 5 825 MHz Bluetooth: 2 402 MHz ~ 2 480 MHz
Antenna Type	PIFA Type Antenna
Antenna Size	Ant.0: 20.17 mm x 16.70 mm Ant.1: 14.69 mm x 16.70 mm
Normal Voltage	DC 15.4 V

3.2 RF power setting in TEST SW

WLAN 2.4 GHz

Mode	Lowest Channel	Middle Channel	Highest Channel
802.11b Ant. All	11.0	11.0	11.0
802.11g Ant. All	12.5	12.5	12.5
802.11n(HT20) Ant. All	12.5	13.0	12.0
802.11n(HT40) Ant. All	12.5	13.0	12.0
802.11ac(VHT20) Ant. All	11.0	13.5	8.0
802.11ac(VHT40) Ant. All	10.5	13.0	7.5

WLAN 5 GHz

Mode	Frequency Band	Lowest Channel	Middle Channel	Highest Channel	Straddle Channel
802.11a	5.2 GHz Band Ant. All	8.0	8.0	8.0	-
	5.3 GHz Band Ant. All	10.5	10.5	10.5	-
	5.6 GHz Band Ant.0	8.5	8.5	8.5	8.5
	5.6 GHz Band Ant.1	9.0	9.0	9.0	9.0
	5.8 GHz Band Ant. All	12.0	12.0	12.0	-
802.11n(HT20) & 802.11ac(VHT20)	5.2 GHz Band Ant. All	8.0	8.0	8.0	-
	5.3 GHz Band Ant. All	10.5	10.5	10.5	-
	5.6 GHz Band Ant.0	8.5	8.5	8.5	8.5
	5.6 GHz Band Ant.1	9.0	9.0	9.0	9.0
	5.8 GHz Band Ant. All	12.0	12.0	12.0	-
802.11n(HT40) & 802.11ac(VHT40)	5.2 GHz Band Ant. All	9.0	9.0	9.0	-
	5.3 GHz Band Ant. All	10.5	-	10.5	-
	5.6 GHz Band Ant.0	8.5	8.5	8.5	8.5
	5.6 GHz Band Ant.1	9.0	9.0	9.0	9.0
	5.8 GHz Band Ant. All	12.0	-	12.0	-
802.11ac(VHT80)	5.2 GHz Band Ant. All	10.0	10.0	10.0	-
	5.3 GHz Band Ant. All	-	11.5	-	-
	5.6 GHz Band Ant.0	9.5	9.5	9.5	-
	5.6 GHz Band Ant.1	9.5	9.5	9.5	-
	5.8 GHz Band Ant. All	-	12.0	-	-

3.3 Antenna Diagram

[Notebook]

- Main(Ant.0) : WLAN Tx/Rx
- Aux(Ant.1) : WLAN Tx/Rx, BT Tx/Rx

[Unit : mm]



[Tablet]

- Main(Ant.0) : WLAN Tx/Rx
- Aux(Ant.1) : WLAN Tx/Rx, BT Tx/Rx

[Unit : mm]



4. Test Result Summary

4.1 WLAN 2.4 GHz Body SAR

802.11n(HT-40) Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 437	14.03	15.00	1.25	Notebook Rear	0	1.00	0.436	0.545

802.11n(HT-40) Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 437	13.70	15.00	1.35	Notebook Rear	0	1.00	0.345	0.466

4.2 WLAN 5 GHz Body SAR

802.11ac(VHT-80) Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 775	10.45	11.50	1.27	Tablet Bottom	0	1.00	0.899	1.15

802.11ac(VHT-80) Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 290	10.61	11.00	1.09	Notebook Rear	0	1.00	0.511	0.559

4.3 Bluetooth Body SAR

BDR

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 441	9.92	11.00	1.28	Notebook Rear	0	1.23	0.122	0.192

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per

KDB Publication 447498 D01v06.

* Contain the results of the worst test SAR including battery.

* 1 g SAR Limit 1.6 W/kg

This test report shall not be reproduced, except in full, without the written approval.

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel : 82-31-285-0894 Fax : 82-505-299-8311 www.kctl.co.kr	Report No.: KR18-SPF0005 Page (10) of (111)	
---	---	---

5. Report Overview

This report details the results of testing carried out on the samples listed in section 3, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of KCTL Inc. Wireless lab or testing done by KCTL Inc. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by KCTL Inc. Wireless lab.


6. Test Lab Declaration or Comments

None

7. Applicant Declaration or Comments

None

8. The SAR Measurement System

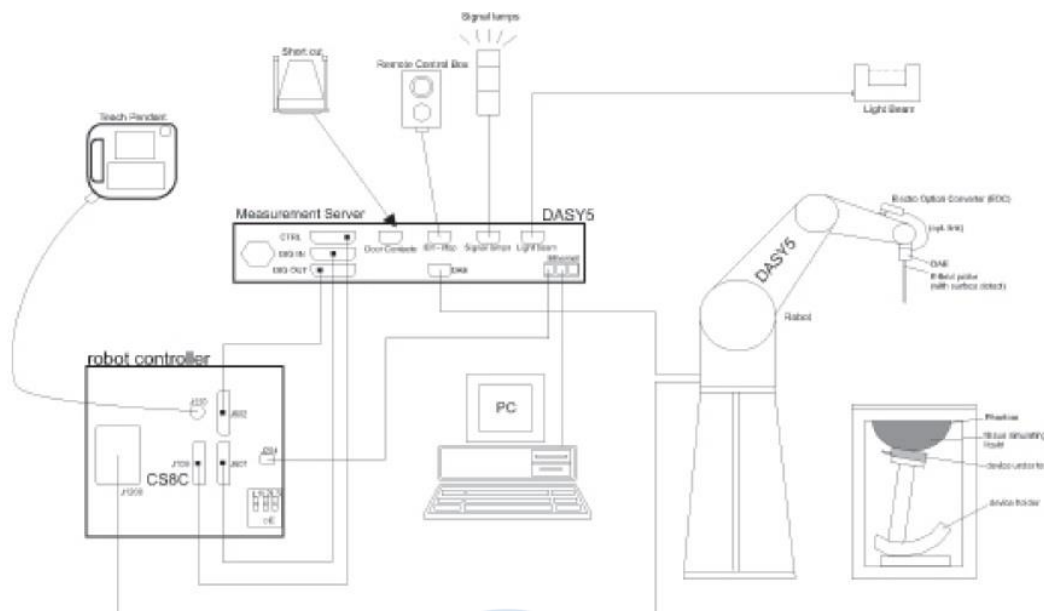

<SAR System Configuration>


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 Isotropic E-field Probe

ES3DV3 Isotropic E-Field Probe for Dosimetric Measurements

	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

EX3DV4 Smallest Isotropic E-Field Probe for Dosimetric Measurements (Preliminary Specifications)

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

8.2 Phantom

Twin SAM	
	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.
Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet
Filling Volume	approx. 25 liters
Wooden Support	SPEAG standard phantom table
Accessories	Mounting Device and Adaptors

ELI	
	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure. ELI V6.0, released in August 2014, has the same shell geometry as ELI4 but offers increased longterm stability.
Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
Shell Thickness	2.0 ± 0.2 mm (bottom plate)
Dimensions	Major axis: 600 mm Minor axis: 400 mm
Filling Volume	approx. 30 liters
Wooden Support	SPEAG standard phantom table
Accessories	Mounting Device and Adaptors

8.3 Device Holder for Transmitters

Mounting Devices and Adaptors



Mounting Device for Hand-Held Transmitters

MD4HHTV5 - Mounting Device for Hand-Held Transmitters

In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Material: Polyoxymethylene (POM)



Mounting Device for Laptops

MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters

In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at flat phantom section.

Material: Polyoxymethylene (POM), PET-G, Foam

9. System Verification

9.1 Tissue Verification


The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Tissue Type	Limit/Measured	Permittivity (ρ)	Conductivity (σ)	Temp ($^\circ\text{C}$)
2 450	MSL	Recommended Limit	$52.70 \pm 5 \%$ (50.07 ~ 55.34)	$1.95 \pm 5 \%$ (1.85 ~ 2.05)	22 ± 2
		Measured, 2018-07-02	51.30	1.93	21.97
2 450	MSL	Recommended Limit	$52.70 \pm 5 \%$ (50.07 ~ 55.34)	$1.95 \pm 5 \%$ (1.85 ~ 2.05)	22 ± 2
		Measured, 2018-07-17	53.15	1.97	21.88
5 300	MSL	Recommended Limit	$48.88 \pm 5 \%$ (46.44 ~ 51.32)	$5.42 \pm 5 \%$ (5.15 ~ 5.69)	22 ± 2
		Measured, 2018-06-28	48.41	5.46	21.66
5 600	MSL	Recommended Limit	$48.47 \pm 5 \%$ (46.05 ~ 50.89)	$5.77 \pm 5 \%$ (5.48 ~ 6.06)	22 ± 2
		Measured, 2018-06-29	48.10	5.79	21.84
5 800	MSL	Recommended Limit	$48.20 \pm 5 \%$ (45.79 ~ 50.61)	$6.00 \pm 5 \%$ (5.70 ~ 6.30)	22 ± 2
		Measured, 2018-07-02	48.33	6.09	21.74
2 450	MSL	Recommended Limit	$52.70 \pm 5 \%$ (50.07 ~ 55.34)	$1.95 \pm 5 \%$ (1.85 ~ 2.05)	22 ± 2
		Measured, 2018-07-24	51.34	1.93	21.87

<Table 1.Measurement result of Tissue electric parameters>

9.2 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2. During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

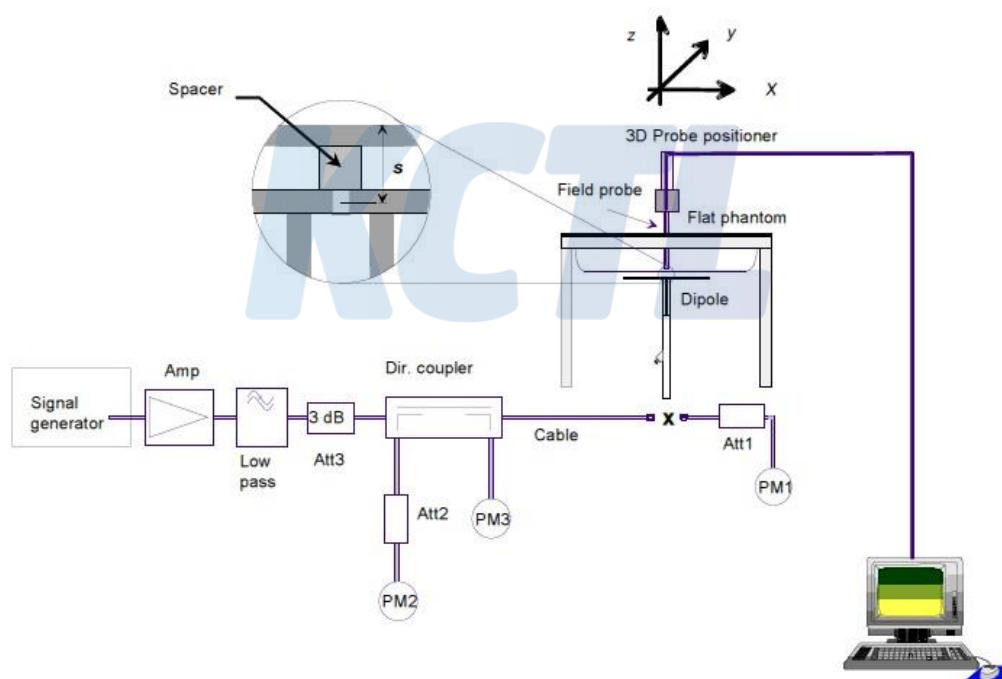

Validation Kit	Dipole Ant. S/N	Frequency (MHz)	Tissue Type	Limit/Measurement (Normalized to 1 W)	
					1 g
D2450V2	895	2 450	MSL	Recommended Limit (Normalized)	50.80 ± 10 % (45.72 ~ 55.88)
				Measured, 2018-07-02	53.20
D2450V2	960	2 450	MSL	Recommended Limit (Normalized)	49.80 ± 10 % (44.82 ~ 54.78)
				Measured, 2018-07-17	51.60
D5GHzV2	1134	5 300	MSL	Recommended Limit (Normalized)	77.90 ± 10 % (70.11 ~ 85.69)
				Measured, 2018-06-28	78.50
D5GHzV2	1134	5 600	MSL	Recommended Limit (Normalized)	80.10 ± 10 % (72.09 ~ 88.11)
				Measured, 2018-06-29	82.20
D5GHzV2	1134	5 800	MSL	Recommended Limit (Normalized)	77.20 ± 10 % (69.48 ~ 84.92)
				Measured, 2018-07-02	76.30
D2450V2	960	2 450	MSL	Recommended Limit (Normalized)	49.80 ± 10 % (44.82 ~ 54.78)
				Measured, 2018-07-24	50.00

<Table 2. Test System Verification Result>

9.3 Justification for Extended SAR Dipole Calibrations

Instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements

KDB 865664 D01v01r04 requirements

a) return loss : < - 20 dB, within 20 % of previous measurement

b) impedance : within 5Ω from previous measurement.

2 450 MHz

Dipole Antenna	Head/Body	Date of Measurement	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
D2450V2 SN 895	Body	2016. 07. 25	-28.0	9.6	49.8	2.3
		2017. 07. 25	-25.3		47.5	

5 300 MHz

Dipole Antenna	Head/Body	Date of Measurement	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
D5GHzV2 SN 1134	Body	2017.05.26	-26.1	10.6%	49.8	2.0
		2018.05.25	-23.3		51.8	

5 600 MHz

Dipole Antenna	Head/Body	Date of Measurement	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
D5GHzV2 SN 1134	Body	2017.05.26	-25.7	10.9%	55.4	4.3
		2018.05.25	-28.5		51.1	

5 800 MHz

Dipole Antenna	Head/Body	Date of Measurement	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
D5GHzV2 SN 1134	Body	2017.05.26	-23.2	11.4%	56.5	2.1
		2018.05.25	-20.5		54.4	

c) extrapolated peak SAR : within 15% of that reported in the calibration data

2 450 MHz

Dipole Antenna	Head/Body	Date of Measurement	extrapolated peak SAR (W/kg)	Δ %
D2450V2 SN 895	Body	2016. 07. 25	26.0	3
		2018. 07. 02	26.8	

5 300 MHz

Dipole Antenna	Head/Body	Date of Measurement	extrapolated peak SAR (W/kg)	Δ %
D5GHzV2 SN 1134	Body	2017. 05. 26	30.1	13
		2018. 06. 28	34.5	

5 600 MHz

Dipole Antenna	Head/Body	Date of Measurement	extrapolated peak SAR (W/kg)	Δ %
D5GHzV2 SN 1134	Body	2017. 05. 26	33.3	8
		2018. 06. 29	36.3	

5 800 MHz

Dipole Antenna	Head/Body	Date of Measurement	extrapolated peak SAR (W/kg)	Δ %
D5GHzV2 SN 1134	Body	2017. 05. 26	34.0	1
		2018. 07. 02	33.8	

10. Operation Configurations

Measurements were performed at the lowest, middle and highest channels of the operating band. The EUT was set to maximum power level during all tests and at the beginning of each test the battery was fully charged.

KCTL

11. SAR Measurement Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensor to surface is 2 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures 5x5x7 points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

Table 10-4:			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \ln(2)$ mm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

* Z Scan Report on Liquid Measure the height Appendix C. Liquid Depth photo to replace

12. Test Equipment Information

Test Platform	SPEAG DASY5 System			
Version	DASY5 : Version 52.8.8.1222 SEMCAD : Version 14.6.10 (7331)			
Location	KCTL Inc.			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	Shield Room	8F - #2	N/A	N/A
DASY5 Robot	TX90XL Speag	F12/5L7FA1/A/01	N/A	N/A
DASY5 Controller	TX90XL Speag	F12/5L7FA1/C/01	N/A	N/A
Phantom	2mm Oval Phantom ELI5	1178	N/A	N/A
Mounting Device	Laptop Holder	None	N/A	N/A
DAE	DAE4	666	2018-06-07	2019-06-07
DAE	DAE4	1342	2017-07-21	2018-07-21
Probe	EX3DV4	3928	2018-01-23	2019-01-23
Signal Generator	E4438C	MY42080486	2018-01-05	2019-01-05
Dual Power Meter	E4419B	GB43312301	2018-05-15	2019-05-15
Power Sensor	8481H	3318A19377	2018-05-15	2019-05-15
Power Sensor	8481H	3318A19379	2018-05-15	2019-05-15
Attenuator	8491B 3dB	17387	2018-05-14	2019-05-14
Attenuator	8491B-6dB	MY39270294	2018-05-14	2019-05-14
Attenuator	8491B 10dB	29425	2018-05-14	2019-05-14
Power Amplifier	2055 BBS3Q7E9I	1005D/C0521	2018-05-15	2019-05-15
Power Amplifier	5190FE	1012	2018-05-15	2019-05-15
Dual Directional Coupler	772D	2839A00719	2018-05-15	2019-05-15
Low Pass Filter	LA-30N	40058	2018-05-14	2019-05-14
Low Pass Filter	LA-60N	40059	2018-05-14	2019-05-14
Dipole Validation Kits	D2450V2	895	2016-07-25	2018-07-25
Dipole Validation Kits	D2450V2	960	2018-03-20	2020-03-20
Dipole Validation Kits	D5GHzV2	1134	2017-05-26	2019-05-26
Network Analyzer	E5071B	MY42403524	2018-01-05	2019-01-05
Dielectric Assessment kit	DAK-3.5	1078	2017-08-15	2018-08-15
Humidity/Temp. Data Recorder	MHB-382SD	23107	2018-06-14	2019-06-14
Bluetooth Tester	TC-3000B	3000B640056	2018-01-31	2019-01-31

13. RF Average Conducted Output Power

13.1 Max. tune up power

WLAN 2.4 GHz (2 412 MHz ~ 2 462 MHz)

Mode	Channel	Target Power	Tolerance	Max. Allowed Power
802.11b	All Channel	12.00	± 1.50 dB	13.50
802.11g	All Channel	13.50	± 1.50 dB	15.00
802.11n(HT-20)	1	13.00	± 1.50 dB	14.50
	6	13.50	± 1.50 dB	15.00
	11	12.50	± 1.50 dB	14.00
802.11ac(VHT-20)	1	13.00	± 1.50 dB	14.50
	6	13.50	± 1.50 dB	15.00
	11	12.50	± 1.50 dB	14.00
802.11n(HT-40)	3	11.00	± 1.50 dB	12.50
	6	13.50	± 1.50 dB	15.00
	9	8.50	± 1.50 dB	10.00
802.11ac(VHT-40)	3	11.00	± 1.50 dB	12.50
	6	13.50	± 1.50 dB	15.00
	9	8.50	± 1.50 dB	10.00

WLAN 5.2 GHz (5 180 MHz ~ 5 240 MHz)

Mode	Channel	Target Power	Tolerance	Max. Allowed Power
802.11a	All Channel	6.00 dBm	± 2.00 dB	8.00 dBm
802.11n(HT-20)	All Channel	6.00 dBm	± 2.00 dB	8.00 dBm
802.11ac(VHT-20)	All Channel	6.00 dBm	± 2.00 dB	8.00 dBm
802.11n(HT-40)	All Channel	7.00 dBm	± 2.00 dB	9.00 dBm
802.11ac(VHT-40)	All Channel	7.00 dBm	± 2.00 dB	9.00 dBm
802.11ac(VHT-80)	All Channel	8.00 dBm	± 2.00 dB	10.00 dBm

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel : 82-31-285-0894 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SPF0005
Page (25) of (111)

**WLAN 5.3 GHz (5 260 MHz ~ 5 320 MHz)**

Mode	Channel	Target Power	Tolerance	Max. Allowed Power
802.11a	All Channel	9.00 dBm	± 2.00 dB	11.00 dBm
802.11n(HT-20)	All Channel	9.00 dBm	± 2.00 dB	11.00 dBm
802.11ac(VHT-20)	All Channel	9.00 dBm	± 2.00 dB	11.00 dBm
802.11n(HT-40)	All Channel	9.00 dBm	± 2.00 dB	11.00 dBm
802.11ac(VHT-40)	All Channel	9.00 dBm	± 2.00 dB	11.00 dBm
802.11ac(VHT-80)	All Channel	9.00 dBm	± 2.00 dB	11.00 dBm

WLAN 5.6 GHz (5 500 MHz ~ 5 720 MHz)

Mode	Channel	Target Power	Tolerance	Max. Allowed Power
802.11a	All Channel	6.50 dBm	± 2.00 dB	8.50 dBm
802.11n(HT-20)	All Channel	6.50 dBm	± 2.00 dB	8.50 dBm
802.11ac(VHT-20)	All Channel	6.50 dBm	± 2.00 dB	8.50 dBm
802.11n(HT-40)	All Channel	6.50 dBm	± 2.00 dB	8.50 dBm
802.11ac(VHT-40)	All Channel	6.50 dBm	± 2.00 dB	8.50 dBm
802.11ac(VHT-80)	All Channel	6.50 dBm	± 2.00 dB	8.50 dBm

WLAN 5.8 GHz (5 745 MHz ~ 5 825 MHz)

Mode	Channel	Target Power	Tolerance	Max. Allowed Power
802.11a	All Channel	9.50 dBm	± 2.00 dB	11.50 dBm
802.11n(HT-20)	All Channel	9.50 dBm	± 2.00 dB	11.50 dBm
802.11ac(VHT-20)	All Channel	9.50 dBm	± 2.00 dB	11.50 dBm
802.11n(HT-40)	All Channel	9.50 dBm	± 2.00 dB	11.50 dBm
802.11ac(VHT-40)	All Channel	9.50 dBm	± 2.00 dB	11.50 dBm
802.11ac(VHT-80)	All Channel	9.50 dBm	± 2.00 dB	11.50 dBm

Bluetooth (2 402 MHz ~ 2 480 MHz)

Mode	Max. Allowed Power (including tune-up tolerance)
BDR(GFSK)	11.00 dBm
EDR ($\pi/4$ DQPSK)	8.00 dBm
EDR(8DPSK)	8.00 dBm
LE(GFSK)	2.50 dBm

13.2 Average Conducted Output Power

WLAN 2.4 GHz Ant.0 (2 412 MHz ~ 2 462 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11b_1 Mbps	13.24	12.60	12.99
802.11g_6 Mbps	13.80	13.53	13.81
802.11n(HT-20)_MCS 0	13.62	13.74	13.22
802.11ac(VHT-20)_MCS 0	13.51	13.70	13.01
802.11n(HT-40)_MCS 0	11.84	14.03	8.94
802.11ac(VHT-40)_MCS 0	11.33	13.51	8.63

WLAN 2.4 GHz Ant.1 (2 412 MHz ~ 2 462 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11b_1 Mbps	11.53	11.64	11.79
802.11g_6 Mbps	13.11	13.03	13.22
802.11n(HT-20)_MCS 0	12.94	13.21	12.51
802.11ac(VHT-20)_MCS 0	12.92	13.33	12.74
802.11n(HT-40)_MCS 0	11.53	13.70	8.44
802.11ac(VHT-40)_MCS 0	10.90	13.13	7.92

WLAN 5.2 GHz Ant.0 (5 180 MHz ~ 5 240 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11a_6 Mbps	7.51	7.75	7.71
802.11n(HT-20)_MCS 0	7.21	7.46	7.57
802.11ac(VHT-20)_MCS 0	7.33	7.40	7.51
802.11n(HT-40)_MCS 0	8.23	-	8.57
802.11ac(VHT-40)_MCS 0	8.14	-	8.33
802.11ac(VHT-80)_MCS 0	-	9.37	-

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel : 82-31-285-0894 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SPF0005
Page (27) of (111)

**WLAN 5.2 GHz Ant.1 (5 180 MHz ~ 5 240 MHz)**

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11a_6 Mbps	7.35	7.50	7.71
802.11n(HT-20)_MCS 0	7.11	7.22	7.71
802.11ac(VHT-20)_MCS 0	7.82	7.90	7.94
802.11n(HT-40)_MCS 0	8.30	-	8.44
802.11ac(VHT-40)_MCS 0	8.83	-	8.72
802.11ac(VHT-80)_MCS 0	-	8.82	

WLAN 5.3 GHz Ant.0 (5 260 MHz ~ 5 320 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11a_6 Mbps	10.49	10.42	10.17
802.11n(HT-20)_MCS 0	10.30	10.06	9.97
802.11ac(VHT-20)_MCS 0	10.31	10.00	9.87
802.11n(HT-40)_MCS 0	10.20	-	9.78
802.11ac(VHT-40)_MCS 0	10.09	-	9.99
802.11ac(VHT-80)_MCS 0	-	10.78	-

WLAN 5.3 GHz Ant.1 (5 260 MHz ~ 5 320 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11a_6 Mbps	10.39	10.03	9.65
802.11n(HT-20)_MCS 0	9.61	9.68	9.29
802.11ac(VHT-20)_MCS 0	10.03	9.76	9.34
802.11n(HT-40)_MCS 0	10.13	-	9.46
802.11ac(VHT-40)_MCS 0	10.12	-	9.52
802.11ac(VHT-80)_MCS 0	-	10.61	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel : 82-31-285-0894 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SPF0005
Page (28) of (111)

**WLAN 5.6 GHz Ant.0 (5 500 MHz ~ 5 720 MHz)**

Mode	Conducted Powers (dBm)			
	Low	Mid.	High	Straddle
802.11a_6 Mbps	8.08	7.10	7.00	6.87
802.11n(HT-20)_MCS 0	8.38	6.96	6.76	6.70
802.11ac(VHT-20)_MCS 0	8.35	6.91	6.77	6.69
802.11n(HT-40)_MCS 0	7.96	7.15	6.76	6.62
802.11ac(VHT-40)_MCS 0	7.94	7.14	6.75	6.62
802.11ac(VHT-80)_MCS 0	8.27	7.72	-	7.57

WLAN 5.6 GHz Ant.1 (5 500 MHz ~ 5 720 MHz)

Mode	Conducted Powers (dBm)			
	Low	Mid.	High	Straddle
802.11a_6 Mbps	6.99	7.61	7.14	7.01
802.11n(HT-20)_MCS 0	6.73	7.37	7.00	6.73
802.11ac(VHT-20)_MCS 0	6.75	7.38	6.99	6.73
802.11n(HT-40)_MCS 0	7.21	7.44	6.97	6.83
802.11ac(VHT-40)_MCS 0	7.22	7.40	6.88	6.82
802.11ac(VHT-80)_MCS 0	7.41	7.64	-	7.38

WLAN 5.8 GHz Ant.0 (5 745 MHz ~ 5 825 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11a_6 Mbps	10.88	10.74	10.35
802.11n(HT-20)_MCS 0	10.76	10.47	10.13
802.11ac(VHT-20)_MCS 0	10.81	10.75	10.46
802.11n(HT-40)_MCS 0	10.83	-	10.62
802.11ac(VHT-40)_MCS 0	10.88	-	10.64
802.11ac(VHT-80)_MCS 0	-	10.45	-

WLAN 5.8 GHz Ant.1 (5 745 MHz ~ 5 825 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
802.11a_6 Mbps	10.45	10.13	9.66
802.11n(HT-20)_MCS 0	10.28	9.91	9.53
802.11ac(VHT-20)_MCS 0	10.24	9.90	9.52
802.11n(HT-40)_MCS 0	9.66	-	9.52
802.11ac(VHT-40)_MCS 0	9.71	-	9.53
802.11ac(VHT-80)_MCS 0	-	9.57	-

Bluetooth (2 402 MHz ~ 2 480 MHz)

Mode	Conducted Powers (dBm)		
	Low	Mid.	High
BDR(GFSK)	9.42	9.92	9.72
EDR ($\pi/4$ DQPSK)	6.12	6.52	6.22
EDR(8DPSK)	6.11	6.51	6.31
LE(GFSK)	0.88	1.38	1.78

WLAN Duty Cycle

Mode	Duty Cyclem [%]	Duty Cycle Compensate Factor
802.11b_1 Mbps	100	1.00
802.11a/g_6 Mbps	100	1.00
802.11n(HT-20)_MCS 0	100	1.00
802.11ac(VHT-20)_MCS 0	100	1.00
802.11n(HT-40)_MCS 0	100	1.00
802.11ac(VHT-40)_MCS 0	100	1.00
802.11ac(VHT-80)_MCS 0	100	1.00

Bluetooth Duty Cycle

Mode	Duty Cycle [%]	Duty Cycle Compensate Factor
BDR(GFSK)	81	1.23
EDR ($\pi/4$ DQPSK)	81	1.23
EDR(8DPSK)	81	1.23
LE(GFSK)	66	1.51

14. SAR Test Results

14.1 WLAN 2.4 GHz Body SAR Test Results

802.11b Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 437	12.60	13.50	1.23	Tablet Rear	0	1.00	0.060	0.074
2 437	12.60	13.50	1.23	Tablet Bottom	0	1.00	0.223	0.274
2 437	12.60	13.50	1.23	Notebook Rear	0	1.00	0.217	0.267

802.11n(HT-40) Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 437	14.03	15.00	1.25	Tablet Rear	0	1.00	0.070	0.088
2 437	14.03	15.00	1.25	Tablet Bottom	0	1.00	0.264	0.330
2 437	14.03	15.00	1.25	Notebook Rear	0	1.00	0.436	0.545

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

* For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg per KDB Publication 248227 D01v02r02.

* 1 g SAR Limit 1.6 W/kg

802.11b Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 437	11.64	13.50	1.53	Tablet Rear	0	1.00	0.087	0.134
2 437	11.64	13.50	1.53	Tablet Bottom	0	1.00	0.184	0.282
2 437	11.64	13.50	1.53	Notebook Rear	0	1.00	0.296	0.454

802.11n(HT-40) Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 437	13.70	15.00	1.35	Tablet Rear	0	1.00	0.118	0.159
2 437	13.70	15.00	1.35	Tablet Bottom	0	1.00	0.245	0.331
2 437	13.70	15.00	1.35	Notebook Rear	0	1.00	0.345	0.466

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

* For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg per KDB Publication 248227 D01v02r02.

* 1 g SAR Limit 1.6 W/kg

14.2 WLAN 5.3 GHz Body SAR Test Results

802.11a Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 300	10.42	11.00	1.14	Tablet Rear	0	1.00	0.128	0.146
5 300	10.42	11.00	1.14	Tablet Bottom	0	1.00	0.365	0.417
5 300	10.42	11.00	1.14	Notebook Rear	0	1.00	0.530	0.606

802.11ac(VHT-80) Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 290	10.78	11.00	1.05	Tablet Rear	0	1.00	0.140	0.147
5 290	10.78	11.00	1.05	Tablet Bottom	0	1.00	0.417	0.439
5 290	10.78	11.00	1.05	Notebook Rear	0	1.00	0.673	0.708

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

* For WLAN 5 GHz, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration per KDB Publication 248227 D01v02r02.

* For WLAN 5 GHz, When the same maximum output power is specified for U-NII-1 and U-NII-2A bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements.

If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR per KDB Publication 248227 D01v02r02.

* 1 g SAR Limit 1.6 W/kg

802.11a Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 300	10.03	11.00	1.25	Tablet Rear	0	1.00	0.137	0.171
5 300	10.03	11.00	1.25	Tablet Bottom	0	1.00	0.340	0.425
5 300	10.03	11.00	1.25	Notebook Rear	0	1.00	0.410	0.513

802.11ac(VHT-80) Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 290	10.61	11.00	1.09	Tablet Rear	0	1.00	0.154	0.168
5 290	10.61	11.00	1.09	Tablet Bottom	0	1.00	0.387	0.423
5 290	10.61	11.00	1.09	Notebook Rear	0	1.00	0.511	0.559

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

* For WLAN 5 GHz, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration per KDB Publication 248227 D01v02r02.

* For WLAN 5 GHz, When the same maximum output power is specified for U-NII-1 and U-NII-2A bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements.

If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR per KDB Publication 248227 D01v02r02.

* 1 g SAR Limit 1.6 W/kg

14.3 WLAN 5.6 GHz Body SAR Test Results

802.11ac(VHT-80) Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 610	7.72	8.50	1.20	Tablet Rear	0	1.00	0.162	0.194
5 610	7.72	8.50	1.20	Tablet Bottom	0	1.00	0.486	0.582
5 610	7.72	8.50	1.20	Notebook Rear	0	1.00	0.562	0.673

802.11ac(VHT-80) Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 610	7.64	8.50	1.22	Tablet Rear	0	1.00	0.168	0.205
5 610	7.64	8.50	1.22	Tablet Bottom	0	1.00	0.184	0.224
5 610	7.64	8.50	1.22	Notebook Rear	0	1.00	0.340	0.414

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

* For WLAN 5 GHz, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration per KDB Publication 248227 D01v02r02.

* 1 g SAR Limit 1.6 W/kg

14.4 WLAN 5.8 GHz Body SAR Test Results

802.11ac(VHT-80) Ant.0

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 775	10.45	11.50	1.27	Tablet Rear	0	1.00	0.208	0.265
5 775	10.45	11.50	1.27	Tablet Bottom	0	1.00	0.899	1.15
5 775	10.45	11.50	1.27	Notebook Rear	0	1.00	0.594	0.756
Repeated Test								
5 775	10.45	11.50	1.27	Tablet Bottom	0	1.00	0.881	1.12

802.11ac(VHT-80) Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
5 775	9.57	11.50	1.56	Tablet Rear	0	1.00	0.135	0.211
5 775	9.57	11.50	1.56	Tablet Bottom	0	1.00	0.205	0.320
5 775	9.57	11.50	1.56	Notebook Rear	0	1.00	0.272	0.424

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

* For WLAN 5 GHz, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration per KDB Publication 248227 D01v02r02.

* 1 g SAR Limit 1.6 W/kg

14.5 Bluetooth Body SAR Test Results

BDR Ant.1

Frequency (MHz)	Average Power (dBm)	Max. tune up power (dBm)	Scaling Factor	EUT Position	Distance (mm)	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)
2 441	9.92	11.00	1.28	Tablet Rear	0	1.23	0.028	0.044
2 441	9.92	11.00	1.28	Tablet Bottom	0	1.23	0.083	0.131
2 441	9.92	11.00	1.28	Notebook Rear	0	1.23	0.122	0.192

<Note>

* SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

* 1 g SAR Limit 1.6 W/kg

KCTL

14.6 Simultaneous Transmission

14.6.1 Tablet Body SAR Simultaneous Transmission

Band	EUT Position	Separation Distance (mm)	Scaled 1 g SAR Ant.0 (W/kg)	Scaled 1 g SAR Ant.1 (W/kg)	Σ 1 g SAR (W/kg)	1 g SAR Limit (W/kg)
WLAN 2.4 GHz 802.11n(HT-40)	Tablet Rear	0	0.088	0.159	0.247	1.6
	Tablet Bottom	0	0.330	0.331	0.661	
WLAN 5.3GHz 802.11a	Tablet Rear	0	0.146	0.171	0.317	
WLAN 5.3GHz 802.11ac(VHT-80)	Tablet Bottom	0	0.439	0.423	0.862	
WLAN 5.6 GHz 802.11ac(VHT-80)	Tablet Rear	0	0.194	0.205	0.399	
	Tablet Bottom	0	0.582	0.224	0.806	
WLAN 5.8 GHz 802.11ac(VHT-80)	Tablet Rear	0	0.265	0.211	0.476	
	Tablet Bottom	0	1.15	0.320	1.47	

Band	EUT Position	Separation Distance (mm)	Scaled 1 g SAR Ant.0 (W/kg)	BT Scaled 1g SAR Ant.1 (W/kg)	Σ 1 g SAR (W/kg)	1 g SAR Limit (W/kg)
WLAN 2.4 GHz + BT 802.11n(HT-40)	Tablet Rear	0	0.088	0.044	0.132	1.6
	Tablet Bottom	0	0.330	0.131	0.461	
WLAN 5.8 GHz + BT 802.11ac(VHT-80)	Tablet Rear	0	0.265	0.044	0.309	
	Tablet Bottom	0	1.15	0.131	1.28	

14.6.2 Notebook Body SAR Simultaneous Transmission

Band	EUT Position	Separation Distance (mm)	Scaled 1 g SAR Ant.0 (W/kg)	Scaled 1 g SAR Ant.1 (W/kg)	Σ 1 g SAR (W/kg)	1 g SAR Limit (W/kg)
WLAN 2.4 GHz 802.11b	Notebook Rear	0	0.545	0.466	1.01	1.6
WLAN 5.3GHz 802.11ac(VHT-80)	Notebook Rear	0	0.708	0.559	1.27	
WLAN 5.6 GHz 802.11ac(VHT-80)	Notebook Rear	0	0.673	0.414	1.09	
WLAN 5.8 GHz 802.11ac(VHT-80)	Notebook Rear	0	0.756	0.424	1.18	

Band	EUT Position	Separation Distance (mm)	Scaled 1 g SAR Ant.0 (W/kg)	BT Scaled 1g SAR Ant.1 (W/kg)	Σ 1 g SAR (W/kg)	1 g SAR Limit (W/kg)
WLAN 2.4 GHz + BT 802.11b	Notebook Rear	0	0.545	0.192	0.737	1.6
WLAN 5.8 GHz + BT 802.11ac(VHT-80)	Notebook Rear	0	0.756	0.192	0.948	

<Note>

* Simultaneous transmission SAR test exclusion considerations

: Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D01v06.

* The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit (1.6 W/kg per 1-g). Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. And therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

14.7 SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissueequivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps
- 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the Original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1g SAR (W/kg)	Ratio
WLAN 5.8 GHz 802.11ac(VHT-80)	5 775	Tablet Bottom	0	0.899	0.881	1.02

15. Test System Verification Results

2 450 MHz (2018-07-02)

Procedure Name: d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 51.296$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

System Performance Check (without Area Scan)/d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 20.6 W/kg

System Performance Check (without Area Scan)/d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.18 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 26.8 W/kg
SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.25 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

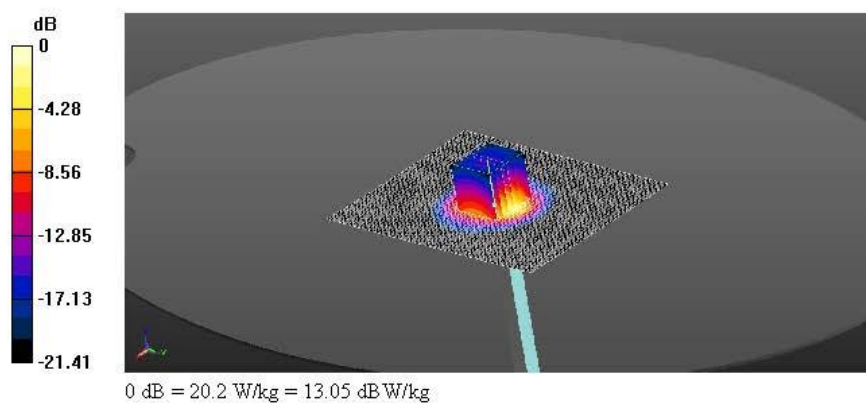

2 450 MHz (2018-07-17)**Procedure Name: d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)**


Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.97 \text{ S/m}$; $\epsilon_r = 53.153$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 2018-06-07
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

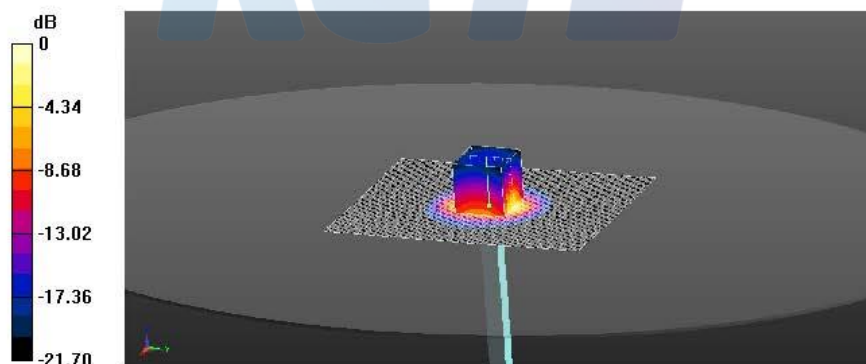System Performance Check (without Area Scan)/d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (101x131x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 20.5 W/kg**System Performance Check (without Area Scan)/d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 101.2 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 26.2 W/kg
SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.01 W/kg
Maximum value of SAR (measured) = 19.6 W/kg

0 dB = 19.6 W/kg = 12.92 dB W/kg

5 300 MHz (2018-06-28)**Procedure Name: d=10mm, Pin=100mW, f=5300MHz**


Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.461 \text{ S/m}$; $\epsilon_r = 48.407$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

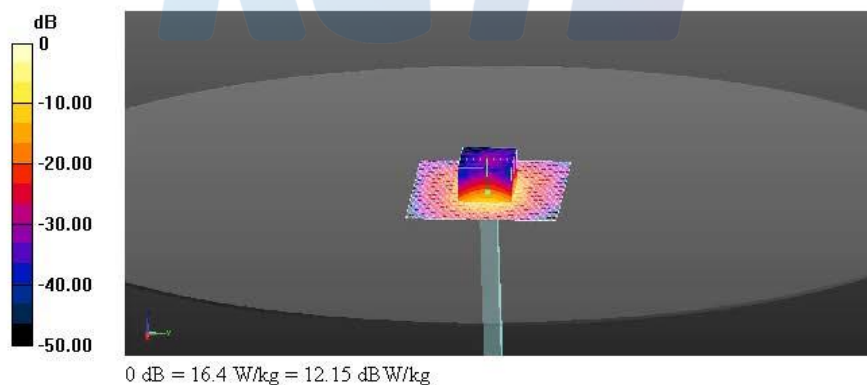Configuration/d=10mm, Pin=100mW, f=5300MHz/Area Scan (91x91x1): Interpolatedgrid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 17.1 W/kg **Configuration/d=10mm, Pin=100mW, f=5300MHz/Zoom Scan (9x9x12)/Cube 0:**Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 56.40 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 34.5 W/kg **SAR(1 g) = 7.85 W/kg ; SAR(10 g) = 2.21 W/kg** Maximum value of SAR (measured) = 16.4 W/kg 

5 600 MHz (2018-06-29)**Procedure Name: d=10mm, Pin=100mW, f=5600MHz**


Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.787 \text{ S/m}$; $\epsilon_r = 48.103$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.1, 4.1, 4.1); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

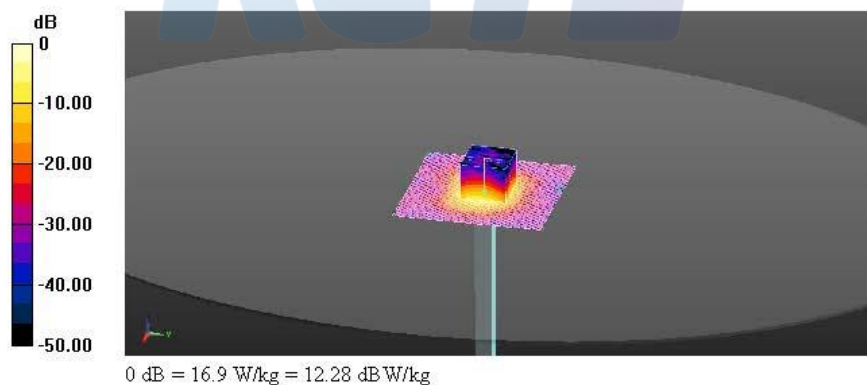Configuration/d=10mm, Pin=100mW, f=5600MHz/Area Scan (91x91x1): Interpolatedgrid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 18.0 W/kg **Configuration/d=10mm, Pin=100mW, f=5600MHz/Zoom Scan (8x8x12)/Cube 0:**Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 57.93 V/m ; Power Drift = 0.14 dB Peak SAR (extrapolated) = 36.3 W/kg **SAR(1 g) = 8.22 W/kg ; SAR(10 g) = 2.34 W/kg** Maximum value of SAR (measured) = 16.9 W/kg 

5 800 MHz (2018-07-02)**Procedure Name: d=10mm, Pin=100mW, f=5800MHz**

Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.094 \text{ S/m}$; $\epsilon_r = 48.327$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.37, 4.37, 4.37); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/d=10mm, Pin=100mW, f=5800MHz/Area Scan (91x91x1): Interpolated
grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 15.5 W/kg


Configuration/d=10mm, Pin=100mW, f=5800MHz/Zoom Scan (8x8x12)/Cube 0:Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 54.78 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 16.0 W/kg

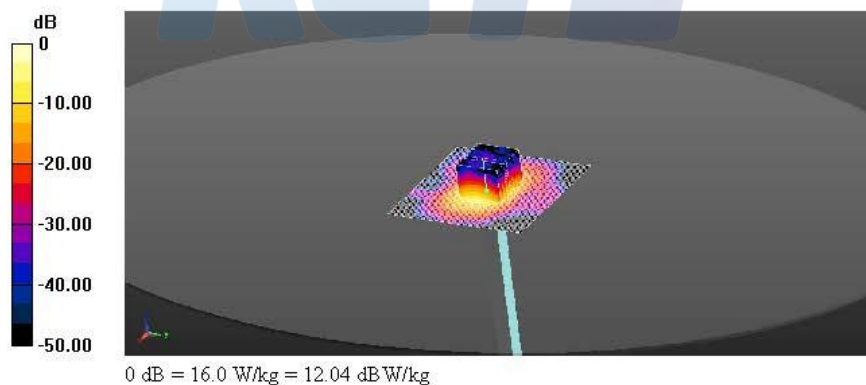

2 450 MHz (2018-07-24)

Procedure Name: d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.933$ S/m; $\epsilon_r = 51.344$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 2018-06-07
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

System Performance Check (without Area Scan)/d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 19.7 W/kg

System Performance Check (without Area Scan)/d=10 mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 99.92 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 26.2 W/kg
SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.8 W/kg
Maximum value of SAR (measured) = 19.2 W/kg

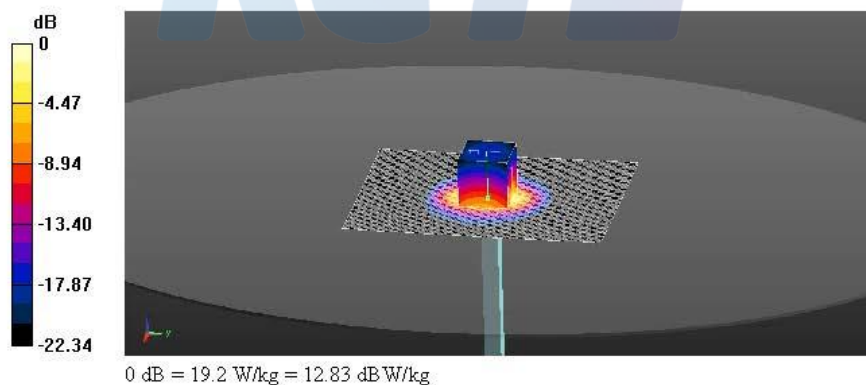

16. Test Results

Procedure Name: 802.11b_f.2 437_Bottom_0 mm_Ant.0

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 51.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11b_f.2 437_Bottom_0 mm_Ant.0/Area Scan (101x131x1):Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.414 W/kg


Configuration/802.11b_f.2 437_Bottom_0 mm_Ant.0/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.64 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

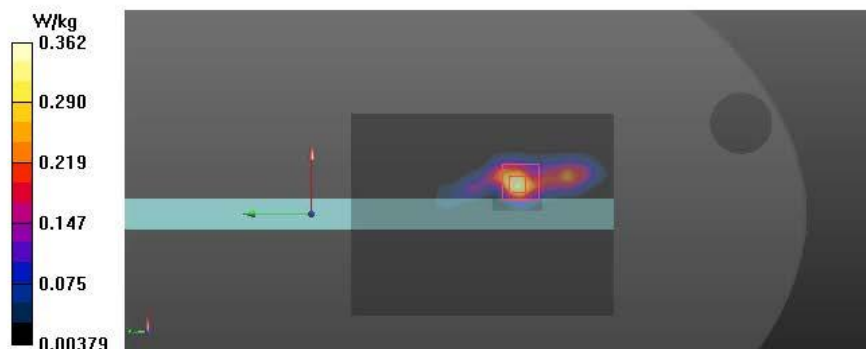

Procedure Name: 802.11n40_f.2 437_Rear_0 mm_Ant.0

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 53.229$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 2018-06-07
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11n40_f.2 437_Rear_0 mm_Ant.0/Area Scan (81x101x1): Interpolated

grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.656 W/kg

Configuration/802.11n40_f.2 437_Rear_0 mm_Ant.0/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.20 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.652 W/kg

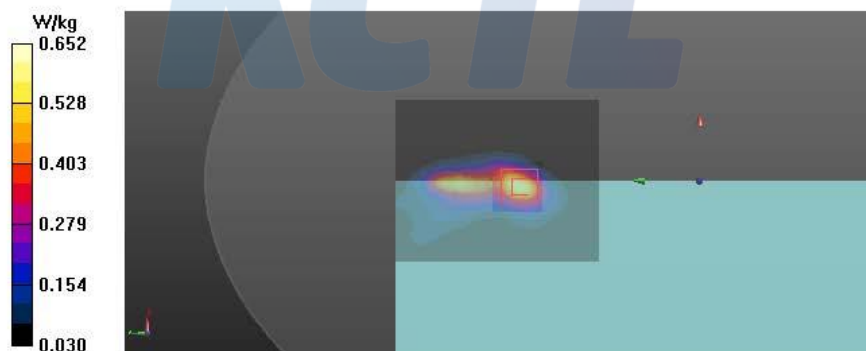

Procedure Name: 802.11b_f.2 437_Rear_0 mm_Ant.1

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 51.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11b_f.2 437_Rear_0 mm_Ant.1/Area Scan (81x101x1): Interpolatedgrid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.467 W/kg


Configuration/802.11b_f.2 437_Rear_0 mm_Ant.1/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.42 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.532 W/kg

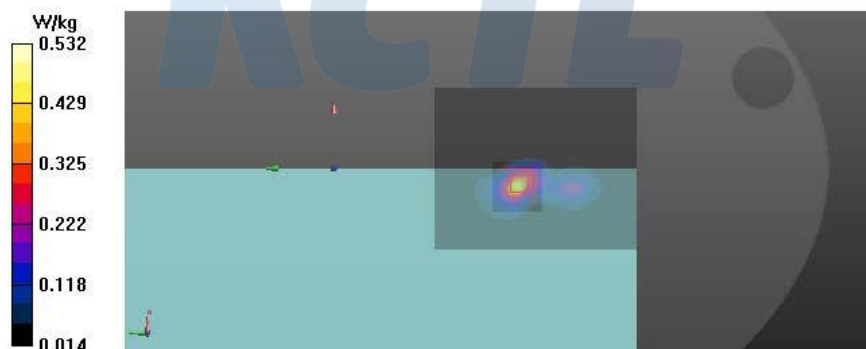

Procedure Name: 802.11n40_f.2 437_Rear_0 mm_Ant.1

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 53.229$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 2018-06-07
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11n40_f.2 437_Rear_0 mm_Ant.1/Area Scan (81x101x1): Interpolated

grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.509 W/kg

Configuration/802.11n40_f.2 437_Rear_0 mm_Ant.1/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.199 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

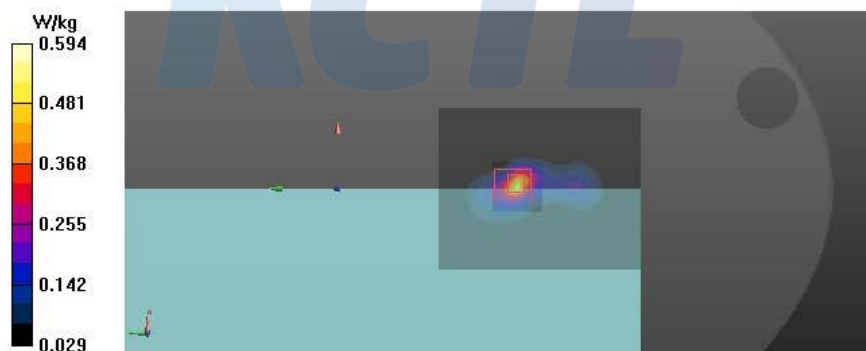

Procedure Name: 802.11a_f.5 300_Rear_0 mm_Ant.0

Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.461$ S/m; $\epsilon_r = 48.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11a_f.5 300_Rear_0 mm_Ant.0/Area Scan (101x121x1): Interpolatedgrid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.911 W/kg


Configuration/802.11a_f.5 300_Rear_0 mm_Ant.0/Zoom Scan (9x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 11.11 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.971 W/kg

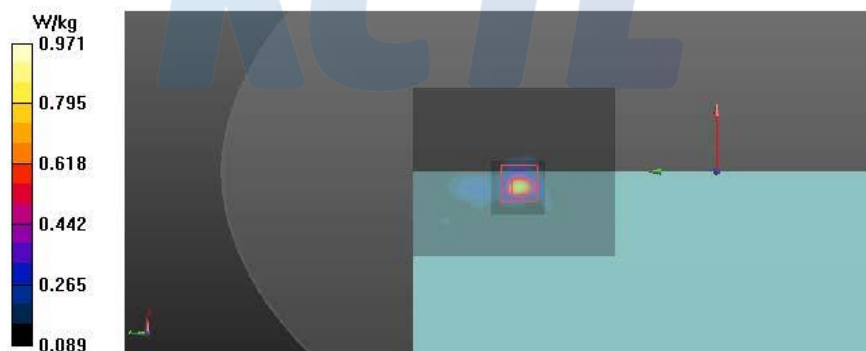

Procedure Name: 802.11ac80_f.5 290_Rear_0 mm_Ant.0

Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.459$ S/m; $\epsilon_r = 48.461$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11ac80_f.5 290_Rear_0 mm_Ant.0/Area Scan (101x121x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Configuration/802.11ac80_f.5 290_Rear_0 mm_Ant.0/Zoom Scan (9x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 12.18 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.03 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

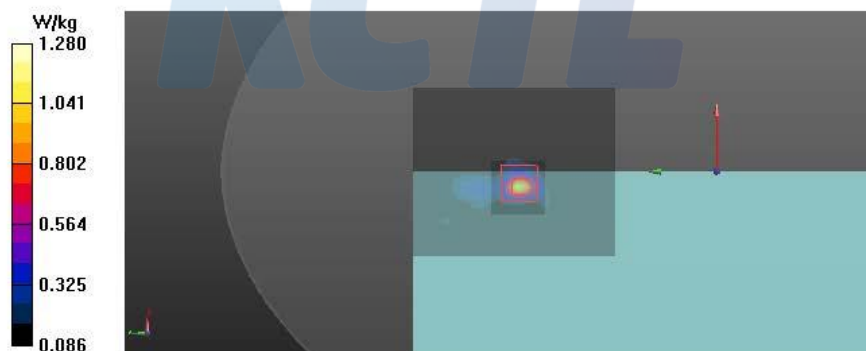

Procedure Name: 802.11a_f.5 300_Rear_0 mm_Ant.1

Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.461$ S/m; $\epsilon_r = 48.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11a_f.5 300_Rear_0 mm_Ant.1/Area Scan (101x121x1): Interpolatedgrid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.609 W/kg


Configuration/802.11a_f.5 300_Rear_0 mm_Ant.1/Zoom Scan (8x8x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.764 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.709 W/kg

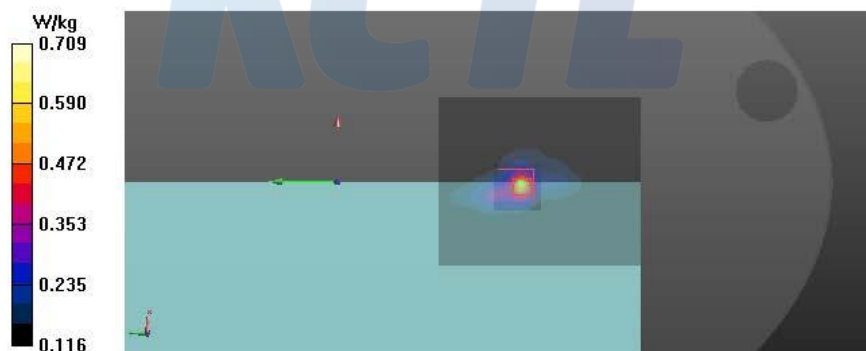

Procedure Name: 802.11ac80_f.5 290_Rear_0 mm_Ant.1

Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.459$ S/m; $\epsilon_r = 48.461$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11ac80_f.5 290_Rear_0 mm_Ant.1/Area Scan (101x121x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.857 W/kg


Configuration/802.11ac80_f.5 290_Rear_0 mm_Ant.1/Zoom Scan (8x8x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.850 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.916 W/kg

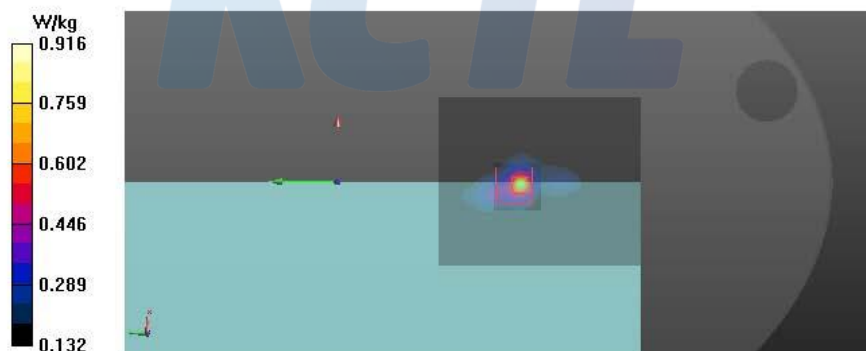

Procedure Name: 802.11ac80_f.5 610_Rear_0 mm_Ant.0

Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.803$ S/m; $\epsilon_r = 48.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.1, 4.1, 4.1); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11ac80_f.5 610_Rear_0 mm_Ant.0/Area Scan (101x121x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.879 W/kg


Configuration/802.11ac80_f.5 610_Rear_0 mm_Ant.0/Zoom Scan (9x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.626 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.956 W/kg

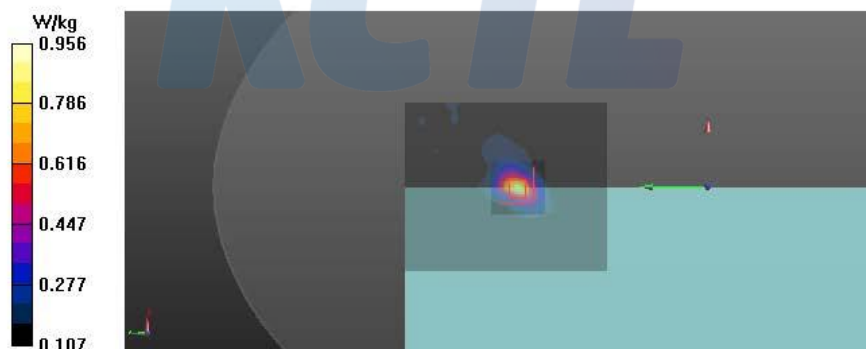

Procedure Name: 802.11ac80_f.5 610_Rear_0 mm_Ant.1

Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.803$ S/m; $\epsilon_r = 48.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.1, 4.1, 4.1); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11ac80_f.5 610_Rear_0 mm_Ant.1/Area Scan (101x121x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.454 W/kg


Configuration/802.11ac80_f.5 610_Rear_0 mm_Ant.1/Zoom Scan (9x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.401 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

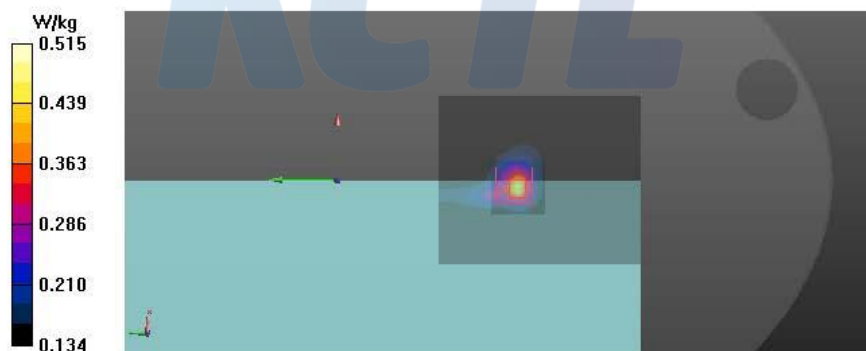

Procedure Name: 802.11ac80_f.5 775_Bottom_0 mm_Ant.0

Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.118$ S/m; $\epsilon_r = 48.482$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.37, 4.37, 4.37); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11ac80_f.5 775_Bottom_0 mm_Ant.0/Area Scan (121x151x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.00 W/kg


Configuration/802.11ac80_f.5 775_Bottom_0 mm_Ant.0/Zoom Scan (8x8x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 17.17 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.41 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.74 W/kg

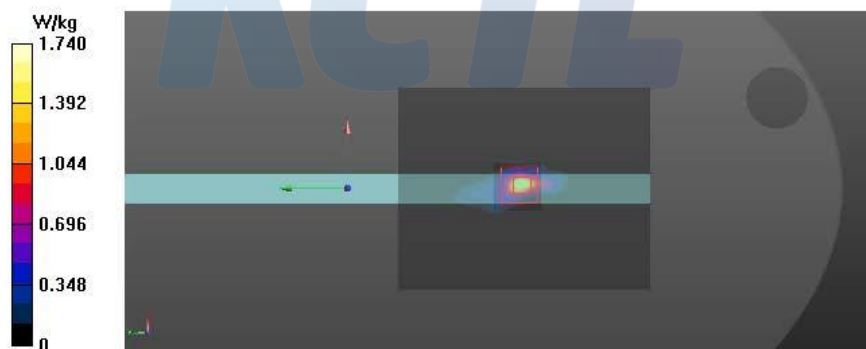

Procedure Name: 802.11ac80_f.5 775_Rear_0 mm_Ant.1

Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.118$ S/m; $\epsilon_r = 48.482$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.37, 4.37, 4.37); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2017-07-21
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/802.11ac80_f.5 775_Rear_0 mm_Ant.1/Area Scan (101x121x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.403 W/kg


Configuration/802.11ac80_f.5 775_Rear_0 mm_Ant.1/Zoom Scan (9x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.582 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

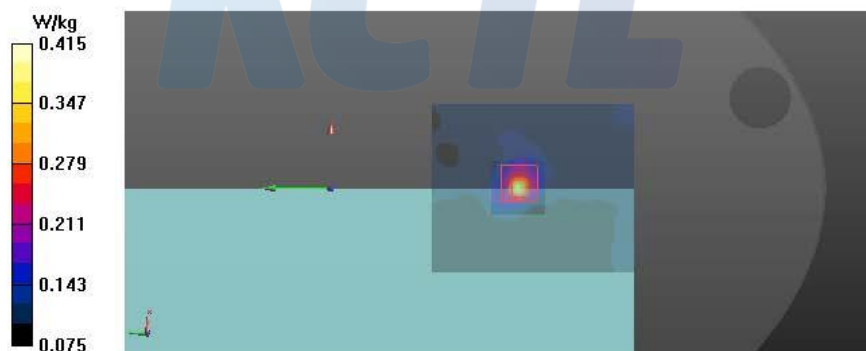

Procedure Name: BDR_f.2 441_Rear_0 mm

Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.924$ S/m; $\epsilon_r = 51.318$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.38, 7.38, 7.38); Calibrated: 2018-01-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 2018-06-07
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.8 (8);

Configuration/BDR_f.2 441_Rear_0 mm/Area Scan (81x101x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.188 W/kg

Configuration/BDR_f.2 441_Rear_0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.62 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

