



FCC SAR TEST REPORT

Application No:	ZR/2019/90020
Applicant:	Qualcomm Atheros, Inc.
Manufacturer:	Qualcomm Atheros, Inc.
Product Name:	2x2 802.11A/B/G/N/AC WiFi + Bluetooth Module
Model No.(EUT):	QCNFA324
Trade Mark:	Qualcomm
FCC ID:	PPD-QCNFA324
Standards:	FCC 47CFR §2.1093
Date of Receipt:	2019-10-10
Date of Test:	2019-10-11 to 2019-11-29
Date of Issue:	2020-01-06
Test Result:	PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com

REVISION HISTORY

Report Number	Revision	Description	Issue Date
ZR/2019/9002004	01	Original	2019-12-13
ZR/2019/9002004	02	Update simultaneous transmission combination	2020-01-06




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

TEST SUMMARY

Frequency Band	Test position	Max Report SAR1-g (W/kg)	SAR limit (W/kg)	Verdict
WI-FI (2.4GHz)	Body	1.19	1.6	PASS
WI-FI (5GHz)	Body	1.38	1.6	PASS

Approved & Released by



Simon Ling

SAR Manager

Tested by



Jackson Li

SAR Engineer

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

CONTENTS

1	GENERAL INFORMATION	6
1.1	DETAILS OF CLIENT	6
1.2	TEST LOCATION	6
1.3	TEST FACILITY	7
1.4	GENERAL DESCRIPTION OF EUT	8
1.5	TEST SPECIFICATION	9
1.6	RF EXPOSURE LIMITS	9
2	SAR MEASUREMENTS SYSTEM CONFIGURATION	10
2.1	THE SAR MEASUREMENT SYSTEM	10
2.2	ISOTROPIC E-FIELD PROBE EX3DV4	11
2.3	DATA ACQUISITION ELECTRONICS (DAE)	12
2.4	SAM TWIN PHANTOM	12
2.5	ELI PHANTOM	13
2.6	DEVICE HOLDER FOR TRANSMITTERS	14
2.7	MEASUREMENT PROCEDURE	15
2.7.1	Scanning procedure	15
2.7.2	Data Storage	17
2.7.3	Data Evaluation by SEMCAD	17
3	DESCRIPTION OF TEST POSITION	19
3.1	THE BODY TEST POSITION	19
4	SAR SYSTEM VERIFICATION PROCEDURE	20
4.1	TISSUE SIMULATE LIQUID	20
4.1.1	Recipes for Tissue Simulate Liquid	20
4.1.2	Measurement for Tissue Simulate Liquid	21
4.2	SAR SYSTEM CHECK	22
4.2.1	Justification for Extended SAR Dipole Calibrations	23
4.2.2	Summary System Validation Result(s)	24
4.2.3	Detailed System Check Results	24
5	TEST RESULTS AND MEASUREMENT DATA	25



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch | SGS EEC Laboratory

| No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5.1	OPERATION CONFIGURATIONS	25
5.1.1	<i>WiFi Test Configuration</i>	25
5.1.2	<i>DUT Antenna Locations</i>	31
5.1.3	<i>EUT side for SAR Testing</i>	32
5.2	MEASUREMENT OF RF CONDUCTED POWER	34
5.2.1	<i>Conducted Power of WiFi and BT</i>	34
5.3	MEASUREMENT OF SAR DATA	46
5.3.1	<i>SAR Result of WiFi 2.4G</i>	46
5.3.2	<i>SAR Result of WiFi 5G</i>	49
5.4	MULTIPLE TRANSMITTER EVALUATION	54
5.4.1	<i>Simultaneous SAR SAR test evaluation</i>	54
5.4.2	<i>Simultaneous Transmission SAR Summation Scenario</i>	54
6	EQUIPMENT LIST	55
7	MEASUREMENT UNCERTAINTY	56
8	CALIBRATION CERTIFICATE	56
9	PHOTOGRAPHS	56
APPENDIX A: DETAILED SYSTEM CHECK RESULTS		57
APPENDIX B: DETAILED TEST RESULTS		57
APPENDIX C: CALIBRATION CERTIFICATE		57
APPENDIX D: PHOTOGRAPHS		57

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

1 General Information

1.1 Details of Client

Applicant:	Qualcomm Atheros, Inc.
Address:	1700 Technology Drive, San Jose, CA 95110
Manufacturer:	Qualcomm Atheros, Inc.
Address:	1700 Technology Drive, San Jose, CA 95110

1.2 Test Location

Company: SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
Address: No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code: 518057
Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
E-mail: ee.shenzhen@sgs.com



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

1.4 General Description of EUT

Product Name:	2x2 802.11A/B/G/N/AC WiFi + Bluetooth Module	
Model No.(EUT):	QCNFA324	
Trade Mark:	Qualcomm	
Product Description of Host	Portable Tablet Computer	
Model No. of Host:	Lenovo CT-X636F	
Trade Mark of Host:	Lenovo	
SN:	HGCDJZV0/HA11HT4R	
FCC ID:	PPD-QCNFA324	
Host	Hardware Version:	Google Chrome 79.0.3940.0 (Platform 12601.0.0-19.10.16)
	Software Version:	Lenovo Tablet CT-X636F
Antenna Type:	Inner Antenna	

Device Operating Configurations:

Modulation Mode:	WIFI: DSSS, OFDM; BT: GFSK, $\pi/4$ DQPSK,8DPSK		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	WIFI(2.4GHz)	2412-2462	2412-2462
	WIFI(5GHz)	5150-5250	5150-5250
		5250-5350	5250-5350
		5470-5725	5470-5725
		5725-5850	5725-5850
Battery Information:	BT	2402-2480	2402-2480
	Battery Model:	L19D1P31	
	Nominal Voltage:	3.85V	
	Rated capacity:	7000mAh	
Keyboard	Manufacture	Lenovo(SCUD)	
	Keyboard Model:	Lenovo Chromebook Keyboard Pack	
Keyboard	Manufacture:	Lenovo	

Remark:

According to the declaration from the applicant, it is only different on some material supplier.

Considering the difference, Sample 1# is the SAR test primary Sample, Sample 2#, Sample 3#, Sample 4# is tested the worst case with primary Sample.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE Std C95.1 – 1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 248227 D01 v02r02	802.11 Wi-Fi SAR
KDB 616217 D04 v01r02	SAR for laptop and tablets
KDB447498 D01 v06	General RF Exposure Guidance
KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
KDB 865664 D02 v01r02	RF Exposure Reporting

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



2 SAR Measurements System Configuration

2.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma / (|E|/2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

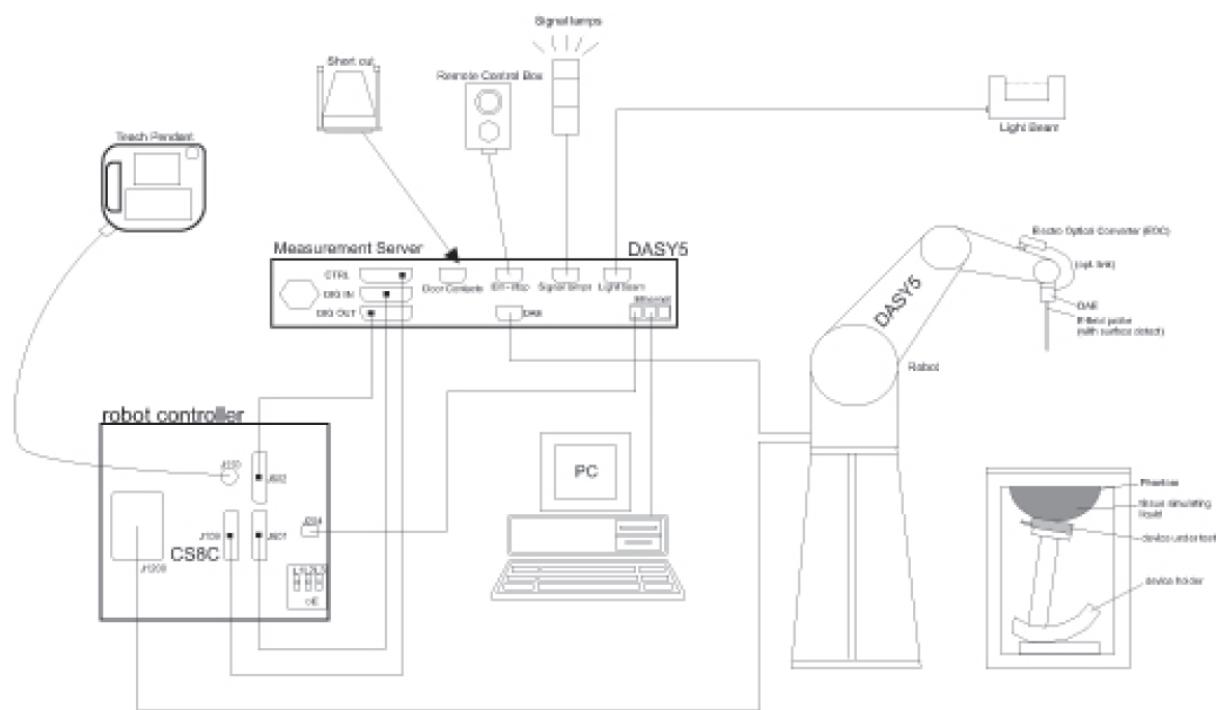

F-1. SAR Measurement System Configuration

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.


2.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

2.3 Data Acquisition Electronics (DAE)

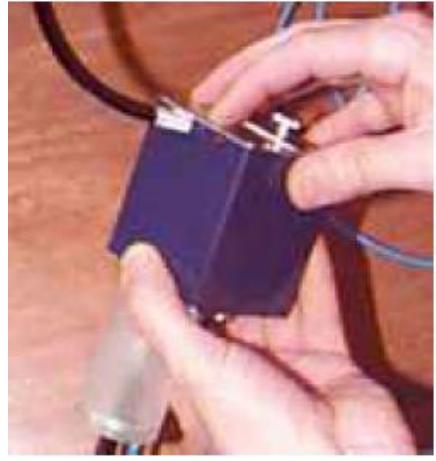Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

2.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.


Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

2.5 ELI Phantom

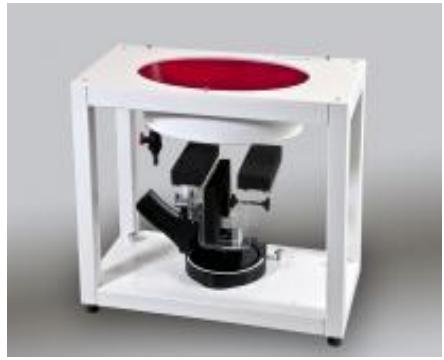Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

2.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

2.7 Measurement procedure

2.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 30mm*30mm*30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5x5x7 points ($\leq 2\text{GHz}$) and 7x7x7 points ($\geq 2\text{GHz}$). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch / CE Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{\text{Zoom}}(n > 1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

2.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

2.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	DcpI	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

$c f$ = crest factor of exciting field (DASY parameter)

$d c p_i$ = diode compression point (DASY parameter)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i $(i = x, y, z)$
Normi = sensor sensitivity of channel i $(i = x, y, z)$
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution
aij = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

3 Description of Test Position

3.1 The Body Test Position

The overall diagonal dimension of the display section of a tablet is > 20 cm, Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. SAR evaluation for the front surface of tablet display screens are generally not necessary. The SAR Exclusion threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

4 SAR System Verification Procedure

4.1 Tissue Simulate Liquid

4.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1800-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85

Salt: 99+% Pure Sodium Chloride **Sucrose:** 98+% Pure Sucrose
Water: De-ionized, 16 MΩ⁺ resistivity **HEC:** Hydroxyethyl Cellulose
Tween: Polyoxyethylene (20) sorbitan monolaurate

HSL5GHz is composed of the following ingredients:
Water: 50-65%
Mineral oil: 10-30%
Emulsifiers: 8-25%
Sodium salt: 0-1.5%

Table 1 : Recipe of Tissue Simulate Liquid

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

4.1.2 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ϵ_r) are listed in Table 2. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm2^\circ\text{C}$.

Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. (°C)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.673	1.802	22.0	2019/10/30
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.177	1.803	22.0	2019/11/29
5250 Head	5250	35.9 (34.11~37.70)	4.71 (4.47~4.95)	36.011	4.767	22.2	2019/10/11
5600 Head	5600	35.5 (33.73~37.28)	5.07 (4.82~5.32)	35.059	5.157	22.2	2019/10/12
5750 Head	5750	35.4 (33.63~37.17)	5.22 (4.96~5.48)	34.695	5.329	22.2	2019/10/11

Table 2 : Measurement result of Tissue electric parameters

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-3. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^\circ\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above $15\pm 0.5\text{ cm}$ in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

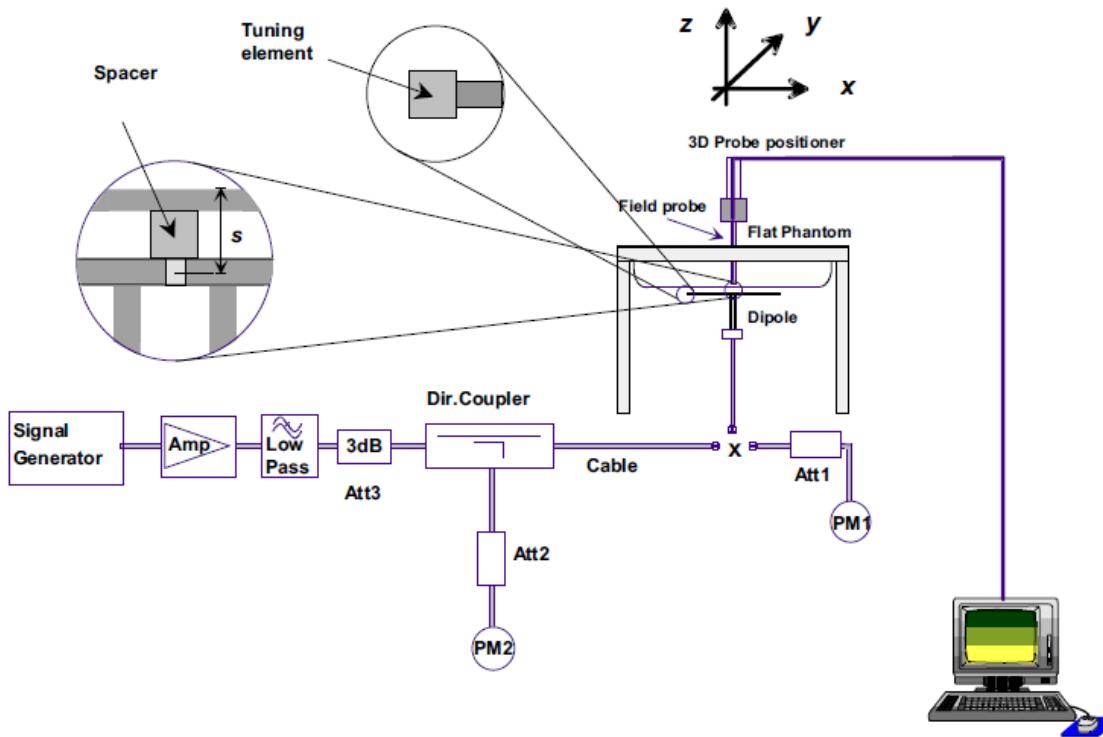

F-3. the microwave circuit arrangement used for SAR system check

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

4.2.1 Justification for Extended SAR Dipole Calibrations

- 1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) Return-loss is within 10% of calibrated measurement;
 - d) Impedance is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.2.2 Summary System Validation Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR normalized to 1W	Measured SAR normalized to 1W	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D2450V2	Head	13.20	6.08	52.80	24.32	53.1 (47.79~58.41)	24.9 (22.41~27.39)	22.0	2019/10/30
D2450V2	Head	12.60	5.82	50.40	23.28	53.1 (47.79~58.41)	24.9 (22.41~27.39)	22.0	2019/11/29
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head (5.25GHz)	8.04	2.32	80.40	23.20	76.6 (68.94~84.26)	21.9 (19.71~24.09)	22.2	2019/10/11
	Head (5.6GHz)	8.56	2.44	85.60	24.40	80.4 (72.36~88.44)	22.8 (20.52~25.08)	22.2	2019/10/12
	Head (5.75GHz)	7.91	2.25	79.10	22.50	80.0 (72~88)	22.7 (20.43~24.97)	22.2	2019/10/11

Table 3 : SAR System Check Result

4.2.3 Detailed System Check Results

Please see the Appendix A

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



5 Test results and Measurement Data


5.1 Operation Configurations

5.1.1 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

- 2.4G WIFI


Duty cycle=12.238/12.412=98.60%

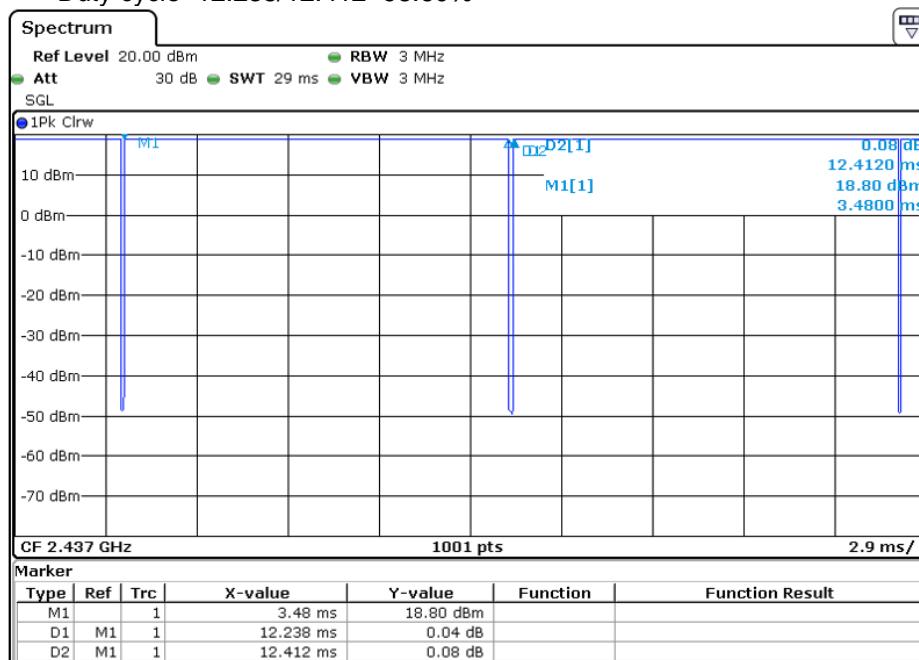


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

- 5G WIFI 802.11a
Duty cycle=2.03/2.15=94.42%

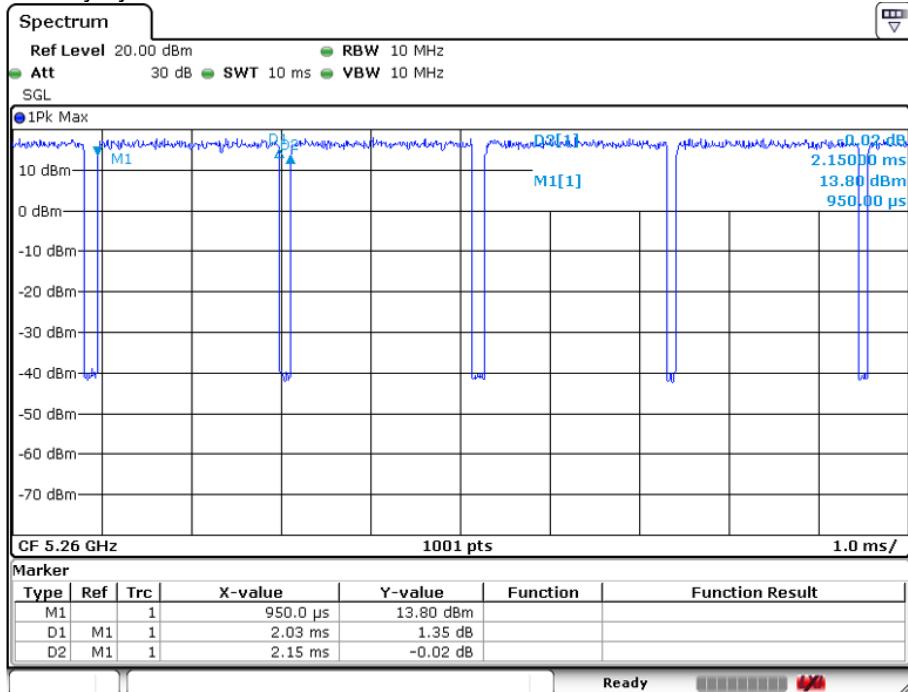

- 5G WIFI 802.11n 40M
Duty cycle=907.4/1059.4=85.65%

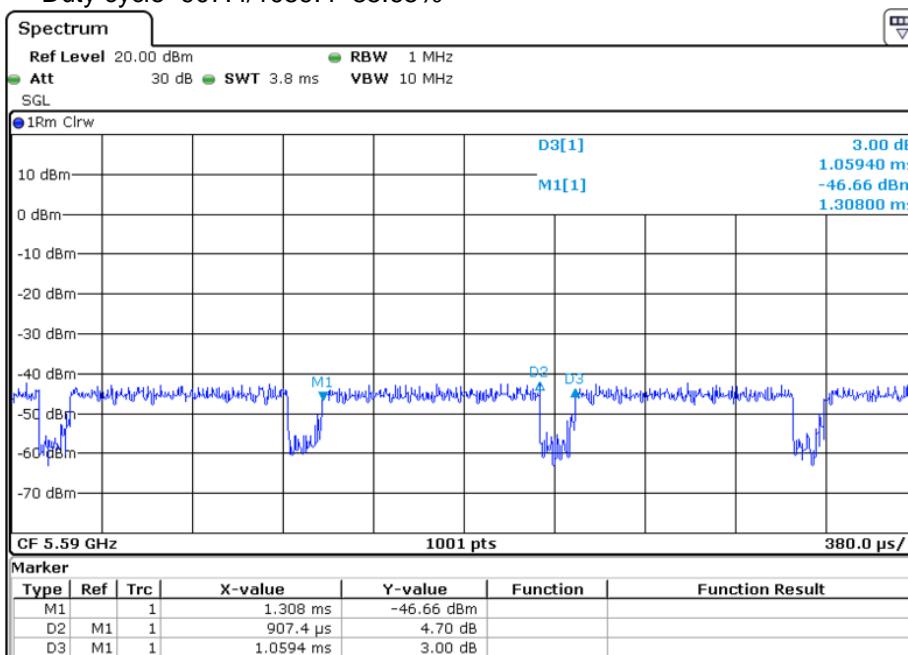

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

5.1.1.1 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

5.1.1.2 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

5.1.1.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch - CECC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace "initial test configuration" with "all tested higher output power configurations"

5.1.1.4 2.4 GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

5.1.1.5 WiFi 5G SAR Test Procedures

5.1.1.5.1 U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest *reported* SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest *reported* SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest *reported* SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

5.1.1.5.2 U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

5.1.1.5.3 OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - The channel closest to mid-band frequency is selected for SAR measurement.
 - For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.


5.1.1.5.4 SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

5.1.2 DUT Antenna Locations

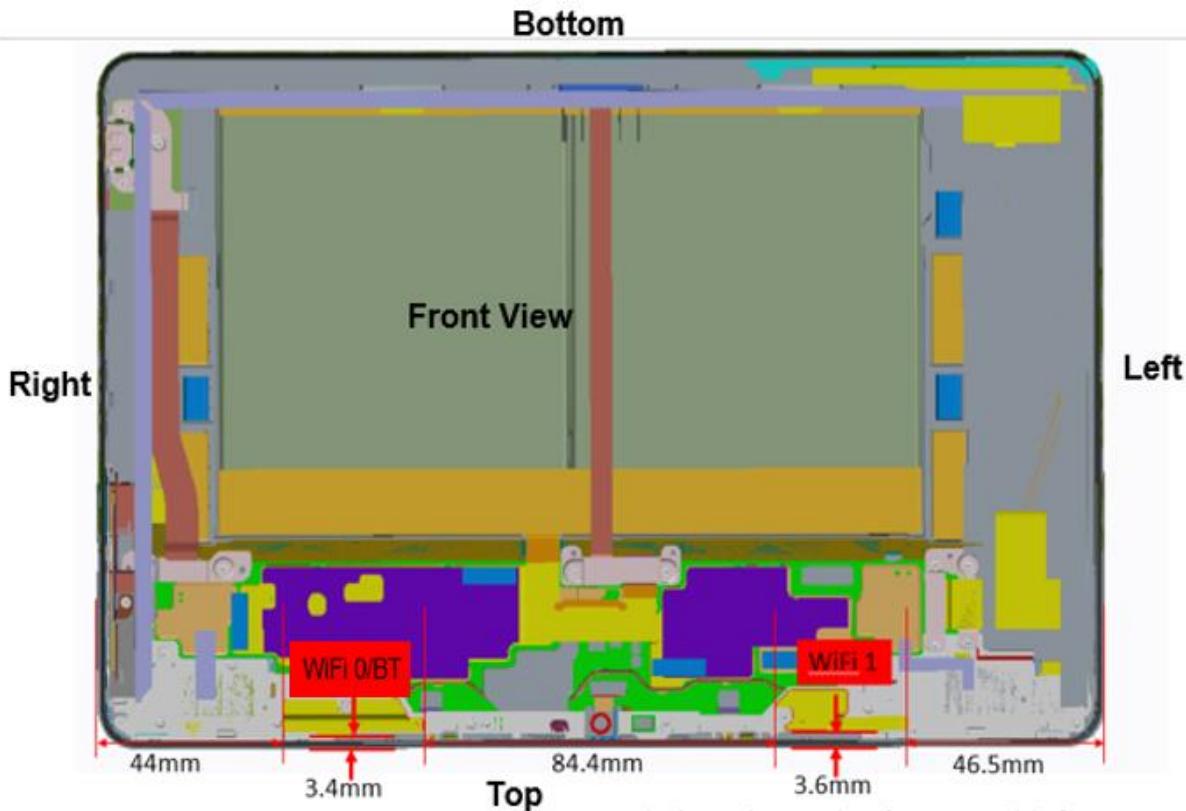

The distance between the wifi0 antenna and the front is 3.58mm
The distance between the wifi0 antenna and the back is 3.75mm

The distance between the wifi1 antenna and the front is 3.63mm
The distance between the wifi1 antenna and the back is 3.7mm

Note: Per KDB 616217, the diagonal length is > 200mm, the device is considered a "tablet" device and needed to test 0mm 1-g body SAR.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

5.1.3 EUT side for SAR Testing

- Stand-alone SAR test evaluation

1) Per FCC KDB 447498D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

2) At 100 MHz to 6 GHz and for test separation distances $>$ 50 mm, the SAR test exclusion threshold is determined according to the following:

a) $[\text{Power allowed at numeric threshold for 50 mm in step 1} + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)] \text{ mW}$, at 100 MHz to 1500 MHz

b) $[\text{Power allowed at numeric threshold for 50 mm in step 1} + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$ at $> 1500 \text{ MHz and } \leq 6 \text{ GHz}$

1) Standalone SAR exclusion calculation (Antenna to adjacent sides < 50 mm)

BnAd	Exposure Condition	f (GHz)	Pmax	Pmax	separation distance(mm)				Calculated Value				SAR Test (Yes or No)						
			(dBm)	(mw)	Back side	Left side	Right side	Top side	Bottom side	Back side	Left side	Right side	Top side	Bottom side	Back side	Left side	Right side	Top side	Bottom side
WIFI 2.4G Ant0	Body 0mm	2.462	19.00	79.43	5	182	44	5	142	24.927	>50mm	2.833	24.927	>50mm	Yes	>50mm	No	Yes	>50mm
WIFI 2.4G Ant1	Body 0mm	2.462	19.00	79.43	5	46.5	175	5	142	24.927	>50mm	24.927	>50mm	Yes	No	>50mm	Yes	>50mm	
WIFI 2.4G MIMO	Body 0mm	2.462	22.00	158.49	5	46.5	44	5	142	49.736	5.348	5.652	49.736	>50mm	Yes	Yes	Yes	Yes	>50mm
WIFI 5.2G Ant0	Body 0mm	5.200	14.50	28.18	5	182	44	5	142	12.854	>50mm	1.461	12.854	>50mm	Yes	>50mm	No	Yes	>50mm
WIFI 5.2G Ant1	Body 0mm	5.200	14.50	28.18	5	46.5	175	5	142	12.854	1.382	>50mm	12.854	>50mm	Yes	No	>50mm	Yes	>50mm
WIFI 5.2G MIMO	Body 0mm	5.200	17.50	56.23	5	46.5	44	5	142	25.647	2.758	2.914	25.647	>50mm	Yes	No	No	Yes	>50mm
WIFI 5.3G Ant0	Body 0mm	5.300	14.50	28.18	5	182	44	5	142	12.977	>50mm	1.475	12.977	>50mm	Yes	>50mm	No	Yes	>50mm
WIFI 5.3G Ant1	Body 0mm	5.300	14.50	28.18	5	46.5	175	5	142	12.977	1.395	>50mm	12.977	>50mm	Yes	No	>50mm	Yes	>50mm
WIFI 5.3G MIMO	Body 0mm	5.300	17.50	56.23	5	46.5	44	5	142	25.892	2.784	2.942	25.892	>50mm	Yes	No	No	Yes	>50mm
WIFI 5.5G Ant0	Body 0mm	5.500	12.50	17.78	5	182	44	5	142	8.341	>50mm	0.948	8.341	>50mm	Yes	>50mm	No	Yes	>50mm
WIFI 5.5G Ant1	Body 0mm	5.500	12.50	17.78	5	46.5	175	5	142	8.341	0.897	>50mm	8.341	>50mm	Yes	No	>50mm	Yes	>50mm
WIFI 5.5G MIMO	Body 0mm	5.500	15.50	35.48	5	46.5	44	5	142	16.642	1.789	1.891	16.642	>50mm	Yes	No	No	Yes	>50mm
WIFI 5.8G Ant0	Body 0mm	5.800	12.50	17.78	5	182	44	5	142	8.565	>50mm	0.973	8.565	>50mm	Yes	>50mm	No	Yes	>50mm
WIFI 5.8G Ant1	Body 0mm	5.800	12.50	17.78	5	46.5	175	5	142	8.565	0.921	>50mm	8.565	>50mm	Yes	No	>50mm	Yes	>50mm
WIFI 5.8G MIMO	Body 0mm	5.800	15.50	35.48	5	46.5	44	5	142	17.090	1.838	1.942	17.090	>50mm	Yes	No	No	Yes	>50mm
BT	Body 0mm	2.480	7.00	5.01	5	182	44	5	142	1.579	>50mm	0.179	1.579	>50mm	No	>50mm	No	No	>50mm

2) Standalone SAR exclusion calculation (Antenna to adjacent sides > 50 mm)

BnAd	Exposure Condition	f (GHz)	Pmax	Pmax	separation distance(mm)				Calculated Value				SAR Test (Yes or No)						
			(dBm)	(mw)	Back side	Left side	Right side	Top side	Bottom side	Back side	Left side	Right side	Top side	Bottom side	Back side	Left side	Right side	Top side	Bottom side
WIFI 2.4G Ant0	Body 0mm	2.462	19.00	79.43	5	182	44	5	142	<50mm	1415.83	<50mm	<50mm	1015.83	<50mm	No	<50mm	<50mm	No
WIFI 2.4G Ant1	Body 0mm	2.462	19.00	79.43	5	46.5	175	5	142	<50mm	<50mm	1345.83	<50mm	1015.83	<50mm	<50mm	<50mm	<50mm	
WIFI 2.4G MIMO	Body 0mm	2.462	22.00	158.49	5	46.5	44	5	142	<50mm	<50mm	<50mm	1015.83	<50mm	<50mm	<50mm	<50mm	<50mm	
WIFI 5.2G Ant0	Body 0mm	5.200	14.50	28.18	5	182	44	5	142	<50mm	1385.78	<50mm	<50mm	985.78	<50mm	No	<50mm	<50mm	No
WIFI 5.2G Ant1	Body 0mm	5.200	14.50	28.18	5	46.5	175	5	142	<50mm	<50mm	1315.78	<50mm	985.78	<50mm	<50mm	<50mm	<50mm	
WIFI 5.2G MIMO	Body 0mm	5.200	17.50	56.23	5	46.5	44	5	142	<50mm	<50mm	<50mm	985.78	<50mm	<50mm	<50mm	<50mm	<50mm	
WIFI 5.3G Ant0	Body 0mm	5.300	14.50	28.18	5	182	44	5	142	<50mm	1385.16	<50mm	<50mm	985.16	<50mm	No	<50mm	<50mm	No
WIFI 5.3G Ant1	Body 0mm	5.300	14.50	28.18	5	46.5	175	5	142	<50mm	<50mm	1315.16	<50mm	985.16	<50mm	<50mm	<50mm	<50mm	
WIFI 5.3G MIMO	Body 0mm	5.300	17.50	56.23	5	46.5	44	5	142	<50mm	<50mm	<50mm	985.16	<50mm	<50mm	<50mm	<50mm	<50mm	
WIFI 5.5G Ant0	Body 0mm	5.500	12.50	17.78	5	182	44	5	142	<50mm	1383.96	<50mm	<50mm	983.96	<50mm	No	<50mm	<50mm	No
WIFI 5.5G Ant1	Body 0mm	5.500	12.50	17.78	5	46.5	175	5	142	<50mm	<50mm	1313.96	<50mm	983.96	<50mm	<50mm	<50mm	<50mm	
WIFI 5.5G MIMO	Body 0mm	5.500	15.50	35.48	5	46.5	44	5	142	<50mm	<50mm	<50mm	983.96	<50mm	<50mm	<50mm	<50mm	<50mm	
WIFI 5.8G Ant0	Body 0mm	5.800	12.50	17.78	5	182	44	5	142	<50mm	1382.29	<50mm	<50mm	982.29	<50mm	No	<50mm	<50mm	No
WIFI 5.8G Ant1	Body 0mm	5.800	12.50	17.78	5	46.5	175	5	142	<50mm	<50mm	1312.29	<50mm	982.29	<50mm	<50mm	<50mm	<50mm	
WIFI 5.8G MIMO	Body 0mm	5.800	15.50	35.48	5	46.5	44	5	142	<50mm	<50mm	<50mm	982.29	<50mm	<50mm	<50mm	<50mm	<50mm	
BT	Body 0mm	2.480	7.00	5.01	5	182	44	5	142	<50mm	1416.00	<50mm	<50mm	1015.83	<50mm	No	<50mm	<50mm	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

According to the table above, the standalone test configurations required for this device are as below:

Test configurations	Front side	Back side	Left side	Right side	Top side	Bottom side
WiFi 2.4G Ant0	No	Yes	No	No	Yes	No
WiFi 2.4G Ant1	No	Yes	No	No	Yes	No
WiFi 2.4G MIMO	No	Yes	Yes	Yes	Yes	No
WiFi 5.2G Ant0	No	Yes	No	No	Yes	No
WiFi 5.2G Ant1	No	Yes	No	No	Yes	No
WiFi 5.2G MIMO	No	Yes	No	No	Yes	No
WiFi 5.3G Ant0	No	Yes	No	No	Yes	No
WiFi 5.3G Ant1	No	Yes	No	No	Yes	No
WiFi 5.3G MIMO	No	Yes	No	No	Yes	No
WiFi 5.5G Ant0	No	Yes	No	No	Yes	No
WiFi 5.5G Ant1	No	Yes	No	No	Yes	No
WiFi 5.5G MIMO	No	Yes	No	No	Yes	No
WiFi 5.8G Ant0	No	Yes	No	No	Yes	No
WiFi 5.8G Ant1	No	Yes	No	No	Yes	No
WiFi 5.8G MIMO	No	Yes	No	No	Yes	No
BT	No	No	No	No	No	No

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

1) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion

2) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distance is $> 50 \text{ mm}$.

Mode	Position	Pmax (dBm)	Pmax (mw)	test separation distance(mm)					f(GHz)	X	Estimated SAR(W/Kg)				
				Back side	Left side	Right side	Top side	Bottom side			Back side	Left side	Right side	Top side	Bottom side
WIFI 2.4G Ant0	Body 0mm	19.00	79.43	5	182	44	5	142	2.462	7.5	measure	0.400	0.378	measure	0.400
WIFI 2.4G Ant1	Body 0mm	19.00	79.43	5	46.5	175	5	142	5.850	7.5	measure	0.378	0.400	measure	0.400
WIFI 2.4G MIMO	Body 0mm	22.00	158.49	5	46.5	44	5	142	2.480	7.5	measure	measure	measure	measure	0.400
WIFI 5.2G Ant0	Body 0mm	14.50	28.18	5	182	44	5	142	2.462	7.5	measure	0.400	0.196	measure	0.400
WIFI 5.2G Ant1	Body 0mm	14.50	28.18	5	46.5	175	5	142	2.462	7.5	measure	0.196	0.400	measure	0.400
WIFI 5.2G MIMO	Body 0mm	17.50	56.23	5	46.5	44	5	142	5.850	7.5	measure	0.390	0.390	measure	0.400
WIFI 5.3G Ant0	Body 0mm	14.50	28.18	5	182	44	5	142	2.480	7.5	measure	0.400	0.198	measure	0.400
WIFI 5.3G Ant1	Body 0mm	14.50	28.18	5	46.5	175	5	142	2.462	7.5	measure	0.198	0.400	measure	0.400
WIFI 5.3G MIMO	Body 0mm	17.50	56.23	5	46.5	44	5	142	5.850	7.5	measure	0.394	0.394	measure	0.400
WIFI 5.5G Ant0	Body 0mm	12.50	17.78	5	182	44	5	142	2.480	7.5	measure	0.400	0.129	measure	0.400
WIFI 5.5G Ant1	Body 0mm	12.50	17.78	5	46.5	175	5	142	2.462	7.5	measure	0.129	0.400	measure	0.400
WIFI 5.5G MIMO	Body 0mm	15.50	35.48	5	46.5	44	5	142	5.850	7.5	measure	0.257	0.257	measure	0.400
WIFI 5.8G Ant0	Body 0mm	12.50	17.78	5	182	44	5	142	2.480	7.5	measure	0.400	0.130	measure	0.400
WIFI 5.8G Ant1	Body 0mm	12.50	17.78	5	46.5	175	5	142	2.462	7.5	measure	0.130	0.400	measure	0.400
WIFI 5.8G MIMO	Body 0mm	15.50	35.48	5	46.5	44	5	142	5.850	7.5	measure	0.130	0.130	measure	0.400
BT	Body 0mm	7.00	5.01	5	182	44	5	142	2.480	7.5	0.211	0.400	0.024	0.211	0.400

Table 4: Estimated SAR calculation for WiFi and BT

Note:

1) * - maximum possible output power declared by manufacturer

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

5.2 Measurement of RF conducted Power

5.2.1 Conducted Power of WIFI and BT

Mode	Antenna	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	Ant0	1	2412	1	19.00	17.28	Yes
		6	2437		19.00	17.58	Yes
		11	2462		19.00	17.72	Yes
	Ant1	1	2412		19.00	17.52	Yes
		6	2437		19.00	17.79	Yes
		11	2462		19.00	17.68	Yes
802.11g	Ant0	1	2412	6	13.00	12.21	No
		2	2417		19.00	17.31	No
		6	2437		19.00	17.66	No
		10	2457		19.00	17.79	No
		11	2462		13.00	12.56	No
	Ant1	1	2412		13.00	12.44	No
		2	2417		19.00	17.72	No
		6	2437		19.00	17.89	No
		10	2457		19.00	17.82	No
		11	2462		13.00	12.55	No
802.11n 20M SISO	Ant0	1	2412	1	13.00	11.94	No
		2	2417		19.00	17.02	No
		6	2437		19.00	17.36	No
		10	2457		19.00	17.53	No
		11	2462		12.50	12.17	No
	Ant1	1	2412		13.00	12.28	No
		2	2417		19.00	17.51	No
		6	2437		19.00	17.72	No
		10	2457		19.00	17.57	No
		11	2462		12.50	11.89	No
		3	2422	13.5	12.50	10.93	No
		4	2427		12.50	10.99	No
		5	2432		15.00	13.06	No
		6	2437		15.00	13.08	No
		7	2442		15.00	13.14	No
		8	2447		9.50	7.75	No
		9	2452		8.50	7.91	No
	Ant1	3	2422		12.50	10.57	No
		4	2427		12.50	11.23	No
		5	2432		15.00	13.09	No
		6	2437		15.00	13.26	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.cn
sgs.china@sgs.com

中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

		7	2442		15.00	13.11	No
		8	2447		9.50	7.83	No
		9	2452		8.50	7.98	No

Mode	Antenna	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	MIMO (Ant0+Ant1)	1	2412	1	22.0	20.40	Yes
		6	2437		22.0	20.70	Yes
		11	2462		22.0	20.92	Yes
802.11g	MIMO (Ant0+Ant1)	1	2412	6	16.0	15.34	No
		2	2417		22.0	20.53	No
		6	2437		22.0	20.79	No
		10	2457		22.0	20.82	No
		11	2462		16.0	15.57	No
802.11n 20M	MIMO (Ant0+Ant1)	1	2412	MCS0	16.0	15.12	No
		2	2417		22.0	20.28	No
		6	2437		22.0	20.55	No
		10	2457		22.0	20.56	No
		11	2462		15.5	15.04	No
802.11n 40M	MIMO (Ant0+Ant1)	3	2422	MCS0	15.5	13.76	No
		4	2427		15.5	14.12	No
		5	2432		18.0	16.09	No
		6	2437		18.0	16.18	No
		7	2442		18.0	16.14	No
		8	2447		12.5	10.80	No
		9	2452		11.5	10.96	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



5GHz Ant 0	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	14.00	12.41	No
		40	5200		14.00	12.09	No
		44	5220		14.00	12.23	No
		48	5240		14.50	12.59	No
	U-NII-2A	52	5260		14.50	12.69	Yes
		56	5280		14.50	12.88	Yes
		60	5300		14.50	12.53	No
		64	5320		14.50	12.62	Yes
	U-NII-2C	100	5500		12.00	10.72	No
		104	5520		12.00	10.05	No
		108	5540		12.00	10.44	No
		112	5560		12.00	10.23	No
		116	5580		12.00	10.65	No
		120	5600		12.00	10.08	No
		124	5620		11.50	9.59	No
		128	5640		11.50	9.67	No
		132	5660		11.50	9.66	No
		136	5680		11.50	9.72	No
		140	5700		11.50	9.59	No
		144	5720		12.00	10.55	No
	U-NII-3	149	5745		12.50	10.92	No
		153	5765		12.50	10.85	No
		157	5785		12.50	10.98	No
		161	5805		12.00	10.54	No
		165	5825		12.50	10.88	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n- HT20	U-NII-1	36	5180	MCS0	13.50	11.78	No
		40	5200		13.50	11.88	No
		44	5220		13.50	12.03	No
		48	5240		13.50	12.34	No
	U-NII-2A	52	5260		13.50	12.44	No
		56	5280		13.50	11.73	No
		60	5300		13.50	12.42	No
		64	5320		13.50	12.08	No
	U-NII-2C	100	5500		12.00	10.43	No
		104	5520		12.00	10.77	No
		108	5540		12.00	10.39	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



	U-NII-3	112	5560		12.00	10.12	No
		116	5580		12.00	10.14	No
		120	5600		12.00	10.74	No
		124	5620		12.00	10.82	No
		128	5640		12.50	10.79	No
		132	5660		12.50	10.83	No
		136	5680		12.50	10.98	No
		140	5700		12.50	10.69	No
		144	5720		12.00	10.34	No
		149	5745		11.50	9.89	No
		153	5765		11.50	9.51	No
		157	5785		12.50	10.68	No
		161	5805		12.00	10.47	No
		165	5825		12.00	10.04	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n- HT40	U-NII-1	38	5190	MCS0	12.00	10.38	No
		46	5230		13.00	11.04	No
	U-NII-2A	54	5270		13.00	11.25	No
		62	5310		11.50	9.98	No
	U-NII-2C	102	5510		12.00	10.25	Yes
		110	5550		12.00	10.01	No
		118	5590		12.50	10.77	Yes
		126	5630		12.50	10.56	No
		134	5670		12.00	10.55	No
		142	5710		12.00	10.61	Yes
		151	5755		12.50	10.59	Yes
	U-NII-3	159	5795		12.00	10.26	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 20M	U-NII-1	36	5180	MCS0	13.50	11.71	No
		40	5200		13.50	11.74	No
		44	5220		13.50	11.88	No
		48	5240		13.50	12.26	No
	U-NII-2A	52	5260		13.50	11.97	No
		56	5280		13.50	12.12	No
		60	5300		13.50	11.84	No
		64	5320		12.50	11.48	No
	U-NII-2C	100	5500		12.50	10.51	No
		104	5520		12.50	10.81	No
		108	5540		11.50	10.45	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



	U-NII-3	112	5560		11.50	9.98	No
		116	5580		12.50	10.57	No
		120	5600		12.00	10.24	No
		124	5620		12.00	10.35	No
		128	5640		12.00	10.34	No
		132	5660		11.50	9.83	No
		136	5680		11.50	9.96	No
		140	5700		11.50	9.79	No
		144	5720		11.00	9.48	No
		149	5745		11.50	10.32	No
		153	5765		11.50	9.94	No
		157	5785		11.50	10.26	No
		161	5805		11.50	10.03	No
		165	5825		11.50	9.59	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS0	11.50	9.98	No
		46	5230		12.50	11.05	No
	U-NII-2A	54	5270		13.00	11.17	No
		62	5310		12.00	10.47	No
	U-NII-2C	102	5510		12.00	10.36	No
		110	5550		11.50	9.59	No
		118	5590		12.00	10.23	No
		126	5630		12.00	10.08	No
		134	5670		11.50	9.57	No
		142	5710		12.00	10.32	No
		151	5755		12.00	10.63	No
		159	5795		12.00	10.34	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	11.00	9.44	No
	U-NII-2A	58	5290		10.50	8.74	No
	U-NII-2C	106	5530		11.00	9.17	No
		122	5610		11.00	9.32	No
		138	5690		10.50	8.89	No
	U-NII-3	155	5775		10.50	8.93	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



5GHz Ant 1	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	14.00	12.07	No
		40	5200		14.00	12.66	No
	U-NII-2A	44	5220		14.00	12.63	No
		48	5240		14.50	12.85	No
	U-NII-2A	52	5260		14.50	12.93	Yes
		56	5280		14.50	12.97	Yes
		60	5300		14.50	12.89	No
		64	5320		14.50	12.94	Yes
	U-NII-2C	100	5500		12.00	10.83	No
		104	5520		12.00	10.02	No
		108	5540		12.00	10.21	No
		112	5560		12.00	10.74	No
		116	5580		12.00	10.76	No
		120	5600		12.00	10.25	No
		124	5620		11.50	10.28	No
		128	5640		11.50	10.24	No
		132	5660		11.50	10.09	No
		136	5680		11.50	10.08	No
		140	5700		11.50	10.66	No
		144	5720		12.00	10.88	No
	U-NII-3	149	5745		12.50	10.68	No
		153	5765		12.50	10.59	No
		157	5785		12.50	10.78	No
		161	5805		12.00	10.46	No
		165	5825		12.50	10.71	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n- HT20	U-NII-1	36	5180	MCS0	13.50	12.38	No
		40	5200		13.50	12.45	No
		44	5220		13.50	12.38	No
		48	5240		13.50	11.68	No
	U-NII-2A	52	5260		13.50	11.65	No
		56	5280		13.50	11.77	No
		60	5300		13.50	11.73	No
		64	5320		13.50	11.75	No
	U-NII-2C	100	5500		12.00	10.91	No
		104	5520		12.00	10.67	No
		108	5540		12.00	10.01	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



	U-NII-3	112	5560		12.00	10.43	No
		116	5580		12.00	10.75	No
		120	5600		12.00	10.98	No
		124	5620		12.00	10.01	No
		128	5640		12.50	10.85	No
		132	5660		12.50	10.78	No
		136	5680		12.50	10.82	No
		140	5700		12.50	10.68	No
		144	5720		12.00	10.53	No
		149	5745		11.50	10.06	No
		153	5765		11.50	10.73	No
		157	5785		12.50	10.64	No
		161	5805		12.00	10.37	No
		165	5825		12.00	10.11	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n- HT40	U-NII-1	38	5190	MCS0	12.00	10.18	No
		46	5230		13.00	11.38	No
	U-NII-2A	54	5270		13.00	11.42	No
		62	5310		11.50	10.37	No
	U-NII-2C	102	5510		12.00	10.39	Yes
		110	5550		12.00	11.38	No
		118	5590		12.50	11.39	Yes
		126	5630		12.50	10.71	No
		134	5670		12.00	10.48	No
		142	5710		12.00	11.21	Yes
		151	5755		12.50	11.14	Yes
	U-NII-3	159	5795		12.00	10.66	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 20M	U-NII-1	36	5180	MCS0	13.50	11.76	No
		40	5200		13.50	11.88	No
		44	5220		13.50	11.93	No
		48	5240		13.50	12.17	No
	U-NII-2A	52	5260		13.50	12.15	No
		56	5280		13.50	12.25	No
		60	5300		13.50	12.17	No
		64	5320		12.50	12.21	No
	U-NII-2C	100	5500		12.50	10.92	No
		104	5520		12.50	10.68	No
		108	5540		11.50	10.05	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



	U-NII-3	112	5560		11.50	10.41	No
		116	5580		12.50	10.87	No
		120	5600		12.00	10.03	No
		124	5620		12.00	10.02	No
		128	5640		12.00	10.01	No
		132	5660		11.50	10.37	No
		136	5680		11.50	10.33	No
		140	5700		11.50	10.17	No
		144	5720		11.00	9.91	No
		149	5745		11.50	10.51	No
		153	5765		11.50	10.23	No
		157	5785		11.50	10.08	No
		161	5805		11.50	9.85	No
		165	5825		11.50	9.59	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS0	11.50	10.15	No
		46	5230		12.50	10.99	No
	U-NII-2A	54	5270		13.00	11.01	No
		62	5310		12.00	10.45	No
	U-NII-2C	102	5510		12.00	10.65	No
		110	5550		11.50	10.94	No
		118	5590		12.00	10.73	No
		126	5630		12.00	11.31	No
		134	5670		11.50	10.99	No
		142	5710		12.00	10.79	No
		151	5755		12.00	11.12	No
	U-NII-3	159	5795		12.00	10.71	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	11.00	9.26	No
	U-NII-2A	58	5290		10.50	9.02	No
	U-NII-2C	106	5530		11.00	9.24	No
		122	5610		11.00	9.07	No
		138	5690		10.50	9.26	No
	U-NII-3	155	5775		10.50	9.31	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



5GHz MIMO	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	17.0	15.25	No
		40	5200		17.0	15.39	No
	U-NII-2A	44	5220		17.0	15.44	No
		48	5240		17.5	15.73	No
	U-NII-2A	52	5260		17.5	15.82	No
		56	5280		17.5	15.94	No
		60	5300		17.5	15.72	No
		64	5320		17.5	15.79	No
	U-NII-2C	100	5500		15.0	13.79	No
		104	5520		15.0	13.05	No
		108	5540		15.0	13.34	No
		112	5560		15.0	13.50	No
		116	5580		15.0	13.72	No
		120	5600		15.0	13.18	No
		124	5620		14.5	12.96	No
		128	5640		14.5	12.97	No
		132	5660		14.5	12.89	No
		136	5680		14.5	12.91	No
		140	5700		14.5	13.17	No
		144	5720		15.0	13.73	No
	U-NII-3	149	5745		15.5	13.81	No
		153	5765		15.5	13.73	No
		157	5785		15.5	13.89	No
		161	5805		15.0	13.51	No
		165	5825		15.5	13.81	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT20	U-NII-1	36	5180	MCS0	16.5	15.10	No
		40	5200		16.5	15.18	No
		44	5220		16.5	15.22	No
		48	5240		16.5	15.03	No
	U-NII-2A	52	5260		16.5	15.07	No
		56	5280		16.5	14.76	No
		60	5300		16.5	15.10	No
		64	5320		16.5	14.93	No
	U-NII-2C	100	5500		15.0	13.69	No
		104	5520		15.0	13.73	No
		108	5540		15.0	13.21	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



	U-NII-3	112	5560		15.0	13.29	No
		116	5580		15.0	13.47	No
		120	5600		15.0	13.87	No
		124	5620		15.0	13.44	No
		128	5640		15.5	13.83	No
		132	5660		15.5	13.82	No
		136	5680		15.5	13.91	No
		140	5700		15.5	13.70	No
		144	5720		15.0	13.45	No
		149	5745		14.5	12.99	No
		153	5765		14.5	13.17	No
		157	5785		15.5	13.67	No
		161	5805		15.0	13.43	No
		165	5825		15.0	13.09	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT40	U-NII-1	38	5190	MCS0	15.0	13.29	No
		46	5230		16.0	14.22	No
	U-NII-2A	54	5270		16.0	14.35	No
		62	5310		14.5	13.19	No
	U-NII-2C	102	5510		15.0	13.15	No
		110	5550		15.0	13.76	No
		118	5590		15.5	14.01	No
		126	5630		15.5	13.65	No
		134	5670		15.0	13.53	No
		142	5710		15.0	13.73	No
	U-NII-3	151	5755		15.5	13.64	No
		159	5795		15.0	13.73	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 20M	U-NII-1	36	5180	MCS0	16.5	14.75	No
		40	5200		16.5	14.82	No
		44	5220		16.5	14.92	No
		48	5240		16.5	15.23	No
	U-NII-2A	52	5260		16.5	15.07	No
		56	5280		16.5	15.20	No
		60	5300		16.5	15.02	No
		64	5320		15.5	14.87	No
	U-NII-2C	100	5500		15.5	13.73	No
		104	5520		15.5	13.76	No
		108	5540		14.5	13.26	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn sgs.china@sgs.com

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Member of the SGS Group (SGS SA)

	U-NII-3	112	5560		14.5	13.21	No
		116	5580		15.5	13.73	No
		120	5600		15.0	13.15	No
		124	5620		15.0	13.20	No
		128	5640		15.0	13.19	No
		132	5660		14.5	13.12	No
		136	5680		14.5	13.16	No
		140	5700		14.5	12.99	No
		144	5720		14.0	12.71	No
		149	5745		14.5	13.43	No
		153	5765		14.5	13.10	No
		157	5785		14.5	13.18	No
		161	5805		14.5	12.95	No
		165	5825		14.5	12.60	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS0	14.5	13.08	No
		46	5230		15.5	14.03	No
	U-NII-2A	54	5270		16.0	14.10	No
		62	5310		15.0	13.47	No
	U-NII-2C	102	5510		15.0	13.52	No
		110	5550		14.5	13.33	No
		118	5590		15.0	13.50	No
		126	5630		15.0	13.75	No
		134	5670		14.5	13.35	No
		142	5710		15.0	13.57	No
	U-NII-3	151	5755		15.0	13.89	No
		159	5795		15.0	13.54	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	14.0	12.36	No
	U-NII-2A	58	5290		13.5	11.89	No
	U-NII-2C	106	5530		14.0	12.22	No
		122	5610		14.0	12.21	No
		138	5690		13.5	12.09	No
	U-NII-3	155	5775		13.5	12.13	No

Table 5 : Conducted Power of WIFI.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



BT		Average Conducted Power(dBm)			
Band	Channel	0	39	78	Tune up
BT	GFSK	5.58	5.54	5.86	7.00
	$\pi/4$ DQPSK	1.35	2.12	2.05	7.00
	8DPSK	1.48	2.46	3.25	7.00
Band	Channel	0	19	39	Tune up
BLE	GFSK	0.81	1.28	1.58	3.50

Table 6 : Conducted Power of BT.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5.3 Measurement of SAR Data

5.3.1 SAR Result of WIFI 2.4G

Ant0 Test Record											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg)	Liquid Temp.
Test data (Separate 0mm)											
Back side	802.11b	11/2462	98.60%	1.014	0.795	0.05	17.72	19.00	1.343	1.083	22
Back side	802.11b	1/2412	98.60%	1.014	0.495	0.01	17.28	19.00	1.486	0.746	22
Back side	802.11b	6/2437	98.60%	1.014	0.652	0.09	17.58	19.00	1.387	0.917	22
Top side	802.11b	11/2462	98.60%	1.014	0.691	0.04	17.72	19.00	1.343	0.941	22
Top side	802.11b	1/2412	98.60%	1.014	0.640	0.11	17.28	19.00	1.486	0.965	22
Top side	802.11b	6/2437	98.60%	1.014	0.656	0.12	17.58	19.00	1.387	0.923	22
Body Test Data at the worst case with Sample 2# (Separate 0mm)											
Back side	802.11b	11/2462	98.60%	1.014	0.783	-0.06	17.72	19.00	1.343	1.066	22
Body Test Data at the worst case with Sample 3# (Separate 0mm)											
Back side	802.11b	11/2462	98.60%	1.014	0.788	0.00	17.72	19.00	1.343	1.073	22
Body Test Data at the worst case with Sample 4# (Separate 0mm)											
Back side	802.11b	11/2462	98.60%	1.014	0.779	0.00	17.72	19.00	1.343	1.061	22
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11b	11/2462	98.60%	1.014	0.000	0.00	17.72	19.00	1.343	0.000	22
Keyboard Face 0mm	802.11b	11/2462	98.60%	1.014	0.022	0.08	17.72	19.00	1.343	0.030	22
Ant1 Test Record											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg)	Liquid Temp.
Test data (Separate 0mm)											
Back side	802.11b	6/2437	98.60%	1.014	0.563	0.09	17.79	19.00	1.321	0.754	22
Back side	802.11b	1/2412	98.60%	1.014	0.550	-0.03	17.52	19.00	1.406	0.784	22
Back side	802.11b	11/2462	98.60%	1.014	0.681	0.01	17.68	19.00	1.355	0.936	22
Top side	802.11b	6/2437	98.60%	1.014	0.471	0.03	17.79	19.00	1.321	0.631	22
Body Test Data at the worst case with Sample 2# (Separate 0mm)											
Back side	802.11b	11/2462	98.60%	1.014	0.675	0.00	17.68	19.00	1.355	0.928	22
Body Test Data at the worst case with Sample 3# (Separate 0mm)											
Back side	802.11b	11/2462	98.60%	1.014	0.667	0.02	17.68	19.00	1.355	0.917	22
Body Test Data at the worst case with Sample 4# (Separate 0mm)											
Back side	802.11b	11/2462	98.60%	1.014	0.671	-0.07	17.68	19.00	1.355	0.922	22
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11b	11/2462	98.60%	1.014	0.012	0.04	17.68	19.00	1.355	0.017	22
Keyboard Face 0mm	802.11b	11/2462	98.60%	1.014	0.243	0.01	17.68	19.00	1.355	0.334	22

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

MIMO Test Record												
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg)	Liquid Temp.	
Test data (Separate 0mm)												
Back side	802.11b	11/2462	98.60%	1.014	0.915	0.01	20.92	22.00	1.282	1.190	22	
Back side Repeat	802.11b	11/2462	98.60%	1.014	0.908	0.07	20.92	22.00	1.282	1.181	22	
Back side	802.11b	1/2412	98.60%	1.014	0.723	0.04	20.40	22.00	1.445	1.060	22	
Back side	802.11b	6/2437	98.60%	1.014	0.682	0.04	20.70	22.00	1.349	0.933	22	
Right side	802.11b	11/2462	98.60%	1.014	0.147	0.03	20.92	22.00	1.282	0.191	22	
Left side	802.11b	11/2462	98.60%	1.014	0.057	0.03	20.92	22.00	1.282	0.074	22	
Top side	802.11b	11/2462	98.60%	1.014	0.743	0.08	20.92	22.00	1.282	0.966	22	
Top side	802.11b	1/2412	98.60%	1.014	0.675	0.16	20.40	22.00	1.445	0.990	22	
Top side	802.11b	6/2437	98.60%	1.014	0.665	0.09	20.70	22.00	1.349	0.910	22	
Body Test Data at the worst case with Sample 2# (Separate 0mm)												
Back side	802.11b	11/2462	98.60%	1.014	0.910	0.01	20.92	22.00	1.282	1.184	22	
Body Test Data at the worst case with Sample 3# (Separate 0mm)												
Back side	802.11b	11/2462	98.60%	1.014	0.905	0.12	20.92	22.00	1.282	1.177	22	
Body Test Data at the worst case with Sample 4# (Separate 0mm)												
Back side	802.11b	11/2462	98.60%	1.014	0.901	0.08	20.92	22.00	1.282	1.172	22	
Body Test Data with Keyboard cover												
Back of Display Screen 25mm	802.11b	11/2462	98.60%	1.014	0.012	0.01	20.92	22.00	1.282	0.015	22	
Keyboard Face 0mm	802.11b	11/2462	98.60%	1.014	0.227	-0.16	20.92	22.00	1.282	0.295	22	

Table 7: SAR of WIFI 2.4G

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
- 3) Per KDB248227D01, for Body SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



Ant 0					
Mode	Tune up (dBm)	Tune up (mW)	Max reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
802.11b	19.00	79.43	1.083	/	Yes
802.11g	19.00	79.43	/	1.083	No
802.11n-HT20	19.00	79.43	/	1.083	No
802.11n-HT40	15.00	31.62	/	0.431	No
Ant 1					
Mode	Tune up (dBm)	Tune up (mW)	Max reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
802.11b	19.00	79.43	0.936	/	Yes
802.11g	19.00	79.43	/	0.936	No
802.11n-HT20	19.00	79.43	/	0.936	No
802.11n-HT40	15.00	31.62	/	0.373	No
MIMO					
Mode	Tune up (dBm)	Tune up (mW)	Max reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
802.11b	22.00	158.49	1.190	/	Yes
802.11g	22.00	158.49	/	1.190	No
802.11n-HT20	22.00	158.49	/	1.190	No
802.11n-HT40	18.00	63.10	/	0.474	No

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
			SAR (1g)		SAR (1g)	
Back Side 0mm (MIMO)	11/2462	0.915	0.908	1.008	N/A	N/A
1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



5.3.2 SAR Result of WIFI 5G

Ant0 Test Record											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg)	Liquid Temp.
Test data of U-NII-2A(Separate 0mm)											
Back side	802.11a	56/5280	94.42%	1.059	0.317	0.00	12.88	14.50	1.452	0.488	22.2
Top side	802.11a	56/5280	94.42%	1.059	0.322	0.05	12.88	14.50	1.452	0.495	22.2
Top side	802.11a	52/5260	94.42%	1.059	0.319	0.01	12.69	14.50	1.517	0.513	22.2
Top side	802.11a	64/5320	94.42%	1.059	0.329	0.05	12.62	14.50	1.542	0.537	22.2
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11a	64/5320	94.42%	1.059	0.011	0.03	12.62	14.50	1.542	0.019	22
Keyboard Face 0mm	802.11a	64/5320	94.42%	1.059	0.107	0.02	12.62	14.50	1.542	0.175	22
Test data of U-NII-2C(Separate 0mm)											
Back side	802.11n-HT40	118/5590	85.65%	1.168	0.200	-0.02	10.77	12.50	1.489	0.348	22.2
Top side	802.11n-HT40	118/5590	85.65%	1.168	0.164	-0.14	10.77	12.50	1.489	0.285	22.2
Back side	802.11n-HT40	102/5510	85.65%	1.168	0.192	0.03	10.25	12.00	1.496	0.335	22.2
Back side	802.11n-HT40	142/5710	85.65%	1.168	0.195	-0.17	10.61	12.00	1.377	0.314	22.2
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11n-HT40	118/5590	85.65%	1.168	0.013	0.03	10.77	12.50	1.489	0.022	22
Keyboard Face 0mm	802.11n-HT40	118/5590	85.65%	1.168	0.119	0.07	10.77	12.50	1.489	0.207	22
Test data of U-NII-3 (Separate 0mm)											
Back side	802.11n-HT40	151/5755	85.65%	1.168	0.118	0.01	10.59	12.50	1.552	0.214	22.2
Top side	802.11n-HT40	151/5755	85.65%	1.168	0.198	-0.13	10.59	12.50	1.552	0.359	22.2
Top side	802.11n-HT40	159/5795	85.65%	1.168	0.202	0.00	10.26	12.00	1.493	0.352	22.2
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11n-HT40	151/5755	85.65%	1.168	0.013	0.01	10.59	12.50	1.552	0.023	22
Keyboard Face 0mm	802.11n-HT40	151/5755	85.65%	1.168	0.118	-0.12	10.59	12.50	1.552	0.214	22
Body Test Data at the worst case with Sample 2# (Separate 0mm)											
Top side	802.11a	64/5320	94.42%	1.059	0.309	0.15	12.62	14.50	1.542	0.505	22.2
Body Test Data at the worst case with Sample 3# (Separate 0mm)											
Top side	802.11a	64/5320	94.42%	1.059	0.316	0.02	12.62	14.50	1.542	0.516	22.2
Body Test Data at the worst case with Sample 4# (Separate 0mm)											
Top side	802.11a	64/5320	94.42%	1.059	0.302	-0.07	12.62	14.50	1.542	0.493	22.2

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Ant1 Test Record											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR 1-g (W/kg)	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg)	Liquid Temp.
Test data of U-NII-2A(Separate 0mm)											
Back side	802.11a	56/5280	94.42%	1.059	0.192	0.00	12.97	14.50	1.422	0.289	22.2
Top side	802.11a	56/5280	94.42%	1.059	0.540	0.08	12.97	14.50	1.422	0.813	22.2
Top side	802.11a	52/5260	94.42%	1.059	0.535	0.04	12.93	14.50	1.435	0.813	22.2
Top side	802.11a	64/5320	94.42%	1.059	0.551	0.08	12.94	14.50	1.432	0.836	22.2
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11a	64/5320	94.42%	1.059	0.021	0.01	12.94	14.50	1.432	0.032	22
Keyboard Face 0mm	802.11a	64/5320	94.42%	1.059	0.057	0.08	12.94	14.50	1.432	0.086	22
Test data of U-NII-2C(Separate 0mm)											
Back side	802.11n-HT40	118/5590	85.65%	1.168	0.294	0.03	11.39	12.50	1.291	0.443	22.2
Top side	802.11n-HT40	118/5590	85.65%	1.168	0.469	0.04	11.39	12.50	1.291	0.707	22.2
Top side	802.11n-HT40	102/5510	85.65%	1.168	0.450	0.07	10.39	12.00	1.449	0.761	22.2
Top side	802.11n-HT40	142/5710	85.65%	1.168	0.458	-0.12	11.21	12.00	1.199	0.641	22.2
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11n-HT40	102/5510	85.65%	1.168	0.023	-0.11	10.39	12.00	1.449	0.038	22
Keyboard Face 0mm	802.11n-HT40	102/5510	85.65%	1.168	0.062	0.07	10.39	12.00	1.449	0.104	22
Test data of U-NII-3 (Separate 0mm)											
Back side	802.11n-HT40	151/5755	85.65%	1.168	0.245	-0.07	11.14	12.50	1.368	0.391	22.2
Top side	802.11n-HT40	151/5755	85.65%	1.168	0.366	0.01	11.14	12.50	1.368	0.584	22.2
Top side	802.11n-HT40	159/5795	85.65%	1.168	0.372	-0.05	10.66	12.00	1.361	0.591	22.2
Body Test Data with Keyboard cover											
Back of Display Screen 25mm	802.11n-HT40	159/5795	85.65%	1.168	0.023	0.16	10.66	12.00	1.361	0.037	22
Keyboard Face 0mm	802.11n-HT40	159/5795	85.65%	1.168	0.063	0.07	10.66	12.00	1.361	0.101	22
Body Test Data at the worst case with Sample 2# (Separate 0mm)											
Top side	802.11a	64/5320	94.42%	1.059	0.413	0.05	12.94	14.50	1.432	0.626	22.2
Body Test Data at the worst case with Sample 3# (Separate 0mm)											
Top side	802.11a	64/5320	94.42%	1.059	0.397	-0.05	12.94	14.50	1.432	0.602	22.2
Body Test Data at the worst case with Sample 4# (Separate 0mm)											
Top side	802.11a	64/5320	94.42%	1.059	0.380	0.03	12.94	14.50	1.432	0.576	22.2

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn sgs.china@sgs.com

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

MIMO(Ant0+Ant1) Test Record												
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg)	Liquid Temp.	
Test data of U-NII-2A(Separate 0mm)												
Back side	802.11a	/	/	/	/	/	/	/	/	0.777	22.2	
Top side	802.11a	/	/	/	/	/	/	/	/	1.373	22.2	
Body Test Data with Keyboard cover												
Back of Display Screen 25mm	802.11a	/	/	/	/	/	/	/	/	0.051	22	
Keyboard Face 0mm	802.11a	/	/	/	/	/	/	/	/	0.261	22	
Test data of U-NII-2C(Separate 0mm)												
Back side	802.11a	/	/	/	/	/	/	/	/	0.689	22.2	
Top side	802.11a	/	/	/	/	/	/	/	/	0.880	22.2	
Body Test Data with Keyboard cover												
Back of Display Screen 25mm	802.11a	/	/	/	/	/	/	/	/	0.051	22	
Keyboard Face 0mm	802.11a	/	/	/	/	/	/	/	/	0.261	22	
Test data of U-NII-3 (Separate 0mm)												
Back side	802.11a	/	/	/	/	/	/	/	/	0.569	22.2	
Top side	802.11a	/	/	/	/	/	/	/	/	0.918	22.2	
Body Test Data with Keyboard cover												
Back of Display Screen 25mm	802.11a	/	/	/	/	/	/	/	/	0.057	22	
Keyboard Face 0mm	802.11a	/	/	/	/	/	/	/	/	0.289	22	
Body Test Data at the worst case with Sample 2# (Separate 0mm)												
Top side	802.11a	/	/	/	/	/	/	/	/	1.131	22.2	
Body Test Data at the worst case with Sample 3# (Separate 0mm)												
Top side	802.11a	/	/	/	/	/	/	/	/	1.118	22.2	
Body Test Data at the worst case with Sample 4# (Separate 0mm)												
Top side	802.11a	/	/	/	/	/	/	/	/	1.069	22.2	

Table 8: SAR of WIFI 5G.

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
- 3) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration;
- 4) For the MIMO SAR, each antenna SAR will be evaluated independently. Then the conservative “max + max” multi-Tx method should be used to combine the scaled SAR value of each antenna as the MIMO SAR.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn sgs.china@sgs.com

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Ant 0					
Mode	Tune up (dBm)	Tune up (mW)	Max reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
802.11a 20M (U-NII-2A)	14.50	28.18	0.537	/	Yes
802.11a 20M (U-NII-1)	14.50	28.18	/	0.537	No
Ant 1					
Mode	Tune up (dBm)	Tune up (mW)	Max reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
802.11a 20M (U-NII-2A)	14.50	28.18	0.836	/	Yes
802.11a 20M (U-NII-1)	14.50	28.18	/	0.836	No

5) For the MIMO SAR, each antenna SAR will be evaluated independently. Then the conservative “max + max” multi-Tx method should be used to combine the scaled SAR value of each antenna as the MIMO SAR.

6) Per KDB248227D01, as the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

Ant 0					
Mode	Tune up (dBm)	Tune up (mW)	Max reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
5.3G U-NII-2A Band					
802.11a 20M	14.50	28.18	0.537	/	Yes
802.11n-HT20	13.50	22.39	/	0.427	No
802.11n-HT40	13.00	19.95	/	0.380	No
802.11ac 20M	13.50	22.39	/	0.427	No
802.11ac 40M	13.00	19.95	/	0.380	No
802.11ac 80M	10.50	11.22	/	0.214	No
5.5G U-NII-2C Band					
802.11n-HT40	12.50	17.78	0.348	/	Yes
802.11a 20M	12.00	15.85	/	0.310	No
802.11n-HT20	12.50	17.78	/	0.348	No
802.11ac 20M	12.50	17.78	/	0.348	No
802.11ac 40M	12.00	15.85	/	0.310	No
802.11ac 80M	11.00	12.59	/	0.246	No
5.8G U-NII-3 Band					
802.11n-HT40	12.50	17.78	0.359	/	Yes
802.11a 20M	12.50	17.78	/	0.359	No
802.11n-HT20	12.50	17.78	/	0.359	No
802.11ac 20M	11.50	14.13	/	0.285	No
802.11ac 40M	12.00	15.85	/	0.320	No
802.11ac 80M	10.50	11.22	/	0.227	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



Ant 1					
Mode	Tune up (dBm)	Tune up (mW)	Max reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
5.3G U-NII-2A Band					
802.11a 20M	14.50	28.18	0.836	/	Yes
802.11n-HT20	13.50	22.39	/	0.664	No
802.11n-HT40	13.00	19.95	/	0.592	No
802.11ac 20M	13.50	22.39	/	0.664	No
802.11ac 40M	13.00	19.95	/	0.592	No
802.11ac 80M	10.50	11.22	/	0.333	No
5.5G U-NII-2C Band					
802.11n-HT40	12.50	17.78	0.761	/	Yes
802.11a 20M	12.00	15.85	/	0.678	No
802.11n-HT20	12.50	17.78	/	0.761	No
802.11ac 20M	12.50	17.78	/	0.761	No
802.11ac 40M	12.00	15.85	/	0.678	No
802.11ac 80M	11.00	12.59	/	0.539	No
5.8G U-NII-3 Band					
802.11n-HT40	12.50	17.78	0.591	/	Yes
802.11a 20M	12.50	17.78	/	0.591	No
802.11n-HT20	12.50	17.78	/	0.591	No
802.11ac 20M	11.50	14.13	/	0.469	No
802.11ac 40M	12.00	15.85	/	0.527	No
802.11ac 80M	10.50	11.22	/	0.373	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5.4 Multiple Transmitter Evaluation

5.4.1 Simultaneous SAR SAR test evaluation

1) Simultaneous Transmission

NO.	Simultaneous TX Combination	Body
1	Wi-Fi 2.4G(Ant0)+Wi-Fi 2.4G(Ant1)	Yes
2	Wi-Fi 5G(Ant0)+Wi-Fi 5G(Ant1)	Yes
3	Wi-Fi 2.4G +BT	No
4	Wi-Fi 5G(Ant0) +BT	No
5	Wi-Fi 5G(Ant1) +BT	No
6	Wi-Fi 5G MIMO(Ant0 + Ant1) +BT	Yes
7	Wi-Fi 2.4G +Wi-Fi 5G + BT	No

5.4.2 Simultaneous Transmission SAR Summation Scenario

Test position	WLAN 2.4G Ant0	WLAN 2.4G Ant1	WLAN 2.4G MIMO	WLAN 5G Ant0	WLAN 5G Ant1	WLAN 5G MIMO	BT	WLAN 5G MIMO+BT
	1	2	3	4	5	6	7	6+7
Body	Back	1.083	0.936	1.190	0.488	0.443	0.777	0.211
	Left	0.400	0.378	0.074	0.400	0.198	0.394	0.400
	Right	0.378	0.400	0.191	0.198	0.400	0.394	0.024
	Top	0.965	0.631	0.990	0.537	0.836	1.373	0.211
	Bottom	0.400	0.400	0.400	0.400	0.400	0.400	0.800

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing //Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch // SGS Laboratory

| No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Equipment list

Test Platform	SPEAG DASY5 Professional				
Location	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch				
Description	SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference	DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)				
Hardware Reference					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
<input checked="" type="checkbox"/> Twin Phantom	SPEAG	SAM 3	1912	NCR	NCR
<input checked="" type="checkbox"/> Twin Phantom	SPEAG	SAM 7	1027	NCR	NCR
<input checked="" type="checkbox"/> DAE	SPEAG	DAE4	871	2019-06-27	2020-06-26
<input checked="" type="checkbox"/> DAE	SPEAG	DAE4	896	2019-09-18	2020-09-17
<input checked="" type="checkbox"/> DAE	SPEAG	DAE4	1428	2019-01-11	2020-01-10
<input checked="" type="checkbox"/> E-Field Probe	SPEAG	EX3DV4	3748	2019-06-19	2020-06-18
<input checked="" type="checkbox"/> E-Field Probe	SPEAG	EX3DV4	3793	2019-03-25	2020-03-24
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D2450V2	733	2016-12-07	2019-12-06
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D5GHzV2	1165	2016-12-13	2019-12-12
<input checked="" type="checkbox"/> Agilent Network Analyzer	Agilent	E5071C	MY46523590	2019-04-12	2020-04-11
<input checked="" type="checkbox"/> Dielectric Probe Kit	Agilent	85070E	US01440210	NCR	NCR
<input checked="" type="checkbox"/> RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
<input checked="" type="checkbox"/> Signal Generator	Agilent	N5171B	MY53050736	2019-04-12	2020-04-11
<input checked="" type="checkbox"/> Preamplifier	Mini-Circuits	ZHL-42W	15542	NCR	NCR
<input checked="" type="checkbox"/> Preamplifier	Compliance Directions Systems Inc.	AMP28-3W	073501433	NCR	NCR
<input checked="" type="checkbox"/> Power Meter	Agilent	E4416A	GB41292095	2019-04-12	2020-04-11
<input checked="" type="checkbox"/> Power Sensor	Agilent	8481H	MY41091234	2019-04-12	2020-04-11
<input checked="" type="checkbox"/> Power Sensor	R&S	NRP-Z92	100025	2019-04-12	2020-04-11
<input checked="" type="checkbox"/> Attenuator	SHX	TS2-3dB	30704	NCR	NCR
<input checked="" type="checkbox"/> Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
<input checked="" type="checkbox"/> Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
<input checked="" type="checkbox"/> 50 Ω coaxial load	Mini-Circuits	KARN-50+	00850	NCR	NCR
<input checked="" type="checkbox"/> DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
<input checked="" type="checkbox"/> Speed reading thermometer	MingGao	T809	NA	2019-04-15	2020-04-14
<input checked="" type="checkbox"/> Humidity and Temperature Indicator	KIMTOKA	KIMTOKA	NA	2019-04-15	2020-04-14

Note: All the equipments are within the valid period when the tests are performed.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch - FCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.cn
sgs.china@sgs.com

7 Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

8 Calibration certificate

Please see the Appendix C

9 Photographs

Please see the Appendix D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

---END---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com