

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

NB Mode/Bottom/802.11b/Main Ant/Ch6/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 mW/g

NB Mode/Bottom/802.11b/Main Ant/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 2.99 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.876 mW/g; SAR(10 g) = 0.437 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.28 mW/g

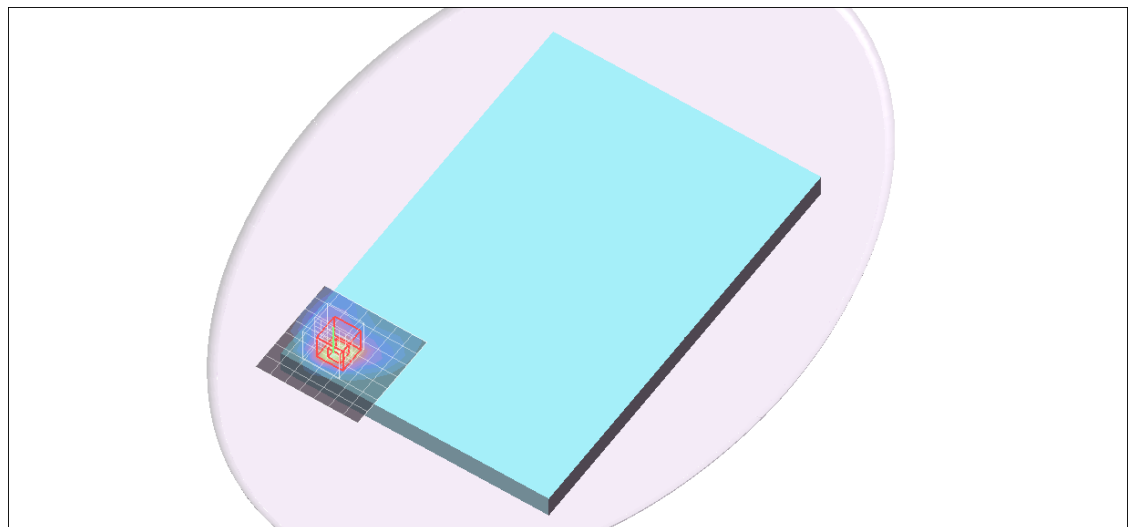

Wi-Fi 2.4GHz Band

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2412.7$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

NB Mode/Bottom/802.11b/Main Ant/Ch1/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.925 mW/g


NB Mode/Bottom/802.11b/Main Ant/Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.42 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.929 mW/g

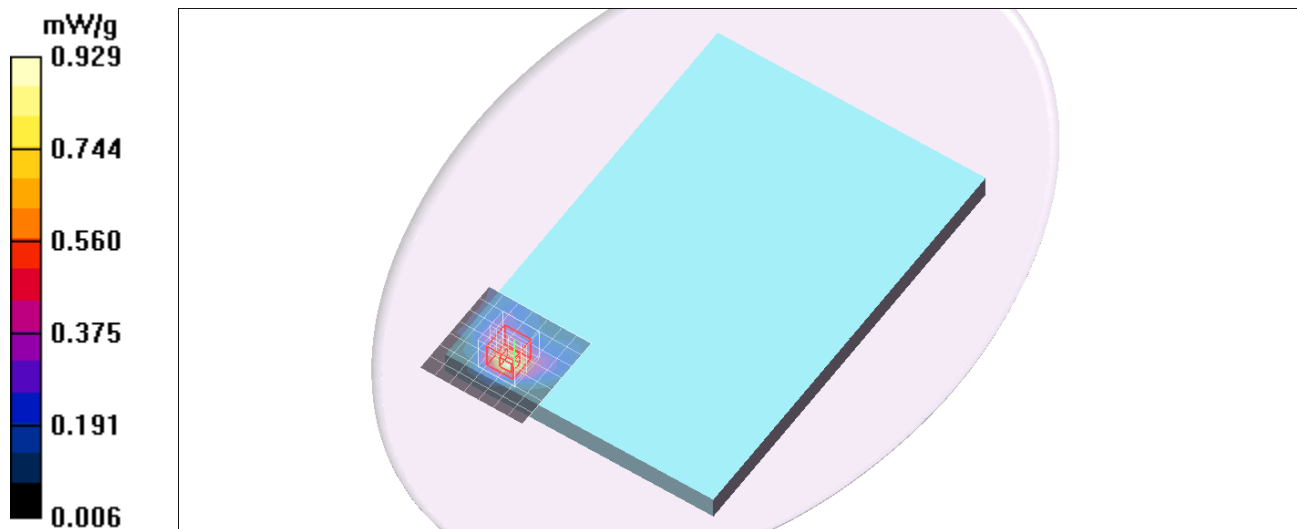

Wi-Fi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462.2$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

NB Mode/Bottom/802.11b/Main Ant/Ch11/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.38 mW/g


NB Mode/Bottom/802.11b/Main Ant/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.954 mW/g; SAR(10 g) = 0.469 mW/g

Maximum value of SAR (measured) = 1.42 mW/g

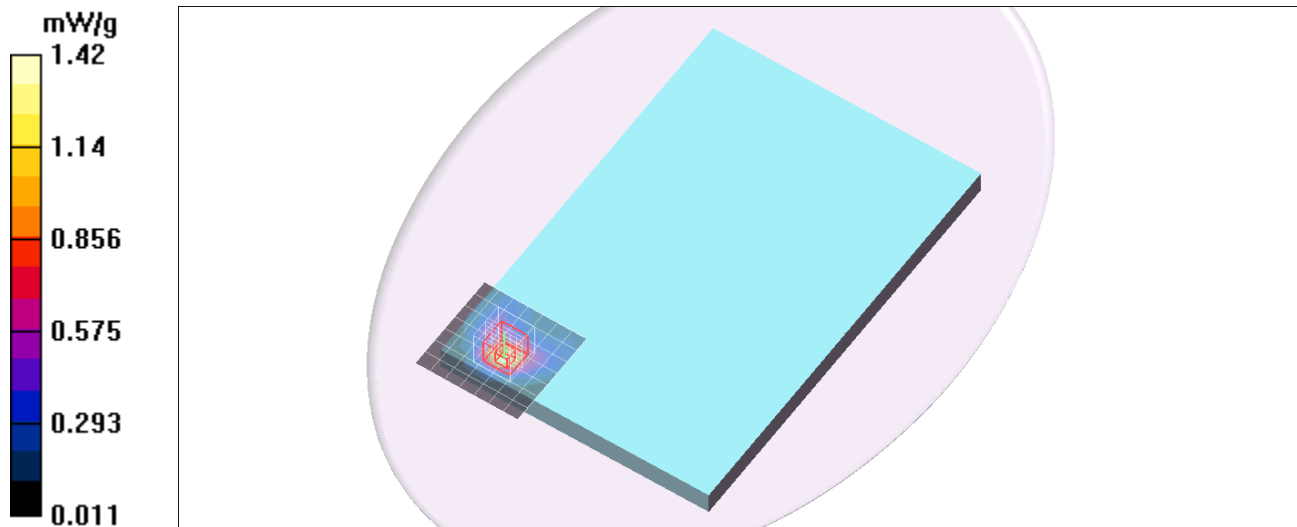


Wi-Fi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1

NB Mode/Bottom/802.11b/Main Ant/Ch11/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.933 mW/g

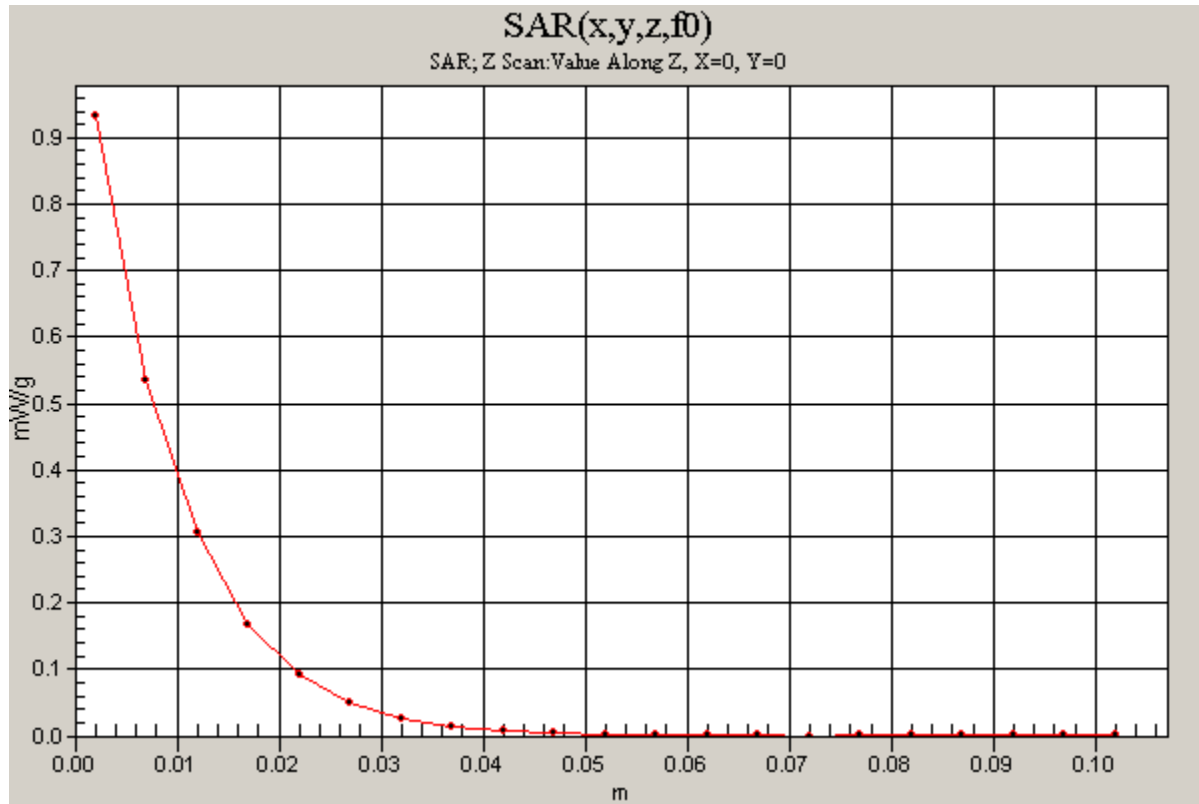

Wi-Fi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462.2$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³ ;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

NB Mode/Bottom/802.11b/Main Ant/Ch11_Repeat/Area Scan (8x8x1):

Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.43 mW/g

NB Mode/Bottom/802.11b/Main Ant/Ch11_Repeat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.05 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.498 mW/g

Maximum value of SAR (measured) = 1.50 mW/g

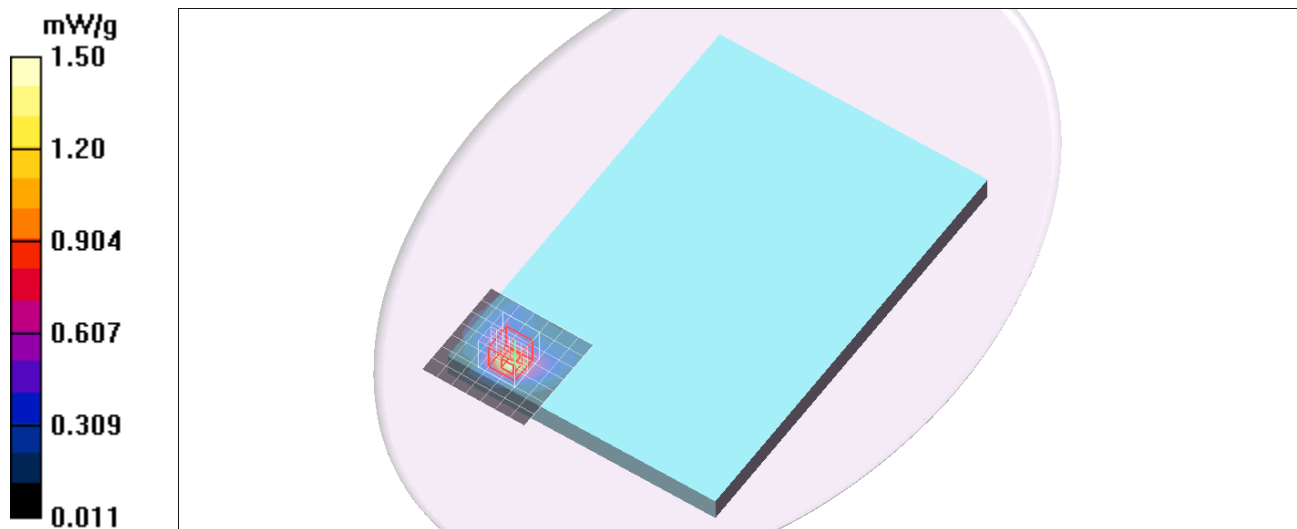

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Tablet Mode/Rear Side/802.11b/Main Ant/Ch6/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 mW/g

Tablet Mode/Rear Side/802.11b/Main Ant/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 1.95 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.484 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.54 mW/g

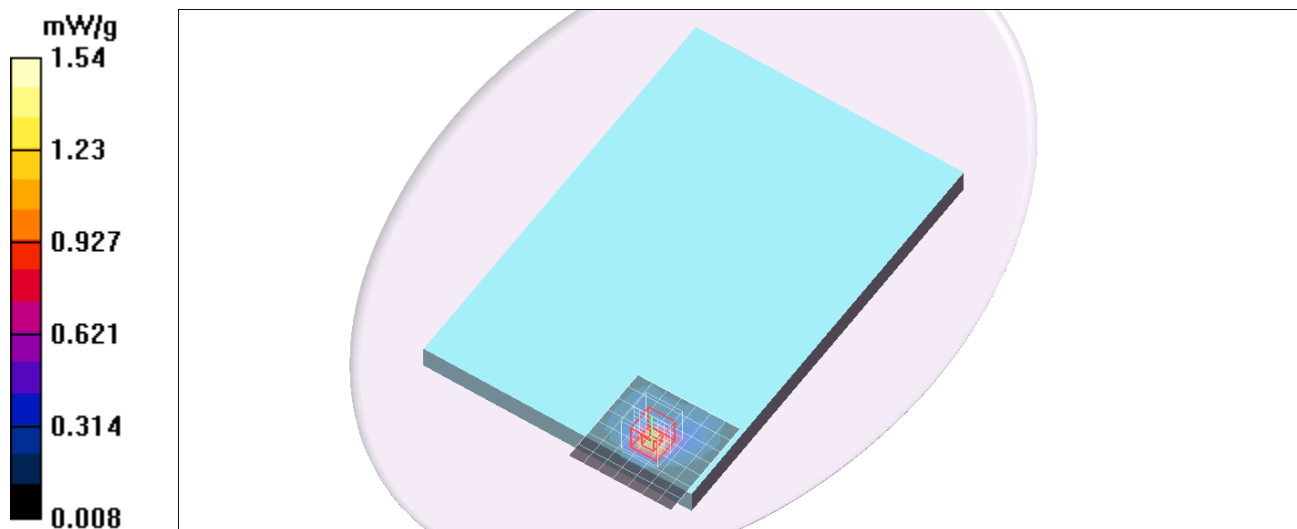

Wi-Fi 2.4GHz Band

Frequency: 2412 MHz; Duty Cycle: 1:1

Tablet Mode/Rear Side/802.11b/Main Ant/Ch6/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.02 mW/g

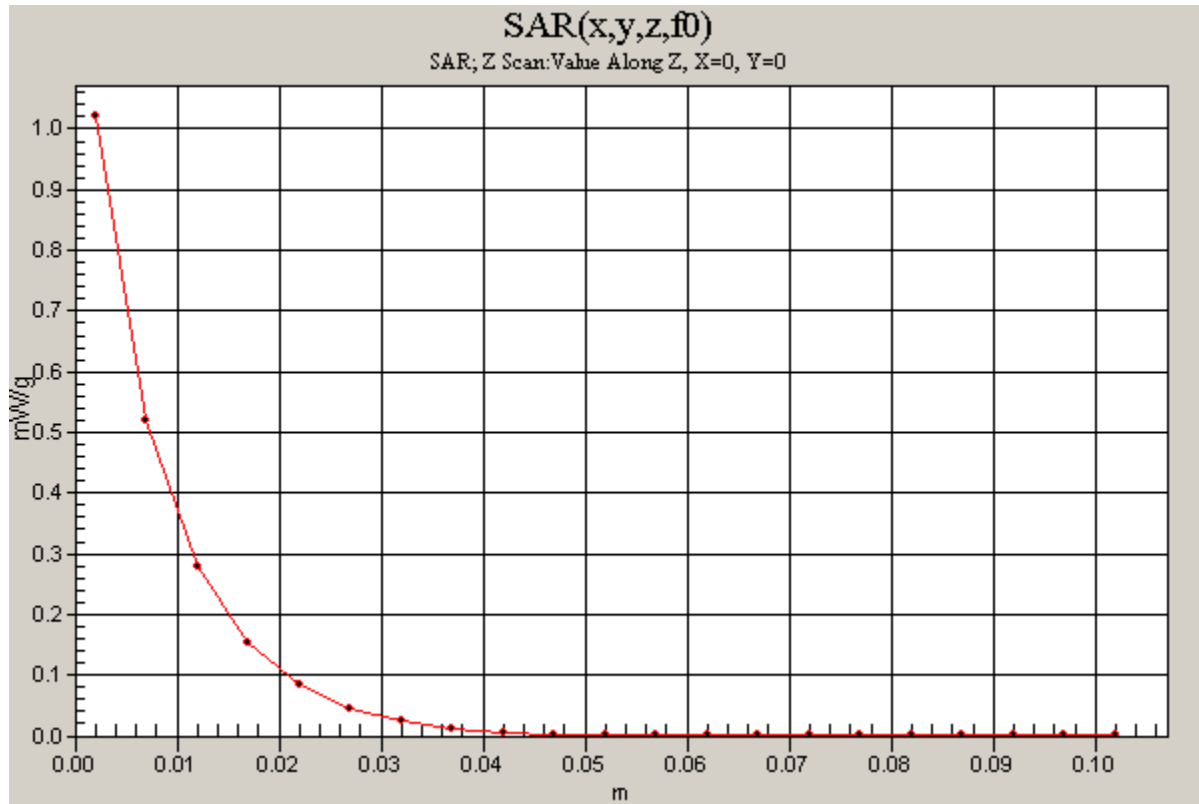

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Tablet Mode/Edge4/802.11b/Main Ant/Ch6/Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.295 mW/g

Tablet Mode/Edge4/802.11b/Main Ant/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.38 V/m; Power Drift = 0.178 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.231 mW/g; SAR(10 g) = 0.116 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.351 mW/g

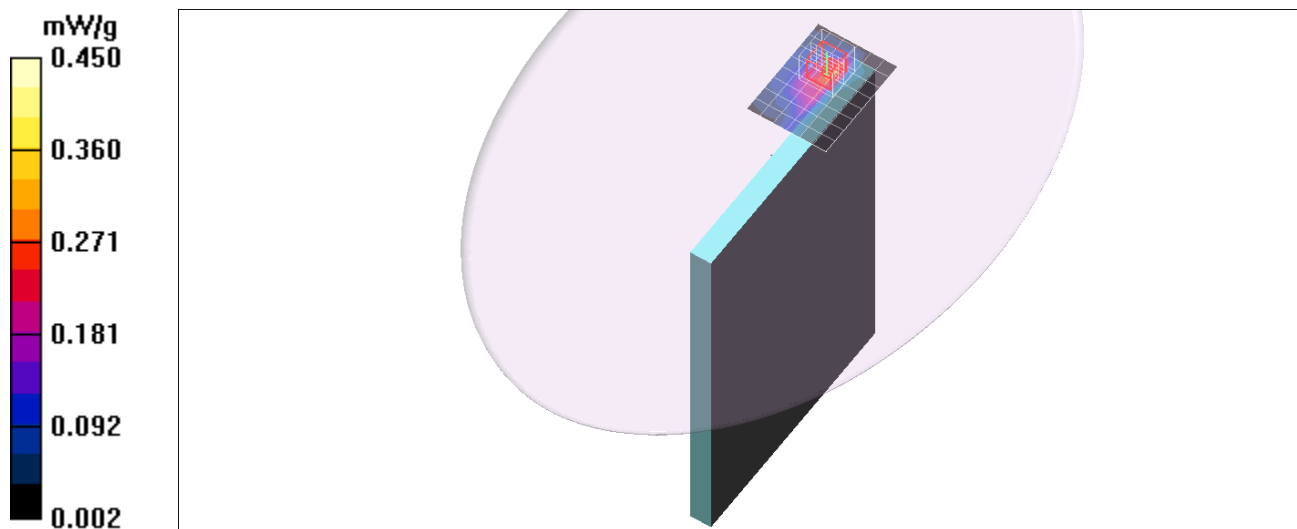

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Tablet Mode/Edge1/802.11b/Main Ant/ch6/Area Scan (7x8x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 mW/g

Tablet Mode/Edge1/802.11b/Main Ant/ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 1.95 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.043 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.133 mW/g

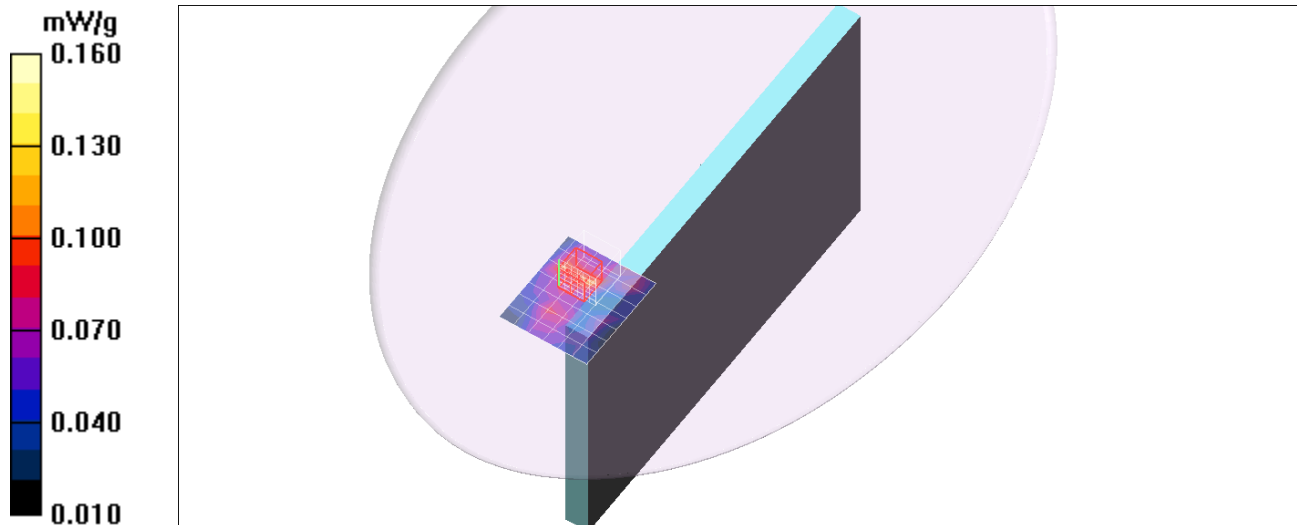

Wi-Fi 2.4GHz Band

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2412.7$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Tablet Mode/Rear Side/802.11b/Main Ant/Ch1/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.00 mW/g


Tablet Mode/Rear Side/802.11b/Main Ant/Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.92 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.408 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

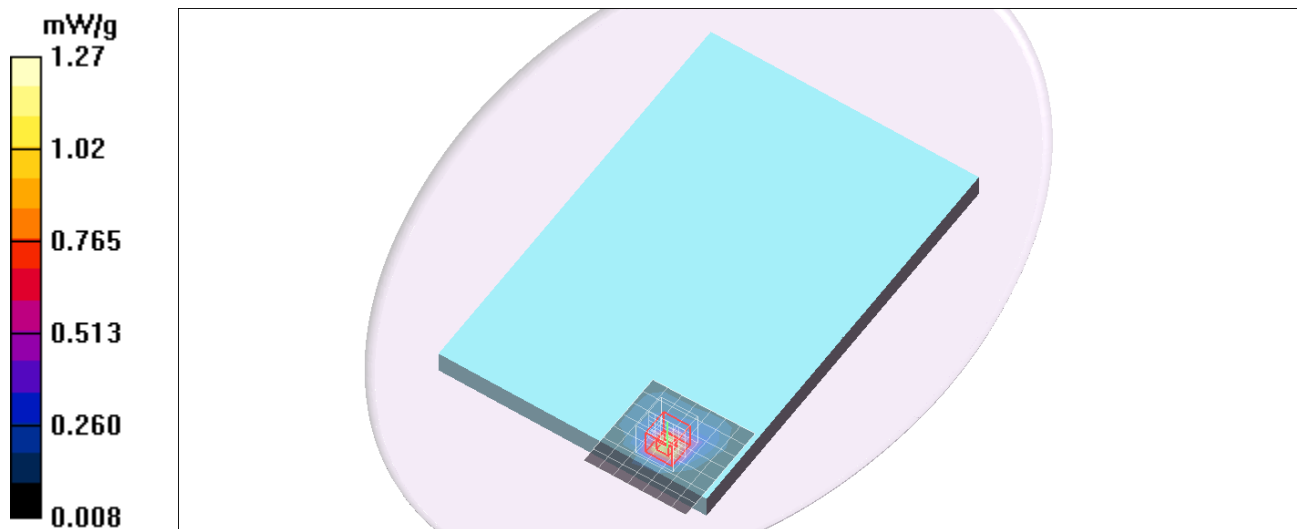

Wi-Fi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462.2$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Tablet Mode/Rear Side/802.11b/Main Ant/Ch11/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.09 mW/g


Tablet Mode/Rear Side/802.11b/Main Ant/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.29 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.946 mW/g; SAR(10 g) = 0.436 mW/g

Maximum value of SAR (measured) = 1.41 mW/g

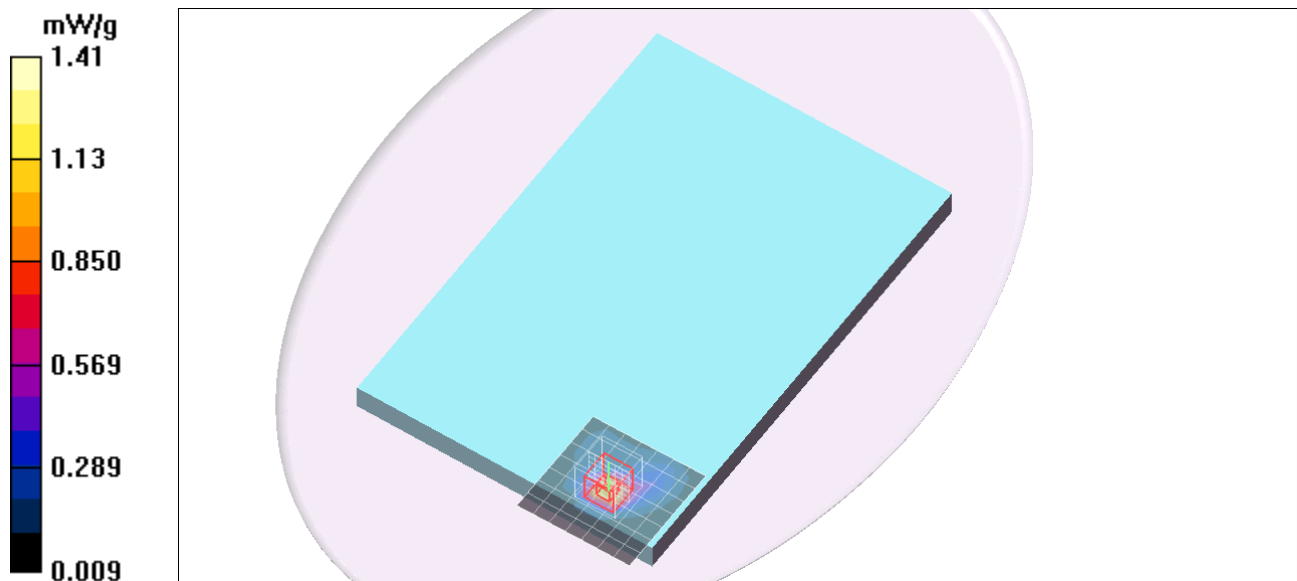

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Tablet Mode/Rear Side/802.11b/Main Ant/Ch6_Repeat/Area Scan (8x8x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 mW/g

Tablet Mode/Rear Side/802.11b/Main Ant/Ch6_Repeat/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.19 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.486 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 mW/g

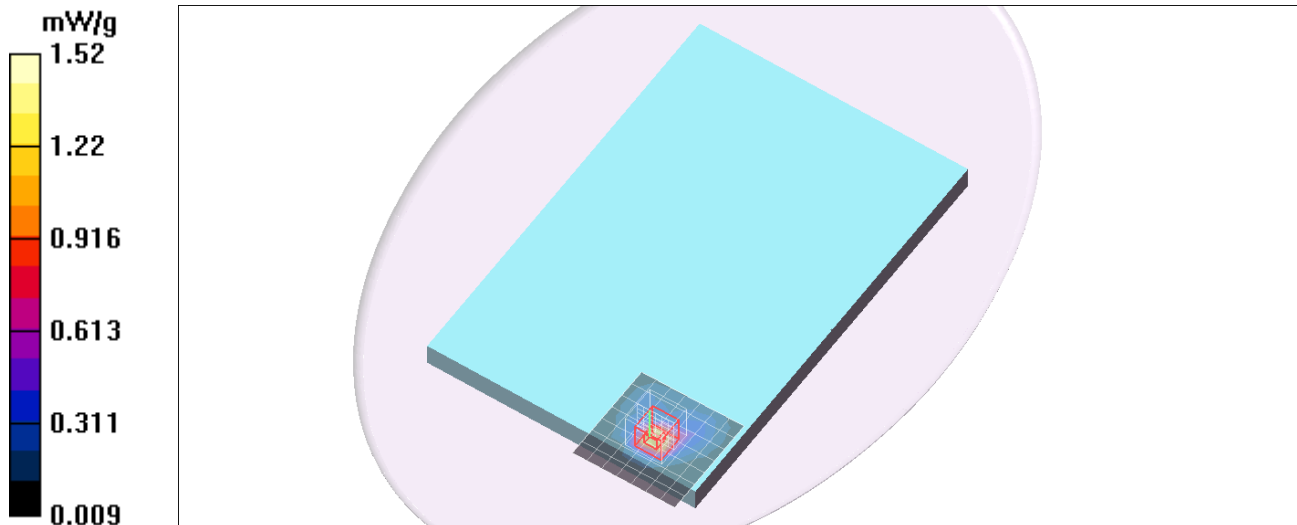

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Stand Mode/Rear/802.11b/Main Ant/Ch6/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 mW/g

Stand Mode/Rear/802.11b/Main Ant/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 5.66 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.588 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.89 mW/g

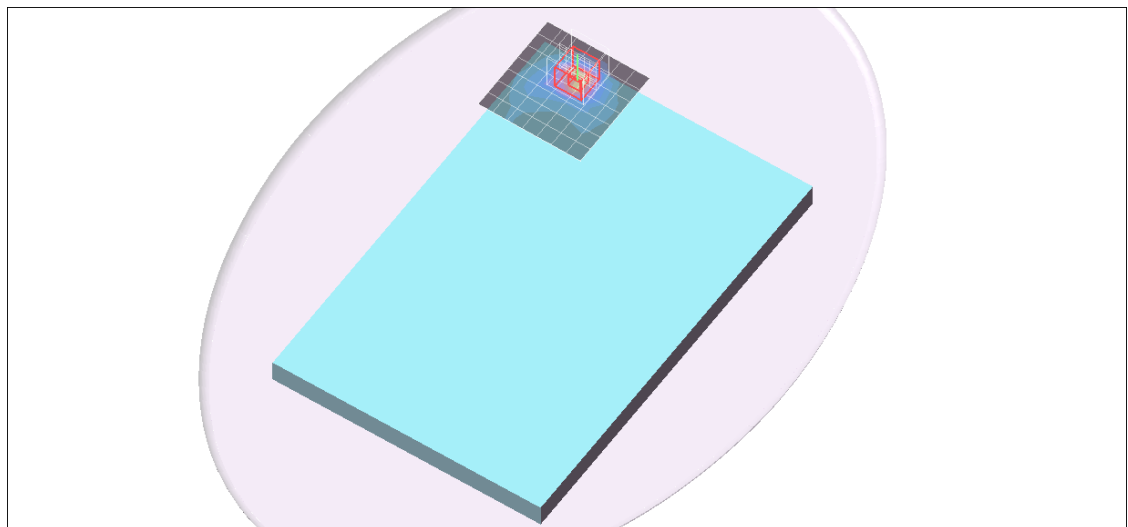


Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1

Stand Mode/Bottom/802.11b/Main Ant/Ch6/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.44 mW/g

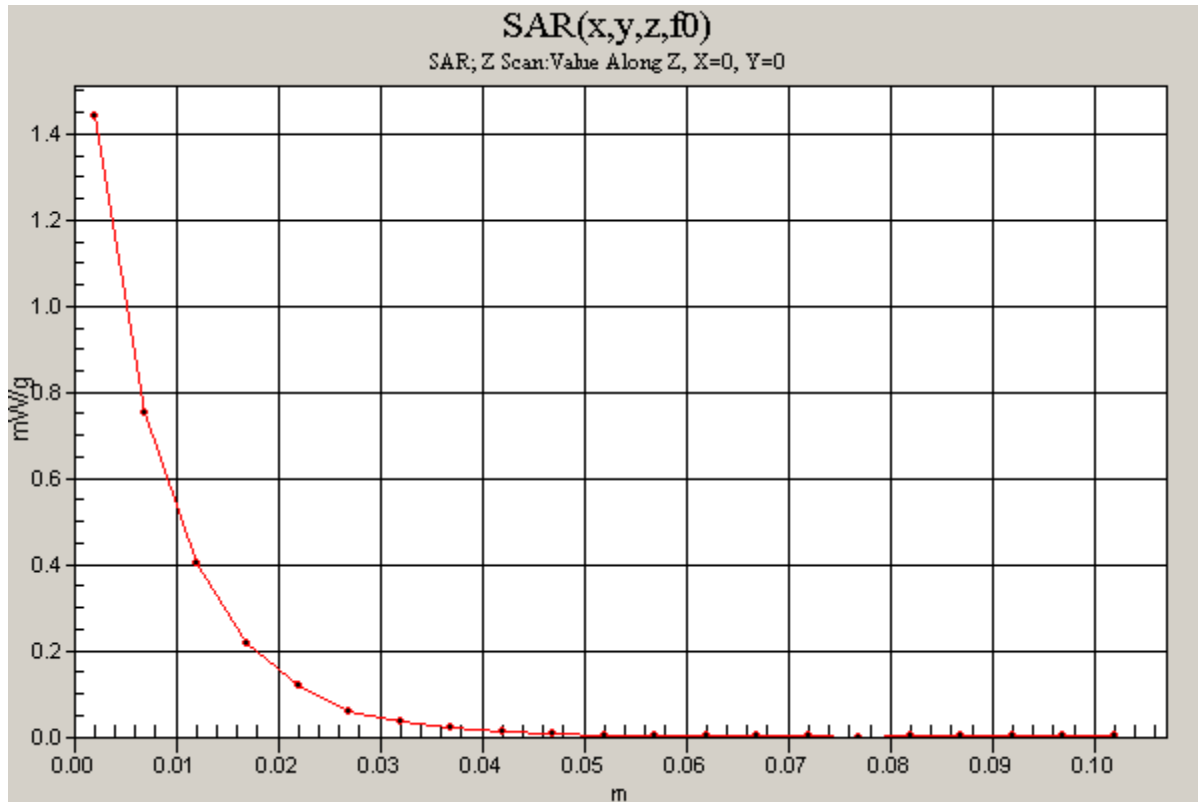

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Stand Mode/Edge4/802.11b/Main Ant/Ch11/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.322 mW/g

Stand Mode/Edge4/802.11b/Main Ant/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.63 V/m; Power Drift = 0.488 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.114 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.335 mW/g

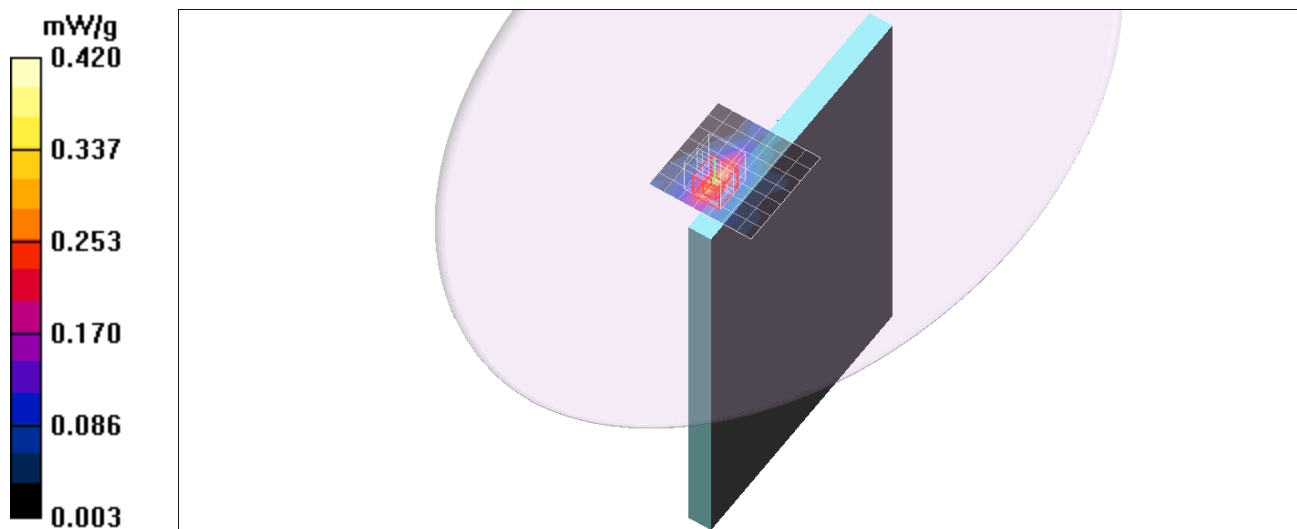

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Stand Mode/Edge1/802.11b/Main Ant/Ch6/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.232 mW/g

Stand Mode/Edge1/802.11b/Main Ant/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.35 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.077 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.201 mW/g

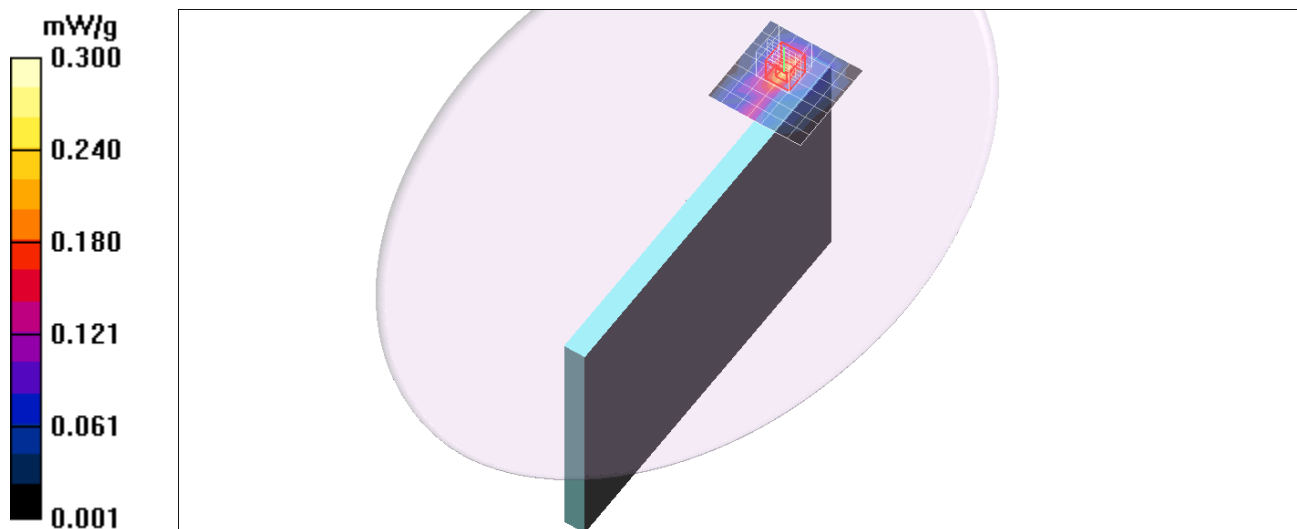

Wi-Fi 2.4GHz Band

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2412.7$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Stand Mode/Rear/802.11b/Main Ant/Ch1/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.22 mW/g


Stand Mode/Rear/802.11b/Main Ant/Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.56 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.478 mW/g

Maximum value of SAR (measured) = 1.48 mW/g

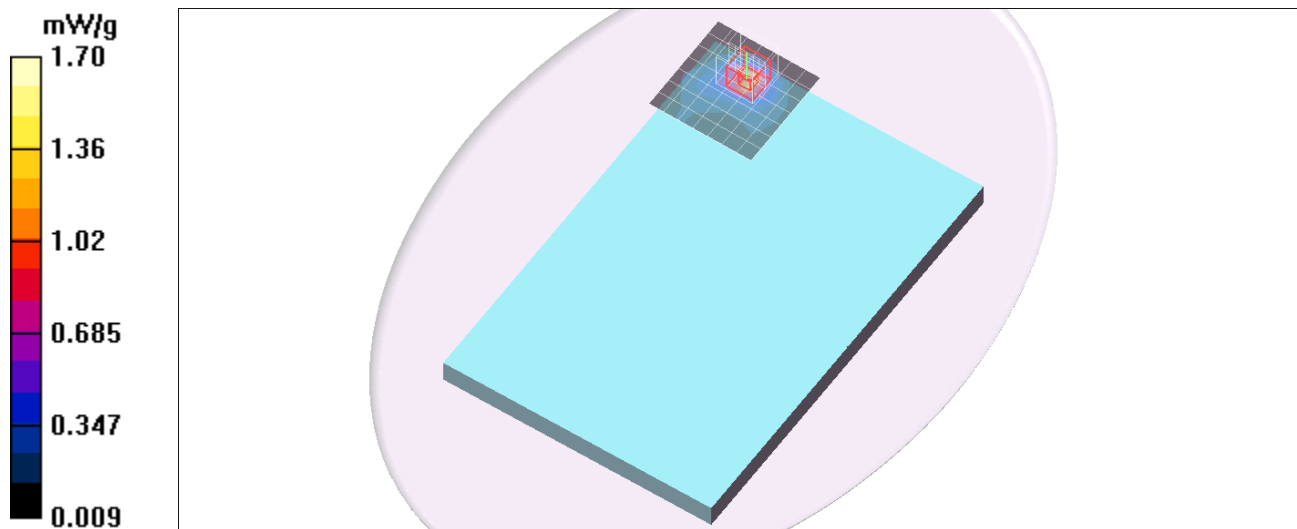

Wi-Fi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462.2$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Stand Mode/Rear/802.11b/Main Ant/Ch11/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.48 mW/g


Stand Mode/Rear/802.11b/Main Ant/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.38 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.577 mW/g

Maximum value of SAR (measured) = 1.87 mW/g

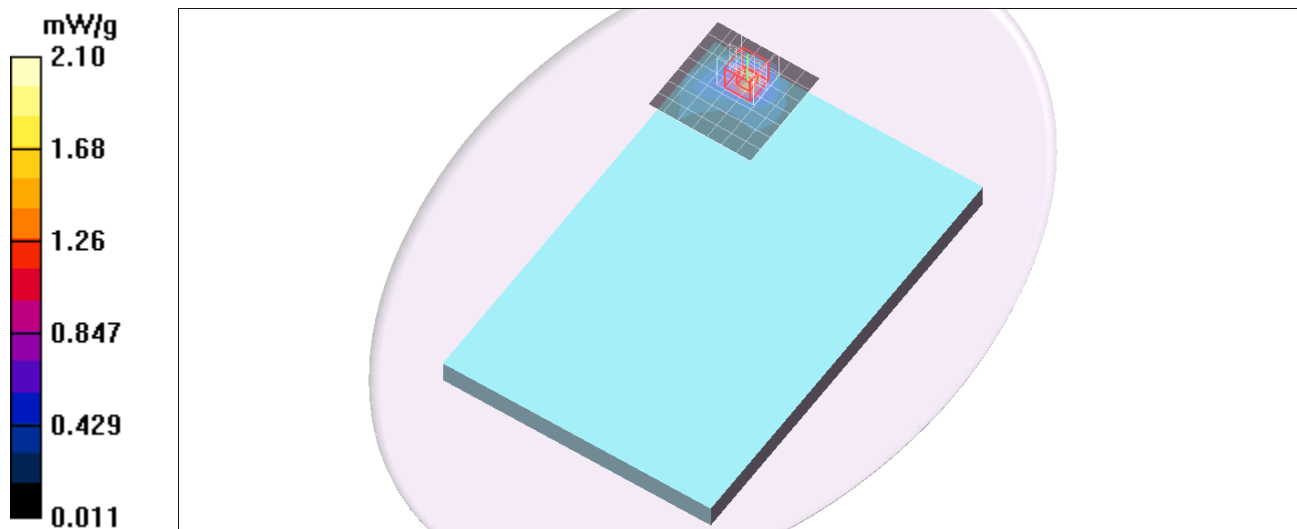

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Stand Mode/Rear/802.11b/Main Ant/Ch6_Repeat/Area Scan (8x8x1): Measurement grid:

dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.53 mW/g

Stand Mode/Rear/802.11b/Main Ant/Ch6_Repeat/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 7.82 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.602 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.93 mW/g

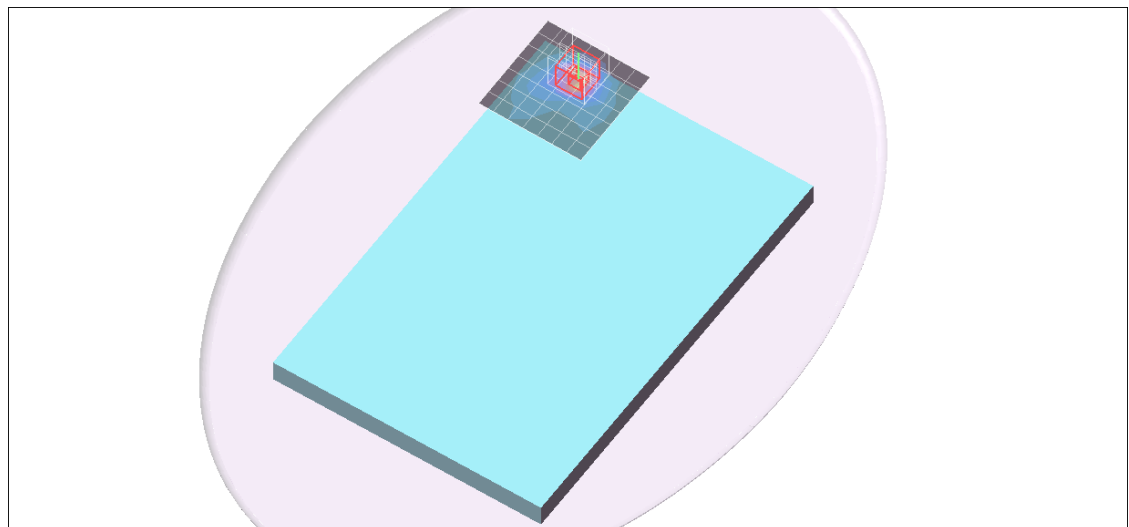

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/25/2013
- Probe: EX3DV4 - SN3554; ConvF(6.24, 6.24, 6.24); Calibrated: 9/26/2013
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052

Tent Mode/Edge1/802.11b/Main Ant/Ch6/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.201 mW/g

Tent Mode/Edge1/802.11b/Main Ant/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.91 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.067 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.177 mW/g

Tent Mode/Edge1/802.11b/Main Ant/Ch6/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.91 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.062 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.170 mW/g

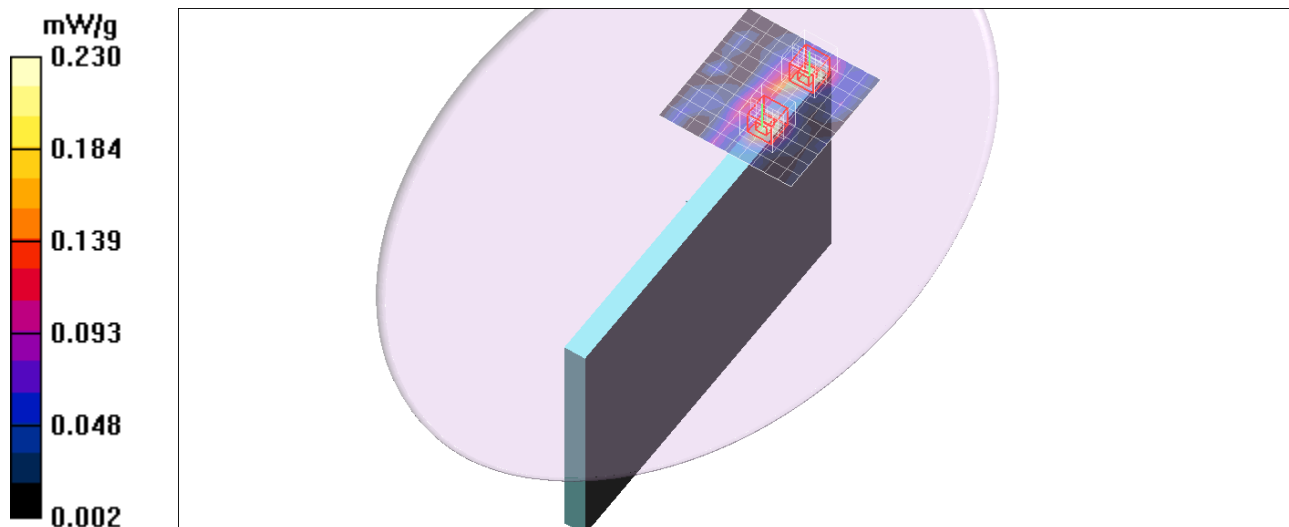

Wi-Fi 2.4GHz Band

Frequency: 2437 MHz; Duty Cycle: 1:1

Tent Mode/Edge1/802.11b/Main Ant/Ch6/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.176 mW/g

