



FCC SAR Report

Report No. : SESF1607051
Client/Manufacturer : Qualcomm Atheros, Inc.
Address : 1700 Technology Drive, San Jose, CA 95110
Product : 802.11a/b/g/n/ac + BT 4.1 M.2 2230 Type Card
Brand : Qualcomm Atheros
Model : QCNFA344A
FCC ID : PPD-QCNFA344AH
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:2005 / IEEE 1528-2013 / KDB
865664 D01 v01r04 / KDB 248227 D01 v02r02 / KDB 447498 D01 v06 /
KDB 616217 D04 v01r02
Test Date : August 11th, 2016~ August 14th, 2016

Statement of Compliance:

The SAR values measured for the test sample are below the maximum recommended level of 1.6W/kg averaged over any 1g tissue according to FCC Knowledge Data Base/ FCC 47CFR Part 2 (2.1093) / IEEE Std.1528-2013.

The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

Prepared By: Leo Chen
Leo Chen

Approved By: Miro Chueh
Miro Chueh





Release Version

Report No.	Issue Date	Description
SESF1607051	2016-08-17	Initial release



Contents

1. Summary of Maximum SAR Value	4
2. Description of Equipment under Test.....	5
3. General Information.....	7
4. Basic restrictions and Standards.....	8
4.1. Test Standards	8
4.2. Environment Condition	8
4.3. RF Exposure Limits.....	8
5. DASY5 Measurement System.....	9
5.1. Uncertainty of Inter-/Extrapolation and Averaging	10
5.2. DASY5 E-Field Probe	10
5.3. Data Acquisition Electronics (DAE)	11
5.4. Robot	11
5.5. Light Beam Unit	11
5.6. Measurement Server	12
5.7. SAM Phantom.....	12
5.8. Device Holder	13
5.9. Test Equipment List	14
5.10. Internal Check of Dipole	14
6. The SAR Measurement Procedure.....	17
6.1. System Performance Check.....	17
6.2. Test Requirements.....	22
7. Wi-Fi/Bluetooth SAR Exclusion and Results	25
7.1. Maximum Tune-up Conducted Average Power	25
7.2. Measured Conducted Average Power	27
7.3. Antenna Location.....	39
7.4. SAR exclusion.....	39
7.5. Required Edges for SAR Testing	44
7.6. Estimated SAR.....	45
7.7. SAR Test Results Summary.....	46
8. Simultaneous Transmission Analysis	50
8.1. Max. Simultaneous SAR.....	50
8.2. Simultaneous Transmission Conclusion	51
9. Measurement Uncertainty	52
APPENDIX A. SAR System Verification Data	
APPENDIX B. SAR measurement Data	
APPENDIX C. Calibration Data for Probe, Dipole and DAE	
APPENDIX D. Photographs of EUT and Setup	



1. Summary of Maximum SAR Value

Equipment Class	Highest Reported SAR _{1-g} (W/kg)
DTS	0.959
U-NII	1.136
DSS	0.4
Highest Simultaneous SAR	
UNII+DSS	1.346
U-NII+ U-NII	1.969



2. Description of Equipment under Test

Product Name	802.11a/b/g/n/ac + BT 4.1 M.2 2230 Type Card
Model No.	QCNFA344A
Brand Name	Qualcomm Atheros
Product Type	WLAN (2TX, 2RX)
Antenna Type	PIFA
Antenna Peak Gain	Amphenol: 2.4GHz:-0.58dBi,5.2GHz:0.58 dBi,5.5GHz:1.11dBi,5.8GHz:-0.40dBi Speed: 2.4GHz:0.33dBi,5.2GHz:0.16 dBi,5.5GHz:0.49dBi,5.8GHz:0.49dBi
Bus Interface	PCIE
Device Category	Portable
RF Exposure Environment	Uncontrolled
Bluetooth	
Bluetooth Frequency	2402~2480MHz
Data Rate	1 Mbps, 2Mbps and Up to 3Mbps
Channel Separation	1MHz for BT3.0, 2MHz for BLE
Modulation technology	BLE4.0 (GFSK), V3.0+EDR(GFSK), V3.0+EDR(8-DPSK)
Wi-Fi	
Modulation Techniques:	802.11b: CCK, DQPSK, DBPSK 802.11a/g: 64QAM, 16QAM, QPSK, BPSK 802.11n: BPSK, QPSK, 16QAM, 64QAM
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps 802.11a/g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: MCS 0 to 15 for HT20MHz, MCS 0 to 15 for HT40MHz 802.11ac: MCS 0 to 8 for HT20MHz, MCS 0 to 9 for HT40MHz, MCS 0 to 9 for HT80MHz
Wi-Fi Frequency	For 15.247: 2.4GHz: 2.412 ~ 2.462GHz
	For 15.407: 802.11a: 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.5~5.72GHz, 5.745 ~ 5.825GHz
Modulation Technology	For 15.247(2.4GHz): 802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40)
	For 15.247(5GHz): 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT80)
	For 15.407: 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT80)

**Additional Information**1. Antenna information

Ant Type	Manufacturer	Part Number
1	Amphenol	Main Antenna: DC33001EA20 / Aux Antenna: DC33001EA30
2	Speed	Main Antenna: DC33001E910 / Aux Antenna: DC33001E900

2. WLAN/BT coexistence mode:

◆ 2x2 WLAN + BT:

- 5GHz 802.11a/an (or 11ac) transmit concurrent with BT.
- 2.4GHz: timely shared coexistence.



3. General Information

Host Details,

Host Manufacture	Host Type	Host Model
Lenovo	Tablet PC	Lenovo MIIX 710-12IKB

Our Lab,

Test Site	Cerpass Technology (Suzhou) Co.,Ltd
Test Site Location	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China



4. Basic restrictions and Standards

4.1. Test Standards

1. IEEE 1528-2013
2. FCC KDB Publication 447498 D01 General RF Exposure Guidance v06
3. FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
4. FCC KDB Publication 616217 D04 SAR for laptop and tablets v01r02
5. FCC KDB Publication 248227 D01 802.11 Wi-Fi SAR v02r02

4.2. Environment Condition

Item	Target	Measured
Ambient Temperature(°C)	18~25	21.5±2
Temperature of Simulant(°C)	20~22	21±2
Relative Humidity(%RH)	30~70	52

4.3. RF Exposure Limits

Human Exposure	Basic restrictions for electric, magnetic and electromagnetic fields. (Unit in mW/g or W/kg)
Spatial Peak SAR ¹ (Head and Body)	1.60
Spatial Average SAR ² (Whole Body)	0.08
Spatial Peak SAR ³ (Arms and Legs)	4.00

Notes:

1. The Spatial Peak value of the SAR averaged over any 1gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over appropriate averaging time.



5. DASY5 Measurement System

DASY5 Measurement System

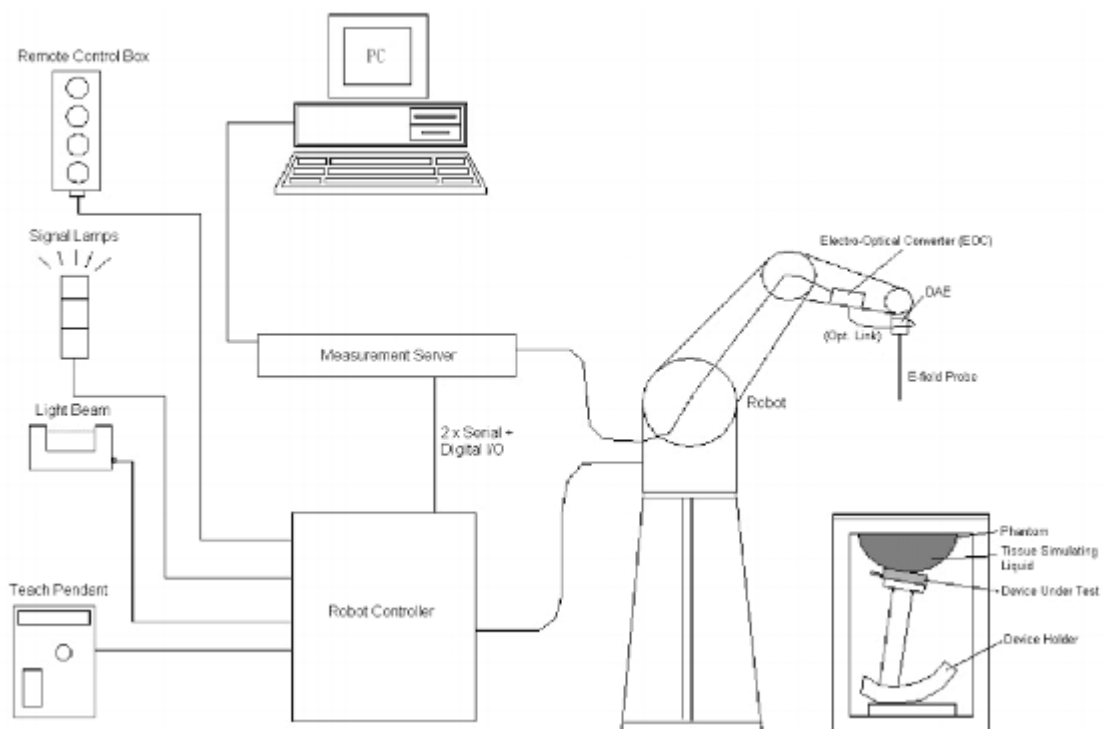


Figure 2.1 SPEAG DASY5 System Configurations

The DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic(DAE)attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter(ECO)performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows 7
- DASY5 software
- Remove control with teach pendant additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system



5.1. Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY5 allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x, y, z) = Ae^{-\frac{z}{2a}} \cos^2 \left(\frac{\pi}{2} \frac{\sqrt{x'^2 + y'^2}}{5a} \right)$$

$$f_2(x, y, z) = Ae^{-\frac{z}{a}} \frac{a^2}{a^2 + x'^2} \left(3 - e^{-\frac{2z}{a}} \right) \cos^2 \left(\frac{\pi}{2} \frac{y'}{3a} \right)$$

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

5.2. DASY5 E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.


SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO 17025. The calibration data are in Appendix D.

Model	EX3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	



5.3. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

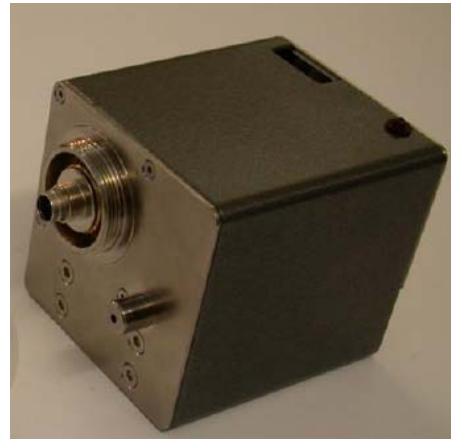

5.4. Robot

The DASY5 system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY5 system, the CS8C robot controller version from Stäubli is used. The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



5.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.





5.6. Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chipdisk and 128MB RAM. The necessary circuits for communication with the DAE electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



5.7. SAM Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The ELI4 Phantom also is a fiberglass shell phantom with 2mm shell thickness. It has 30 liters filling volume, and with a dimension of 600mm for major ellipse axis, 400mm for minor axis. It is intended for compliance testing of handheld and body-mounted wireless devices in frequency range of 30 MHz to 6GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.




5.8. Device Holder

The DASY5 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles. The DASY5 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



The laptop extension is lightweight and made of POM, acrylic glass and foam. It fits easily on upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

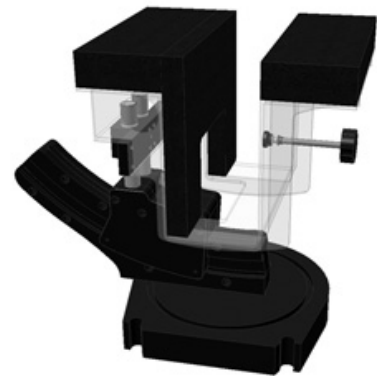

**5.9. Test Equipment List**

Instrument	Manufacturer	Model No.	Serial No.	Cali. Date	Cali. Due Date
Stäubli Robot TX60L	Stäubli	TX60L	5P6VA1/A/01	only once	only once
Robot Controller	Stäubli	CS8C	5P6VA1/C/01	only once	only once
Dipole Validation Kits	Speag	D2450V2	914	2015.05.19	2017.05.18 ^{Note}
Dipole Validation Kits	Speag	D5GHzV2	1156	2015.05.22	2017.05.21 ^{Note}
SAM ELI Phantom	Speag	SAM	1211	N/A	N/A
Laptop Holder	Speag	SM LH1 001CD	N/A	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	1379	2016.05.23	2017.05.22
E-Field Probe	Speag	EX3DV4	3927	2016.05.25	2017.05.24
SAR Software	Speag	DASY5	V5.2 Build 162	N/A	N/A
Power Amplifier	Mini-Circuit	ZVA-183W-S+	MN136701248	2015.09.03	2016.09.02
Directional Coupler	Agilent	772D	MY52180104	2015.09.03	2016.09.02
Spectrum Analyzer	R&S	FSP40	100324	2016.03.22	2017.03.21
Vector Network	Agilent	E5071C	MY4631693	2016.01.15	2017.01.14
Signal Generator	R&S	SML	103287	2016.03.09	2017.03.08
Power Meter	R&S	BLWA0830-160/100/40D	76659	2016.03.26	2017.03.25
AUG Power Sensor	R&S	NRP-Z91	100384	2016.03.09	2017.03.08


Note: For dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the requirements in KDB 865664 Section 3.2.2. We usually return the dipoles to the SAR system manufacturer or its designated calibration facilities for re-calibration every two years. The supporting information internal check of dipole is as follows.

5.10. Internal Check of Dipole


Dipole Validation Kits	Internal check Date
D2450V2	2016-08-11
D5GHzV2	2016-08-11



2450MHz Body calibrated impedance 53.027Ω; measured impedance: 53.072Ω (within 5Ω)

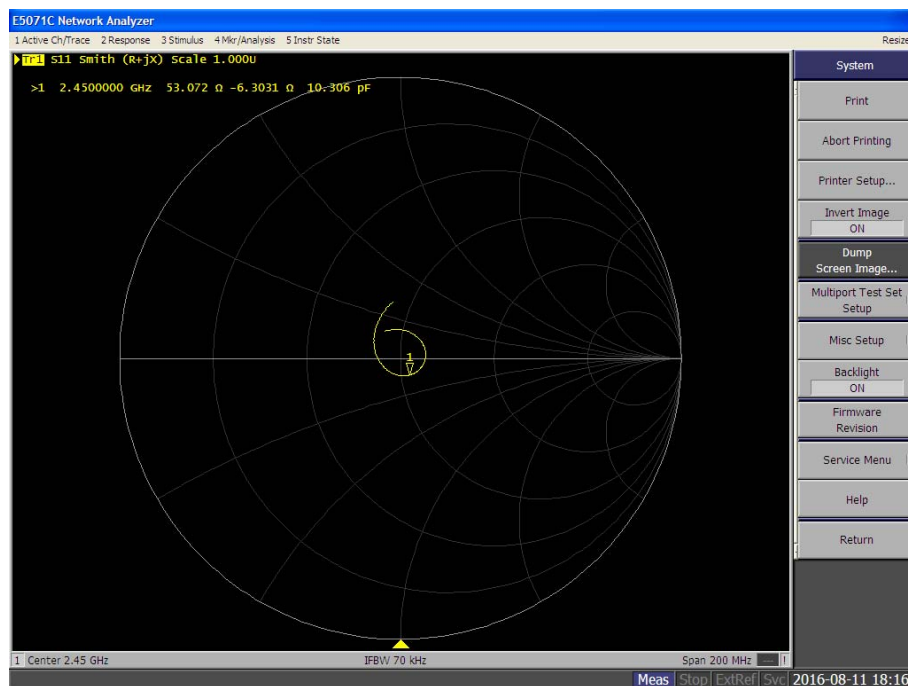

2450MHz Body calibrated return loss: -26.642 dB; Measured return loss: -26.245dB (within 20%)

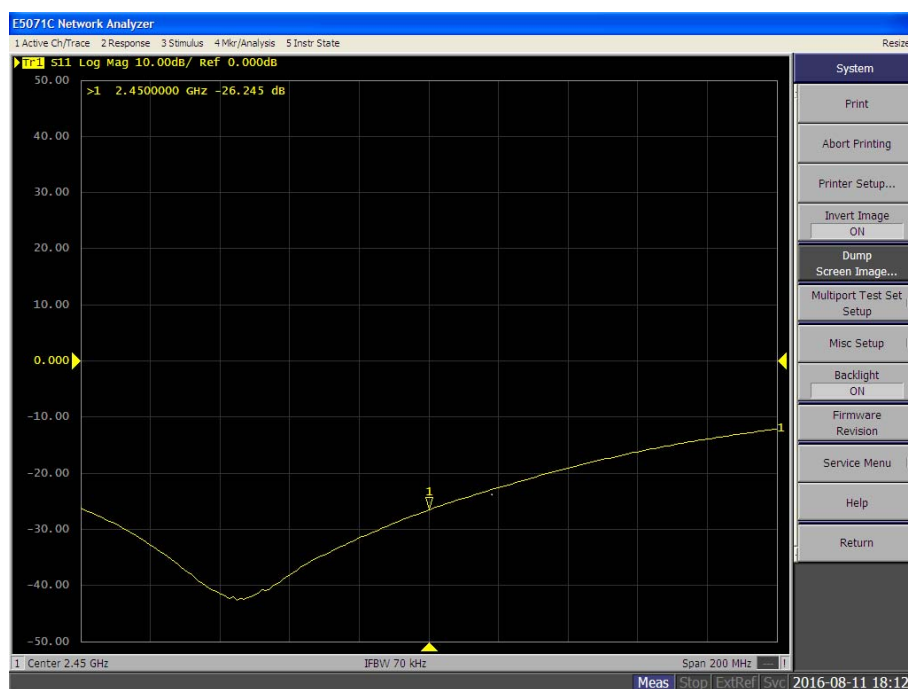




5200MHz Body calibrated impedance 50.602Ω; measured impedance: 46.148Ω (within 5Ω)

5300MHz Body calibrated impedance 50.607Ω; measured impedance: 46.277Ω (within 5Ω)

5600MHz Body calibrated impedance 57.824Ω; measured impedance: 58.300Ω (within 5Ω)

5800MHz Body calibrated impedance 58.828Ω; measured impedance: 56.823Ω (within 5Ω)

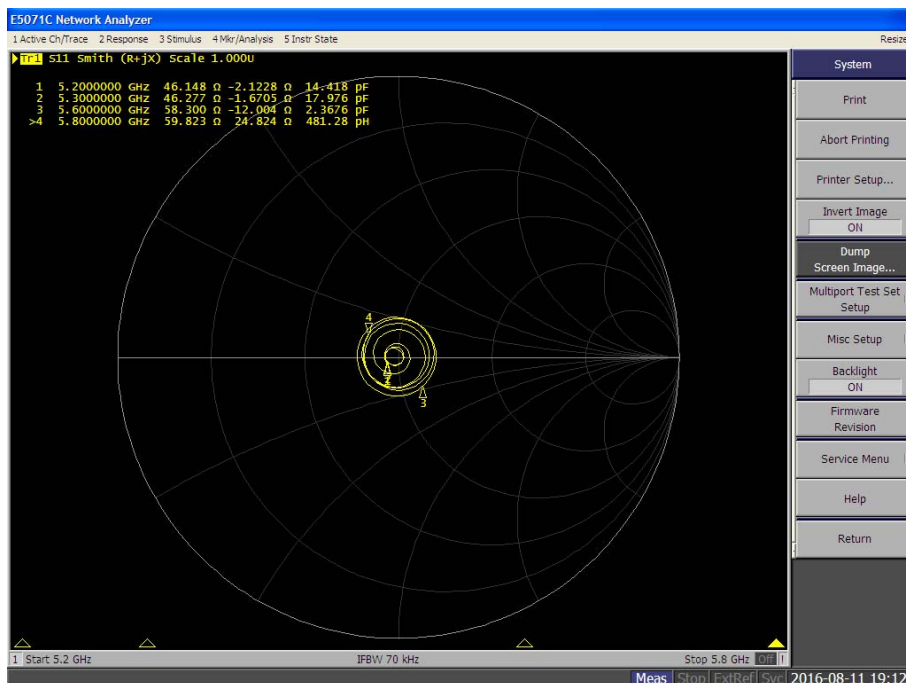


5200MHz Body calibrated return loss: -24.413 dB; Measured return loss: -20.805dB (within 20%)

5300MHz Body calibrated return loss: -25.153 dB; Measured return loss: -25.115dB (within 20%)

5600MHz Body calibrated return loss: -22.766 dB; Measured return loss: -19.000dB (within 20%)

5800MHz Body calibrated return loss: -20.937 dB; Measured return loss: -18.809dB (within 20%)

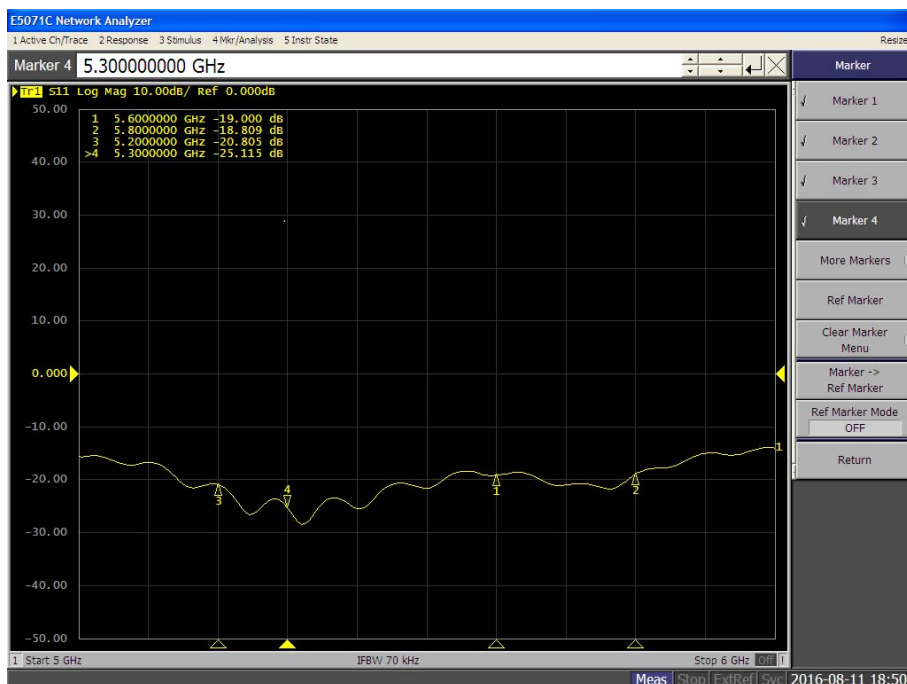



6. The SAR Measurement Procedure

6.1. System Performance Check

6.1.1 Purpose

1. To verify the simulating liquids are valid for testing.
2. To verify the performance of testing system is valid for testing.

6.1.2 Tissue Dielectric Parameters for Head and Body Phantoms

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
850	41.5	0.92	55.2	0.99
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5200	36.0	4.66	49.0	5.30
5300	35.87	4.76	48.88	5.42
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)



6.1.3 Tissue Calibration Result

■ The dielectric parameters of the liquids were verified prior to the SAR evaluation using DASY5 Dielectric Assessment Kit and Agilent Vector Network Analyzer E5071C.

Tissue parameter for body							
Fre. <MHz>	Permittivity	Conductivity	Target Permittivity	Target Conductivity	Delta Permittivity%	Delta Conductivity %	Tissue Temperature °C
11-08-2016							
2450	52.46	1.94	52.70	1.95	0.00	-0.01	21.0
2412	52.55	1.91	52.75	1.91	0.00	0.00	21.0
2437	52.52	1.92	52.73	1.93	0.00	-0.01	21.0
2462	52.41	1.96	52.69	1.96	-0.01	0.00	21.0
12-08-2016							
5300	49.15	5.41	48.88	5.42	0.01	0.00	21.0
5260	49.13	5.36	48.95	5.37	0.00	0.00	21.0
5280	49.11	5.38	48.92	5.40	0.00	0.00	21.0
13-08-2016							
5600	48.51	5.76	48.50	5.77	0.00	0.00	21.0
5580	48.56	5.74	48.52	5.75	0.00	0.00	21.0
5660	48.34	5.81	48.39	5.82	0.00	0.00	21.0
5680	48.32	5.83	48.37	5.85	0.00	0.00	21.0
5720	48.23	5.88	48.33	5.89	0.00	0.00	21.0
14-08-2016							
5800	48.43	5.96	48.20	6.00	0.00	-0.01	21.0
5765	48.51	5.93	48.26	5.93	0.01	0.00	21.0
5785	48.46	5.95	48.24	5.97	0.00	0.00	21.0
5805	48.42	5.97	48.19	6.01	0.00	-0.01	21.0

Note: 1. The Delta Permittivity% and Delta Conductivity% should be both within $\pm 5\%$ limit of target values.

2. Refer to KDB 865664 D01 v01r04, The depth of body tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with $\leq \pm 0.5$ cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with $\leq \pm 0.5$ cm variation for measurements > 3 GHz.



6.1.4 System Performance Check Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and the system performance check. They are read-only document files and destined as fully defined but unmeasured masks, so the finished system performance check must be saved under a different name. The system performance check document requires the SAM Twin Phantom or ELI4 Phantom, so the phantom must be properly installed in your system. (User defined measurement procedures can be created by opening a new document or editing an existing document file). Before you start the system performance check, you need only to tell the system with which components (probe, medium, and device) you are performing the system performance check; the system will take care of all parameters.

■ **The Power Reference Measurement and Power Drift Measurement** jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the Dipole output power. If it is too high (above ± 0.2 dB), the system performance check should be repeated;


■ **The Surface Check** job tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system performance check and stir the liquid;

■ **The Area Scan** job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable;

■ **The Zoom Scan** job measures the field in a volume around the peak SAR value assessed in the previous Area Scan job (for more information see the application note on SAR evaluation). If the system performance check gives reasonable results. The dipole input power (forward power) was 250 mW, 1 g and 10 g spatial average SAR values normalized to 1 W dipole input power give reference data for comparisons and it's equal to $10 \times (\text{dipole forward power})$. The next sections analyze the expected uncertainties of these values, as well as additional checks for further information or troubleshooting.




6.1.5 System Performance Check Setup

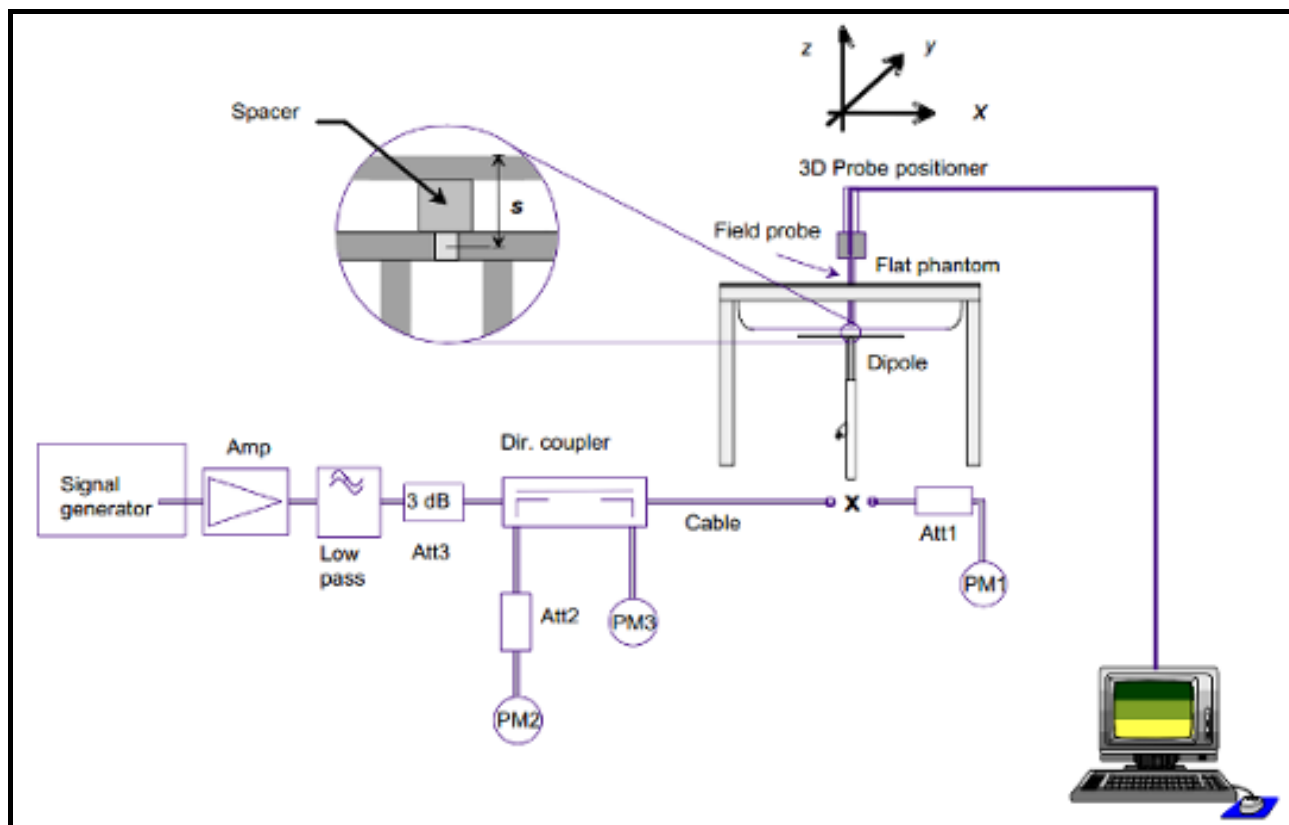

6.1.6 Validation Dipoles

The dipoles use is based on the IEEE Std.1528-2013 and FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 standard, and is complied with mechanical and electrical specifications in line with the requirements of both EN62209-1 and EN62209-2. The table below provides details for the mechanical and electrical specifications for the dipoles.



**6.1.7 Result of System Performance Check: Valid Result****System Performance Check at 2450MHz, 5300MHz, 5600MHz and 5800MHz for Body.****Validation Dipole: D2450V2-SN 914**

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
2450 MHz	Reference result ± 10% window	52.5 47.25 to 57.75	24.6 22.14 to 27.06	21.0
	11-08-2016	53.2	24.2	

Validation Dipole: D5GHzV2-SN1156

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5300MHz	Reference result ± 10% window	75.8 68.22 to 83.38	21.1 18.99 to 23.21	21.0
	12-08-2016	75.5	21.3	
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5600MHz	Reference result ± 10% window	79.5 71.55 to 87.45	22.0 19.8 to 24.2	21.0
	13-08-2016	80.7	22.1	
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5800MHz	Reference result ± 10% window	76.6 68.94 to 84.26	21.1 18.99 to 23.21	21.0
	14-08-2016	73.2	20.4	

Note: All SAR values are normalized to 1W forward power.



6.2. Test Requirements

6.2.1 Test Procedures

Step 1 Setup a Connection

First, engineer should record the conducted power before the test. Then establish a call in handset at the maximum power level with a base station simulator via air interface, or make the EUT estimate by itself in testing band. Place the EUT to the specific test location. After the testing, must export SAR test data by SEMCAD. Then writing down the conducted power of the EUT into the report, also the SAR values tested.

Step 2 Power Reference Measurements

To measure the local E-field value at a fixed location which value will be taken as a reference value for calculating a possible power drift.

Step 3 Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01v01r04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**Step 4 Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 5 Power Drift Measurements

Repetition of the E-field measurement at the fixed location mentioned in Step 1 to make sure the two results differ by less than ± 0.2 dB.



6.2.2 Test Channel

Per KDB248227 D01 v02r01, channel selection procedures below apply to both the initial test configuration and subsequent test configuration(s):

- 1) 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.
- 2) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
- 3) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 4) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 5) The same procedures also apply to subsequent highest output power channel(s) selection.
 - a> The channel closest to mid-band frequency is selected for SAR measurement.
 - b> For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.



7. Wi-Fi/Bluetooth SAR Exclusion and Results

7.1. Maximum Tune-up Conducted Average Power

1.5dBm for 2.4GHz and 2dBm for 5GHz manufacture tolerance is included for tune up power in 802.11 a/b/g/n/ac SAR evaluation (excluding Bluetooth).

<QCNFA344A_WIFI 2x2Tx_ Single Chain Power> (Unit: dBm)

Ch.	Freq(MHz)	11b	11g	HT20/VHT20	HT40	VHT40
1	2412	14	14	14	--	--
3	2422	--	--	--	11	11
6	2437	14	14	14	14	14
9	2452	--	--	--	9	9
11	2462	14	14	14	--	--

Ch.	Freq(MHz)	11a	HT20	VHT20
36	5180	13.5	13.5	13.5
38	5200	14	14	14
44	5220	14	14	14
48	5240	14	14	14
52	5260	14	14	14
56	5280	14	14	14
60	5300	14	14	14
64	5320	13.5	13	13
100	5500	13.5	13	13
104	5520	14	14	14
108	5540	14	14	14
112	5560	14	14	14
116	5580	14	14	14
120	5600	14	14	14
124	5620	14	14	14
128	5640	14	14	14
132	5660	14	14	14
136	5680	14	14	14
140	5700	13	12	12
144	5720	14	14	12.5
149	5745	14	14	12.5
153	5765	15.5	15.5	15.5
157	5785	15.5	15.5	15.5
161	5805	15.5	15.5	15.5
165	5825	15	14	13.5



Ch.	Freq(MHz)	HT40	VHT40
38	5190	9	8.5
46	5230	13.5	13.5
54	5270	13.5	13.5
62	5310	11.5	11.5
102	5510	9	8.5
110	5550	13.5	13.5
118	5590	13.5	13.5
126	5630	13.5	13.5
134	5670	12.5	12.5
142	5710	12.5	12.5
151	5755	9.5	10
159	5795	13	13

Ch.	Freq(MHz)	VHT80
42	5210	8
58	5290	9
106	5530	9.5
122	5610	13
138	5690	13
155	5775	10

<QCNFA344A_Bluetooth > (Unit: dBm)

Bluetooth Max. Tune-up power
7.0dBm

**7.2. Measured Conducted Average Power**

Speed Antenna Host

< QCNFA344A _Chain1_Main> (Unit: dBm)

Configurations	Mode			
	Channel / Frequency (MHz)			
2.4GHz WLAN Average Power	802.11b			
	1/2412	6/2437	11/2462	
	13.74	13.83	13.71	
	802.11g			
	1/2412	6/2437	11/2462	
	13.76	13.82	13.75	
	802.11n(HT20)			
	1/2412	6/2437	11/2462	
	13.81	13.82	13.81	
	802.11n(VHT20)			
	1/2412	6/2437	11/2462	
	13.74	13.78	13.76	
	802.11n(HT40)			
	3/2422	6/2437	9/2452	
	10.85	13.76	8.92	
	802.11n(VHT40)			
	3/2422	6/2437	9/2452	
	10.83	13.81	8.82	
5.2GHz WLAN Average Power	802.11a			
	36/5180	40/5200	44/5220	48/5240
	13.05	13.23	13.24	13.28
	802.11n(HT20)			
	36/5180	40/5200	44/5220	48/5240
	13.02	13.21	13.20	13.24
	802.11ac(VHT20)			
	36/5180	40/5200	44/5220	48/5240
	13.03	13.22	13.23	13.25
	802.11n(HT40)			
	38/5190		46/5230	
	8.78		13.36	
	802.11ac(VHT40)			
	38/5190		38/5230	
	8.23		13.10	
	802.11ac(VHT80)			
	42/5210			
	7.93			



Configurations	Mode							
	Channel / Frequency (MHz)							
5.3GHz WLAN Average Power	802.11a							
	52/5260		56/5280		60/5300		64/5320	
	13.87		13.93		13.85		13.45	
	802.11n(HT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.74		13.82		13.81		12.91	
	802.11ac(VHT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.75		13.81		13.76		12.87	
	802.11n(HT40)							
	54/5270				62/5310			
	13.41				11.46			
	802.11ac(VHT40)							
	54/5270				62/5310			
	13.35				11.39			
	802.11ac(VHT80)							
	58/5290							
	8.77							
5.6GHz WLAN Average Power	802.11a							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	13.45	13.75	13.92	13.82	13.85	13.94	12.86	13.74
	802.11n(HT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.86	13.77	13.87	13.79	13.87	13.87	11.93	13.79
	802.11ac(VHT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.77	13.63	13.82	13.74	13.72	13.83	11.91	12.43
	802.11n(HT40)							
	102/5510	110/5550	118/5590	126/5630	134/5670	142/5710		
	8.94	13.37	13.41	13.39	12.41	12.36		
	802.11ac(VHT40)							
	102/5510	110/5550	118/5590	126/5630	134/5670	142/5710		
	8.33	13.26	13.42	13.36	12.33	12.35		
	802.11ac(VHT80)							
	106/5530			122/5610			138/5690	
	9.43			12.89			12.87	



Configurations	Mode				
	Channel / Frequency (MHz)				
5.8GHz WLAN Average Power	802.11a				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.87	15.39	15.46	15.41	14.86
	802.11n(HT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.84	15.37	15.43	15.37	13.87
	802.11ac(VHT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	12.43	15.31	15.37	15.32	13.43
	802.11n(HT40)				
	151/5755		159/5795		
	9.47		12.86		
	802.11ac(VHT40)				
	151/5755		159/5795		
	9.73		12.81		
	802.11ac(VHT80)				
	155/5775				
	9.92				



Speed Antenna Host

< QCNFA344A_Chain0_Aux> (Unit: dBm)

Configurations	Mode			
	Channel / Frequency (MHz)			
2.4GHz WLAN Average Power	802.11b			
	1/2412	6/2437	11/2462	
	13.71	13.82	13.75	
	802.11g			
	1/2412	6/2437	11/2462	
	13.77	13.78	13.74	
	802.11n(HT20)			
	1/2412	6/2437	11/2462	
	13.75	13.81	13.80	
	802.11n(VHT20)			
	1/2412	6/2437	11/2462	
	13.75	13.77	13.74	
	802.11n(HT40)			
	3/2422	6/2437	9/2452	
	10.81	13.75	8.87	
	802.11n(VHT40)			
	3/2422	6/2437	9/2452	
	10.82	13.78	8.81	
5.2GHz WLAN Average Power	802.11a			
	36/5180	40/5200	44/5220	48/5240
	13.03	13.22	13.25	13.26
	802.11n(HT20)			
	36/5180	40/5200	44/5220	48/5240
	13.01	13.21	13.22	13.23
	802.11ac(VHT20)			
	36/5180	40/5200	44/5220	48/5240
	13.02	13.20	13.23	13.24
	802.11n(HT40)			
	38/5190		46/5230	
	8.77		13.35	
	802.11ac(VHT40)			
	38/5190		38/5230	
	8.24		13.12	
	802.11ac(VHT80)			
	42/5210			
	7.94			



Configurations	Mode							
	Channel / Frequency (MHz)							
5.3GHz WLAN Average Power	802.11a							
	52/5260		56/5280		60/5300		64/5320	
	13.81		13.92		13.86		13.47	
	802.11n(HT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.75		13.81		13.83		12.92	
	802.11ac(VHT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.76		13.82		13.77		12.81	
	802.11n(HT40)							
	54/5270				62/5310			
	13.43				11.44			
	802.11ac(VHT40)							
	54/5270				62/5310			
	13.31				11.38			
	802.11ac(VHT80)							
	58/5290							
	8.76							
5.6GHz WLAN Average Power	802.11a							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	13.46	13.77	13.93	13.81	13.86	13.95	12.87	13.75
	802.11n(HT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.81	13.78	13.89	13.78	13.85	13.86	11.91	13.74
	802.11ac(VHT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.76	13.62	13.81	13.75	13.71	13.84	11.92	12.45
	802.11n(HT40)							
	102/5510	110/5550	118/5590	126/5630	134/5670	142/5710		
	8.95	13.38	13.42	13.37	12.42	12.37		
	802.11ac(VHT40)							
	102/5510	110/5550	118/5590	126/5630	134/5670	142/5710		
	8.32	13.27	13.41	13.37	12.34	12.36		
	802.11ac(VHT80)							
	106/5530			122/5610			138/5690	
	9.42			12.87			12.86	



Configurations	Mode				
	Channel / Frequency (MHz)				
5.8GHz WLAN Average Power	802.11a				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.86	15.38	15.45	15.42	14.85
	802.11n(HT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.83	15.35	15.41	15.38	13.85
	802.11ac(VHT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	12.42	15.33	15.35	15.34	13.45
	802.11n(HT40)				
	151/5755		159/5795		
	9.48		12.87		
	802.11ac(VHT40)				
	151/5755		159/5795		
	9.71		12.82		
	802.11ac(VHT80)				
	155/5775				
	9.95				

< QCNFA344A _Bluetooth > (Unit: dBm)

Max. Bluetooth Power	
2441MHz GFSK	7.0



Amphenol Antenna Host

< QCNFA344A _Chain1_Main> (Unit: dBm)

Configurations	Mode			
	Channel / Frequency (MHz)			
2.4GHz WLAN Average Power	802.11b			
	1/2412	6/2437	11/2462	
	13.76	13.89	13.72	
	802.11g			
	1/2412	6/2437	11/2462	
	13.77	13.85	13.77	
	802.11n(HT20)			
	1/2412	6/2437	11/2462	
	13.83	13.85	13.84	
	802.11n(VHT20)			
	1/2412	6/2437	11/2462	
	13.75	13.79	13.78	
	802.11n(HT40)			
	3/2422	6/2437	9/2452	
	10.79	13.78	8.83	
	802.11n(VHT40)			
	3/2422	6/2437	9/2452	
	10.81	13.84	8.86	
5.2GHz WLAN Average Power	802.11a			
	36/5180	40/5200	44/5220	48/5240
	13.04	13.22	13.25	13.26
	802.11n(HT20)			
	36/5180	40/5200	44/5220	48/5240
	13.03	13.20	13.20	13.25
	802.11ac(VHT20)			
	36/5180	40/5200	44/5220	48/5240
	13.04	13.21	13.22	13.24
	802.11n(HT40)			
	38/5190		46/5230	
	8.76		13.37	
	802.11ac(VHT40)			
	38/5190		38/5230	
	8.25		13.09	
	802.11ac(VHT80)			
	42/5210			
	7.95			



Configurations	Mode							
	Channel / Frequency (MHz)							
5.3GHz WLAN Average Power	802.11a							
	52/5260		56/5280		60/5300		64/5320	
	13.84		13.92		13.86		13.41	
	802.11n(HT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.73		13.81		13.85		12.86	
	802.11ac(VHT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.77		13.82		13.75		12.84	
	802.11n(HT40)							
	54/5270				62/5310			
	13.42				11.47			
	802.11ac(VHT40)							
	54/5270				62/5310			
	13.36				11.41			
	802.11ac(VHT80)							
	58/5290							
	8.78							
5.6GHz WLAN Average Power	802.11a							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	13.46	13.74	13.93	13.81	13.87	13.96	12.87	13.75
	802.11n(HT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.81	13.72	13.81	13.74	13.86	13.89	11.91	13.75
	802.11ac(VHT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.75	13.61	13.83	13.75	13.73	13.84	11.92	12.41
	802.11n(HT40)							
	102/5510	110/5550	118/5590	126/5630	134/5670	142/5710		
	8.96	13.38		13.45	13.34	12.43	12.37	
	802.11ac(VHT40)							
	102/5510	110/5550	118/5590	126/5630	134/5670	142/5710		
	8.34	13.27	13.43	13.37	12.35	12.36		
	802.11ac(VHT80)							
	106/5530			122/5610			138/5690	
	9.44			12.85			12.83	



Configurations	Mode				
	Channel / Frequency (MHz)				
5.8GHz WLAN Average Power	802.11a				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.84	15.32	15.43	15.42	14.87
	802.11n(HT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.85	15.36	15.42	15.39	13.88
	802.11ac(VHT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	12.42	15.33	15.36	15.34	13.45
	802.11n(HT40)				
	151/5755		159/5795		
	9.49		12.85		
	802.11ac(VHT40)				
	151/5755		159/5795		
	9.74		12.87		
	802.11ac(VHT80)				
	155/5775				
	9.93				



Amphenol Antenna Host

< QCNFA344A _Chain0_Aux> (Unit: dBm)

Configurations	Mode		
	Channel / Frequency (MHz)		
2.4GHz WLAN Average Power	802.11b		
	1/2412	6/2437	11/2462
	13.75	13.84	13.73
	802.11g		
	1/2412	6/2437	11/2462
	13.77	13.83	13.76
	802.11n(HT20)		
	1/2412	6/2437	11/2462
	13.84	13.83	13.79
	802.11n(VHT20)		
	1/2412	6/2437	11/2462
	13.75	13.77	13.74
	802.11n(HT40)		
	3/2422	6/2437	9/2452
	10.85	13.78	8.95
	802.11n(VHT40)		
	3/2422	6/2437	9/2452
	10.84	13.82	8.89

5.2GHz WLAN Average Power	802.11a			
	36/5180	40/5200	44/5220	48/5240
	13.02	13.21	13.24	13.25
	802.11n(HT20)			
	36/5180	40/5200	44/5220	48/5240
	13.01	13.20	13.21	13.23
	802.11ac(VHT20)			
	36/5180	40/5200	44/5220	48/5240
	13.02	13.21	13.22	13.24
	802.11n(HT40)			
	38/5190		46/5230	
	8.72		13.31	
	802.11ac(VHT40)			
	38/5190		38/5230	
	8.24		13.10	
	802.11ac(VHT80)			
	42/5210			
	7.89			



Configurations	Mode							
	Channel / Frequency (MHz)							
5.3GHz WLAN Average Power	802.11a							
	52/5260		56/5280		60/5300		64/5320	
	13.89		13.91		13.86		13.41	
	802.11n(HT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.71		13.92		13.84		12.85	
	802.11ac(VHT20)							
	52/5260		56/5280		60/5300		64/5320	
	13.73		13.85		13.81		12.86	
	802.11n(HT40)							
	54/5270				62/5310			
	13.43				11.47			
	802.11ac(VHT40)							
	54/5270				62/5310			
	13.36				11.37			
	802.11ac(VHT80)							
	58/5290							
	8.79							
5.6GHz WLAN Average Power	802.11a							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	13.46	13.71	13.91	13.83	13.87	13.95	12.85	13.73
	802.11n(HT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.85	13.79	13.87	13.75	13.89	13.89	11.94	13.73
	802.11ac(VHT20)							
	100/5500	112/5560	116/5580	128/5640	132/5660	136/5680	140/5700	144/5720
	12.78	13.61	13.83	13.71	13.74	13.85	11.92	12.46
	802.11n(HT40)							
	102/5510		110/5550		118/5590		126/5630	
	8.96		13.38		13.43		13.34	
	802.11ac(VHT40)							
	102/5510		110/5550		118/5590		126/5630	
	8.34		13.22		13.45		13.37	
	802.11ac(VHT80)							
	106/5530			122/5610			138/5690	
9.42			12.81			12.86		




Configurations	Mode				
	Channel / Frequency (MHz)				
5.8GHz WLAN Average Power	802.11a				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.85	15.37	15.43	15.42	14.81
	802.11n(HT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	13.86	15.38	15.41	15.35	13.86
	802.11ac(VHT20)				
	149/5745	153/5765	157/5785	161/5805	165/5825
	12.44	15.33	15.39	15.33	13.45
	802.11n(HT40)				
	151/5755		159/5795		
	9.48		12.85		
	802.11ac(VHT40)				
	151/5755		159/5795		
	9.71		12.82		
	802.11ac(VHT80)				
	155/5775				
	9.93				

< QCNFA344A _Bluetooth > (Unit: dBm)

Max. Bluetooth Power	
2441MHz GFSK	7.0



7.3. Antenna Location

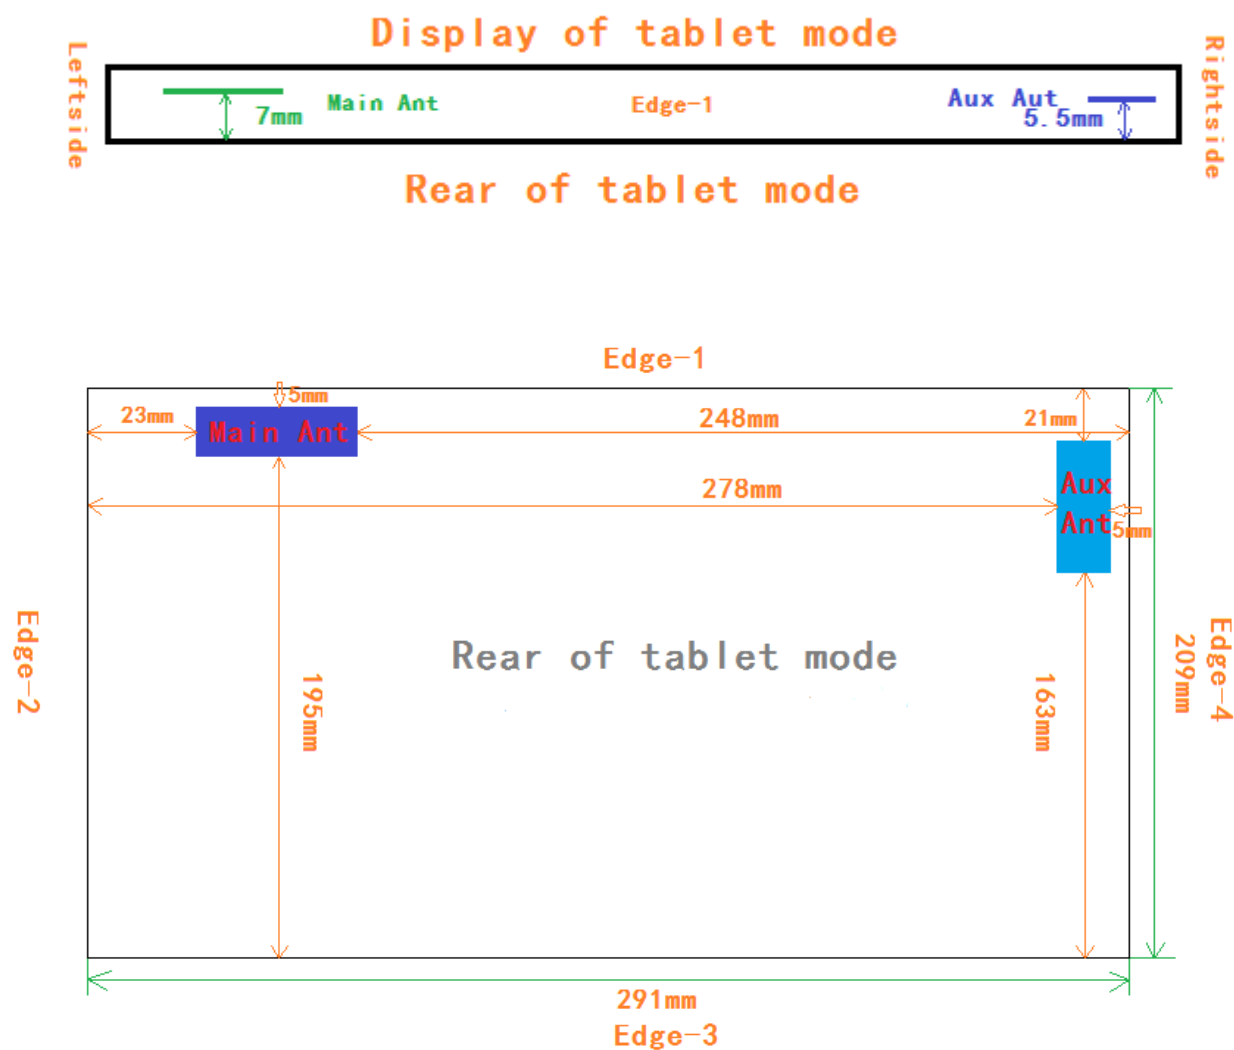

Antenna	Antenna Distance to Edges(mm)				
	Back	Edge_1	Edge_2	Edge_3	Edge_4
Main(Tx1)	7	5	23	195	248
Aux(Tx2)	5.5	21	278	163	5

7.4. SAR exclusion

Per FCC KDB 447498 D01v06 for 100MHz~6GHz:

1) The 1g-SAR exclusion threshold for distances<50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel(mW)}}{\text{Test Separation Distance(mm)}} \times \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

**5mm Test Separation**

Test Mode	Frq.(MHz)	Antenna-to-user distance (mm)	Thresholds (mW)	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	SAR Test(Y/N)
Bluetooth	2441	5	10	7	5	N
802.11b	2437	5	10	14	25	Y
802.11g	2437	5	10	14	25	Y
802.11n(HT20)	2437	5	10	14	25	Y
802.11n(HT40)	2437	5	10	14	25	Y
802.11a	5220	5	7	14	25	Y
802.11n(HT20)	5220	5	7	14	25	Y
802.11n(HT40)	5230	5	7	13.5	22	Y
802.11ac(VHT80)	5210	5	7	8	6	N
802.11a	5300	5	7	14	25	Y
802.11n(HT20)	5300	5	7	14	25	Y
802.11n(HT40)	5310	5	7	11.5	14	Y
802.11ac(VHT80)	5290	5	7	9	8	Y
802.11a	5540	5	6	14	25	Y
802.11n(HT20)	5540	5	6	14	25	Y
802.11n(HT40)	5550	5	6	13.5	22	Y
802.11ac(VHT80)	5530	5	6	9.5	9	Y
802.11a	5785	5	6	15.5	35	Y
802.11n(HT20)	5785	5	6	15.5	35	Y
802.11n(HT40)	5795	5	6	13	20	Y
802.11ac(VHT80)	5775	5	6	10	10	Y

5.5mm Test Separation

Test Mode	Frq.(MHz)	Antenna-to-user distance (mm)	Thresholds (mW)	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	SAR Test(Y/N)
Bluetooth	2441	5.5	11	7	5	N
802.11b	2437	5.5	11	14	25	Y
802.11g	2437	5.5	11	14	25	Y
802.11n(HT20)	2437	5.5	11	14	25	Y
802.11n(HT40)	2437	5.5	11	14	25	Y
802.11a	5220	5.5	7	14	25	Y
802.11n(HT20)	5220	5.5	7	14	25	Y
802.11n(HT40)	5230	5.5	7	13.5	22	Y
802.11ac(VHT80)	5210	5.5	7	8	6	N
802.11a	5300	5.5	7	14	25	Y
802.11n(HT20)	5300	5.5	7	14	25	Y
802.11n(HT40)	5310	5.5	7	11.5	14	Y
802.11ac(VHT80)	5290	5.5	7	9	8	Y
802.11a	5540	5.5	7	14	25	Y
802.11n(HT20)	5540	5.5	7	14	25	Y
802.11n(HT40)	5550	5.5	7	13.5	22	Y
802.11ac(VHT80)	5530	5.5	7	9.5	9	Y
802.11a	5785	5.5	7	15.5	35	Y
802.11n(HT20)	5785	5.5	7	15.5	35	Y
802.11n(HT40)	5795	5.5	7	13	20	Y
802.11ac(VHT80)	5775	5.5	7	10	10	Y

**7mm Test Separation**

Test Mode	Frq.(MHz)	Antenna-to-user distance (mm)	Thresholds (mW)	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	SAR Test(Y/N)
Bluetooth	2441	7	13	7	5	N
802.11b	2437	7	13	14	25	Y
802.11g	2437	7	13	14	25	Y
802.11n(HT20)	2437	7	13	14	25	Y
802.11n(HT40)	2437	7	13	14	25	Y
802.11a	5220	7	9	14	25	Y
802.11n(HT20)	5220	7	9	14	25	Y
802.11n(HT40)	5230	7	9	13.5	22	Y
802.11ac(VHT80)	5210	7	9	8	6	N
802.11a	5300	7	9	14	25	Y
802.11n(HT20)	5300	7	9	14	25	Y
802.11n(HT40)	5310	7	9	11.5	14	Y
802.11ac(VHT80)	5290	7	9	9	8	N
802.11a	5540	7	9	14	25	Y
802.11n(HT20)	5540	7	9	14	25	Y
802.11n(HT40)	5550	7	9	13.5	22	Y
802.11ac(VHT80)	5530	7	9	9.5	9	Y
802.11a	5785	7	9	15.5	35	Y
802.11n(HT20)	5785	7	9	15.5	35	Y
802.11n(HT40)	5795	7	9	13	20	Y
802.11ac(VHT80)	5775	7	9	10	10	Y

21mm Test Separation

Test Mode	Frq.(MHz)	Antenna-to-user distance (mm)	Thresholds (mW)	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	SAR Test(Y/N)
Bluetooth	2441	21	40	7	5	N
802.11b	2437	21	40	14	25	N
802.11g	2437	21	40	14	25	N
802.11n(HT20)	2437	21	40	14	25	N
802.11n(HT40)	2437	21	40	14	25	N
802.11a	5220	21	28	14	25	N
802.11n(HT20)	5220	21	28	14	25	N
802.11n(HT40)	5230	21	28	13.5	22	N
802.11ac(VHT80)	5210	21	28	8	6	N
802.11a	5300	21	27	14	25	N
802.11n(HT20)	5300	21	27	14	25	N
802.11n(HT40)	5310	21	27	11.5	14	N
802.11ac(VHT80)	5290	21	27	9	8	N
802.11a	5540	21	27	14	25	N
802.11n(HT20)	5540	21	27	14	25	N
802.11n(HT40)	5550	21	27	13.5	22	N
802.11ac(VHT80)	5530	21	27	9.5	9	N
802.11a	5785	21	26	15.5	35	Y
802.11n(HT20)	5785	21	26	15.5	35	Y
802.11n(HT40)	5795	21	26	13	20	N
802.11ac(VHT80)	5775	21	26	10	10	N

**23mm Test Separation**

Test Mode	Frq.(MHz)	Antenna-to-user distance (mm)	Thresholds (mW)	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	SAR Test(Y/N)
Bluetooth	2441	23	44	7	5	N
802.11b	2437	23	44	14	25	N
802.11g	2437	23	44	14	25	N
802.11n(HT20)	2437	23	44	14	25	N
802.11n(HT40)	2437	23	44	14	25	N
802.11a	5220	23	30	14	25	N
802.11n(HT20)	5220	23	30	14	25	N
802.11n(HT40)	5230	23	30	13.5	22	N
802.11ac(VHT80)	5210	23	30	8	6	N
802.11a	5300	23	30	14	25	N
802.11n(HT20)	5300	23	30	14	25	N
802.11n(HT40)	5310	23	30	11.5	14	N
802.11ac(VHT80)	5290	23	30	9	8	N
802.11a	5540	23	29	14	25	N
802.11n(HT20)	5540	23	29	14	25	N
802.11n(HT40)	5550	23	29	13.5	22	N
802.11ac(VHT80)	5530	23	29	9.5	9	N
802.11a	5785	23	29	15.5	35	Y
802.11n(HT20)	5785	23	29	15.5	35	Y
802.11n(HT40)	5795	23	29	13	20	N
802.11ac(VHT80)	5775	23	29	10	10	N

2) At test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

- [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50mm)·(f (MHz)/150)] mW, at 100 MHz to 1500 MHz
- [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz

**163mm Test Separation**

Test Mode	Frq.(MHz)	Antenna-to-user distance (mm)	Thresholds (mW)	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	SAR Test(Y/N)
Bluetooth	2441	163	1226	7	5	N
802.11b	2437	163	1226	14	25	N
802.11g	2437	163	1226	14	25	N
802.11n(HT20)	2437	163	1226	14	25	N
802.11n(HT40)	2437	163	1226	14	25	N
802.11a	5220	163	1196	14	25	N
802.11n(HT20)	5220	163	1196	14	25	N
802.11n(HT40)	5230	163	1196	13.5	22	N
802.11ac(VHT80)	5210	163	1196	8	6	N
802.11a	5300	163	1195	14	25	N
802.11n(HT20)	5300	163	1195	14	25	N
802.11n(HT40)	5310	163	1195	11.5	14	N
802.11ac(VHT80)	5290	163	1195	9	8	N
802.11a	5540	163	1194	14	25	N
802.11n(HT20)	5540	163	1194	14	25	N
802.11n(HT40)	5550	163	1194	13.5	22	N
802.11ac(VHT80)	5530	163	1194	9.5	9	N
802.11a	5785	163	1192	15.5	35	N
802.11n(HT20)	5785	163	1192	15.5	35	N
802.11n(HT40)	5795	163	1192	13	20	N
802.11ac(VHT80)	5775	163	1192	10	10	N

195mm Test Separation

Test Mode	Frq.(MHz)	Antenna-to-user distance (mm)	Thresholds (mW)	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	SAR Test(Y/N)
Bluetooth	2441	195	1546	7	5	N
802.11b	2437	195	1546	14	25	N
802.11g	2437	195	1546	14	25	N
802.11n(HT20)	2437	195	1546	14	25	N
802.11n(HT40)	2437	195	1546	14	25	N
802.11a	5220	195	1516	14	25	N
802.11n(HT20)	5220	195	1516	14	25	N
802.11n(HT40)	5230	195	1516	13.5	22	N
802.11ac(VHT80)	5210	195	1516	8	6	N
802.11a	5300	195	1515	14	25	N
802.11n(HT20)	5300	195	1515	14	25	N
802.11n(HT40)	5310	195	1515	11.5	14	N
802.11ac(VHT80)	5290	195	1515	9	8	N
802.11a	5540	195	1514	14	25	N
802.11n(HT20)	5540	195	1514	14	25	N
802.11n(HT40)	5550	195	1514	13.5	22	N
802.11ac(VHT80)	5530	195	1514	9.5	9	N
802.11a	5785	195	1512	15.5	35	N
802.11n(HT20)	5785	195	1512	15.5	35	N
802.11n(HT40)	5795	195	1512	13	20	N
802.11ac(VHT80)	5775	195	1512	10	10	N

Note: The exclusion calculation tables for antenna-to-user separation distances greater than 200 mm are unnecessary since these are mobile RF exposure conditions.



7.5. Required Edges for SAR Testing

Test Mode	Main Antenna					Aux Antenna				
	Back	Edge_1	Edge_2	Edge_3	Edge_4	Back	Edge_1	Edge_2	Edge_3	Edge_4
BT(GFSK)	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
802.11b	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11g	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT20)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT40)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11a	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT20)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT40)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11ac(VHT 80)	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
802.11a	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT20)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT40)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11ac(VHT 80)	NO	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11a	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT20)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11n(HT40)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11ac(VHT 80)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11a	YES	YES	YES	NO	NO	YES	YES	NO	NO	YES
802.11n(HT20)	YES	YES	YES	NO	NO	YES	YES	NO	NO	YES
802.11n(HT40)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES
802.11ac(VHT 80)	YES	YES	NO	NO	NO	YES	NO	NO	NO	YES

Note: According to KDB 248227 D01 v02r01, SAR configuration may be reduced.



7.6. Estimated SAR

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is $\leq 1.6\text{W/kg}$. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 2, the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation, mm}}$$

Where: Test separation distances $\leq 50\text{mm}$.

Bluetooth

Test Position	Test Mode	Frq.(MHz)	Test Separations	Max. Tune-up Power(dBm)	Max. Tune-up Power(mW)	Estimated SAR(W/kg)
Back	Bluetooth GFSK	2441	5.5	7.0	5.0	0.19
Edge-1/Edge-4	Bluetooth GFSK	2441	5	7.0	5.0	0.21
Edge-2	Bluetooth GFSK	2441	23	7.0	5.0	0.05

Note: An estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR for test separate on distances $>50\text{mm}$ per 447498 D01v06.



7.7. SAR Test Results Summary

■ Tablet Mode- DTS_WLAN 2.4GHz

Plot No.	Ant Type	Ant Port	Band	Mode	Test Position	Dist. mm	Ch.	Fre.	Max. Tune-up Power(dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift(dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
Initial Test configuration of Speed Antenna														
	1	main	802.11b	CCK	Back	0	6	2437	14.0	13.83	1.012	0.01	0.641	0.649
	1	main	802.11b	CCK	Edge_1	0	6	2437	14.0	13.83	1.012	-0.08	0.511	0.517
	1	aux	802.11b	CCK	Edge_4	0	6	2437	14.0	13.82	1.013	0.09	0.869	0.880
	1	aux	802.11b	CCK	Edge_4	0	1	2412	14.0	13.71	1.021	0.11	0.807	0.824
	1	aux	802.11b	CCK	Edge_4	0	11	2462	14.0	13.75	1.018	-0.13	0.839	0.854
	1	aux	802.11b	CCK	Back	0	6	2437	14.0	13.82	1.013	0.02	0.696	0.705
Initial Test configuration of Amphenol Antenna														
	2	main	802.11b	CCK	Back	0	6	2437	14.0	13.89	1.008	0.01	0.591	0.596
	2	main	802.11b	CCK	Edge_1	0	6	2437	14.0	13.89	1.008	-0.07	0.383	0.386
01	2	aux	802.11b	CCK	Edge_4	0	6	2437	14.0	13.84	1.012	-0.16	0.948	0.959
	2	aux	802.11b	CCK	Edge_4	0	1	2412	14.0	13.75	1.018	0.02	0.843	0.858
	2	aux	802.11b	CCK	Edge_4	0	11	2462	14.0	13.73	1.020	-0.16	0.907	0.925
	2	aux	802.11b	CCK	Back	0	6	2437	14.0	13.84	1.012	0.05	0.769	0.778

Note:

1. Per KDB248227 D01 v02r02 section 5.2.1 2), when the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, 802.11g/n OFDM SAR is not required, per KDB248227 D01 v02r01 section 5.2.2 2).



■ Tablet Mode- U-NII-1 _WLAN 5.2GHz

Note: Due to U-NII-2A band highest reported SAR is 1.095W/kg and U-NII-1 have lower maximum power than U-NII-2A, therefore per KDB248227 D01v02r02 section 5.3.1 a), if U-NII-2A band highest reported SAR is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.

■ Tablet Mode- U-NII-2A _WLAN 5.3GHz

Plot No.	Ant Type	Ant Port	Band	Mode	Test Position	Dist. mm	Ch.	Fre.	Max. Tune-up Power(dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift(dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
Initial Test configuration of Speed Antenna														
02	1	main	802.11a	OFDM	Back	0	56	5280	14.0	13.93	1.005	0.01	1.09	1.095
	1	main	802.11a	OFDM	Back	0	60	5300	14.0	13.85	1.011	-0.02	0.8	0.809
	1	main	802.11a	OFDM	Edge_1	0	56	5280	14.0	13.93	1.005	0.14	0.806	0.810
	1	main	802.11a	OFDM	Edge_2	0	56	5280	14.0	13.93	1.005	0.16	0.207	0.208
	1	aux	802.11a	OFDM	Edge_4	0	56	5280	14.0	13.92	1.006	0.01	1.04	1.046
	1	aux	802.11a	OFDM	Edge_4	0	60	5300	14.0	13.86	1.010	0.05	0.972	0.982
	1	aux	802.11a	OFDM	Edge_1	0	56	5280	14.0	13.92	1.006	0.17	0.196	0.197
	1	aux	802.11a	OFDM	Back	0	56	5280	14.0	13.92	1.006	-0.15	0.869	0.874
Initial Test configuration of Amphenol Antenna														
	2	main	802.11a	OFDM	Back	0	56	5280	14.0	13.92	1.006	0.16	1.01	1.016
	2	main	802.11a	OFDM	Back	0	60	5300	14.0	13.86	1.010	0.07	0.852	0.861
	2	main	802.11a	OFDM	Edge_1	0	56	5280	14.0	13.92	1.006	0.11	0.759	0.763
	2	main	802.11a	OFDM	Edge_2	0	56	5280	14.0	13.92	1.006	0.12	0.167	0.168
	2	aux	802.11a	OFDM	Edge_4	0	56	5280	14.0	13.91	1.006	-0.08	0.913	0.919
	2	aux	802.11a	OFDM	Edge_4	0	60	5300	14.0	13.86	1.010	-0.07	0.874	0.883
	2	aux	802.11a	OFDM	Edge_1	0	56	5280	14.0	13.91	1.006	-0.03	0.115	0.116
	2	aux	802.11a	OFDM	Back	0	56	5280	14.0	13.91	1.006	0.16	0.796	0.801

Note:

1. Per KDB248227 D01 v02r02 section 5.3.3 initial test configuration procedures, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg.



■ Tablet Mode- U-NII-2C_ WLAN 5.6GHz

Below 5.65GHz

Plot No.	Ant Type	Ant Port	Band	Mode	Test Position	Dist. mm	Ch.	Fre.	Max. Tune-up Power(dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift(dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
Initial Test configuration of Speed Antenna														
03	1	main	802.11a	OFDM	Edge_1	0	116	5580	14.0	13.92	1.01	0.05	1.13	1.136
	1	main	802.11a	OFDM	Edge_1	0	112	5560	14.0	13.75	1.02	-0.11	1.07	1.089
	1	main	802.11a	OFDM	Edge_2	0	116	5580	14.0	13.92	1.01	0.05	0.227	0.228
	1	main	802.11a	OFDM	Back	0	116	5580	14.0	13.92	1.01	0.02	0.957	0.973
	1	aux	802.11a	OFDM	Edge_4	0	116	5580	14.0	13.93	1.01	-0.03	0.973	0.989
	1	aux	802.11a	OFDM	Edge_4	0	112	5560	14.0	13.77	1.02	-0.17	0.861	0.865
	1	aux	802.11a	OFDM	Edge_1	0	116	5580	14.0	13.93	1.01	-0.06	0.109	0.110
	1	aux	802.11a	OFDM	Back	0	116	5580	14.0	13.93	1.01	0.09	0.879	0.883
Initial Test configuration of Amphenol Antenna														
	2	main	802.11a	OFDM	Back	0	116	5580	14.0	13.93	1.01	0.15	0.974	0.98
	2	main	802.11a	OFDM	Back	0	112	5560	14.0	13.74	1.02	0.12	0.855	0.871
	2	main	802.11a	OFDM	Edge_2	0	116	5580	14.0	13.93	1.01	0.14	0.097	0.097
	2	main	802.11a	OFDM	Edge_1	0	116	5580	14.0	13.93	1.01	-0.07	0.843	0.847
	2	aux	802.11a	OFDM	Back	0	116	5580	14.0	13.91	1.01	0.05	0.867	0.873
	2	aux	802.11a	OFDM	Back	0	112	5560	14.0	13.71	1.02	-0.03	0.851	0.869
	2	aux	802.11a	OFDM	Edge_1	0	116	5580	14.0	13.91	1.01	-0.14	0.082	0.083
	2	aux	802.11a	OFDM	Edge_4	0	116	5580	14.0	13.91	1.01	-0.09	0.812	0.817

Above 5.65GHz

Plot No.	Ant Type	Ant Port	Band	Mode	Test Position	Dist. mm	Ch.	Fre.	Max. Tune-up Power(dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift(dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
Initial Test configuration of Speed Antenna														
	1	main	802.11a	OFDM	Edge_1	0	136	5680	14.0	13.94	1.00	0.03	1.04	1.044
	1	main	802.11a	OFDM	Edge_1	0	132	5660	14.0	13.85	1.01	-0.12	0.964	0.974
	1	main	802.11a	OFDM	Edge_2	0	136	5680	14.0	13.94	1.00	0.04	0.167	0.168
	1	main	802.11a	OFDM	Back	0	136	5680	14.0	13.94	1.00	0.05	0.786	0.794
	1	aux	802.11a	OFDM	Edge_4	0	136	5680	14.0	13.95	1.00	-0.06	0.958	0.968
	1	aux	802.11a	OFDM	Edge_4	0	132	5660	14.0	13.86	1.01	-0.01	0.834	0.837
	1	aux	802.11a	OFDM	Edge_1	0	136	5680	14.0	13.95	1.00	-0.02	0.089	0.089
	1	aux	802.11a	OFDM	Back	0	136	5680	14.0	13.95	1.00	-0.09	0.766	0.769
Initial Test configuration of Amphenol Antenna														
	2	main	802.11a	OFDM	Edge_1	0	136	5680	14.0	13.96	1.00	0.07	0.945	0.948
	2	main	802.11a	OFDM	Edge_1	0	132	5660	14.0	13.87	1.01	-0.11	0.917	0.926
	2	main	802.11a	OFDM	Edge_2	0	136	5680	14.0	13.96	1.00	0.03	0.152	0.153
	2	main	802.11a	OFDM	Back	0	136	5680	14.0	13.96	1.00	0.09	0.865	0.873
	2	aux	802.11a	OFDM	Edge_4	0	136	5680	14.0	13.95	1.00	0.01	0.853	0.861
	2	aux	802.11a	OFDM	Edge_4	0	132	5660	14.0	13.87	1.01	-0.06	0.763	0.766
	2	aux	802.11a	OFDM	Edge_1	0	136	5680	14.0	13.95	1.00	-0.05	0.084	0.084
	2	aux	802.11a	OFDM	Back	0	136	5680	14.0	13.95	1.00	0.09	0.805	0.808

Note:

1. Per KDB248227 D01 v02r02 section 5.3.3 initial test configuration procedures, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg.



■ Tablet Mode- U-NII-3_ WLAN 5.8GHz

Plot No.	Ant Type	Ant Port	Band	Mode	Test Position	Dist. mm	Ch.	Fre.	Max. Tune-up Power(dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift(dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
Initial Test configuration of Speed Antenna														
	1	main	802.11a	OFDM	Edge_1	0	157	5785	15.5	15.46	1.003	0.02	0.975	0.978
	1	main	802.11a	OFDM	Edge_1	0	153	5765	15.5	15.39	1.007	-0.06	0.897	0.903
	1	main	802.11a	OFDM	Edge_2	0	157	5785	15.5	15.46	1.003	-0.07	0.124	0.124
	1	main	802.11a	OFDM	Back	0	157	5785	15.5	15.46	1.003	0.14	0.890	0.892
	1	aux	802.11a	OFDM	Edge_4	0	157	5785	15.5	15.45	1.003	0.11	0.853	0.856
	1	aux	802.11a	OFDM	Edge_4	0	153	5765	15.5	15.38	1.008	-0.05	0.763	0.769
	1	aux	802.11a	OFDM	Edge_1	0	157	5785	15.5	15.45	1.003	-0.03	0.092	0.092
	1	aux	802.11a	OFDM	Back	0	157	5785	15.5	15.45	1.003	0.12	0.811	0.814
Initial Test configuration of Amphenol Antenna														
04	2	main	802.11a	OFDM	Edge_1	0	157	5785	15.5	15.43	1.005	-0.03	1.010	1.015
	2	main	802.11a	OFDM	Edge_1	0	153	5765	15.5	15.32	1.012	-0.04	0.936	0.947
	2	main	802.11a	OFDM	Edge_2	0	157	5785	15.5	15.43	1.005	-0.14	0.154	0.155
	2	main	802.11a	OFDM	Back	0	157	5785	15.5	15.43	1.005	0.09	0.670	0.673
	2	aux	802.11a	OFDM	Edge_4	0	157	5785	15.5	15.43	1.005	0.14	0.691	0.694
	2	aux	802.11a	OFDM	Edge_1	0	157	5785	15.5	15.43	1.005	-0.07	0.053	0.053
	2	aux	802.11a	OFDM	Back	0	157	5785	15.5	15.43	1.005	0.12	0.674	0.677

Note:

- Per KDB248227 D01 v02r02 section 5.3.3 initial test configuration procedures, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg.



8. Simultaneous Transmission Analysis

8.1. Max. Simultaneous SAR

■ WLAN1 + WLAN2(Main Ant+ Aux Ant)

Speed Antenna

Configurations	WLAN1 SAR (W/kg)	WLAN2 SAR (W/kg)	Σ SAR(W/ kg)	Peak SAR1 Coordinate			Peak SAR2 Coordinates			Ri	SPLSR	Conclusion
				x, mm	y, mm	z, mm	x, mm	y, mm	z, mm			
Tablet Mode 802.11b CH6	0.649	0.705	1.354	N/A								Pass
Tablet Mode 802.11a CH56	1.095	0.874	1.969	86.0	112.0	-3.4	59.0	-129.4	-3.0	242.9	0.0114	Pass
Tablet Mode 802.11a CH116	0.973	0.883	1.856	86.7	111.5	-2.7	57.3	-135.0	-2.6	248.2	0.0102	Pass
Tablet Mode 802.11a CH157	0.892	0.814	1.706	84.0	112.0	-3.6	60.5	-131.2	-2.3	244.3	0.0091	Pass

Amphenol Antenna

Configurations	WLAN1 SAR (W/kg)	WLAN2 SAR (W/kg)	Σ SAR(W/kg)	Peak SAR1 Coordinate			Peak SAR2 Coordinates			Ri	SPLSR	Conclusion
				x, mm	y, mm	z, mm	x, mm	y, mm	z, mm			
Tablet Mode 802.11b CH6	0.596	0.778	1.374	N/A								Pass
Tablet Mode 802.11a CH56	1.016	0.801	1.817	87.0	112.0	-2.7	55.0	-129.8	-3.0	243.9	0.0100	Pass
Tablet Mode 802.11a	0.980	0.873	1.853	84.0	112.0	-3.7	61.2	-141.6	-2.0	254.6	0.0099	Pass
Tablet Mode 802.11a	0.673	0.677	1.350	N/A								Pass

Note: When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio per KDB 447498 D01v05r01; $Ratio = (SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04$ for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. The peak separation distance R_i is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated and interpolated peak SAR locations in the zoom scan.

**■WLAN+ Bluetooth**Speed Antenna

Configurations	Test Position	WLAN SAR(W/kg)	BT SAR(W/kg)	Σ SAR(W/kg)
WLAN(UNII) + BT(DSS)	Body-Back	1.095	0.19	1.285
	Body-Edge_1	1.136	0.21	1.346
	Body-Edge_2	0.228	0.05	0.278
	Body-Edge_3	0.4	0.4	0.8
	Body-Edge_4	1.046	0.21	1.256

Amphenol Antenna

Configurations	Test Position	WLAN SAR(W/kg)	BT SAR(W/kg)	Σ SAR(W/kg)
WLAN(UNII) + BT(DSS)	Body-Back	1.016	0.19	1.206
	Body-Edge_1	0.948	0.21	1.158
	Body-Edge_2	0.168	0.05	0.218
	Body-Edge_3	0.4	0.4	0.8
	Body-Edge_4	0.919	0.21	1.129

Note:

1. An estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR for test separate on distances >50mm per 447498 D01v06.

8.2. Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

**9. Measurement Uncertainty**

Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std.Unc. (1g)	Std. nc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max.SAR Eval.	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Power Scalingp	±0%	R	$\sqrt{3}$	0	0	±0%	±0%	∞
Phantom and Setup								
Phantom Uncertainty	±6.1%	R	$\sqrt{3}$	1	1	±3.5%	±3.5%	∞
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%	∞
Liquid Conductivity (mea.)DAK	±2.5%	R	$\sqrt{3}$	0.78	0.71	±1.1%	±1.0%	∞
Liquid Permittivity (mea.)DAK	±2.5%	R	$\sqrt{3}$	0.26	0.26	±0.3%	±0.4%	∞
Temp. unc. –ConductivityBB	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%	∞
Temp. unc. – PermittivityBB	±0.4%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%	∞
Combined Std. Uncertainty						±11.2%	±11.1%	361
Expanded STD Uncertainty(k=2)						±22.3%	±22.2%	

DASY5 Uncertainty Budget, according to IEEE 1528/2011 and IEC 62209-1/2011(0.3-3GHz)



Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std.Unc. (1g)	Std. nc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.55%	N	1	0	0			
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Modulation Response ^m	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%	∞
Max.SAR Eval.	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Power Scaling ^p	±0%	R	$\sqrt{3}$	0	0	±0%	±0%	∞
Phantom and Setup								
Phantom Uncertainty	±6.6%	R	$\sqrt{3}$	1	1	±3.8%	±3.8%	∞
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5%	R	$\sqrt{3}$	0.78	0.71	±1.1%	±1.0%	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5%	R	$\sqrt{3}$	0.26	0.26	±0.3%	±0.4%	∞
Temp. unc. –Conductivity ^{BB}	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%	∞
Temp. unc. – Permittivity ^{BB}	±0.4%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%	∞
Combined Std. Uncertainty						±12.3%	±12.2%	748
Expanded STD Uncertainty(Coverage factor=2)						±24.6%	±24.5%	

DASY5 Uncertainty Budget, according to IEEE 1528/2011 and IEC 62209-1/2011(3-6GHz)

--END--

APPENDIX A. SAR System Verification Data

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

Date/Time: 11/08/2016

Test Laboratory: Cerpass Lab

SystemPerformanceCheck-D2450 Body

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Meas. Ambient Temp (celsius) -22°C; Input power-250mW

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.68, 7.68, 7.68); Calibrated: 2016/5/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/SystemPerformanceCheck-D2450 Body/Area Scan (5x7x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm, Maximum value of SAR (measured) = 17.7 W/kg

Configuration/SystemPerformanceCheck-D2450 Body/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm, Reference Value = 91.33 V/m; Power Drift = -0.02 dB, Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.05 W/kg Maximum value of SAR (measured) = 15.1 W/kg

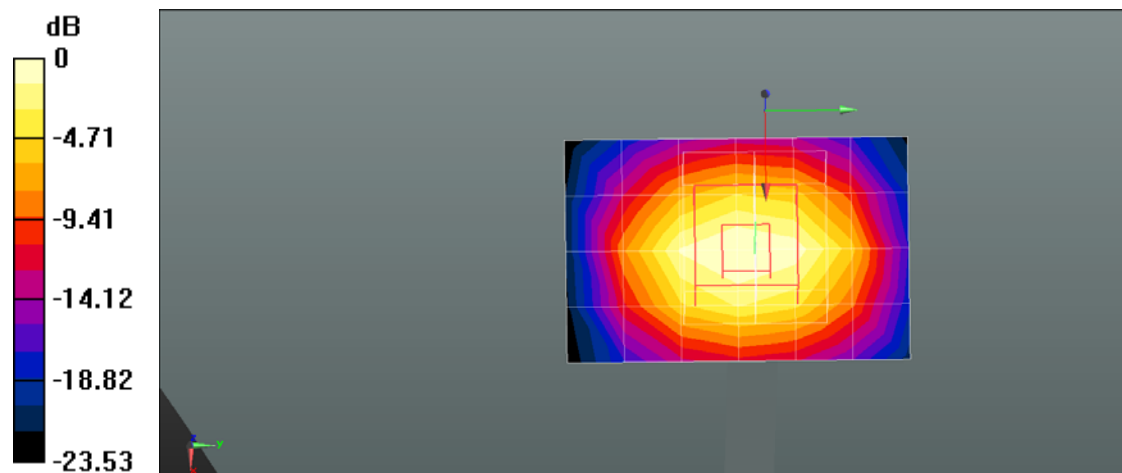

0 dB = 15.1 W/kg = 11.79 dBW/kg

Date/Time: 12/08/2016

Test Laboratory: Cerpass Lab

Dipole Calibration for Body Tissue Pin=100mW, dist=10mm, f=5300 MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 49.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(4.28, 4.28, 4.28); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm, Maximum value of SAR (measured) = 14.1 W/kg

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm, Reference Value = 39.26 V/m; Power Drift = 0.13 dB, Peak SAR (extrapolated) = 30.5 W/kg

SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.13 W/kg Maximum value of SAR (measured) = 15.9 W/kg

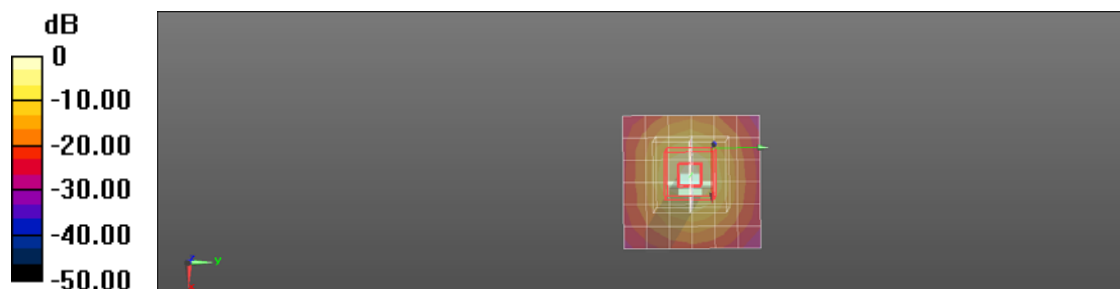

0 dB = 15.9 W/kg = 12.01 dBW/kg

Date/Time: 13/08/2016

Test Laboratory: Cerpass Lab

Dipole Calibration for Body Tissue Pin=100mW, dist=10mm, f=5600 MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2

Communication System: CW; Frequency: 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.76$ S/m; $\epsilon_r = 48.51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm, Maximum value of SAR (measured) = 13.8 W/kg

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm, Reference Value = 37.21 V/m; Power Drift = 0.02 dB, Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.21 W/kg Maximum value of SAR (measured) = 17.3 W/kg

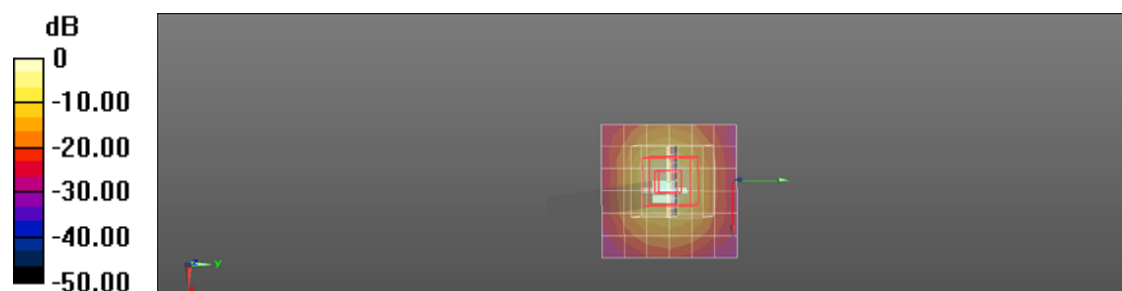

0 dB = 17.3 W/kg = 12.38 dBW/kg

Date/Time: 14/08/2016

Test Laboratory: Cerpass Lab

Dipole Calibration for Body Tissue Pin=100mW, dist=10mm, f=5800 MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.96$ S/m; $\epsilon_r = 48.43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Area Scan (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 13.0 W/kg

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm, Reference Value = 35.26 V/m; Power Drift = 0.18 dB, Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.32 W/kg; SAR(10 g) = 2.04 W/kg Maximum value of SAR (measured) = 15.9 W/kg

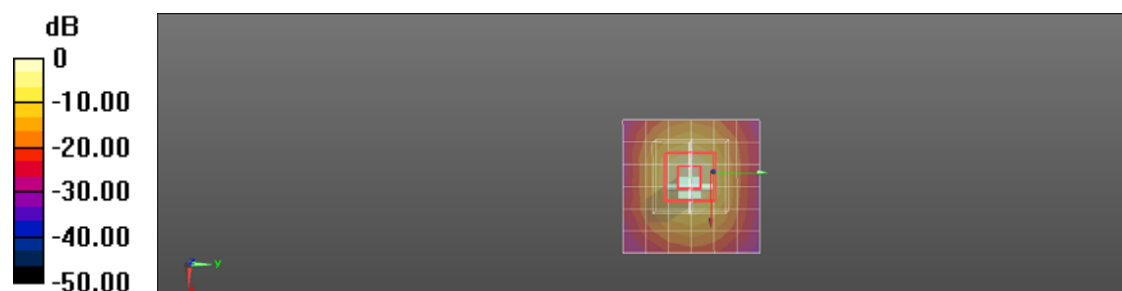

0 dB = 15.9 W/kg = 12.01 dBW/kg

APPENDIX B. SAR measurement Data

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

Plot1

Date/Time: 11/08/2016

Test Laboratory: Cerpass Lab

802.11b 2437MHz Edge4-aux

DUT: MIIX710-12IKB; Type: QCNFA344A;

Communication System: UID 0, 2.4GHz Wi-Fi (0); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 52.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EX3DV4 - SN3927; ConvF(7.68, 7.68, 7.68); Calibrated: 2016/5/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/802.11b 2437MHz Edge4- aux/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm, Maximum value of SAR (measured) = 1.46 W/kg

Configuration/802.11b 2437MHz Edge4- aux/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm, Reference Value = 2.525 V/m; Power Drift = -0.16 dB, Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.363 W/kg Maximum value of SAR (measured) = 1.54 W/kg

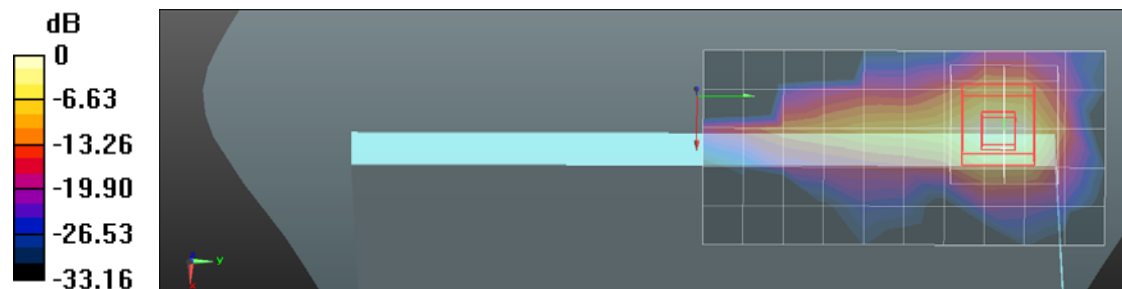

0 dB = 1.54 W/kg = 1.88 dBW/kg

Plot2

Date/Time: 12/08/2016

Test Laboratory: Cerpass Lab

802.11a 5280MHz Tablet-Back_Main

DUT: MIIX 710-12IKB; Type: QCNFA344A;

Communication System: UID 0, 5GHz Wi-Fi (0); Frequency: 5280 MHz

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 49.11$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EX3DV4 - SN3927; ConvF(4.28, 4.28, 4.28); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/802.11a 5280MHz Tablet-Back Main/Area Scan (7x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 2.17 W/kg

Configuration/802.11a 5280MHz Tablet-Back Main/Zoom Scan (7x8x6)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm, Reference Value = 2.413 V/m; Power Drift = 0.01 dB, Peak SAR (extrapolated) = 4.76 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.278 W/kg Maximum value of SAR (measured) = 2.26 W/kg

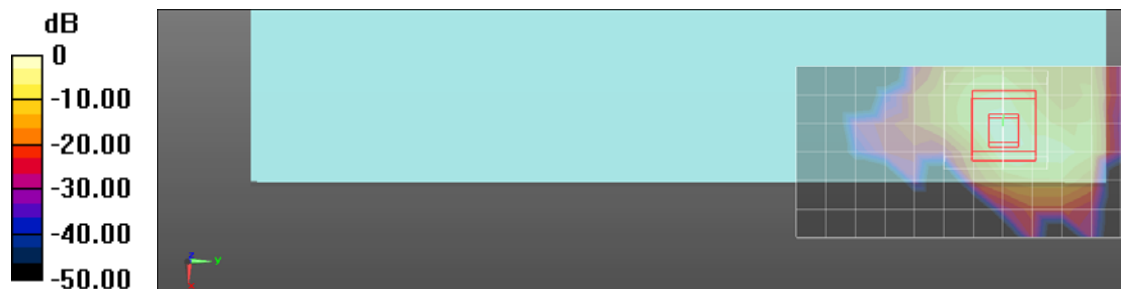

0 dB = 2.26 W/kg = 3.54 dBW/kg

Test Laboratory: Cerpass Lab

802.11a 5580MHz Tablet-edge-1 Main

DUT: MIIX 710-12IKB; Type: QCNFA344A;

Communication System: UID 0, 5GHz Wi-Fi (0); Frequency: 5580 MHz

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.74$ S/m; $\epsilon_r = 48.56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/802.11a 5580MHz Tablet-edge-1 Main/Area Scan (7x13x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 1.69 W/kg

Configuration/802.11a 5580MHz Tablet-edge-1 Main/Zoom Scan (7x8x6)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm, Reference Value = 3.025 V/m; Power Drift = 0.05 dB, Peak SAR (extrapolated) = 4.97 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.347 W/kg Maximum value of SAR (measured) = 2.74 W/kg

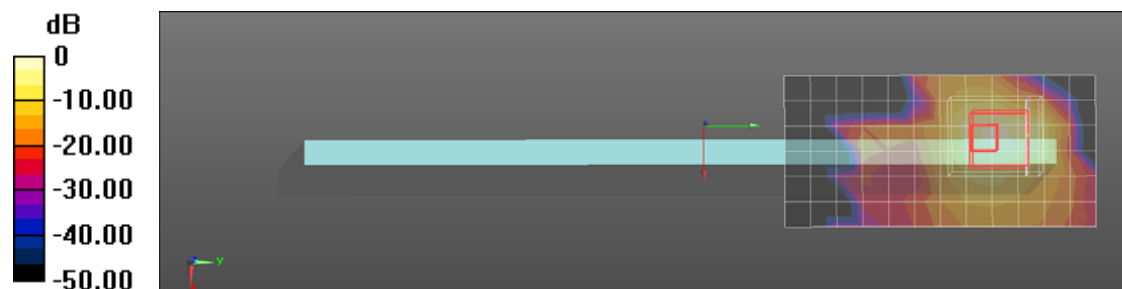

0 dB = 2.74 W/kg = 4.38 dBW/kg

Test Laboratory: Cerpass Lab

802.11a 5785MHz Tablet-edge-1 Main

DUT: MIIX 710-12IKB; Type: QCNFA344A;

Communication System: UID 0, 5GHz Wi-Fi (0); Frequency: 5785 MHz

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.95$ S/m; $\epsilon_r = 48.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/802.11a 5785MHz Tablet-edge-1 Main/Area Scan (7x13x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 1.86 W/kg

Configuration/802.11a 5785MHz Tablet-edge-1 Main/Zoom Scan (8x9x6)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm, Reference Value = 2.968 V/m; Power Drift = -0.03 dB, Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.287 W/kg Maximum value of SAR (measured) = 2.23 W/kg

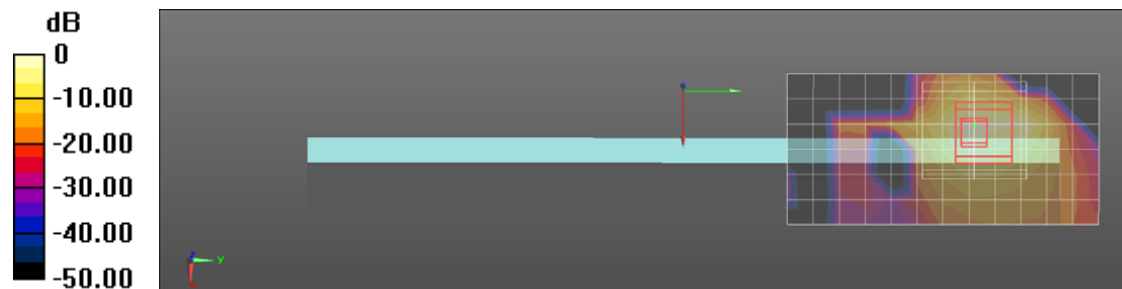

0 dB = 2.23 W/kg = 3.48 dBW/kg

APPENDIX C. Calibration Data for Probe, Dipole and DAE

Please refer to attached files.

APPENDIX D. Photographs of EUT and Setup

Please refer to attached files.