

APPENDIX A. SAR System Verification Data

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

Date/Time: 13/05/2017

Test Laboratory: CERPASS TECH

Dipole Calibration for Body Tissue Pin=250mW, dist=10mm, f=2450 MHz

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 52.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section;

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.68, 7.68, 7.68); Calibrated: 2016/5/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/SystemPerformanceCheck-D2450 Body/Area Scan (5x7x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm, Maximum value of SAR (measured) = 15.1 W/kg

Configuration/SystemPerformanceCheck-D2450 Body/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm, Reference Value = 78.43 V/m; Power Drift = 0.08 dB, Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.51 W/kg Maximum value of SAR (measured) = 16.4 W/kg

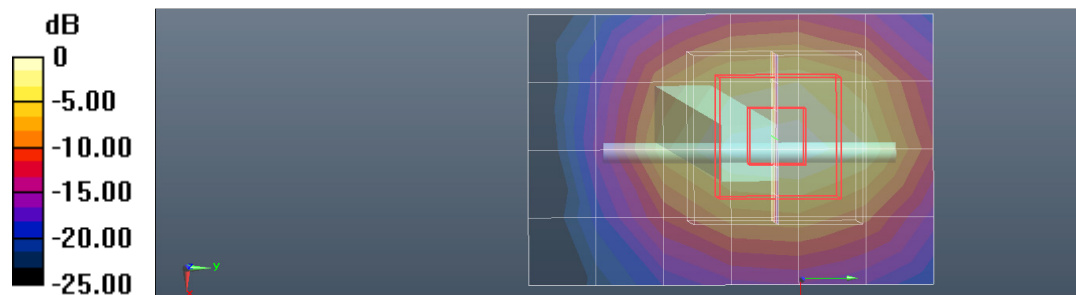

0 dB = 16.4 W/kg = 12.15 dBW/kg

Date/Time: 13/05/2017

Test Laboratory: CERPASS TECH

Dipole Calibration for Body Tissue Pin=100mW, dist=10mm, f=5300 MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section;

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(4.28, 4.28, 4.28); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Area Scan (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 14.2 W/kg

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm, Reference Value = 37.69 V/m; Power Drift = 0.06 dB, Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.19 W/kg Maximum value of SAR (measured) = 16.5 W/kg

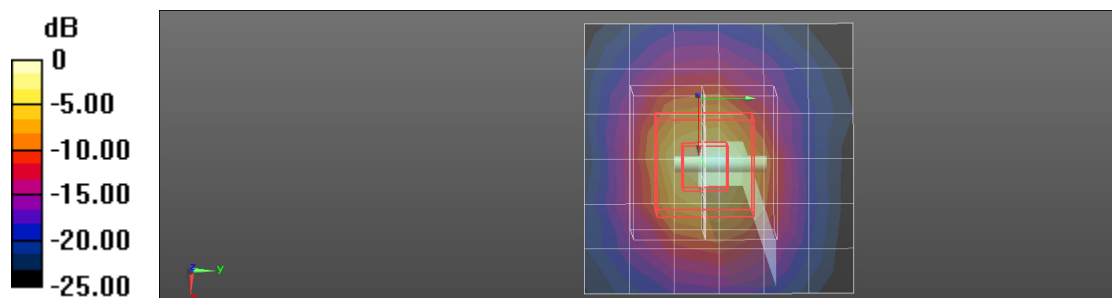

0 dB = 16.5 W/kg = 12.17 dBW/kg

Date/Time: 14/05/2017

Test Laboratory: CERPASS TECH

Dipole Calibration for Body Tissue Pin=100mW, dist=10mm, f=5600 MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2

Communication System: CW; Frequency: 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.76$ S/m; $\epsilon_r = 48.44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm, Maximum value of SAR (measured) = 14.1 W/kg

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm, Reference Value = 37.21 V/m; Power Drift = 0.02 dB, Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 8.29 W/kg; SAR(10 g) = 2.28 W/kg Maximum value of SAR (measured) = 17.7 W/kg

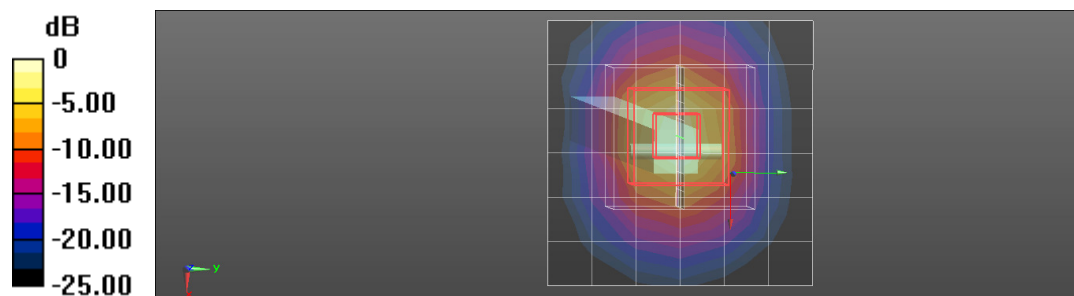

0 dB = 17.7 W/kg = 12.48 dBW/kg

Date/Time: 14/05/2017

Test Laboratory: CERPASS TECH

Dipole Calibration for Body Tissue Pin=100mW, dist=10mm, f=5800 MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.96$ S/m; $\epsilon_r = 48.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm, Maximum value of SAR (measured) = 13.6 W/kg

Configuration/Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm, Reference Value = 35.26 V/m; Power Drift = 0.18 dB, Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.13 W/kg Maximum value of SAR (measured) = 16.7 W/kg

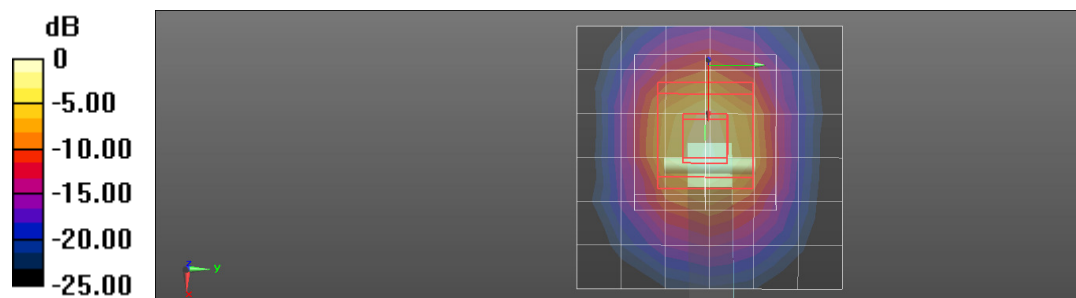

0 dB = 16.7 W/kg = 12.23 dBW/kg

APPENDIX B. SAR measurement Data

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

Plot1

Date/Time: 13/05/2017

Test Laboratory: CERPASS TECH

802.11b 2437MHz Bottom of laptop-main

DUT: ideapad 720s-13IKB; Type: QCNFA344A; (LUXSHARE-ICT Ant)

Communication System: 2.4GHz Wi-Fi; Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 52.48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(7.68, 7.68, 7.68); Calibrated: 2016/5/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/802.11b 2437MHz Bottom of laptop-main/Area Scan (7x11x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm, Maximum value of SAR (measured) = 1.33W/kg

Configuration/802.11b 2437MHz Bottom of laptop-main/Zoom Scan (8x8x6)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm, Reference Value = 2.720 V/m; Power Drift = 0.11 dB, Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.480 W/kg Maximum value of SAR (measured) = 1.87 W/kg

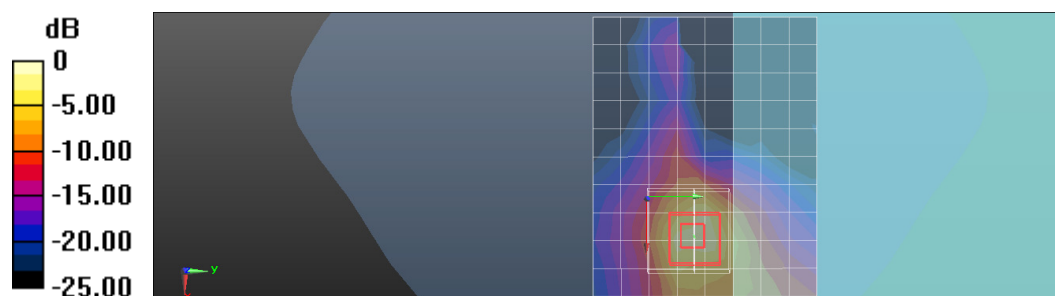

0 dB = 1.87 W/kg = 2.72 dBW/kg

Test Laboratory: CERPASS TECH

802.11a 5260MHz Bottom of laptop-aux

DUT: ideapad 720s-13IKB; Type: QCNFA344A; (LUXSHARE-ICT Ant)

Communication System: 5GHz Wi-Fi; Frequency: 5260 MHz

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.36$ S/m; $\epsilon_r = 49.40$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(4.28, 4.28, 4.28); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/802.11a 5260MHz Bottom of laptop-aux/Area Scan (9x11x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 1.10 W/kg

Configuration/802.11a 5260MHz Bottom of laptop-aux/Zoom Scan (10x10x6)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm, Reference Value = 2.609 V/m; Power Drift = 0.06 dB, Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.148 W/kg Maximum value of SAR (measured) = 1.18 W/kg

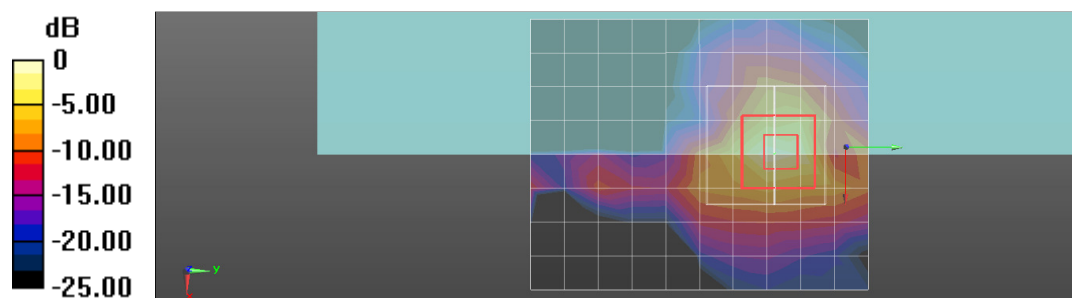

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Laboratory: CERPASS TECH

802.11a 5580MHz Bottom of laptop-aux

DUT: ideapad 720s-13IKB; Type: QCNFA344A; (LUXSHARE-ICT Ant)

Communication System: 5GHz Wi-Fi; Frequency: 5580 MHz

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.74$ S/m; $\epsilon_r = 48.50$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF(3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/802.11a 5580MHz Bottom of laptop-aux/Area Scan (9x11x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 1.08 W/kg

Configuration/802.11a 5580MHz Bottom of laptop-aux/Zoom Scan (9x11x6)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm, Reference Value = 5.509 V/m; Power Drift = 0.14 dB, Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.183 W/kg Maximum value of SAR (measured) = 1.39 W/kg

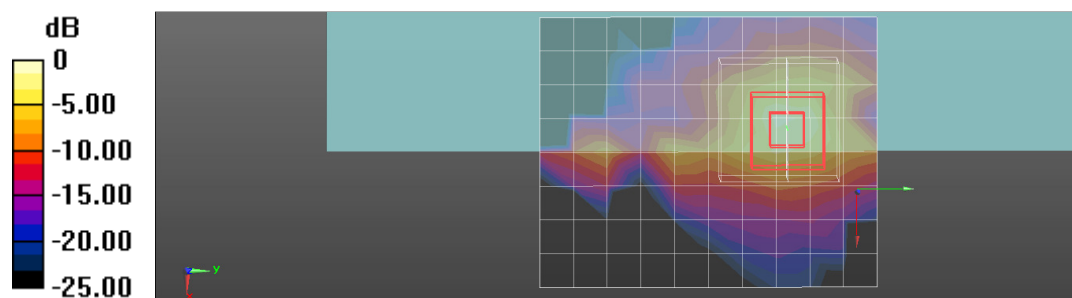

0 dB = 1.39 W/kg = 1.43 dBW/kg

Test Laboratory: CERPASS TECH

802.11a 5785MHz Bottom of laptop-aux

DUT: ideapad 720s-13IKB; Type: QCNFA344A; (LUXSHARE-ICT Ant)

Communication System: 5GHz Wi-Fi; Frequency: 5785 MHz

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.93$ S/m; $\epsilon_r = 48.22$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3927; ConvF((3.8, 3.8, 3.8); Calibrated: 2016/5/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1379; Calibrated: 2016/5/23
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/802.11a 5785MHz Bottom of laptop-aux/Area Scan (9x11x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm, Maximum value of SAR (measured) = 0.884 W/kg

Configuration/802.11a 5785MHz Bottom of laptop-aux/Zoom Scan (10x11x6)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm, Reference Value = 5.256 V/m; Power Drift = 0.04 dB, Peak SAR (extrapolated) = 4.80 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.152 W/kg Maximum value of SAR (measured) = 1.20 W/kg

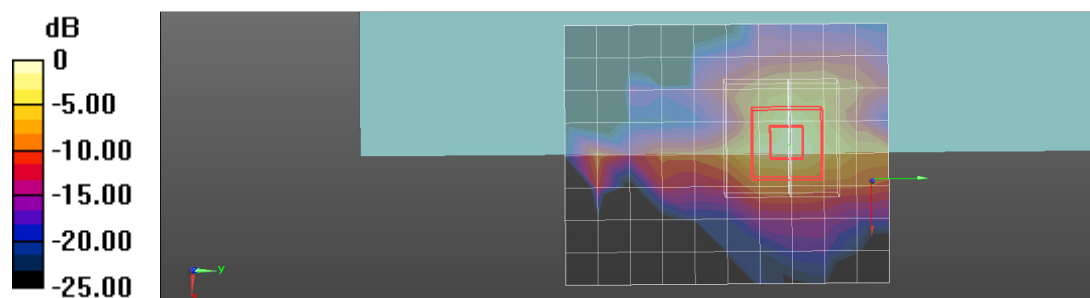

0 dB = 1.20 W/kg = 0.79 dBW/kg

APPENDIX C. Calibration Data for Probe, Dipole and DAE

Please refer to attached files.

APPENDIX D. Photographs of EUT and Setup

Please refer to attached files.