

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch11;Ant 1+2

Communication System: 802.11b ; Frequency: 2462 MHz;Duty Cycle: 1:1.01

Medium: MSL_2450_180409 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 51.401$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.94, 7.94, 7.94); Calibrated: 2017/5/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1238
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7373)

Area Scan (71x261x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.919 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.16 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.987 W/kg

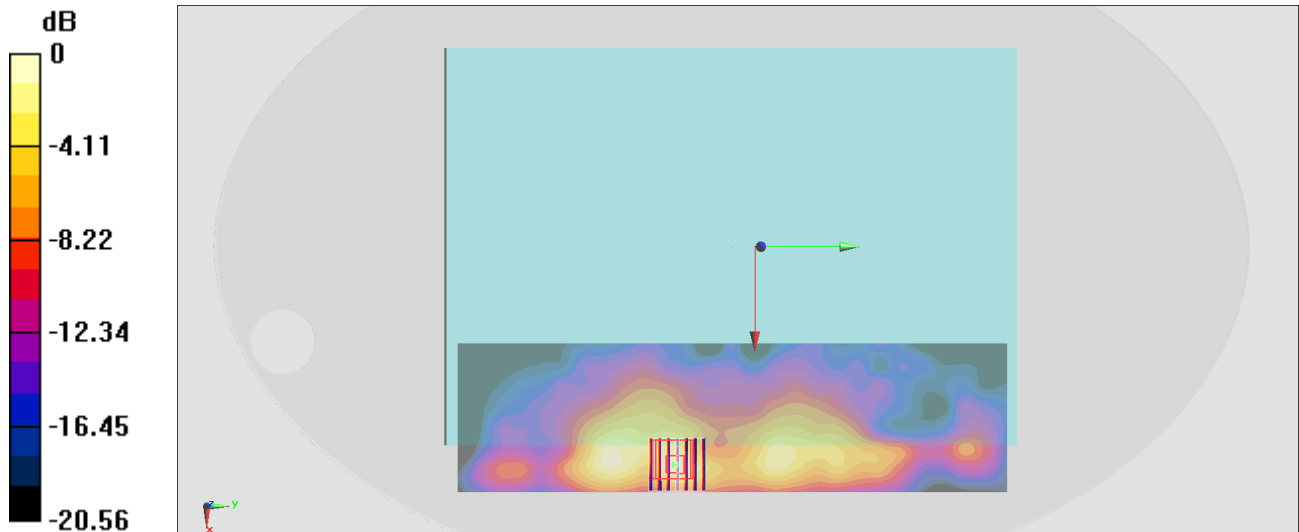

0 dB = 0.987 W/kg = -0.06 dBW/kg

#02_WLAN5GHz_802.11a 6Mbps_Bottom of Laptop_0mm_Ch60;Ant 1+2

Communication System: 802.11a ; Frequency: 5300 MHz;Duty Cycle: 1:1.058

Medium: MSL_5G_180409 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.494$ S/m; $\epsilon_r = 48.36$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(4.59, 4.59, 4.59); Calibrated: 2017/5/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1029
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7373)

Area Scan (81x341x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.570 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.398 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.647 W/kg

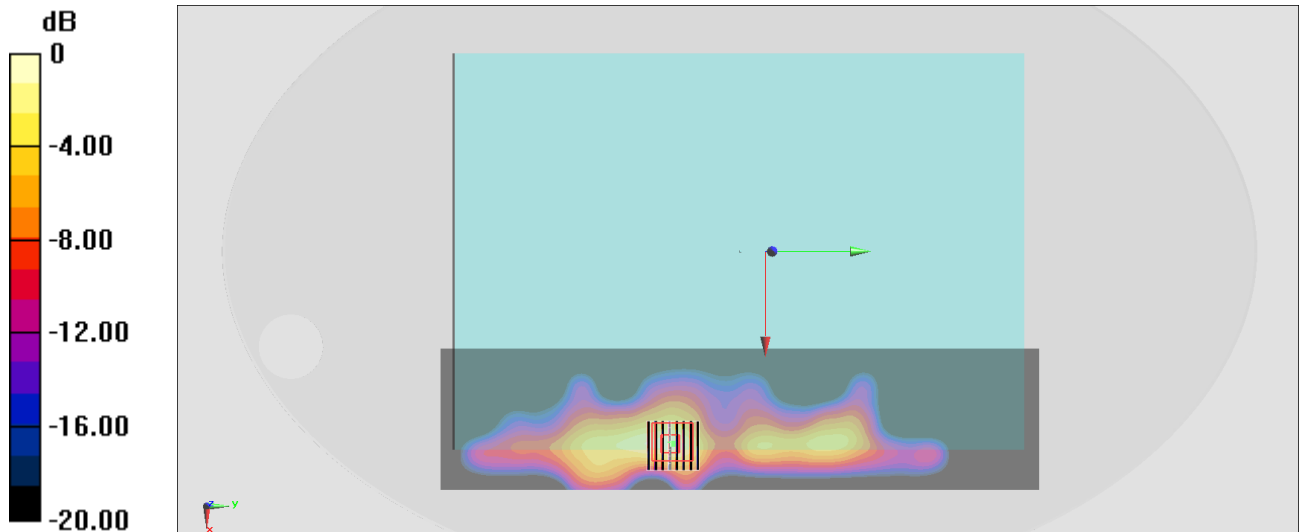

0 dB = 0.647 W/kg = -1.89 dBW/kg

#03_WLAN5GHz_802.11a 6Mbps_Bottom of Laptop_0mm_Ch100;Ant 1+2

Communication System: 802.11a ; Frequency: 5500 MHz;Duty Cycle: 1:1.058

Medium: MSL_5G_180409 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.754$ S/m; $\epsilon_r = 48.022$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(4.17, 4.17, 4.17); Calibrated: 2017/5/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1029
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7373)

Area Scan (81x341x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.735 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.684 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.866 W/kg

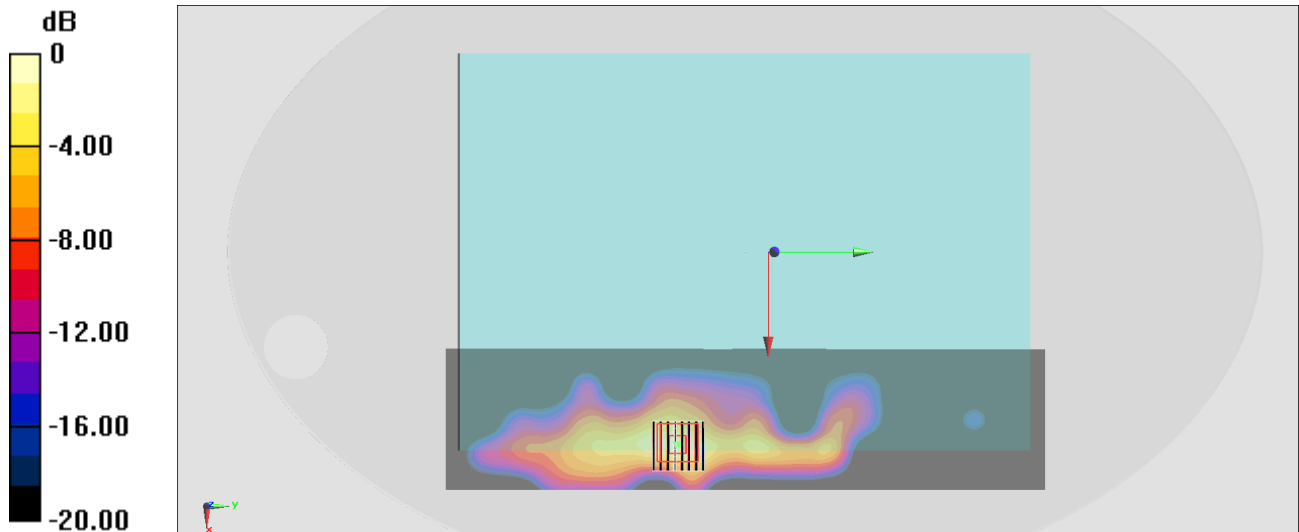

0 dB = 0.866 W/kg = -0.62 dBW/kg

#04_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch159;Ant 1+2

Communication System: 802.11n ; Frequency: 5795 MHz;Duty Cycle: 1:1.126

Medium: MSL_5G_180409 Medium parameters used : $f = 5795$ MHz; $\sigma = 6.163$ S/m; $\epsilon_r = 47.519$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(4.14, 4.14, 4.14); Calibrated: 2017/5/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1029
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7437)

Area Scan (81x341x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.884 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.414 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

