




A D T

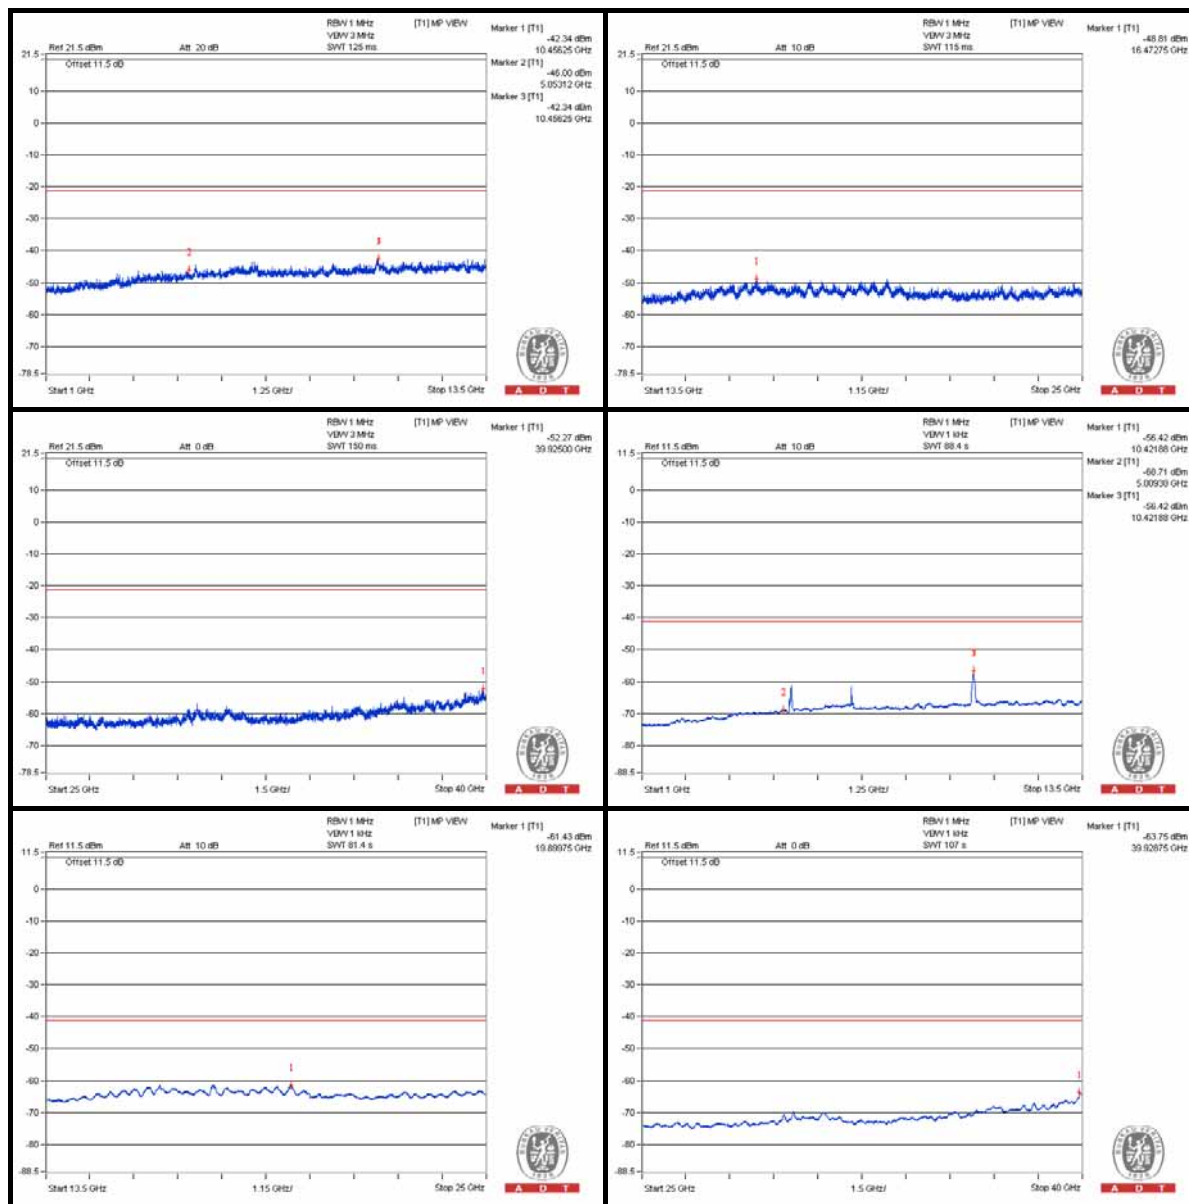

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5148.7 PK	69.98	74	-4.02	-28.36	3.08	-25.28
2	5148.05 AV	56.44	54	*2.44	-41.9	3.08	-38.82

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)

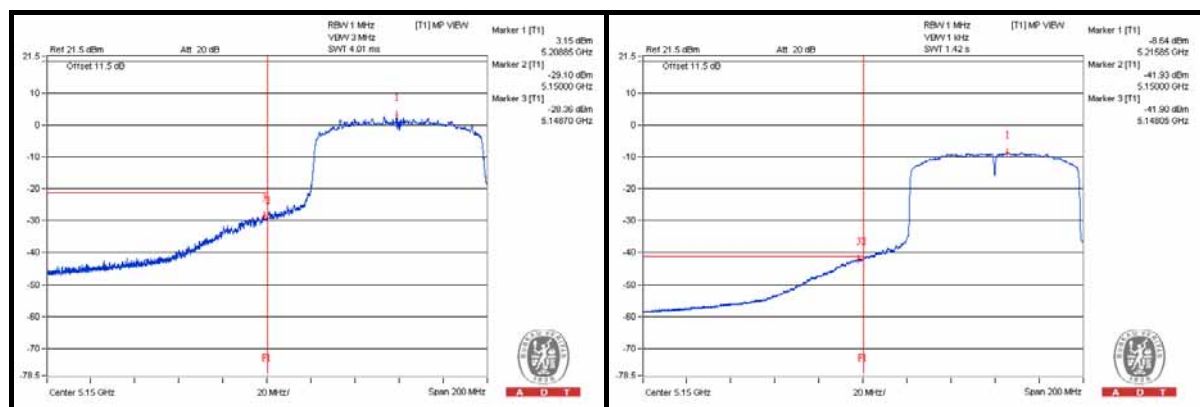

802.11ac (VHT80) - Channel 58


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3525 PK	52.13	74	-21.87	-47.89	4.76	-43.13
2	3528.125 AV	29.44	54	-24.56	-70.58	4.76	-65.82
3	7050 PK	53.67	74	-20.33	-46.35	4.76	-41.59
4	7053.125 AV	35.51	54	-18.49	-64.51	4.76	-59.75
5	10578.125 PK	56.48	74	-17.52	-43.54	4.76	-38.78
6	10581.25 AV	39.76	54	-14.24	-60.26	4.76	-55.5
7	15860.375 PK	48.5	74	-25.5	-51.52	4.76	-46.76
8	15866.125 AV	37.03	54	-16.97	-62.99	4.76	-58.23

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

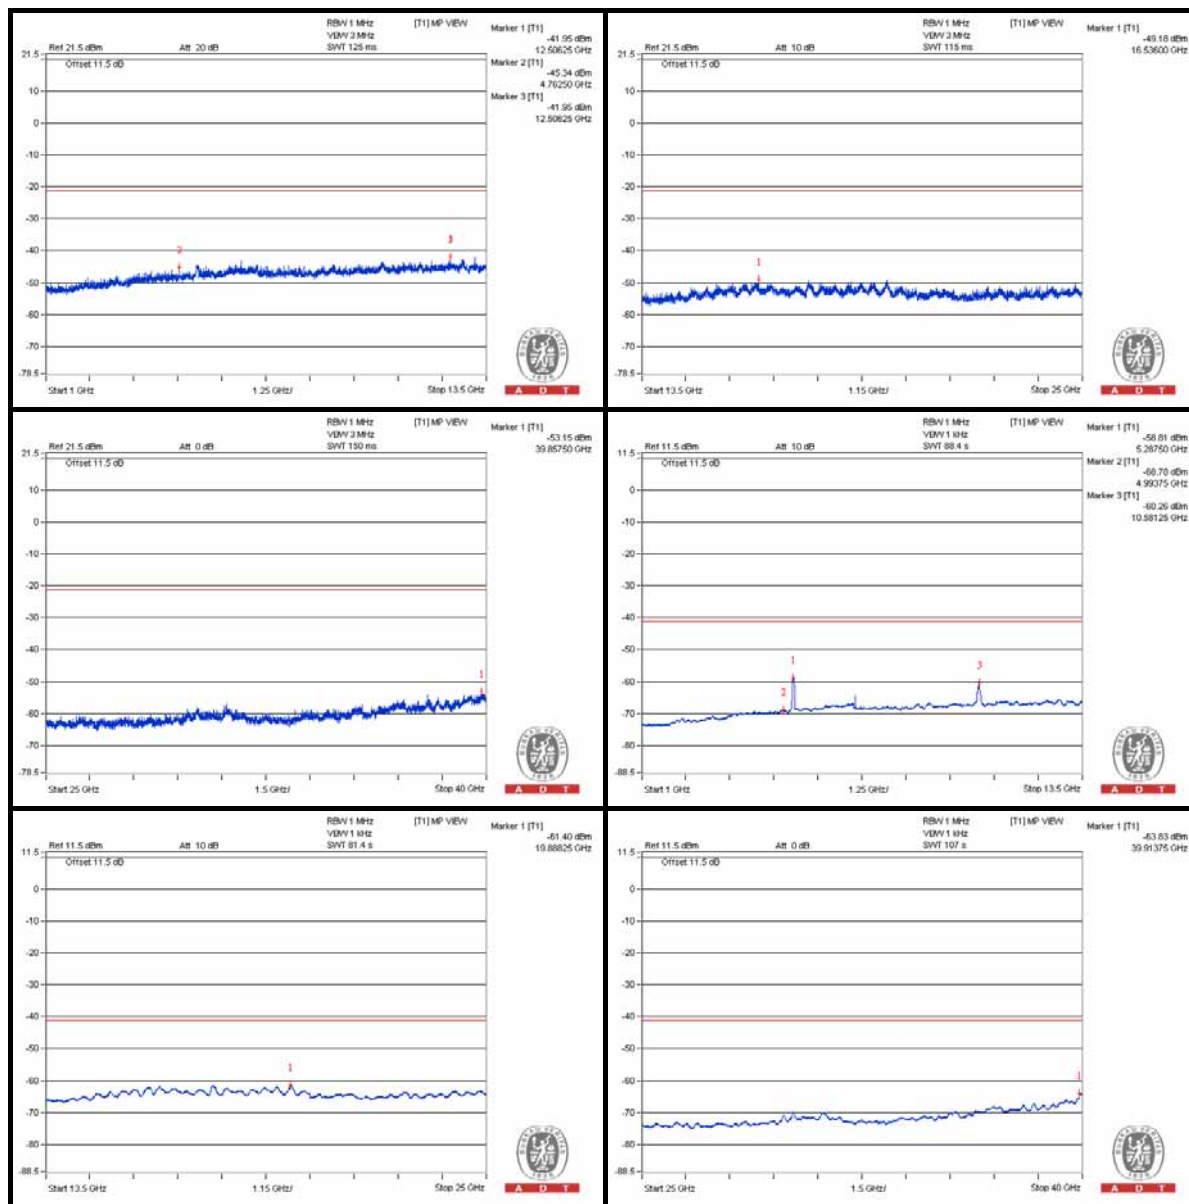


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5358.95 PK	63.79	74	-10.21	-34.55	3.08	-31.47
2	5350.05 AV	49.53	54	-4.47	-48.81	3.08	-45.73

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

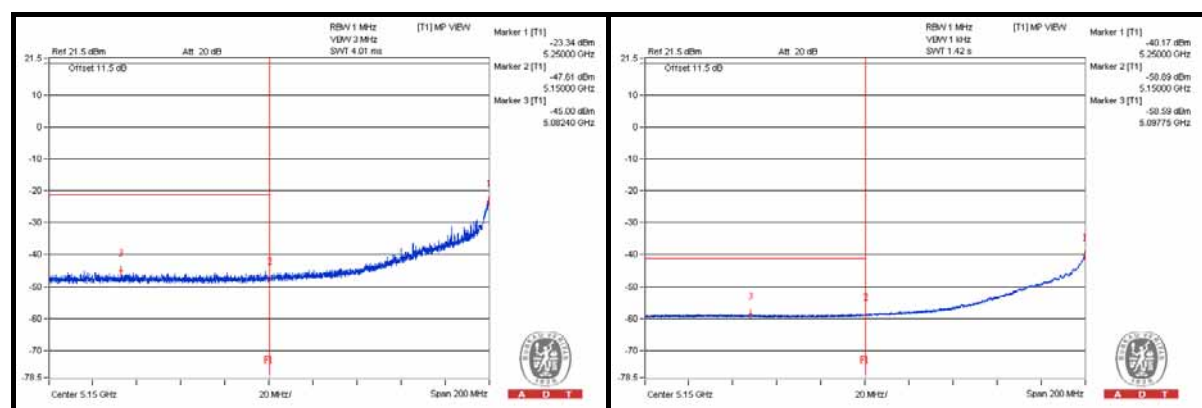

802.11ac (VHT80) - Channel 106


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3681.25 PK	51.73	74	-22.27	-48.29	4.76	-43.53
2	3687.5 AV	29.67	54	-24.33	-70.35	4.76	-65.59
3	7378.125 PK	53.26	74	-20.74	-46.76	4.76	-42
4	7371.875 AV	31.77	54	-22.23	-68.25	4.76	-63.49
5	11062.5 PK	55.88	74	-18.12	-44.14	4.76	-39.38
6	11059.375 AV	41.61	54	-12.39	-58.41	4.76	-53.65
7	16582 PK	48.78	74	-25.22	-51.24	4.76	-46.48
8	16582 AV	36.68	54	-17.32	-63.34	4.76	-58.58

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

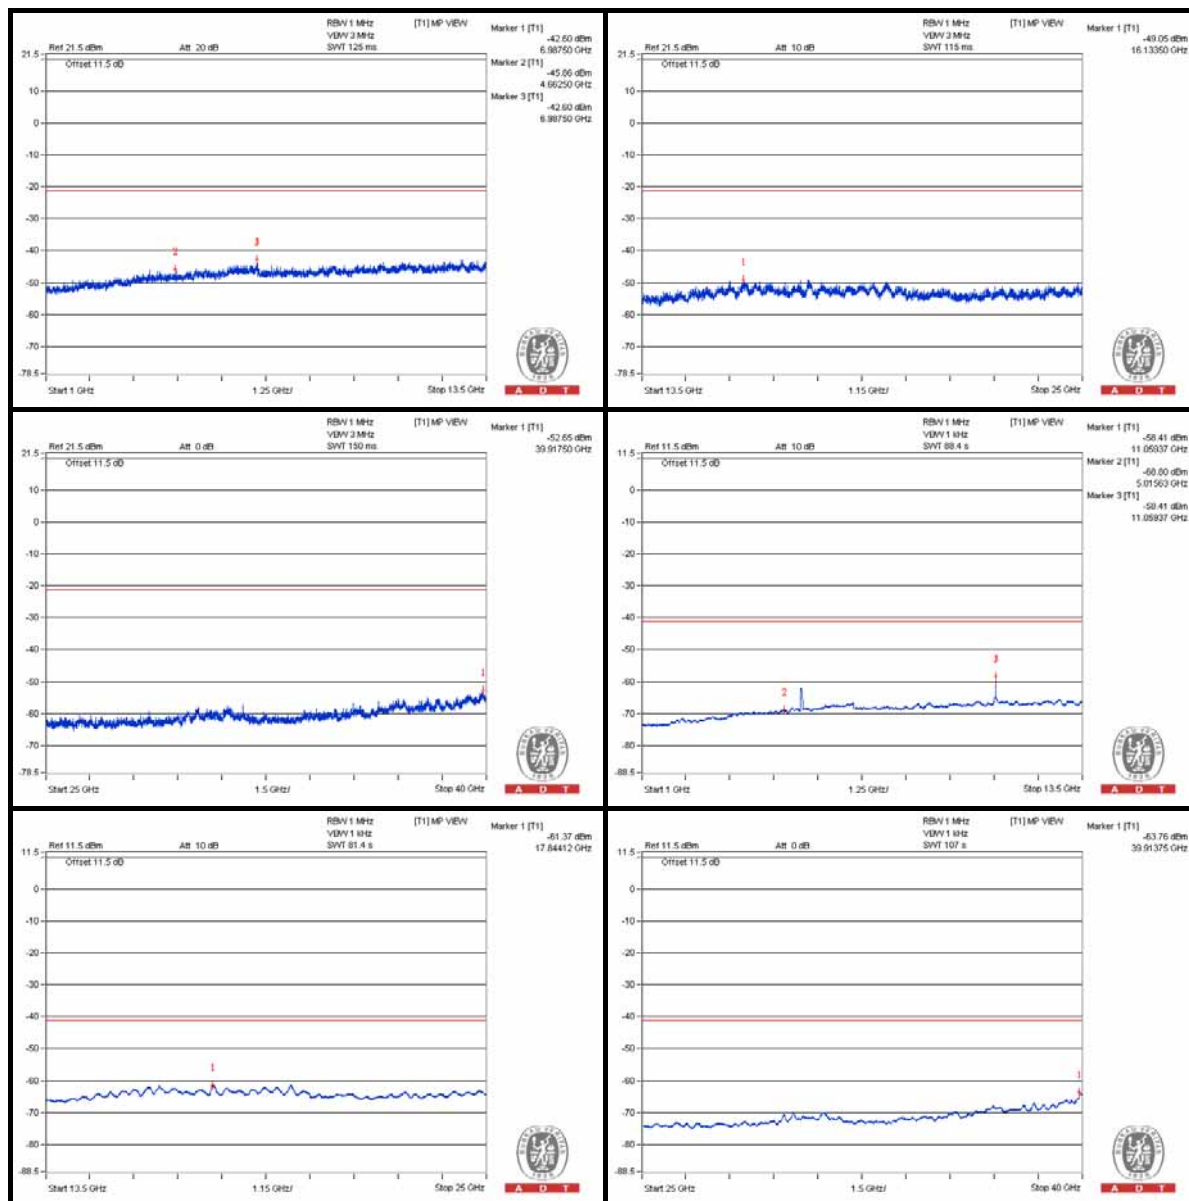

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5460.25 PK	69.74	74	-4.26	-30.28	4.76	-25.52
2	*5469.94 AV	54.89	54	*0.89	-45.13	4.76	-40.37

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)

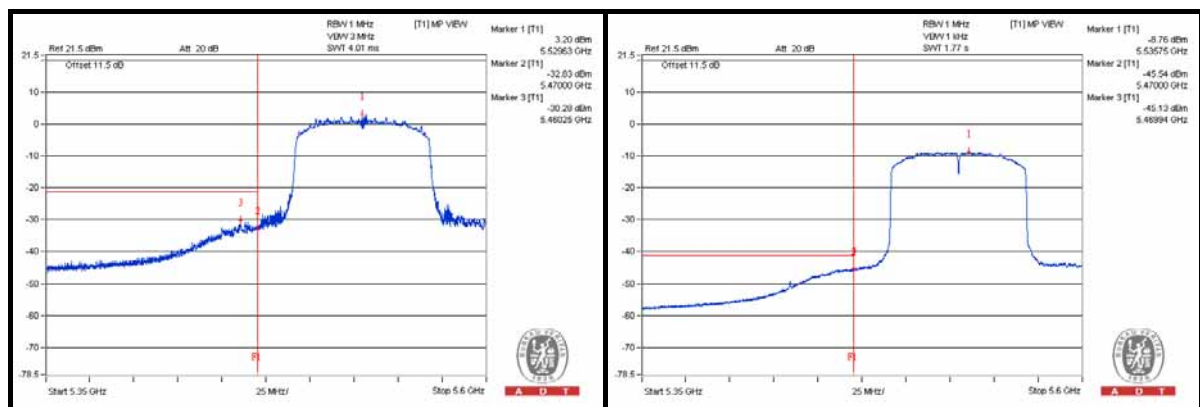

802.11ac (VHT80) - Channel 138

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793.75 PK	53.01	74	-20.99	-47.01	4.76	-42.25
2	3793.75 AV	38.25	54	-15.75	-61.77	4.76	-57.01
3	7584.375 PK	54.34	74	-19.66	-45.68	4.76	-40.92
4	7581.25 AV	31.96	54	-22.04	-68.06	4.76	-63.3
5	11387.5 PK	56.19	74	-17.81	-43.83	4.76	-39.07
6	11381.25 AV	37.99	54	-16.01	-62.03	4.76	-57.27
7	17079.375 PK	47.49	74	-26.51	-52.53	4.76	-47.77
8	17070.75 AV	36.23	54	-17.77	-63.79	4.76	-59.03


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



A D T

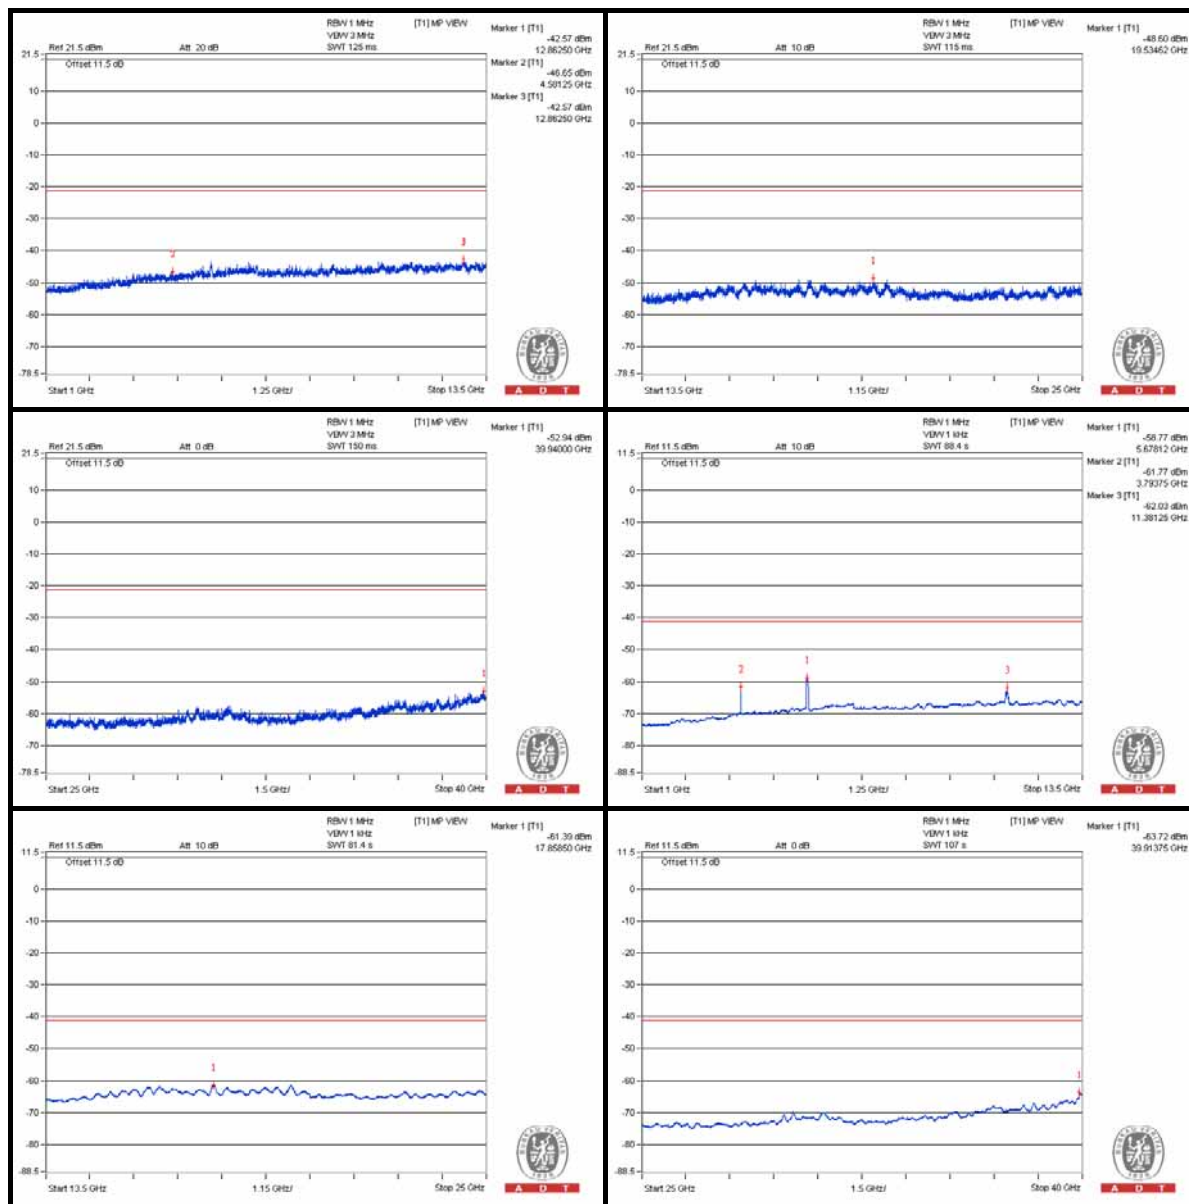


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5365 PK	55.96	74	-18.04	-44.06	4.76	-39.3
2	5389.06 AV	42.28	54	-11.72	-57.74	4.76	-52.98

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

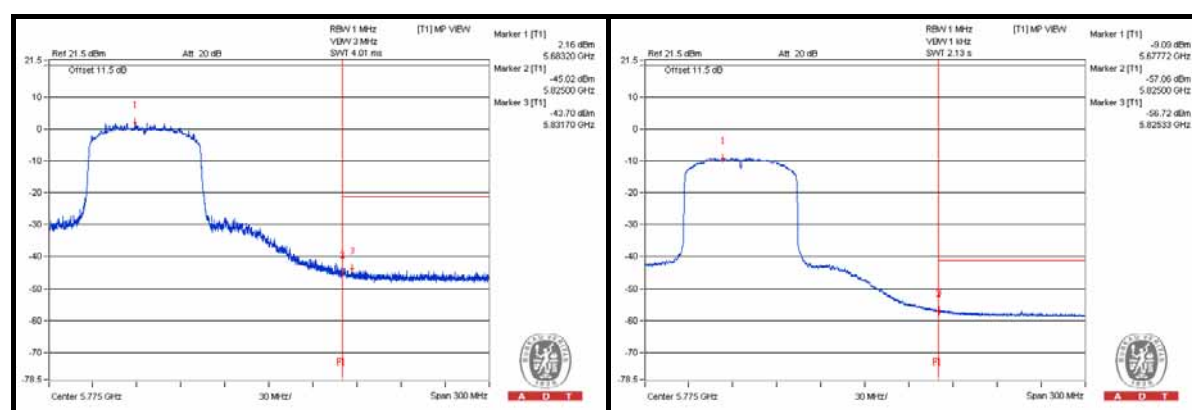

4.5.11 TEST RESULTS (MODE 2, CONDUCTED MEASUREMENT)

Radiated versus Conducted Measurement	
☒ Conducted measurement	☐ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Conducted Measurement Factor
a. The composite gain will be used when signal support the correlated signal. (Composite gain = $3.08\text{dBi} + 10\log(2) = 6.09\text{dBi}$ Composite gain = $4.76\text{dBi} + 10\log(2) = 7.77\text{dBi}$) b. For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. c. For the band edge the gain for the specific band may have been used. d. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For $f = 30 - 1000$ MHz, add 4.7 dB. Note: The conducted emission test was considered some factor to compute test result.

BELOW 1GHz WORST-CASE DATA

802.11a – Channel 116


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	70.9825	29.79	40	-10.21	-77.04	-75.59	7.77	-65.47
2	195.6275	30.1	43.5	-13.4	-75.17	-76.87	7.77	-65.16
3	344.0375	30.15	46	-15.85	-74.51	-77.93	7.77	-65.11
4	517.425	29.99	46	-16.01	-74.35	-78.87	7.77	-65.27
5	765.9875	31.48	46	-14.52	-75.47	-73.81	7.77	-63.78
6	935.7375	31.79	46	-14.21	-74.06	-74.44	7.77	-63.47

Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

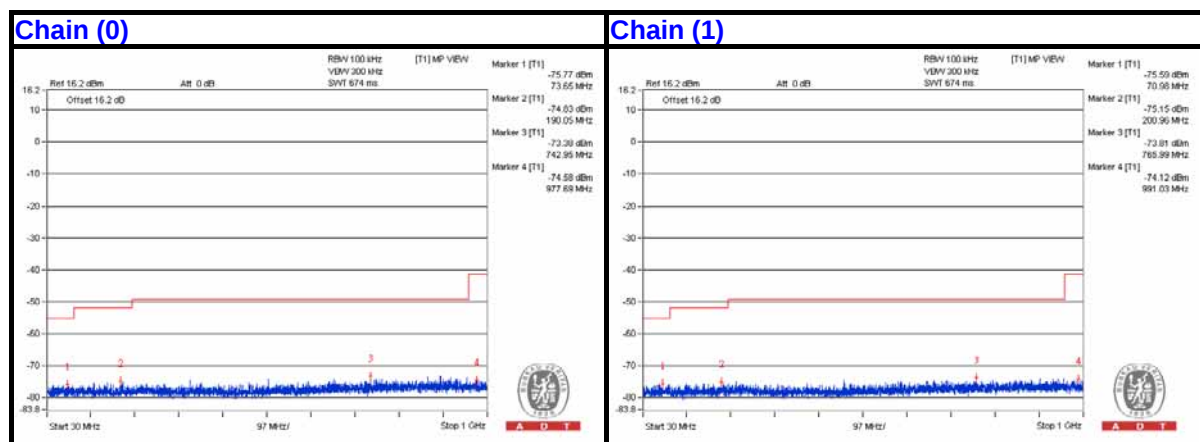

ABOVE 1GHz DATA
802.11a - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3462.5 PK	54.87	74	-19.13	-50.09	-48.97	6.09	-40.39
2	3459.375 AV	33.78	54	-20.22	-70.53	-70.64	6.09	-61.48
3	6912.5 PK	58.47	74	-15.53	-46.53	-45.34	6.09	-36.79
4	6906.25 AV	41.48	54	-12.52	-60.66	-67.65	6.09	-53.78
5	10365.625 PK	61.05	74	-12.95	-42.39	-44.48	6.09	-34.21
6	10359.375 AV	46.21	54	-7.79	-57.12	-59.5	6.09	-49.05
7	15538.375 PK	52.77	74	-21.23	-52.12	-51.12	6.09	-42.49
8	15544.125 AV	41.21	54	-12.79	-62.98	-63.33	6.09	-54.05

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

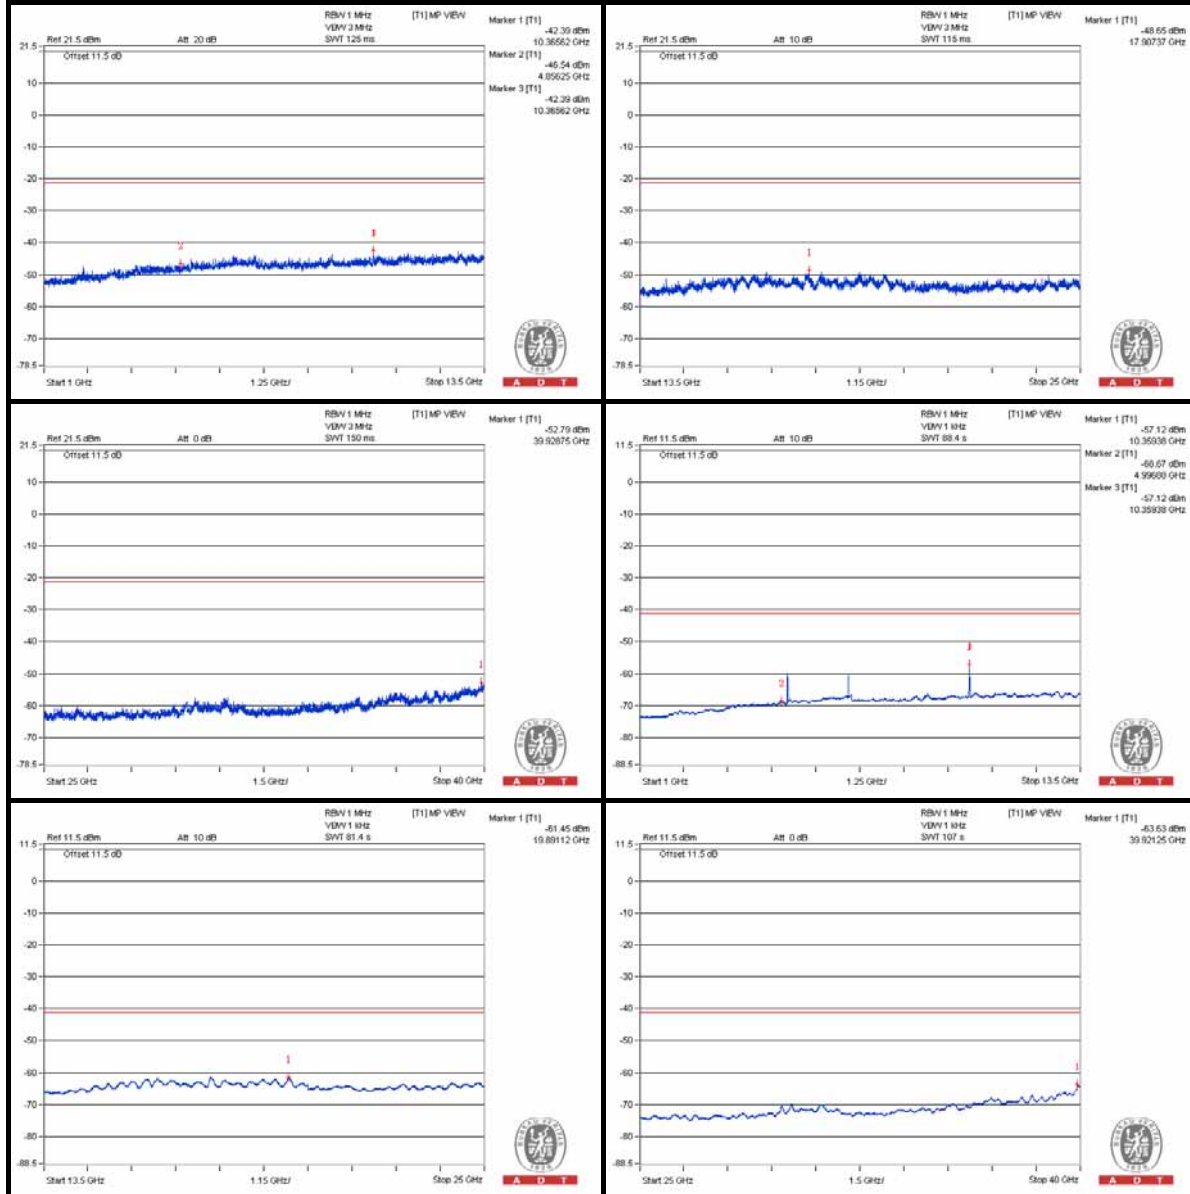

Chain (1)

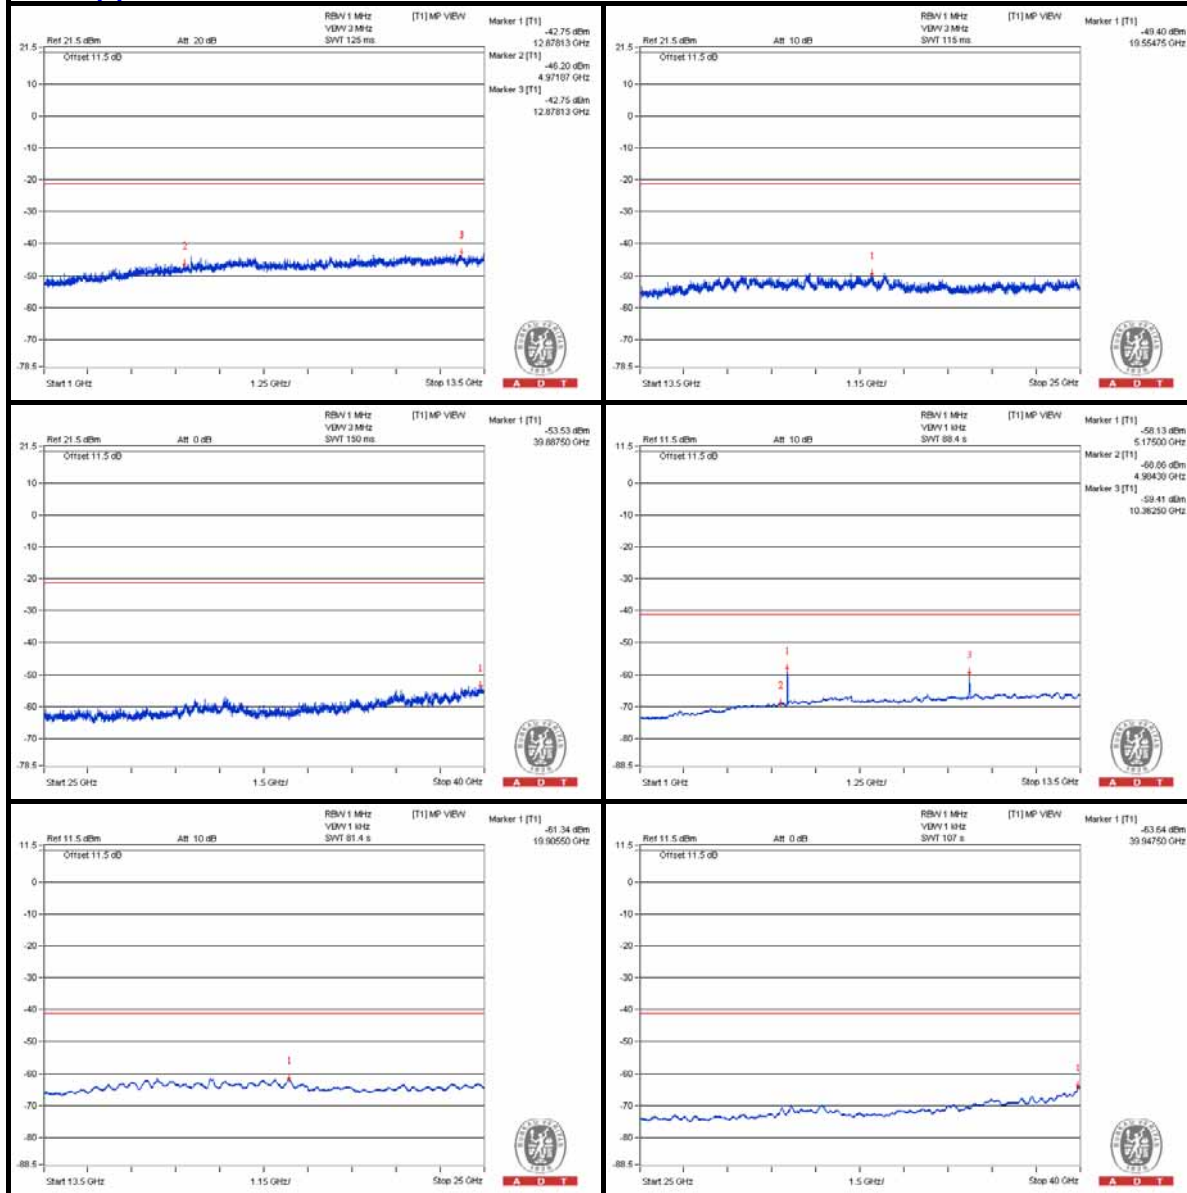

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.05 PK	71.95	74	-2.05	-36.06	-30.45	6.09	-23.31
2	5149.9 AV	48.59	54	-5.41	-56.37	-55.24	6.09	-46.67

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

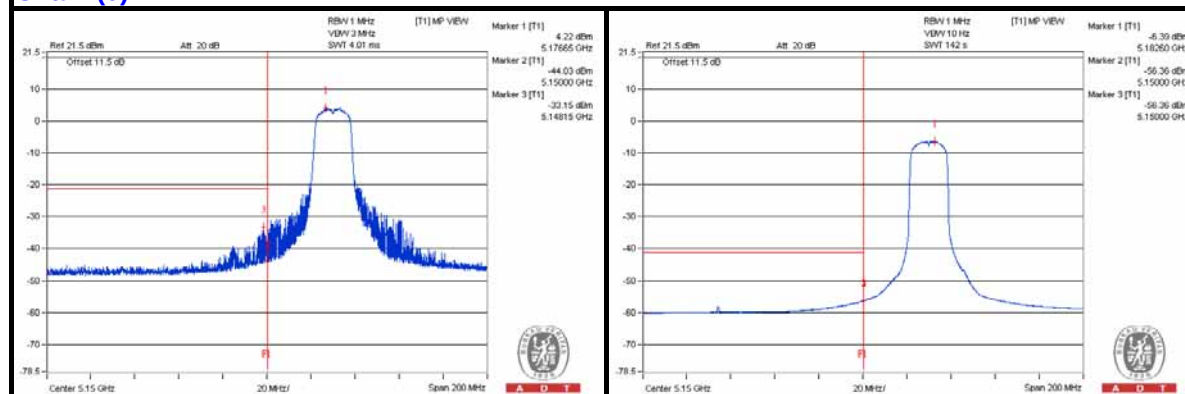

Chain (1)

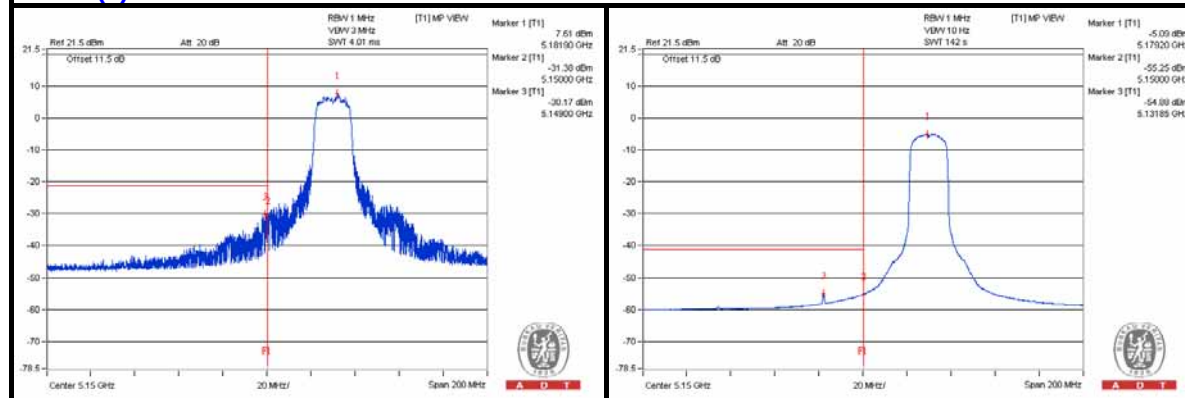

802.11a - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3468.75 PK	54.75	74	-19.25	-50.61	-48.79	6.09	-40.51
2	3468.75 AV	33.16	54	-20.84	-71.08	-71.33	6.09	-62.1
3	6934.375 PK	58.28	74	-15.72	-46.27	-45.9	6.09	-36.98
4	6934.375 AV	41.42	54	-12.58	-60.7	-67.81	6.09	-53.84
5	10403.125 PK	61.61	74	-12.39	-40.91	-46.01	6.09	-33.65
6	10400 AV	47.95	54	-6.05	-54.14	-61.46	6.09	-47.31
7	15598.75 PK	52.05	74	-21.95	-51.32	-53.6	6.09	-43.21
8	15593 AV	40.15	54	-13.85	-64.19	-64.24	6.09	-55.11

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

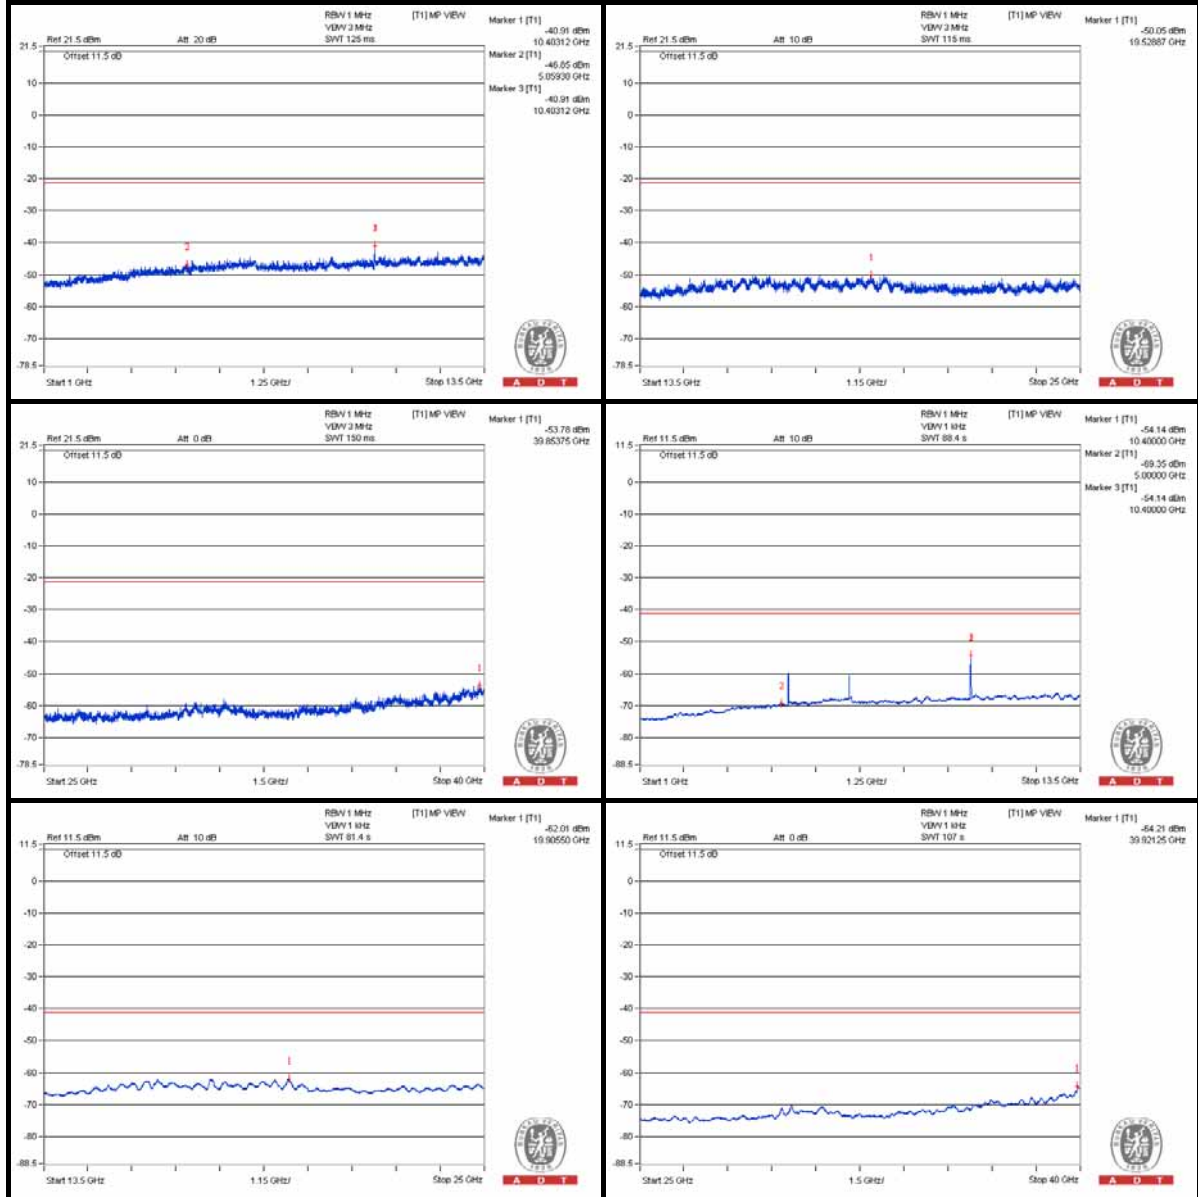

Chain (1)

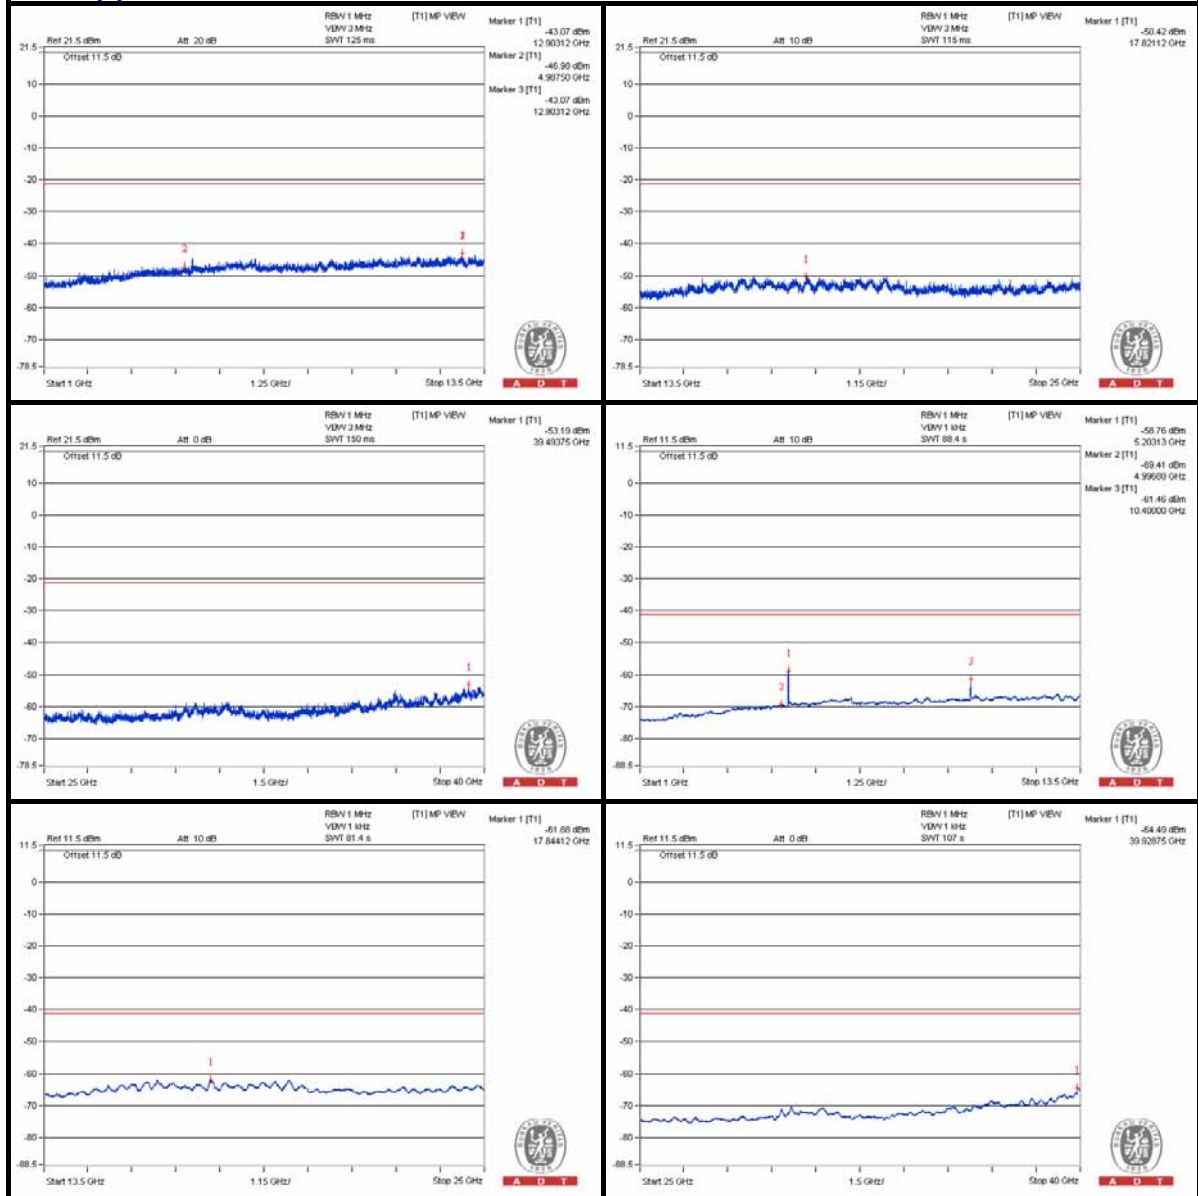

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5147.6 PK	63.68	74	-10.32	-42.28	-39.51	6.09	-31.58
2	5149.95 AV	46.46	54	-7.54	-58.34	-57.51	6.09	-48.8

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

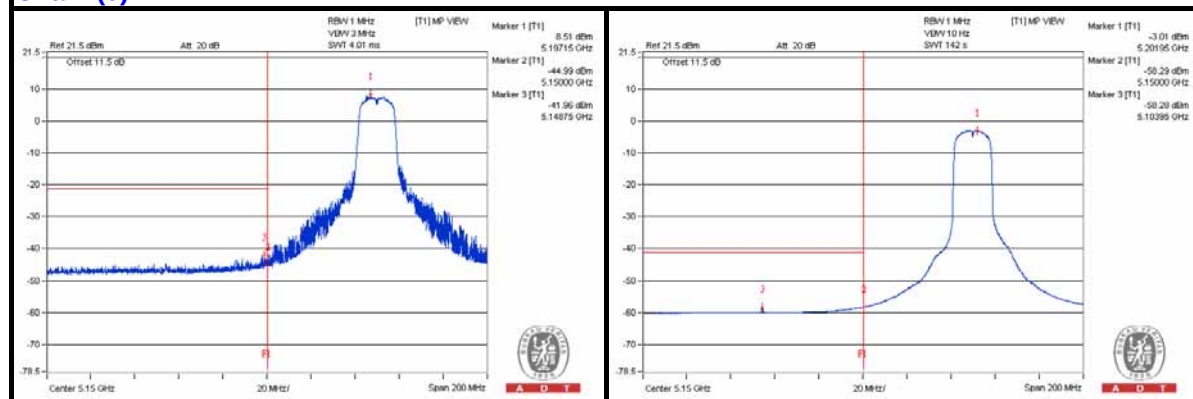

Chain (1)

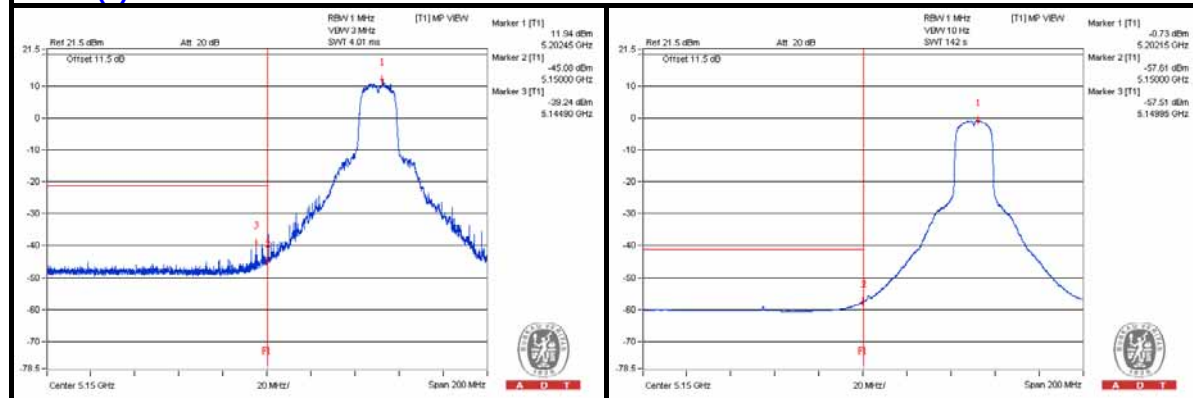

802.11a - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3500 PK	55.93	74	-18.07	-49.13	-47.83	6.09	-39.33
2	3500 AV	33.69	54	-20.31	-70.6	-70.74	6.09	-61.57
3	6981.25 PK	59.5	74	-14.5	-44.47	-45.3	6.09	-35.76
4	6987.5 AV	39.86	54	-14.14	-63.09	-66.59	6.09	-55.4
5	10478.125 PK	61.99	74	-12.01	-41.28	-43.83	6.09	-33.27
6	10478.125 AV	46.36	54	-7.64	-55.75	-62.91	6.09	-48.9
7	15713.75 PK	52.61	74	-21.39	-52.21	-51.34	6.09	-42.65
8	15725.25 AV	41.03	54	-12.97	-63.5	-63.16	6.09	-54.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

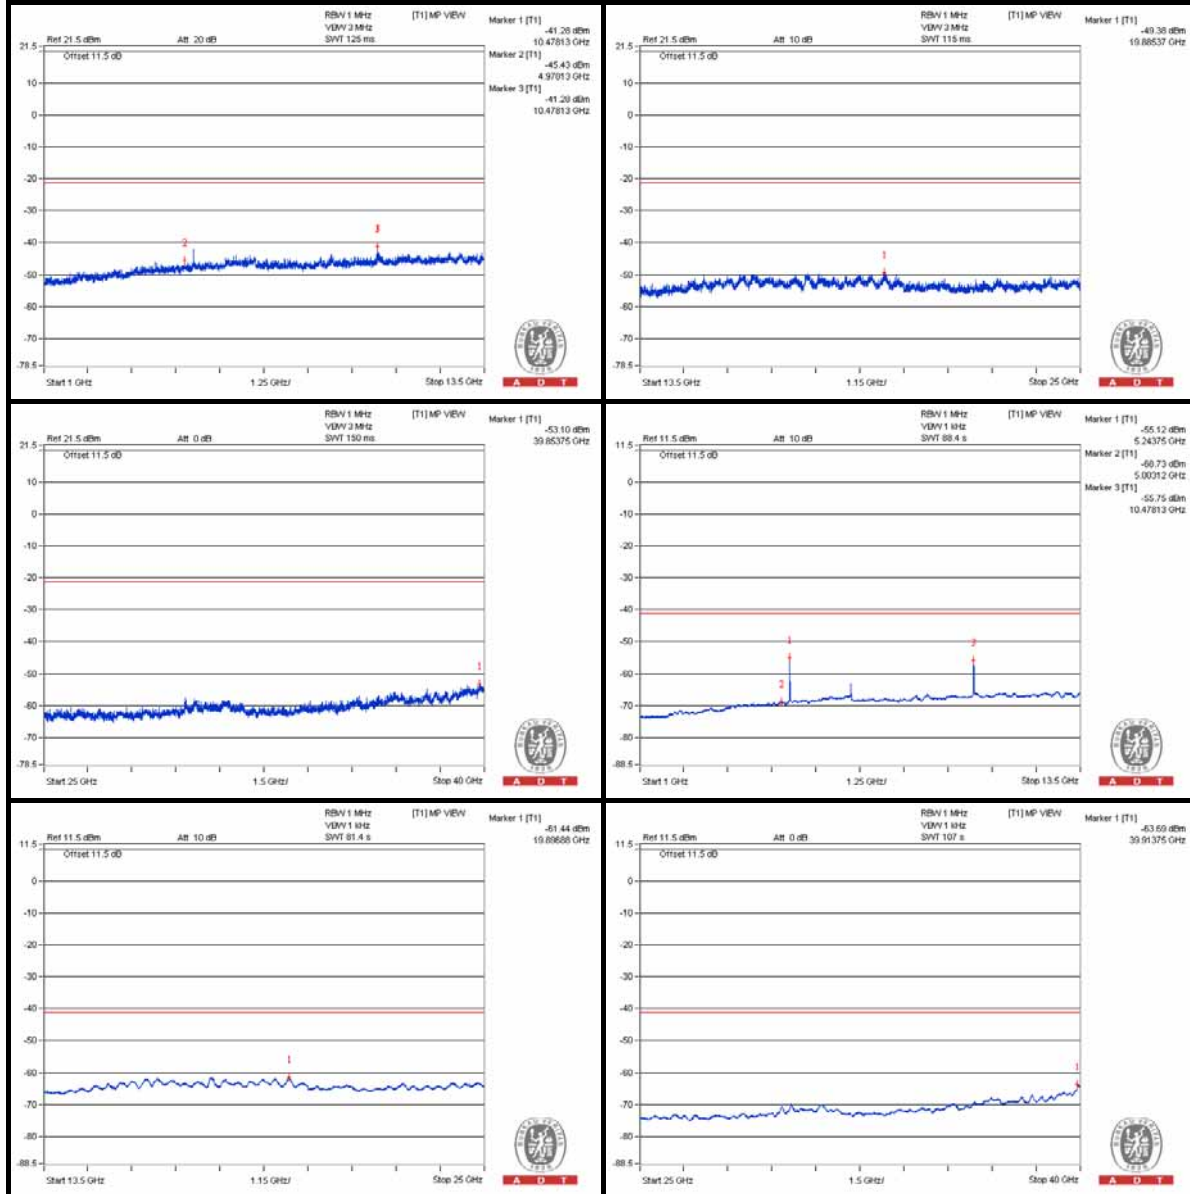

Chain (1)

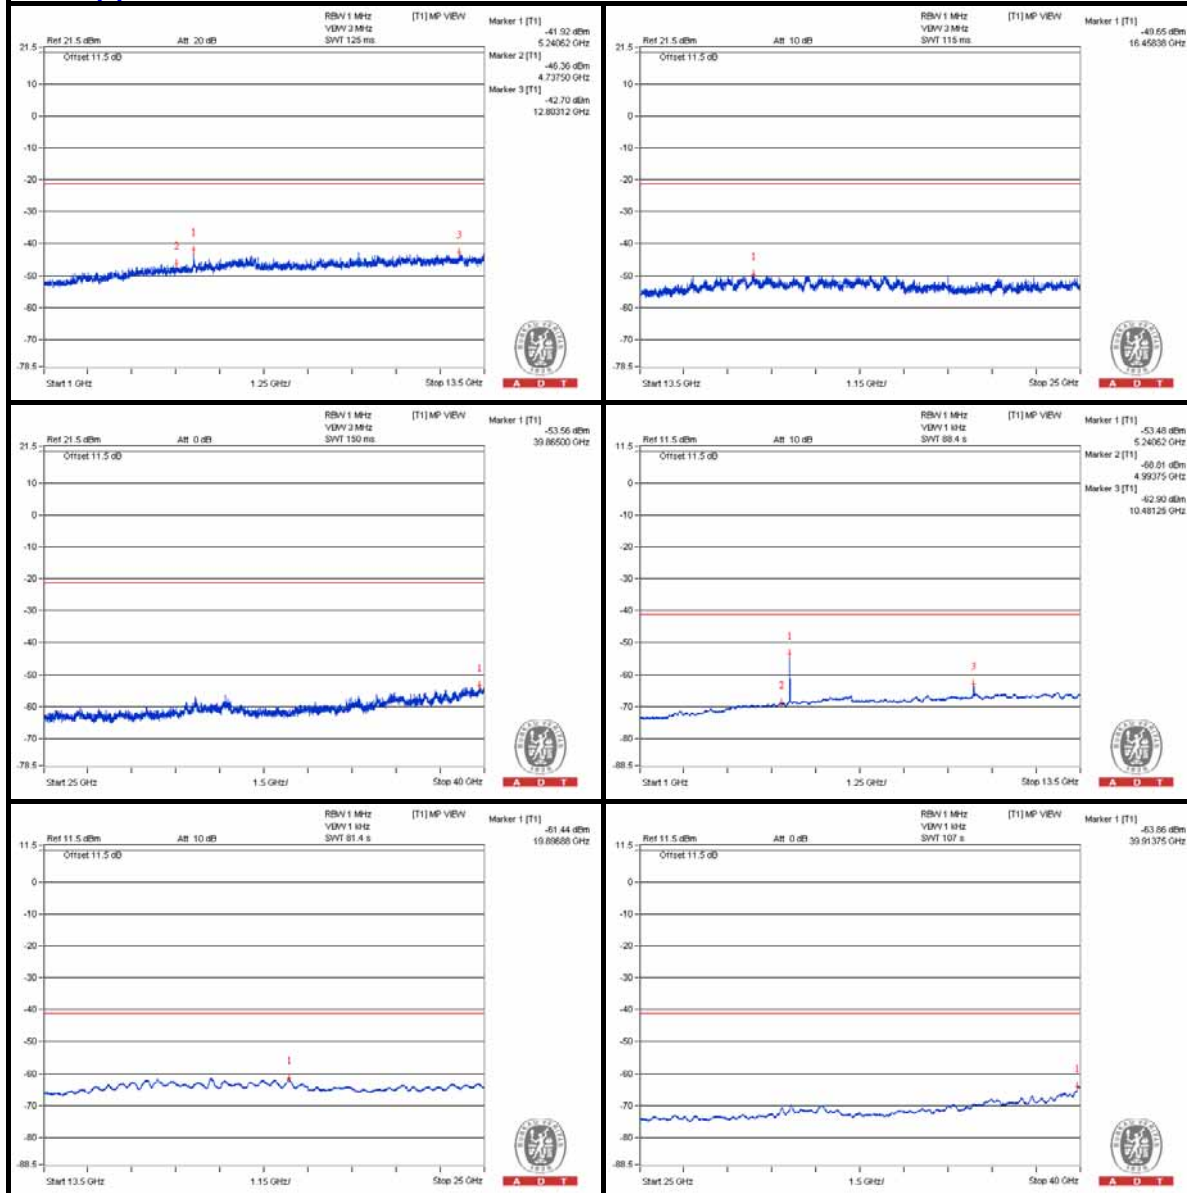

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5144.75 PK	58.72	74	-15.28	-48.78	-43.84	6.09	-36.54
2	5144.45 AV	44.93	54	-9.07	-60.16	-58.8	6.09	-50.33

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

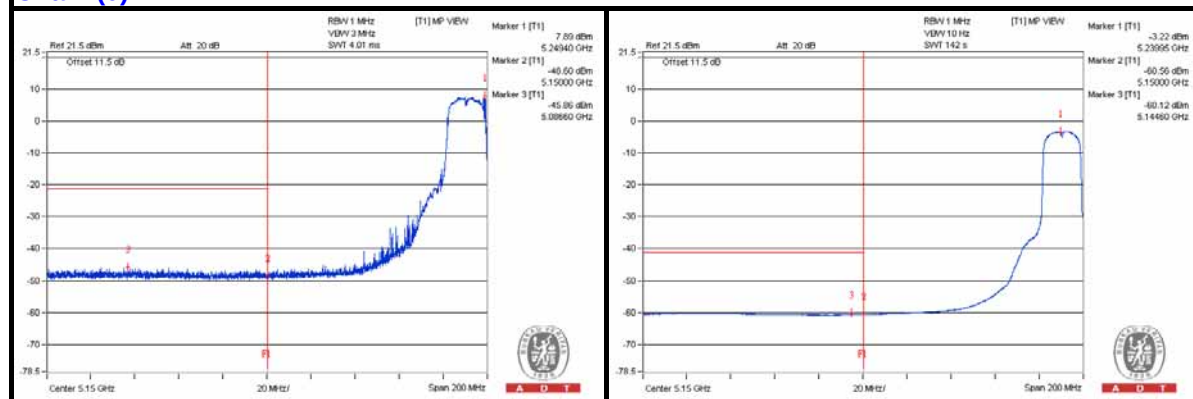

Chain (1)

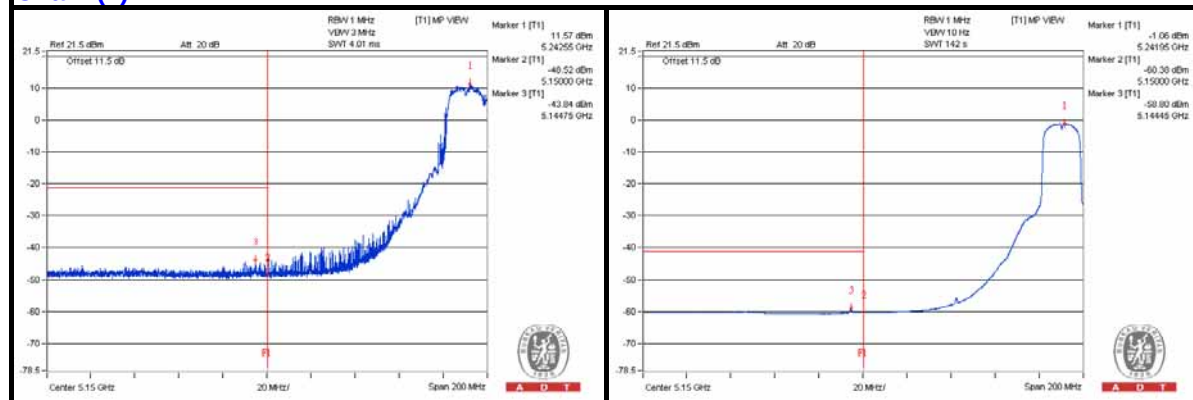

802.11a - Channel 52

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3500 PK	55.82	74	-18.18	-49.23	-47.95	6.09	-39.44
2	3515.625 AV	33.73	54	-20.27	-70.5	-70.77	6.09	-61.53
3	7009.375 PK	58.23	74	-15.77	-47.21	-45.26	6.09	-37.03
4	7012.5 AV	39.27	54	-14.73	-63.65	-67.25	6.09	-55.99
5	10518.75 PK	61.47	74	-12.53	-42.02	-43.99	6.09	-33.79
6	10521.875 AV	46.81	54	-7.19	-55.23	-62.85	6.09	-48.45
7	15771.25 PK	52.78	74	-21.22	-51.96	-51.24	6.09	-42.48
8	15785.625 AV	41.7	54	-12.3	-62.81	-62.51	6.09	-53.56

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

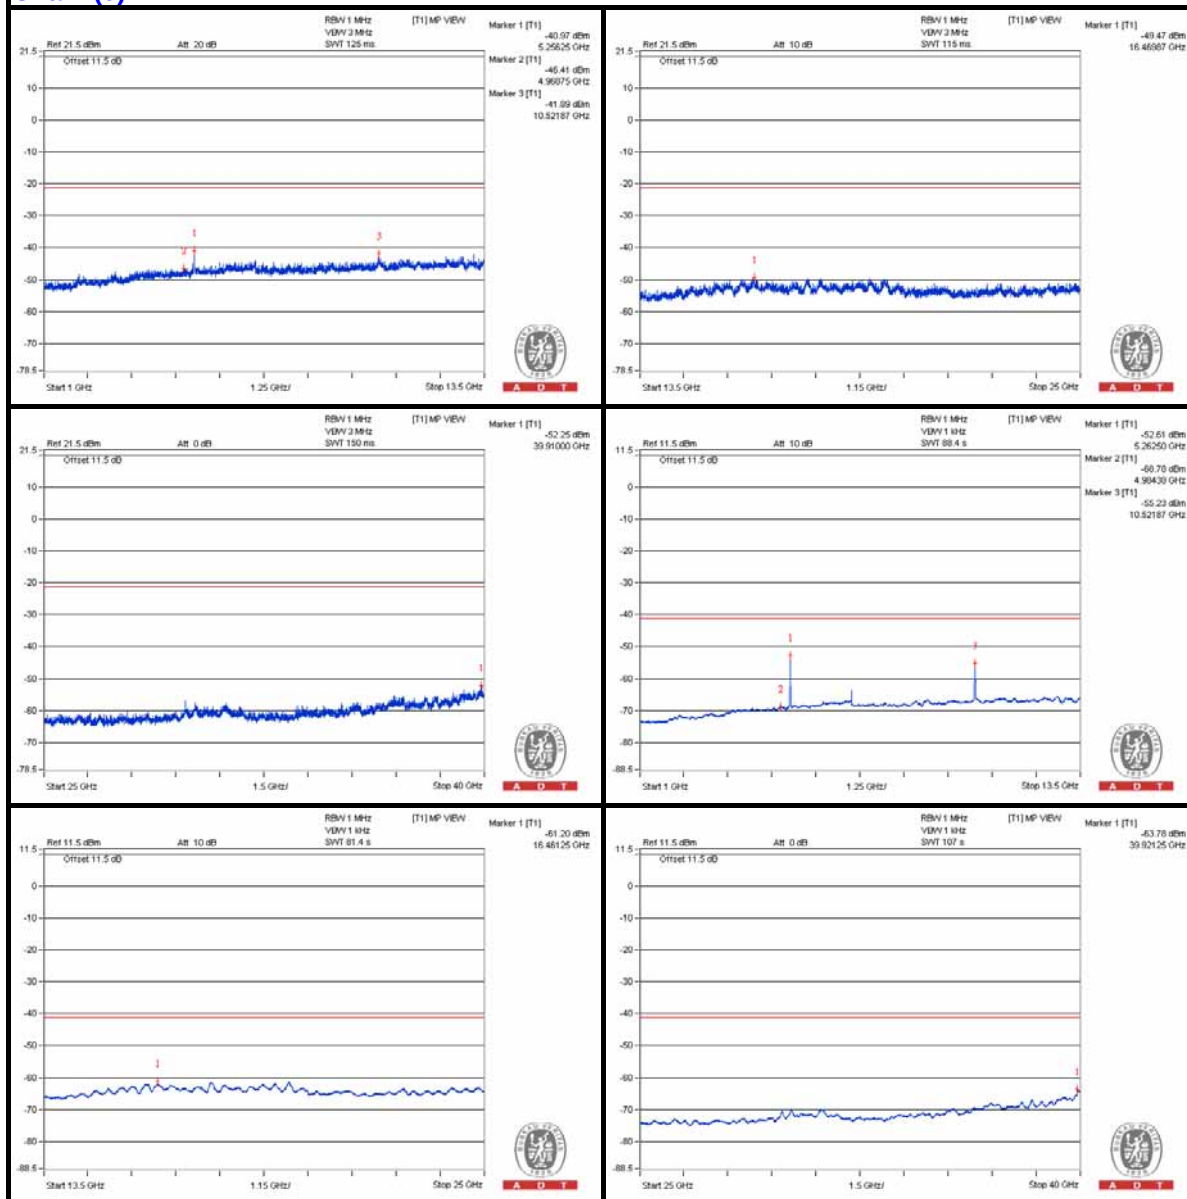

Chain (1)

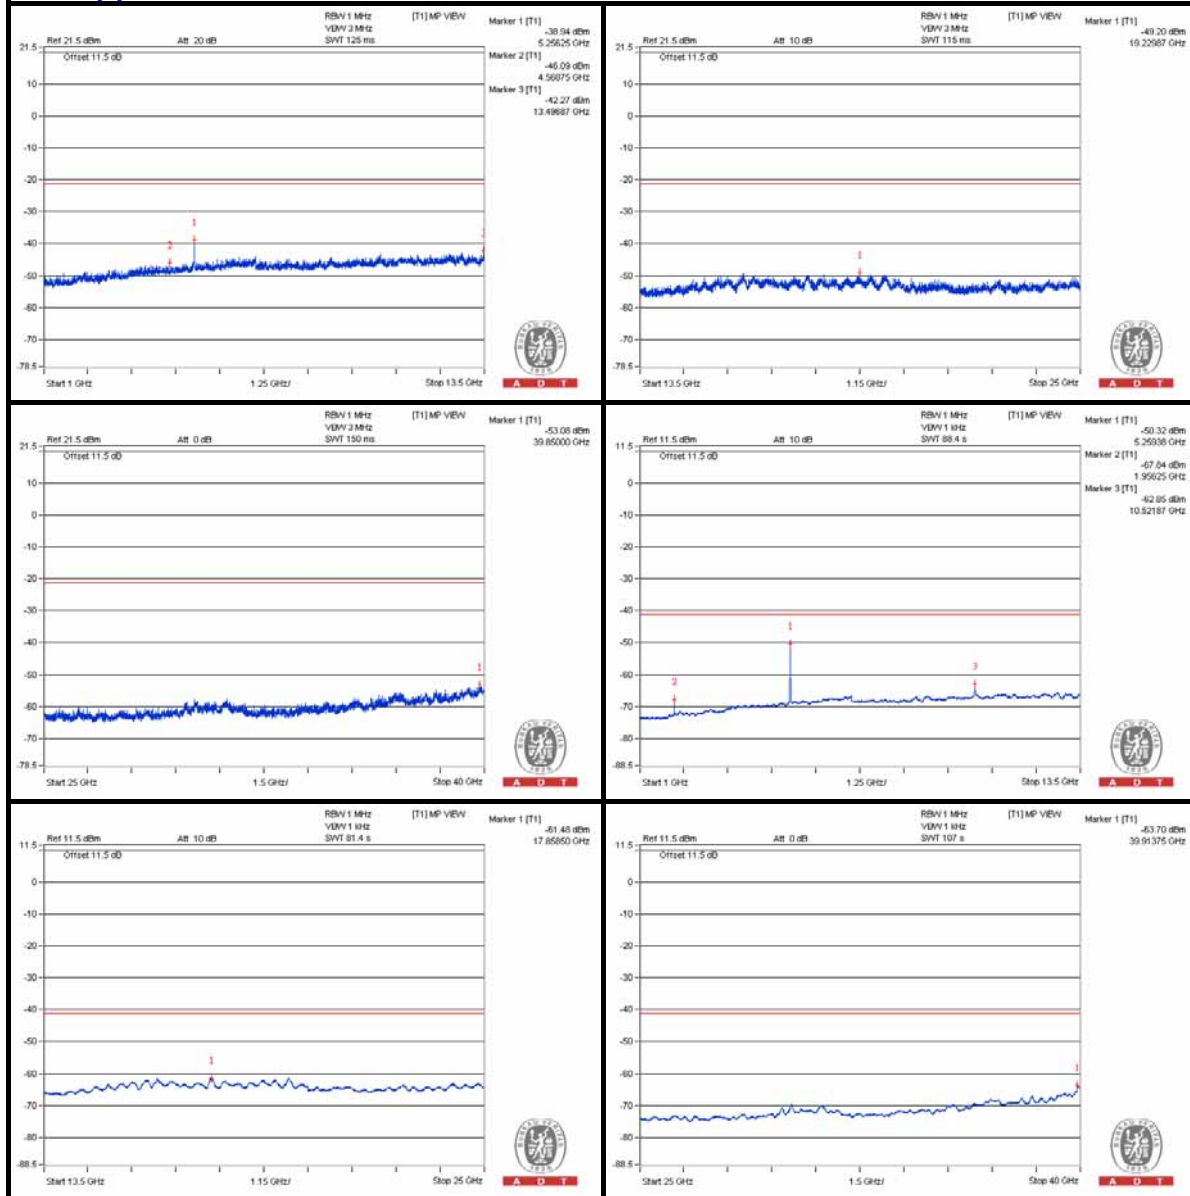

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5085.15 PK	57.62	74	-16.38	-46.8	-46.69	6.09	-37.64
2	5068.35 AV	44.14	54	-9.86	-60.28	-60.17	6.09	-51.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

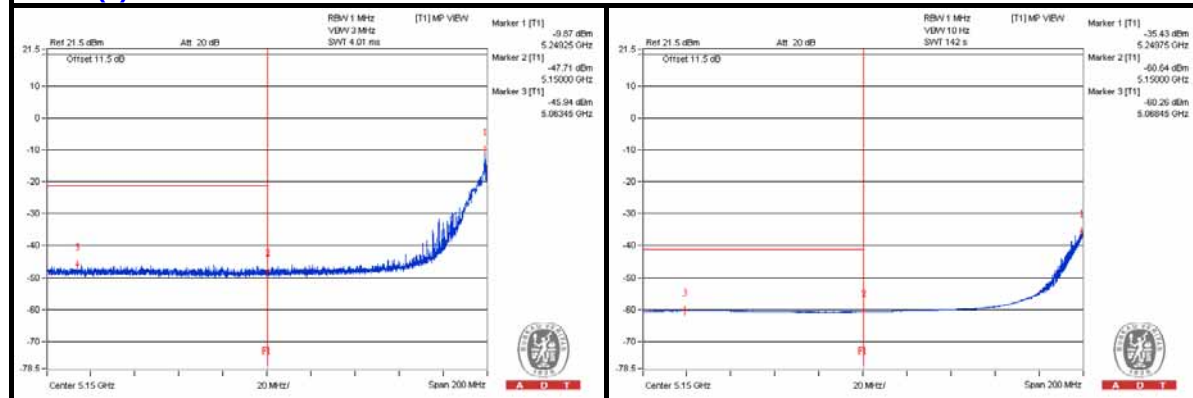

Chain (1)

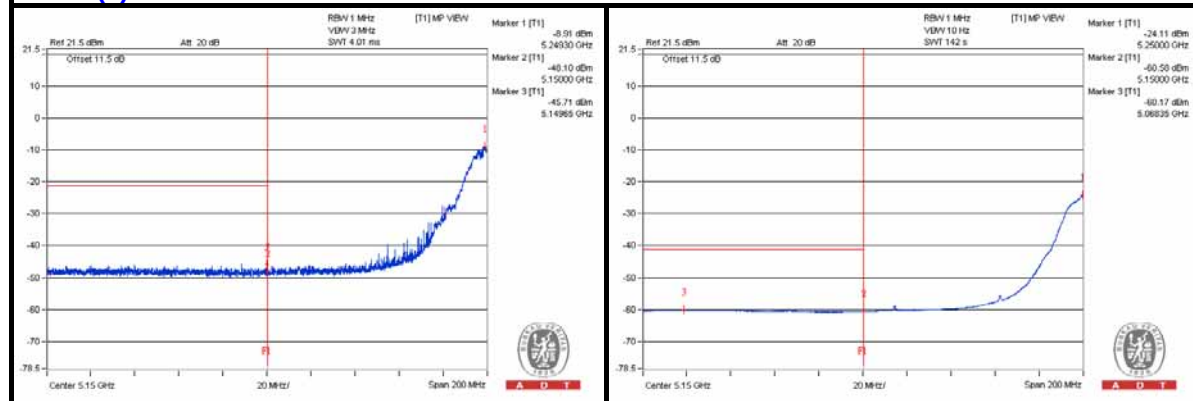

802.11a - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3531.25 PK	55.3	74	-18.7	-50.46	-48.01	6.09	-39.96
2	3537.5 AV	33.23	54	-20.77	-71.06	-71.2	6.09	-62.03
3	7062.5 PK	57.08	74	-16.92	-47.84	-46.79	6.09	-38.18
4	7065.625 AV	37.97	54	-16.03	-66.34	-66.44	6.09	-57.29
5	10600 PK	62.73	74	-11.27	-42.69	-40.78	6.09	-32.53
6	10600 AV	49.71	54	-4.29	-55.65	-53.84	6.09	-45.55
7	15894.875 PK	51.61	74	-22.39	-52.78	-52.73	6.09	-43.65
8	15894.875 AV	40.52	54	-13.48	-63.82	-63.87	6.09	-54.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

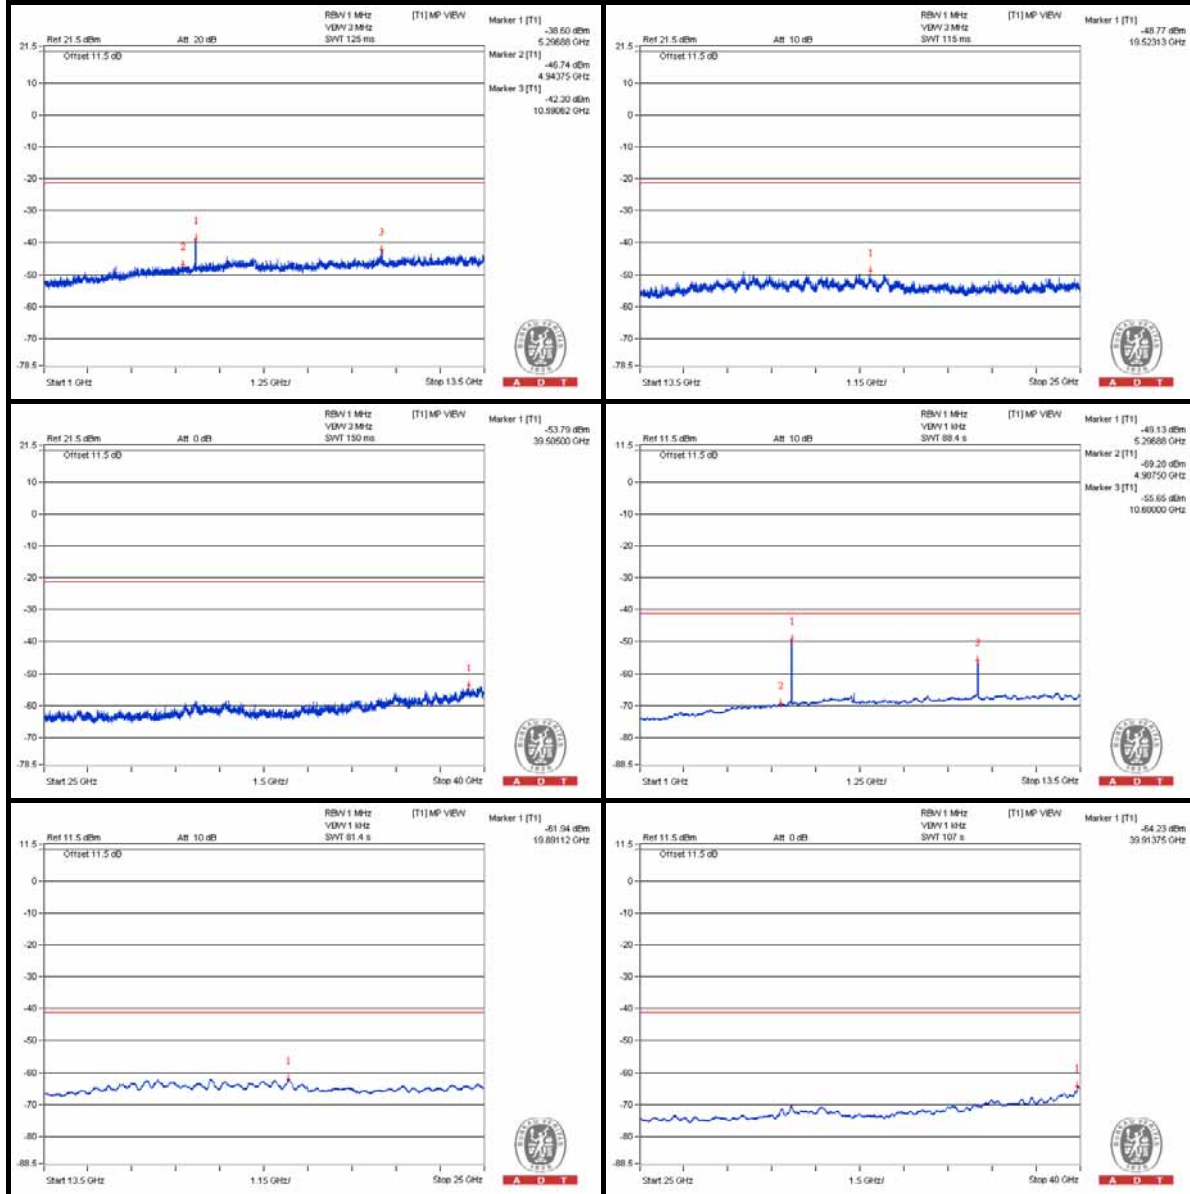

Chain (1)

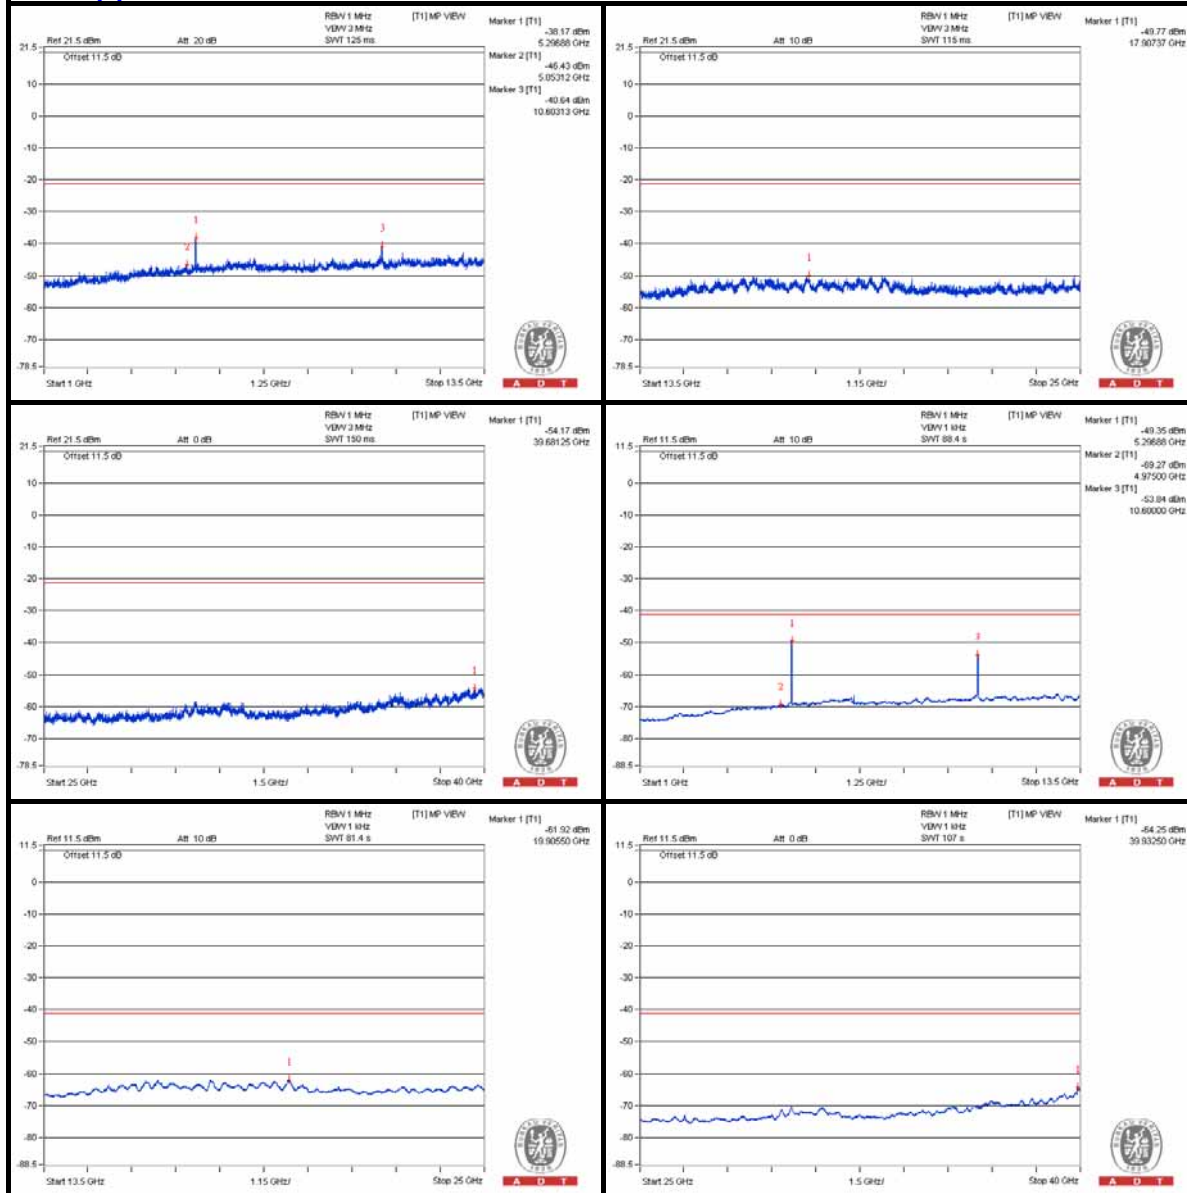

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5396 PK	69.78	74	-4.22	-31.72	-46.29	6.09	-25.48
2	5350 AV	46.47	54	-7.53	-58.59	-57.29	6.09	-48.79

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

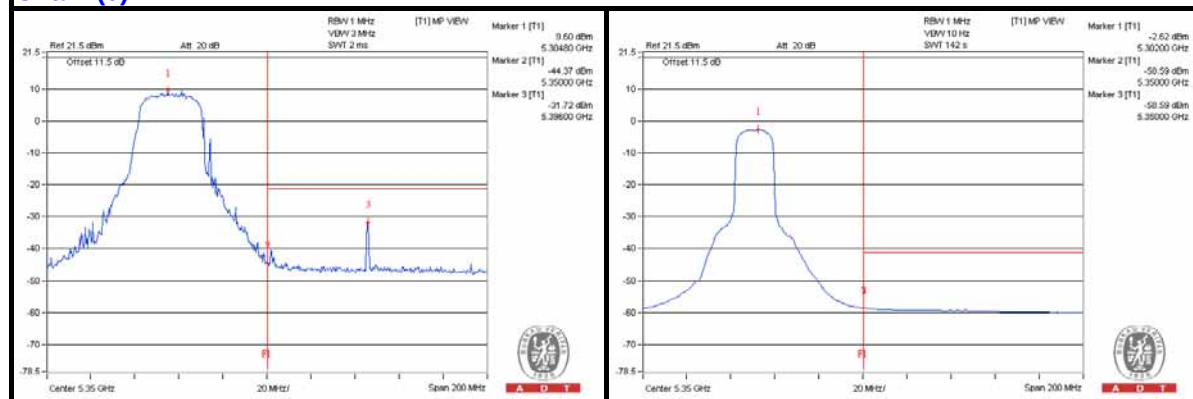

Chain (1)

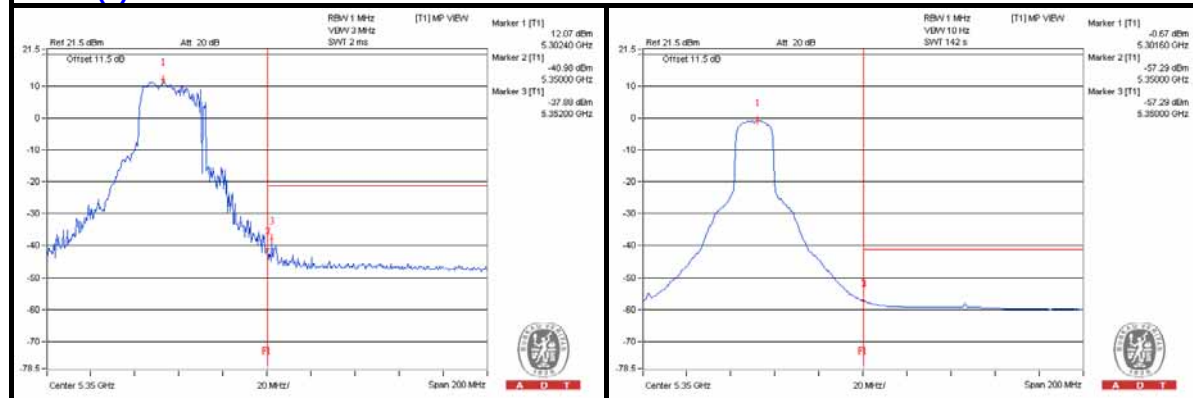

802.11a - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3537.5 PK	56.06	74	-17.94	-47.66	-49.06	6.09	-39.2
2	3543.75 AV	33.88	54	-20.12	-70.64	-70.32	6.09	-61.38
3	7084.375 PK	58.73	74	-15.27	-46.11	-45.19	6.09	-36.53
4	7093.75 AV	38.63	54	-15.37	-65.3	-66.2	6.09	-56.63
5	10650 PK	59.11	74	-14.89	-44.47	-46.2	6.09	-36.15
6	10643.75 AV	41.57	54	-12.43	-61.28	-65.13	6.09	-53.69
7	15969.625 PK	50.36	74	-23.64	-54.23	-53.79	6.09	-44.9
8	15955.25 AV	39.61	54	-14.39	-64.8	-64.7	6.09	-55.65

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

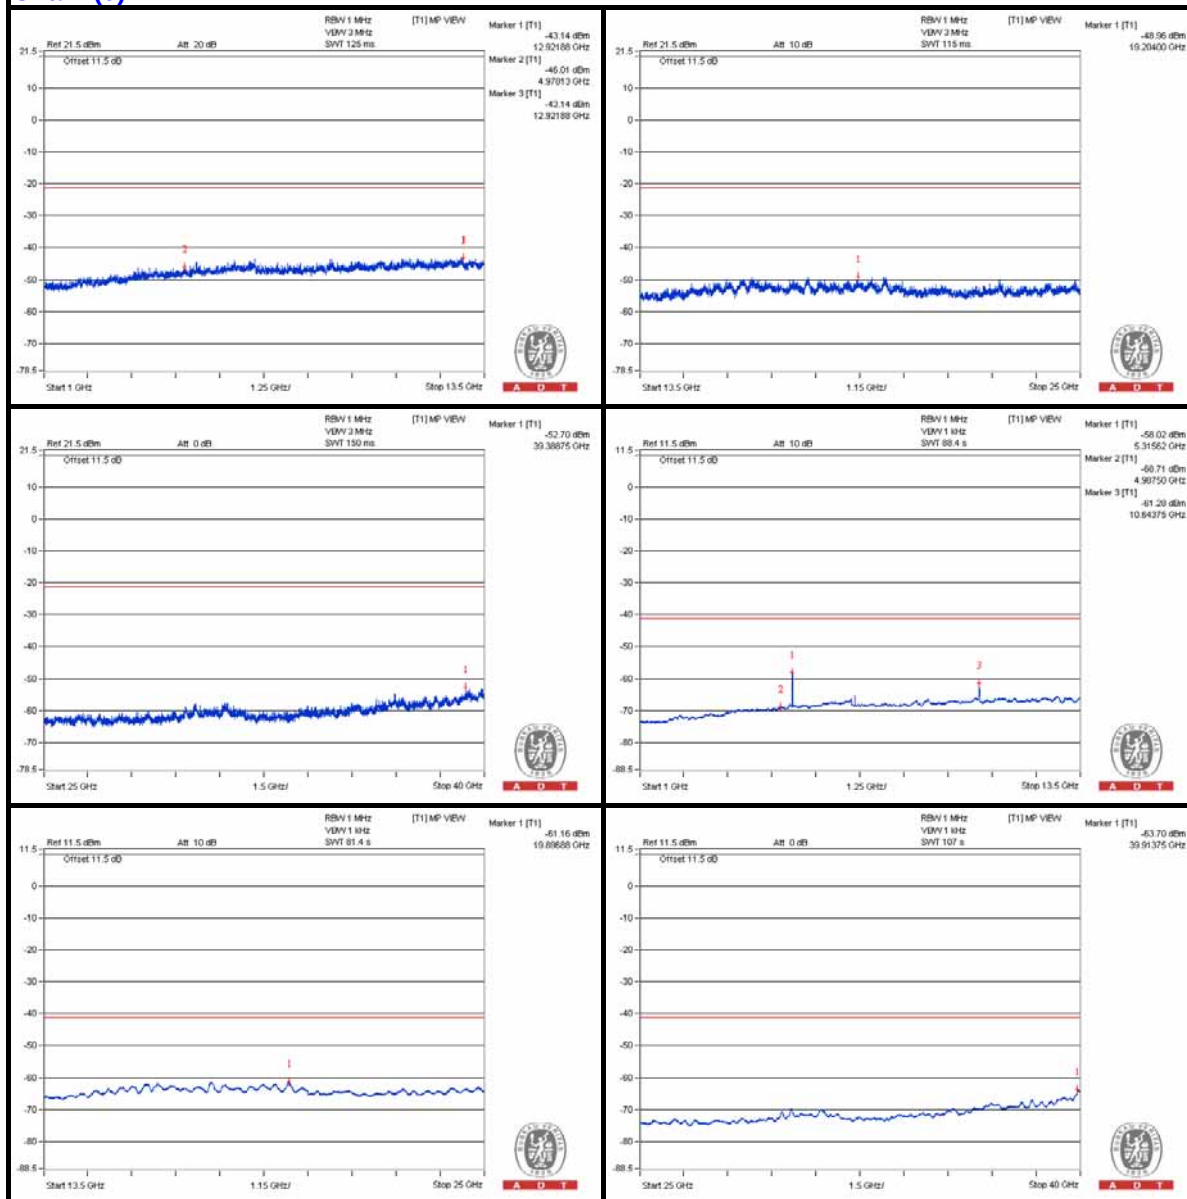

Chain (1)

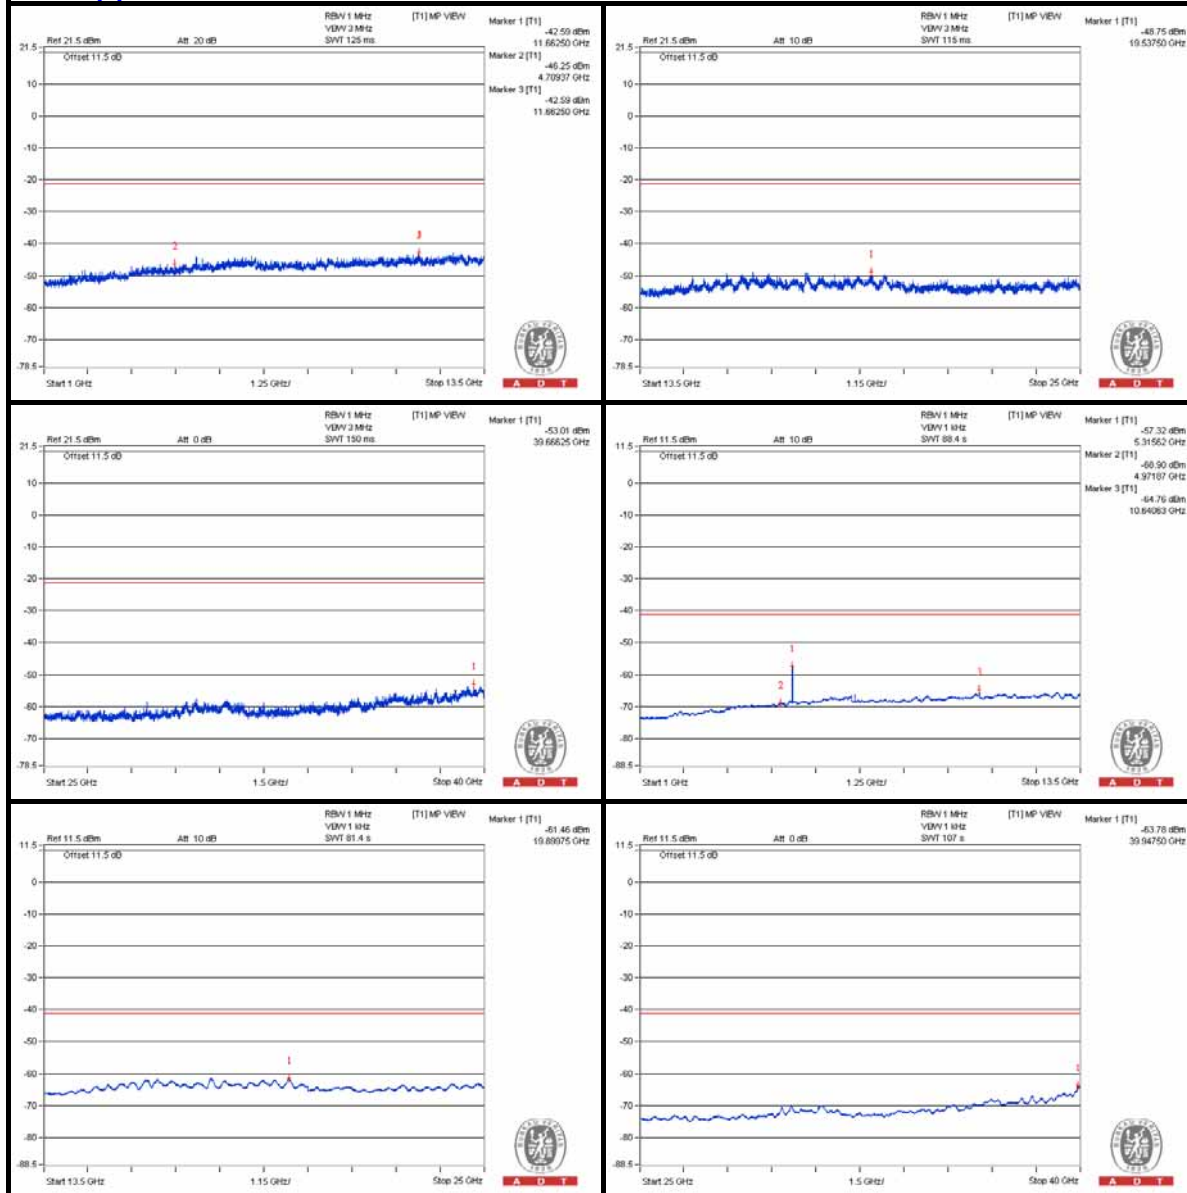

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.6 PK	72.37	74	-1.63	-33.49	-30.88	6.09	-22.89
2	5350.05 AV	48.58	54	-5.42	-56.06	-55.51	6.09	-46.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

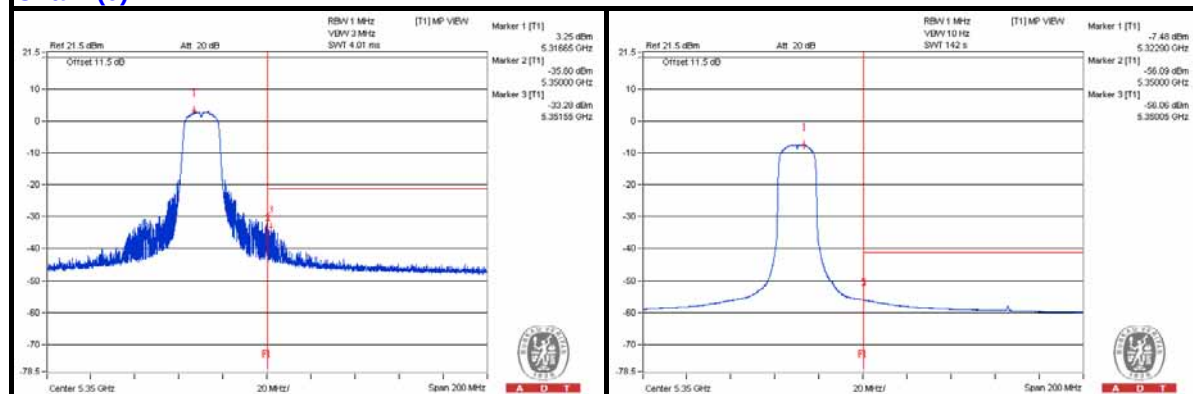

Chain (1)

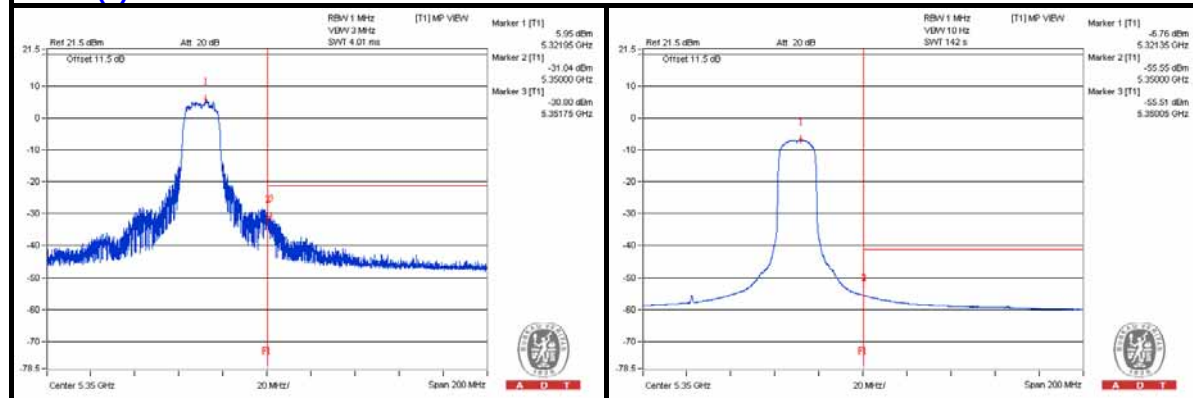

802.11a - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3675 PK	57.73	74	-16.27	-49.3	-47.51	7.77	-37.53
2	3665.625 AV	37.22	54	-16.78	-69.24	-68.44	7.77	-58.04
3	7331.25 PK	59.77	74	-14.23	-46.29	-46.26	7.77	-35.49
4	7328.125 AV	37.7	54	-16.3	-68.41	-68.27	7.77	-57.56
5	11000 PK	60.22	74	-13.78	-45.91	-45.74	7.77	-35.04
6	11000 AV	41.98	54	-12.02	-63.6	-64.57	7.77	-53.28
7	16495.75 PK	55.06	74	-18.94	-50.37	-51.69	7.77	-40.2
8	16498.625 AV	43.5	54	-10.5	-62.4	-62.68	7.77	-51.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

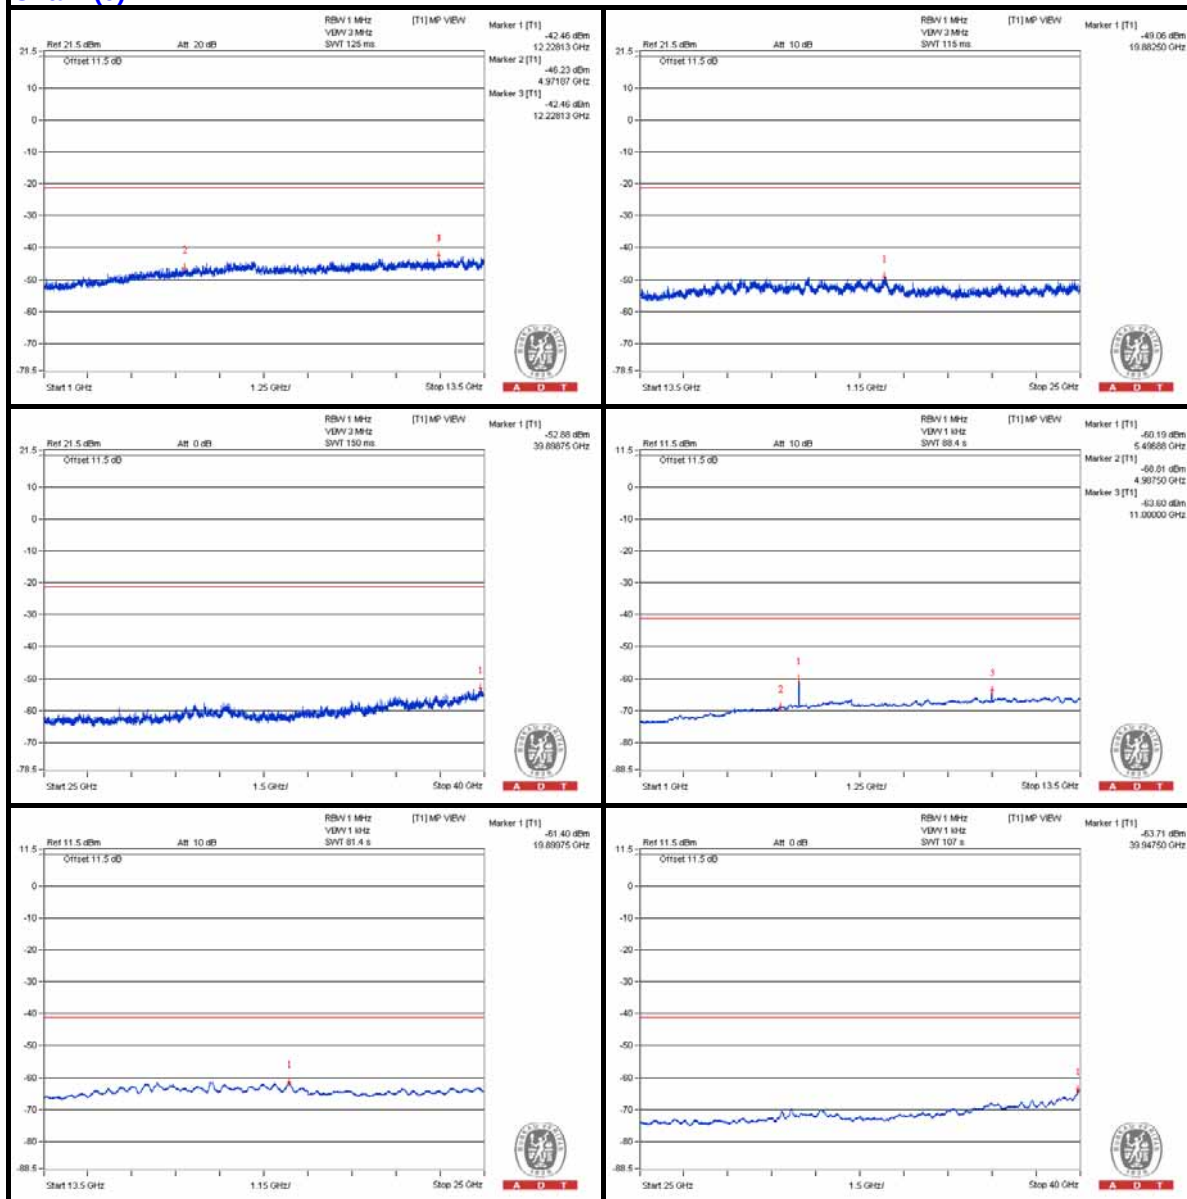

Chain (1)

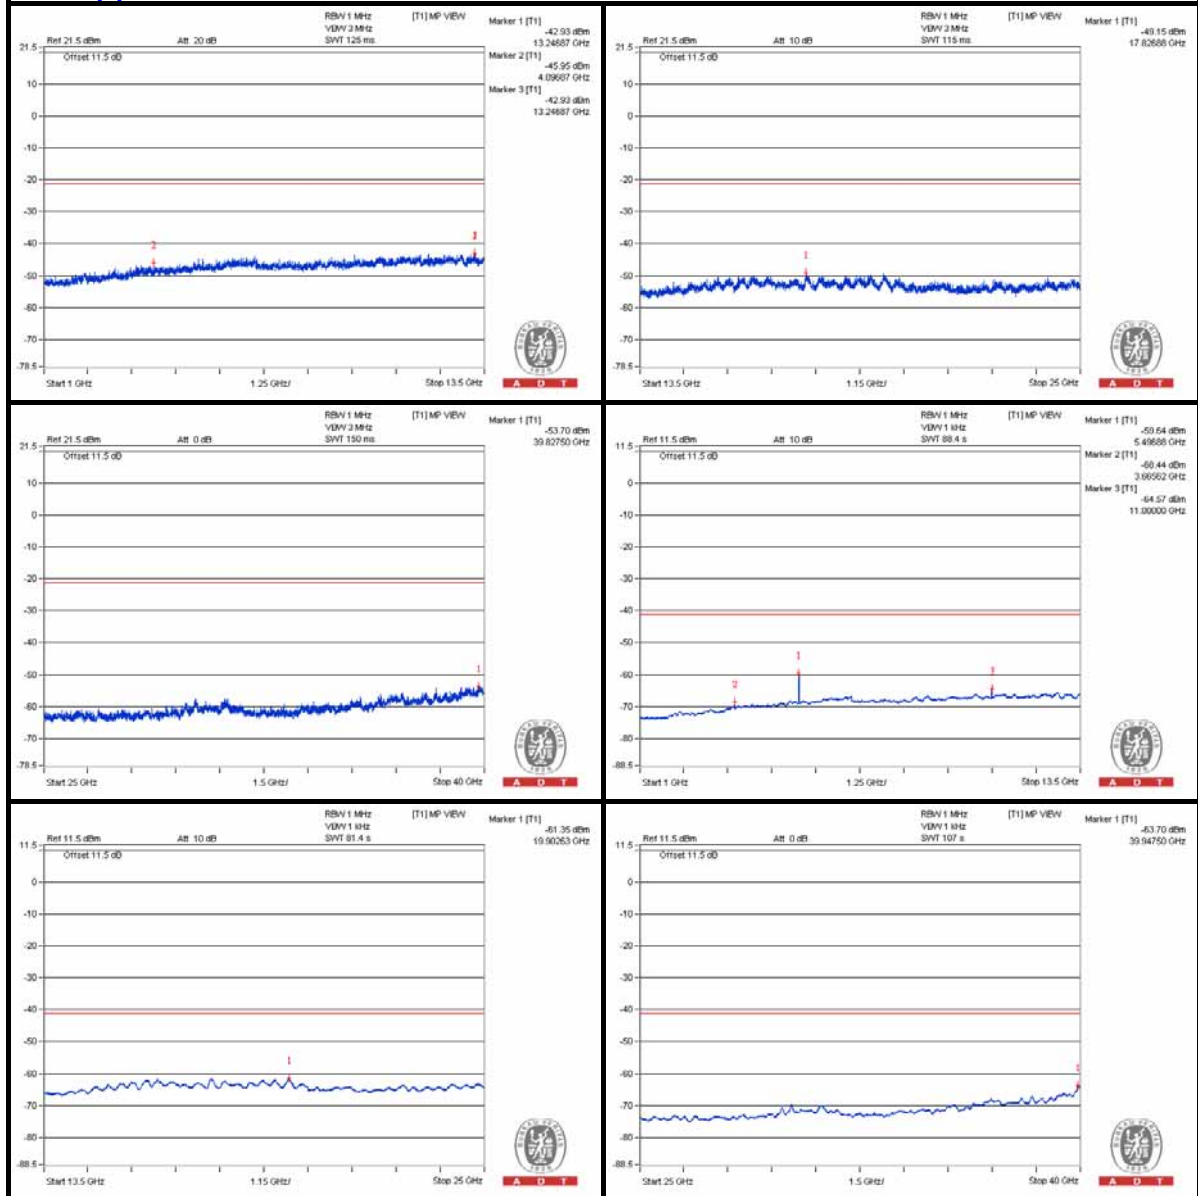

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.4375 PK	72.01	74	-1.99	-37.58	-32.1	7.77	-23.25
2	5469.9375 AV	48.7	54	-5.3	-57.8	-56.93	7.77	-46.56

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

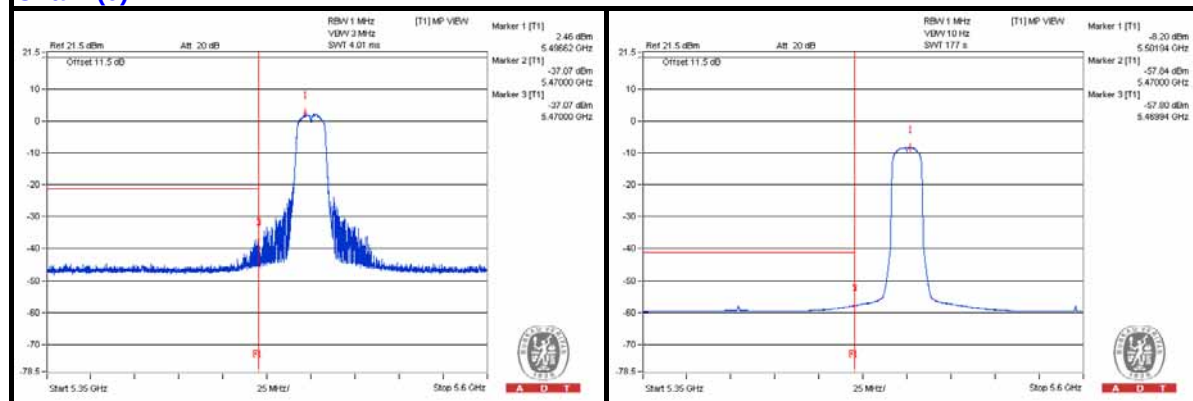

Chain (1)

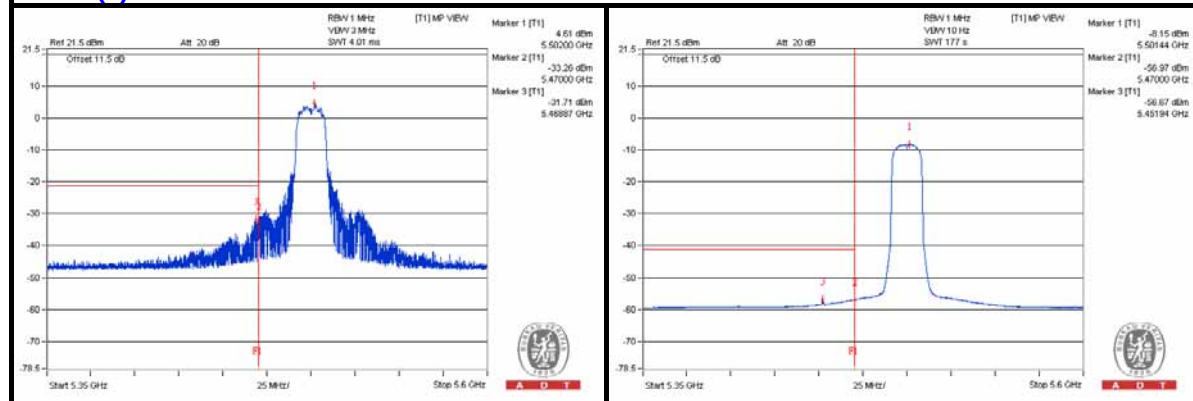

802.11a - Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3718.75 PK	57.27	74	-16.73	-49.66	-48.04	7.77	-37.99
2	3718.75 AV	37.85	54	-16.15	-67.7	-68.74	7.77	-57.41
3	7440.625 PK	59.4	74	-14.6	-45.66	-47.91	7.77	-35.86
4	7440.625 AV	37.71	54	-16.29	-68.37	-68.3	7.77	-57.55
5	11165.625 PK	62.33	74	-11.67	-43.07	-44.47	7.77	-32.93
6	11162.5 AV	46.18	54	-7.82	-57.89	-63.57	7.77	-49.08
7	16737.25 PK	53.93	74	-20.07	-52.05	-52.17	7.77	-41.33
8	16748.75 AV	43.07	54	-10.93	-63.09	-62.86	7.77	-52.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

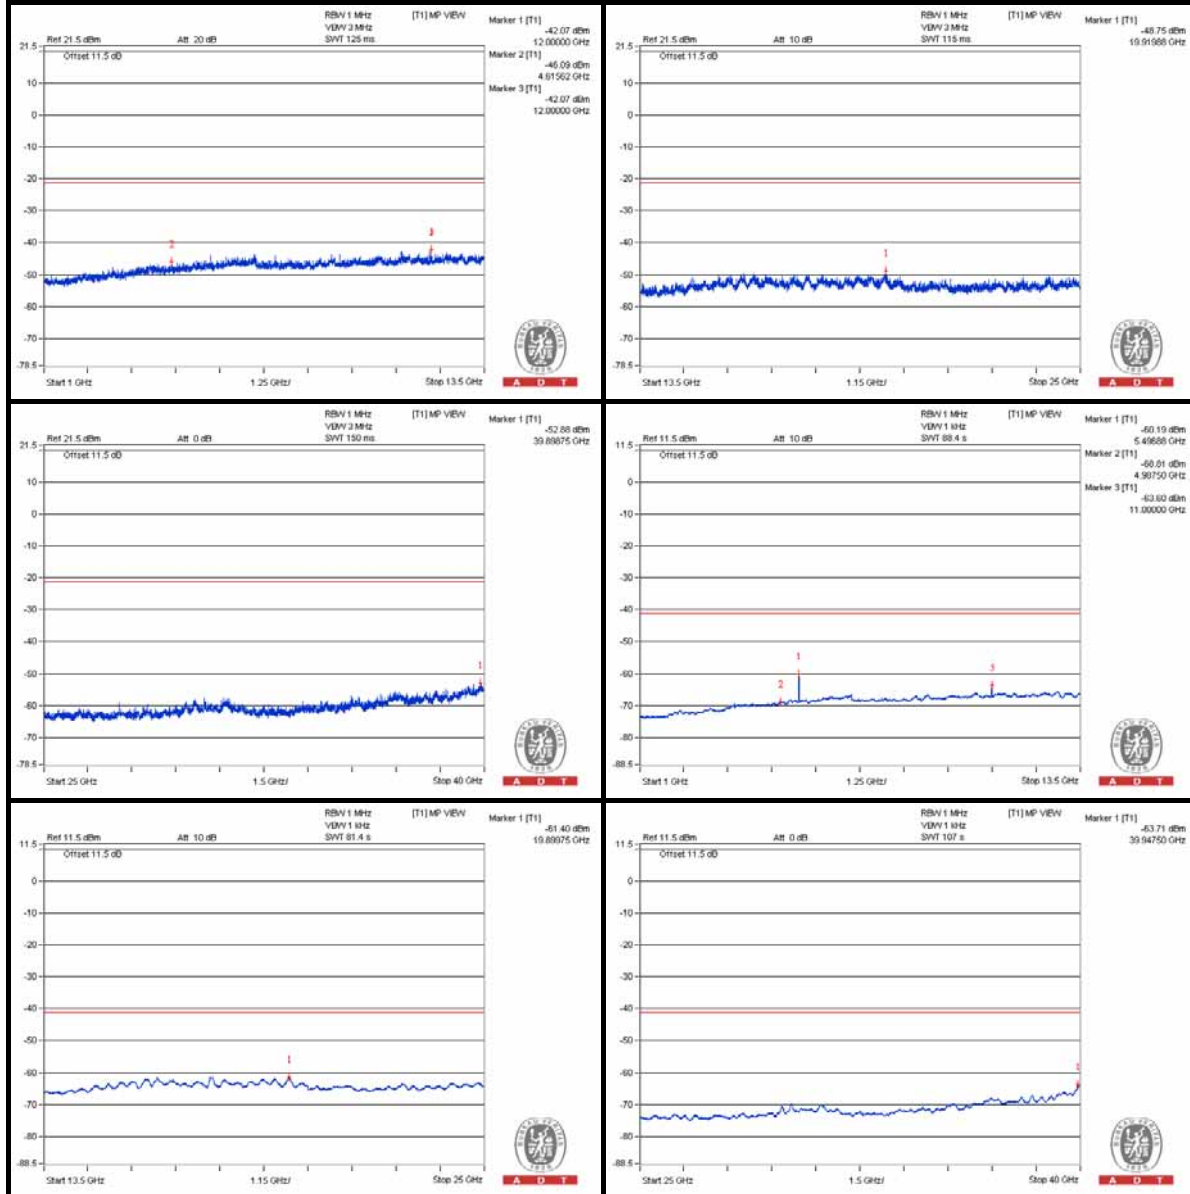

Chain (1)

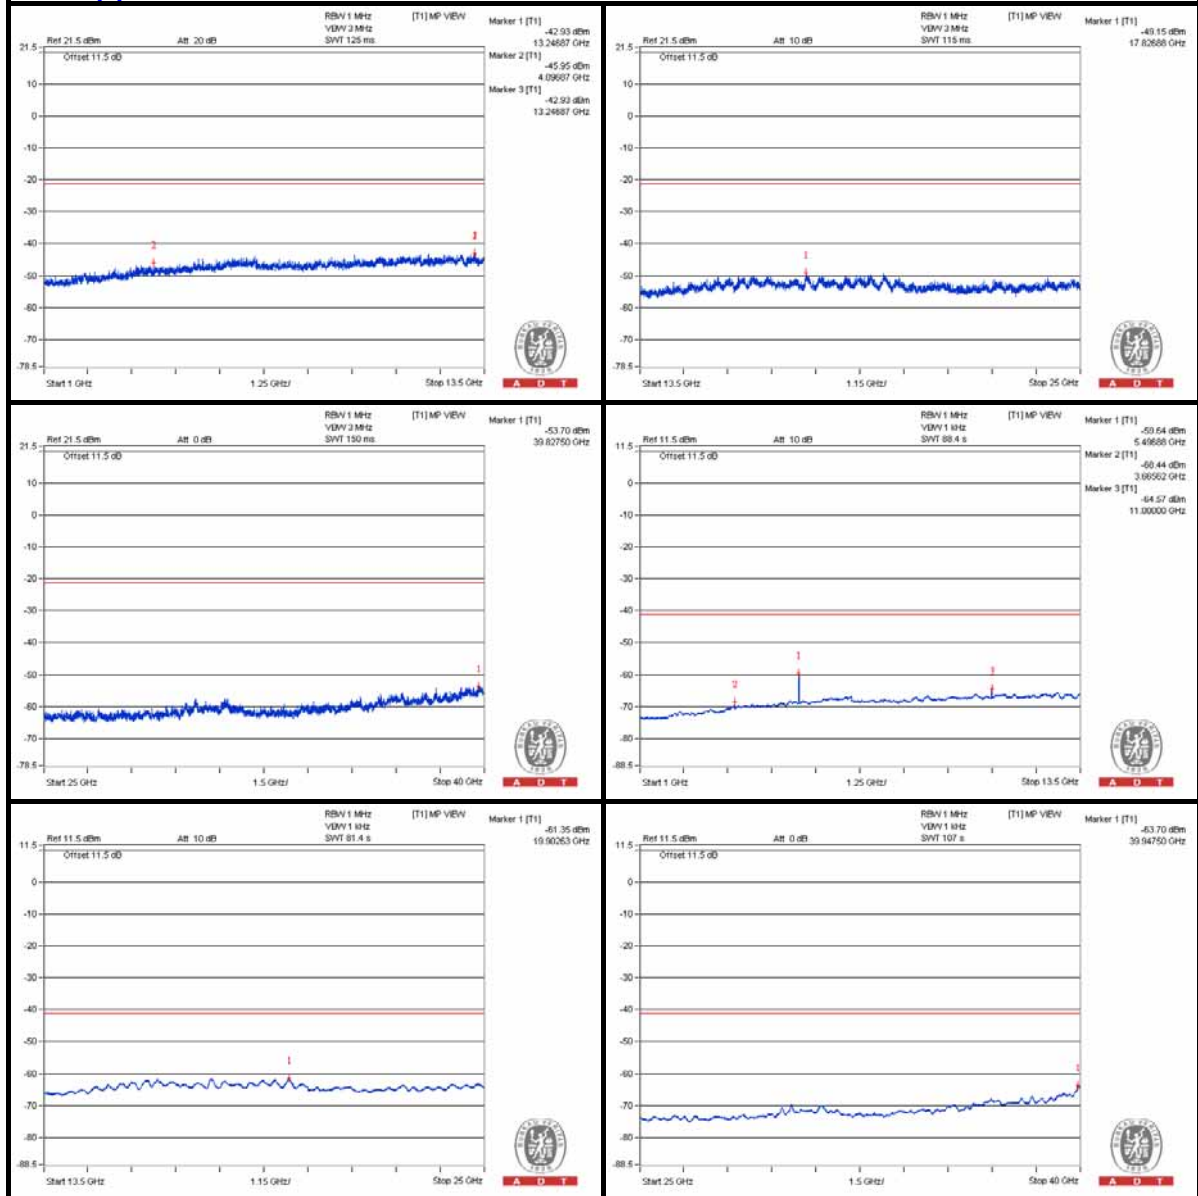

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5368.1875 PK	60.09	74	-13.91	-46.22	-45.7	7.77	-35.17
2	5388.5 AV	46.68	54	-7.32	-59.34	-59.38	7.77	-48.58

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

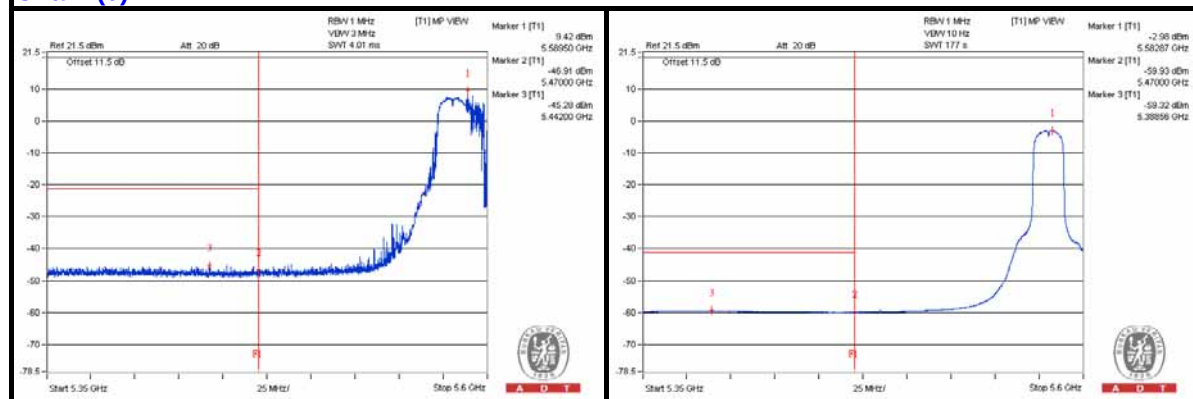

Chain (1)

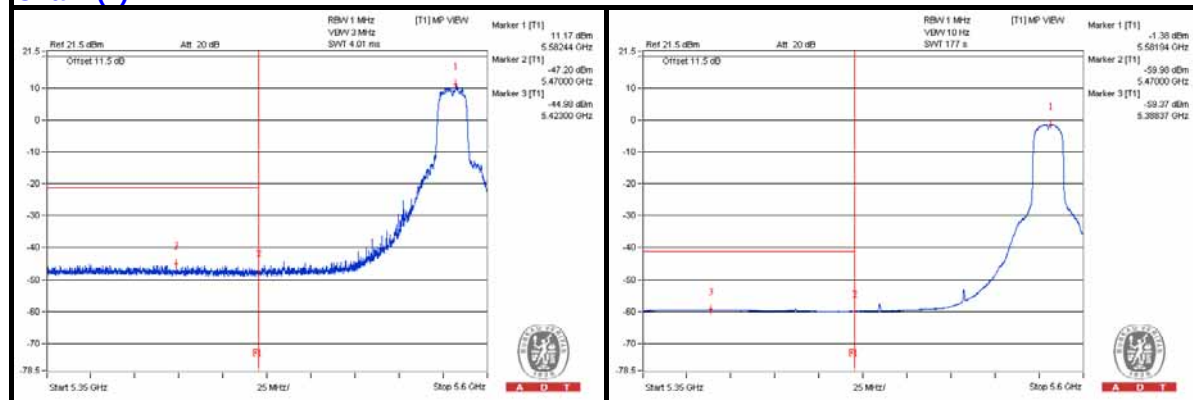

802.11a - Channel 132

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3781.25 PK	57.82	74	-16.18	-48.71	-47.78	7.77	-37.44
2	3771.875 AV	41.95	54	-12.05	-63.38	-64.93	7.77	-53.31
3	7546.875 PK	58.97	74	-15.03	-47.52	-46.66	7.77	-36.29
4	7546.875 AV	37.29	54	-16.71	-68.73	-68.78	7.77	-57.97
5	11321.875 PK	63.47	74	-10.53	-43.14	-42.06	7.77	-31.79
6	11321.875 AV	48.26	54	-5.74	-59.91	-56.36	7.77	-47
7	16973 PK	53.65	74	-20.35	-53.31	-51.64	7.77	-41.61
8	16970.125 AV	42.25	54	-11.75	-64.04	-63.55	7.77	-53.01

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

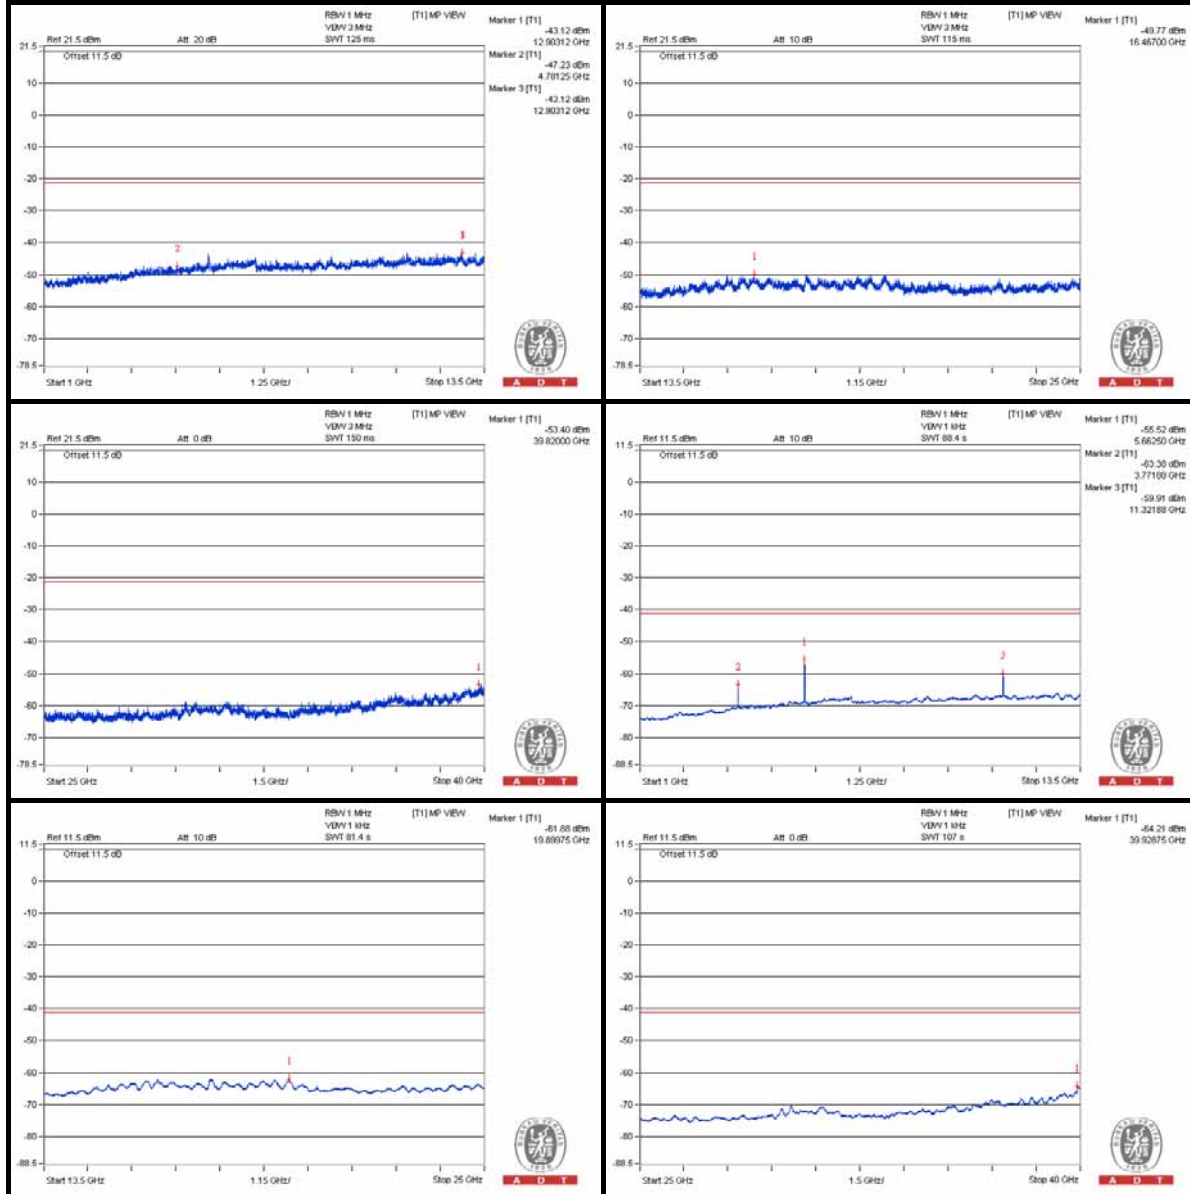

Chain (1)

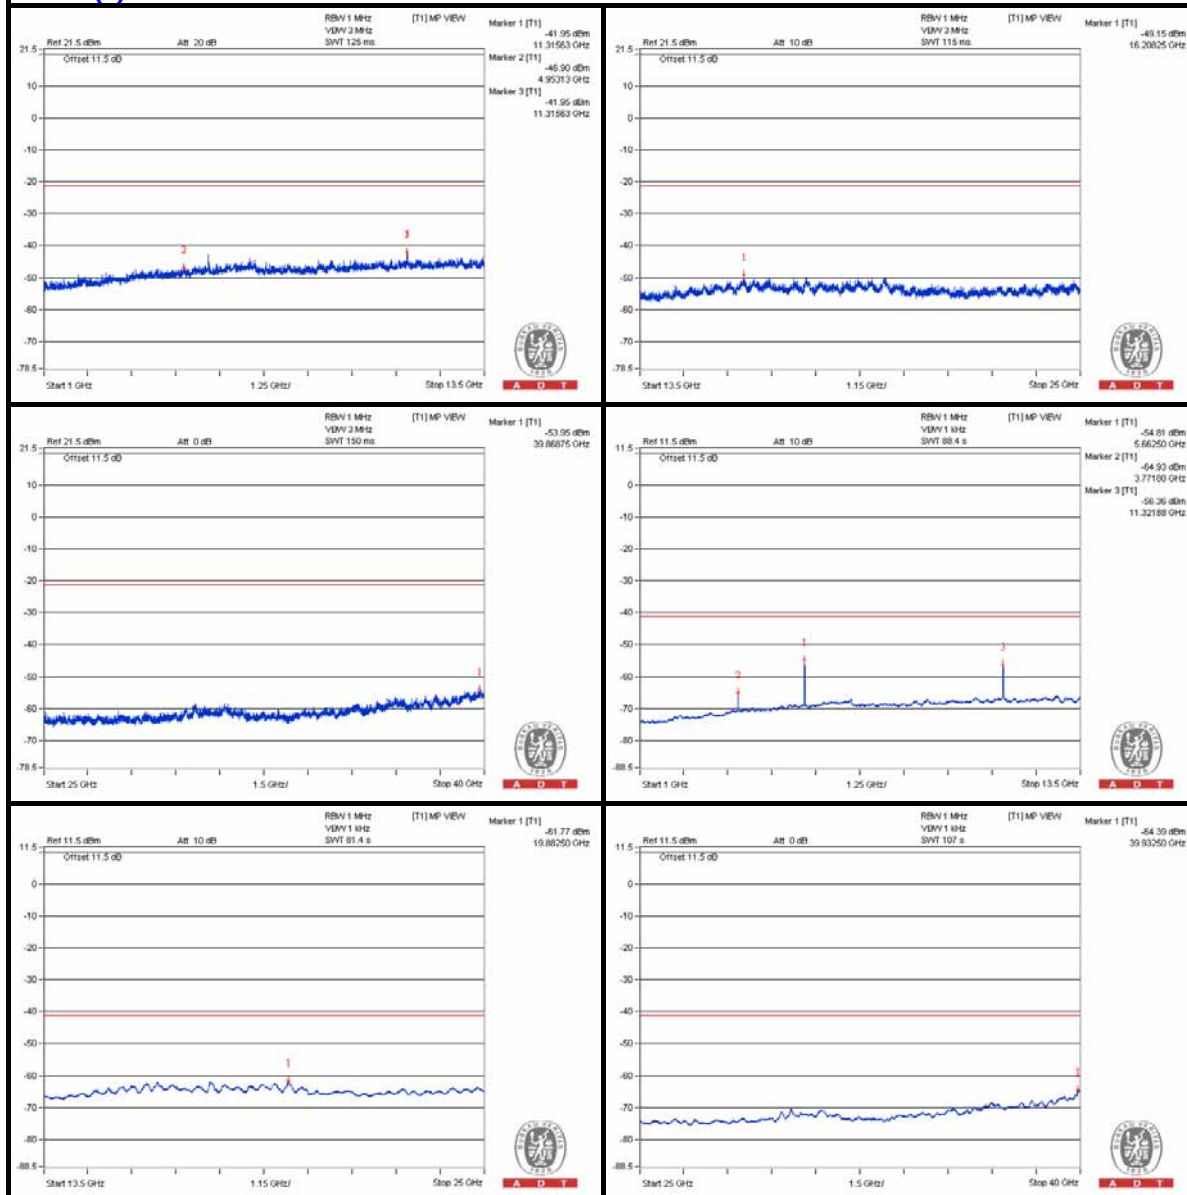

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725 PK	60.9	74	-13.1	-46.4	-44.16	7.77	-34.36
2	5725 AV	46.78	54	-7.22	-59.27	-59.25	7.77	-48.48

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

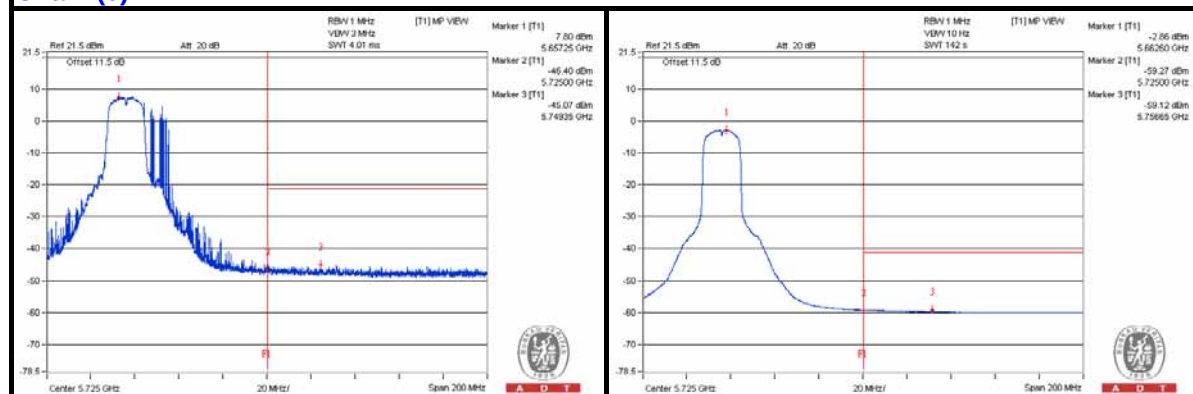

Chain (1)

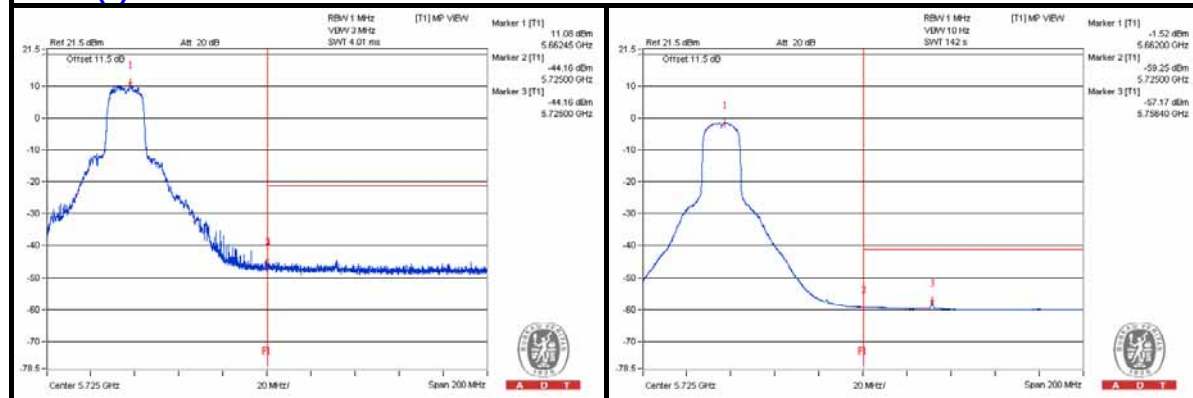

802.11a - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	58.75	74	-15.25	-47.49	-47.09	7.77	-36.51
2	3800 AV	42.69	54	-11.31	-61.75	-65.91	7.77	-52.57
3	7606.25 PK	59.59	74	-14.41	-45.53	-47.62	7.77	-35.67
4	7600 AV	38.28	54	-15.72	-67.42	-68.12	7.77	-56.98
5	11406.25 PK	61.74	74	-12.26	-44.48	-44.13	7.77	-33.52
6	11400 AV	41.33	54	-12.67	-64.34	-65.11	7.77	-53.93
7	17102.375 PK	54.02	74	-19.98	-51.77	-52.28	7.77	-41.24
8	17096.625 AV	42.41	54	-11.59	-63.62	-63.64	7.77	-52.85

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

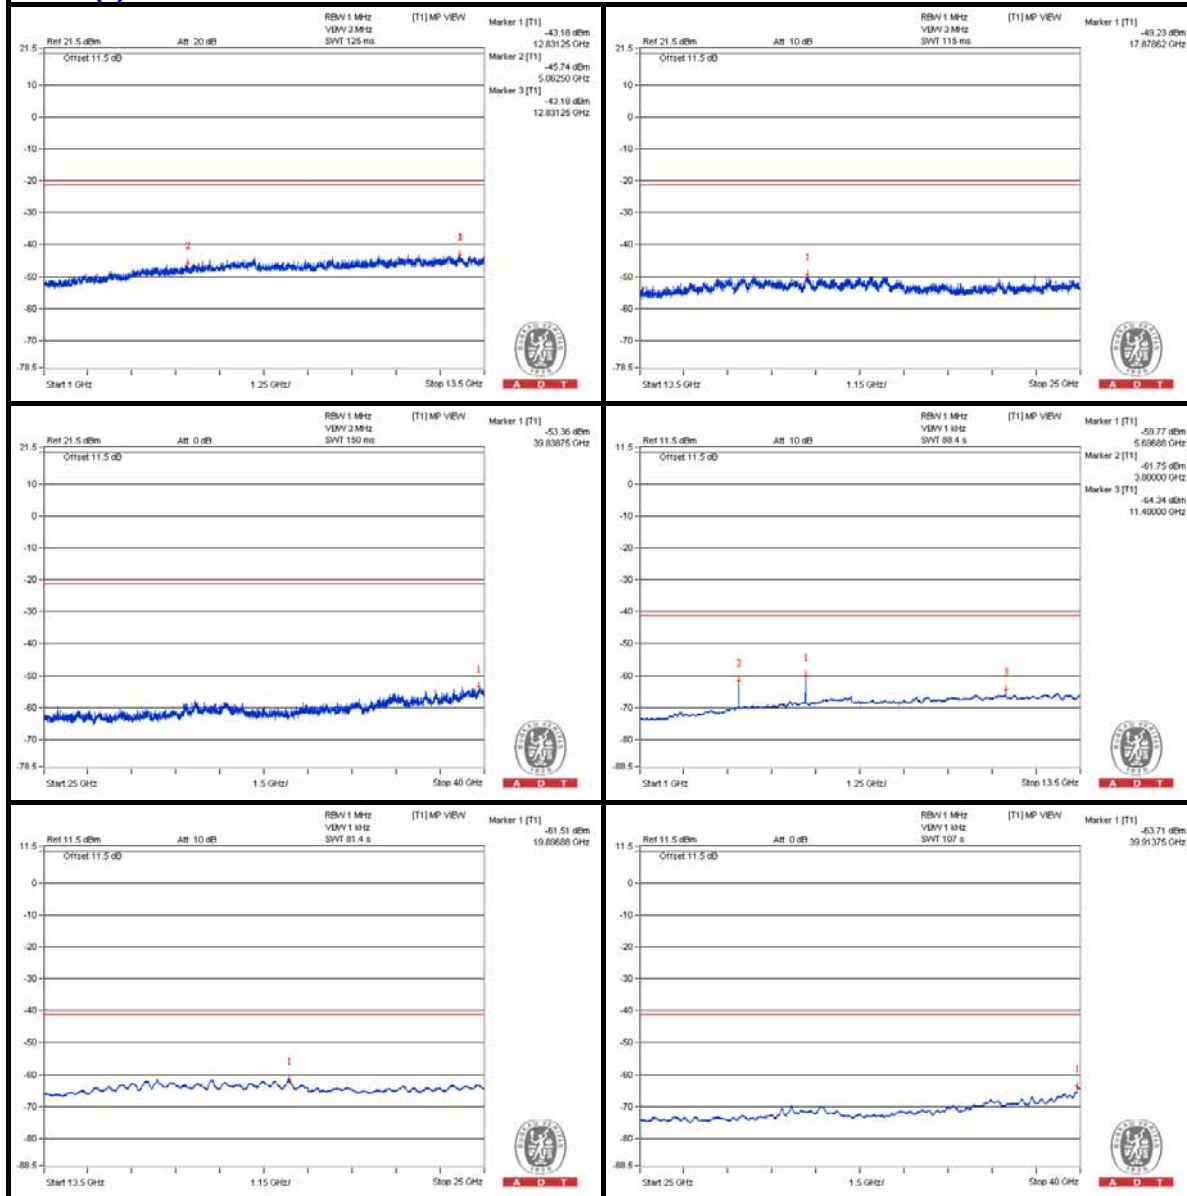

Chain (1)

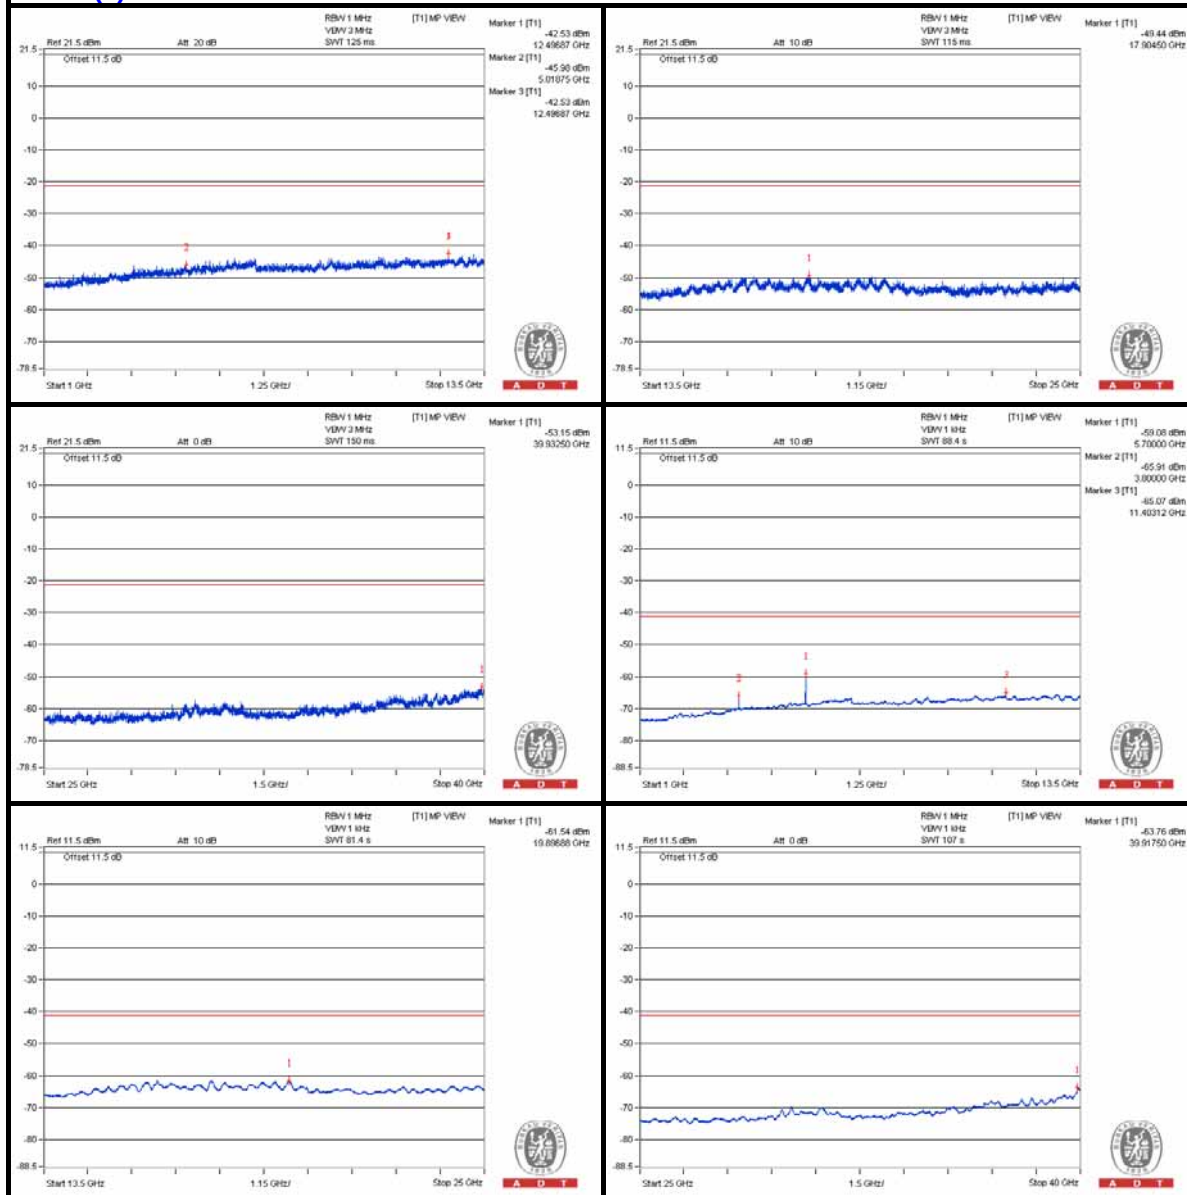

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5730.6 PK	69.73	74	-4.27	-37.74	-35.24	7.77	-25.53
2	5725 AV	48.04	54	-5.96	-58.1	-57.9	7.77	-47.22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

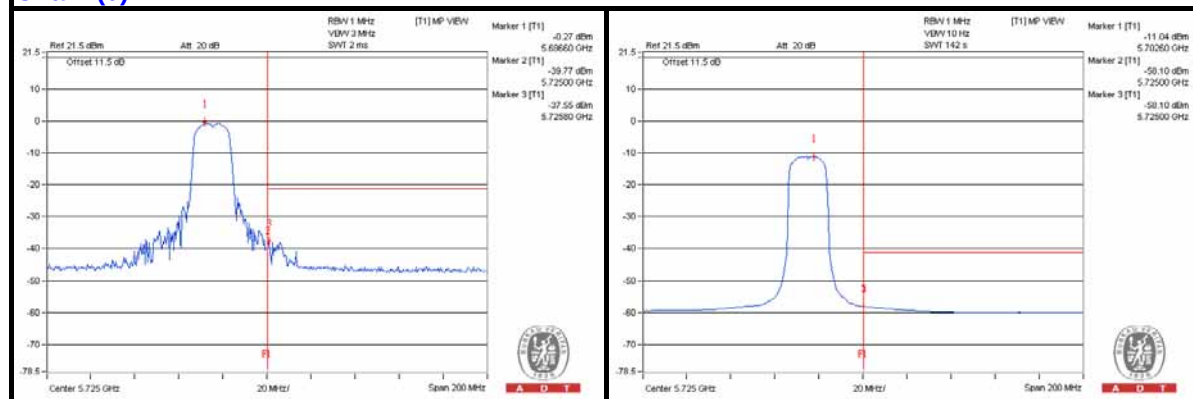

Chain (1)

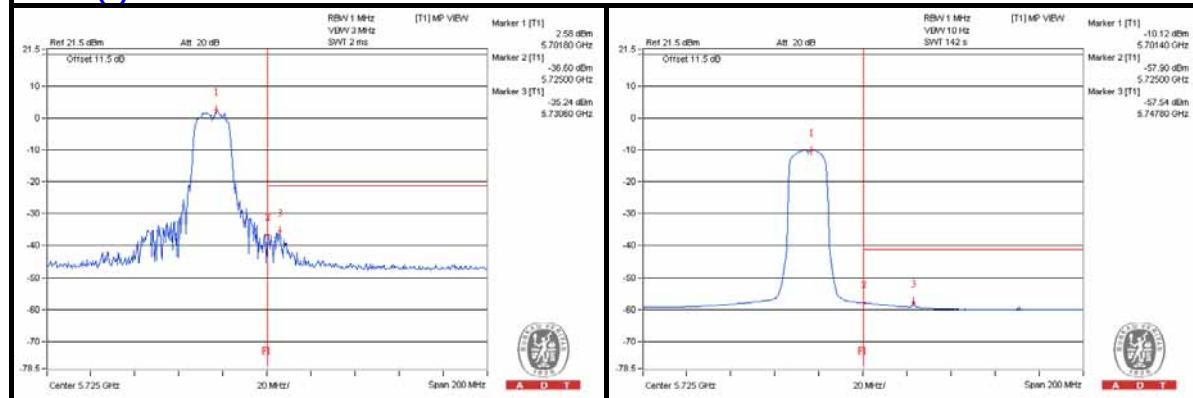

802.11a - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3806.25 PK	57.4	74	-16.6	-48.94	-48.36	7.77	-37.86
2	3812.5 AV	41.59	54	-12.41	-63.52	-65.63	7.77	-53.67
3	7621.875 PK	59.67	74	-14.33	-46.28	-46.46	7.77	-35.59
4	7618.75 AV	38.02	54	-15.98	-68.08	-67.97	7.77	-57.24
5	11443.75 PK	64.24	74	-9.76	-42.8	-40.99	7.77	-31.02
6	11437.5 AV	50.36	54	-3.64	-57.47	-54.42	7.77	-44.9
7	17168.5 PK	54.09	74	-19.91	-51.49	-52.47	7.77	-41.17
8	17165.625 AV	42.72	54	-11.28	-63.38	-63.26	7.77	-52.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

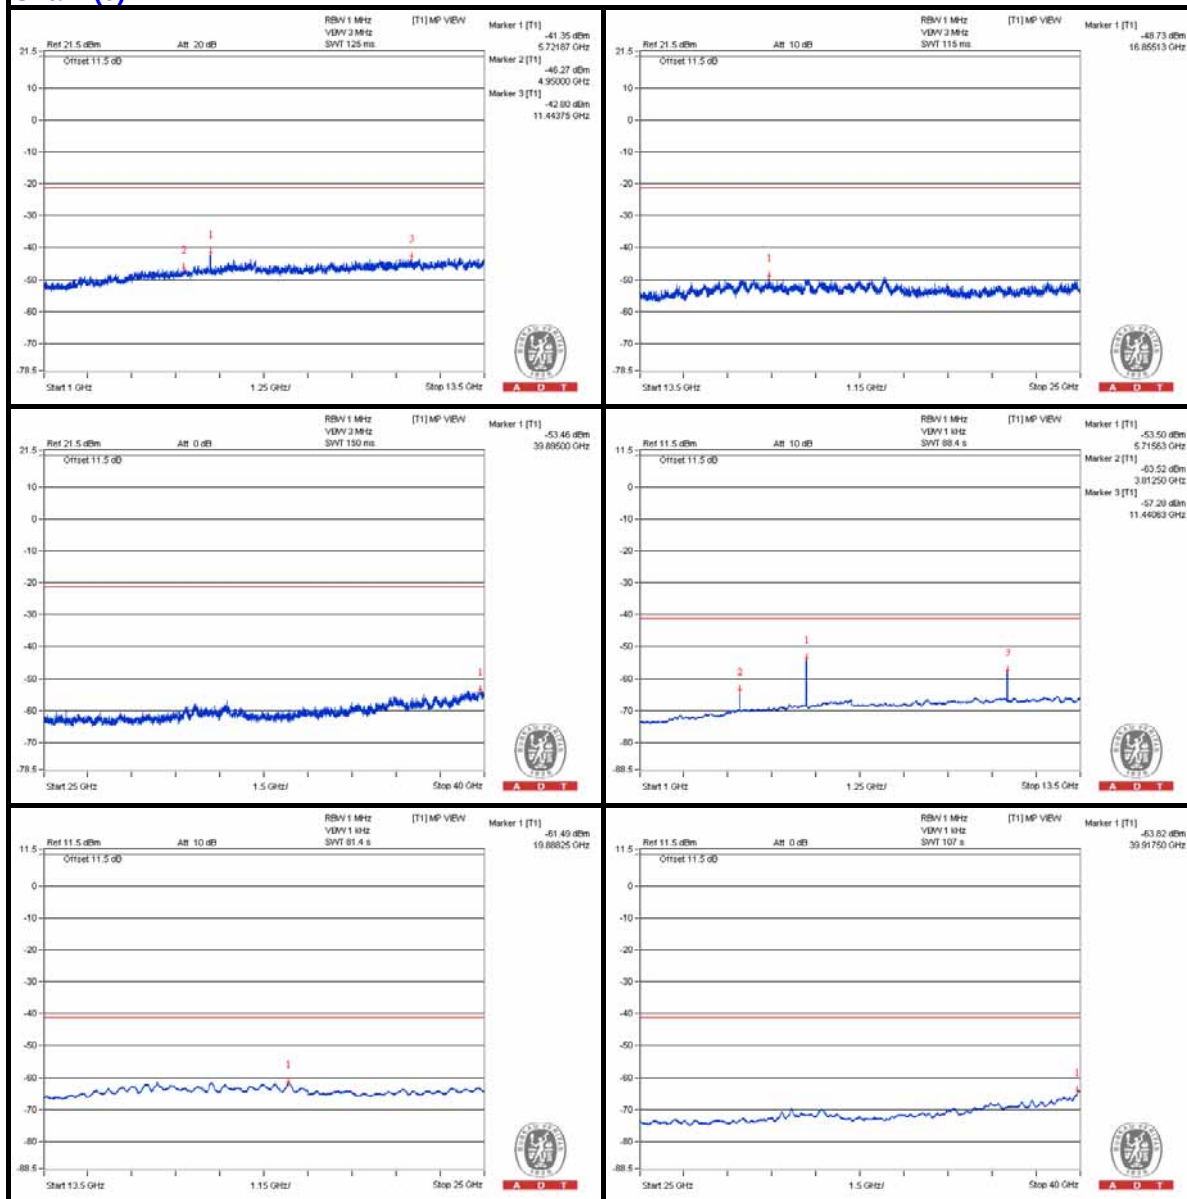

Chain (1)

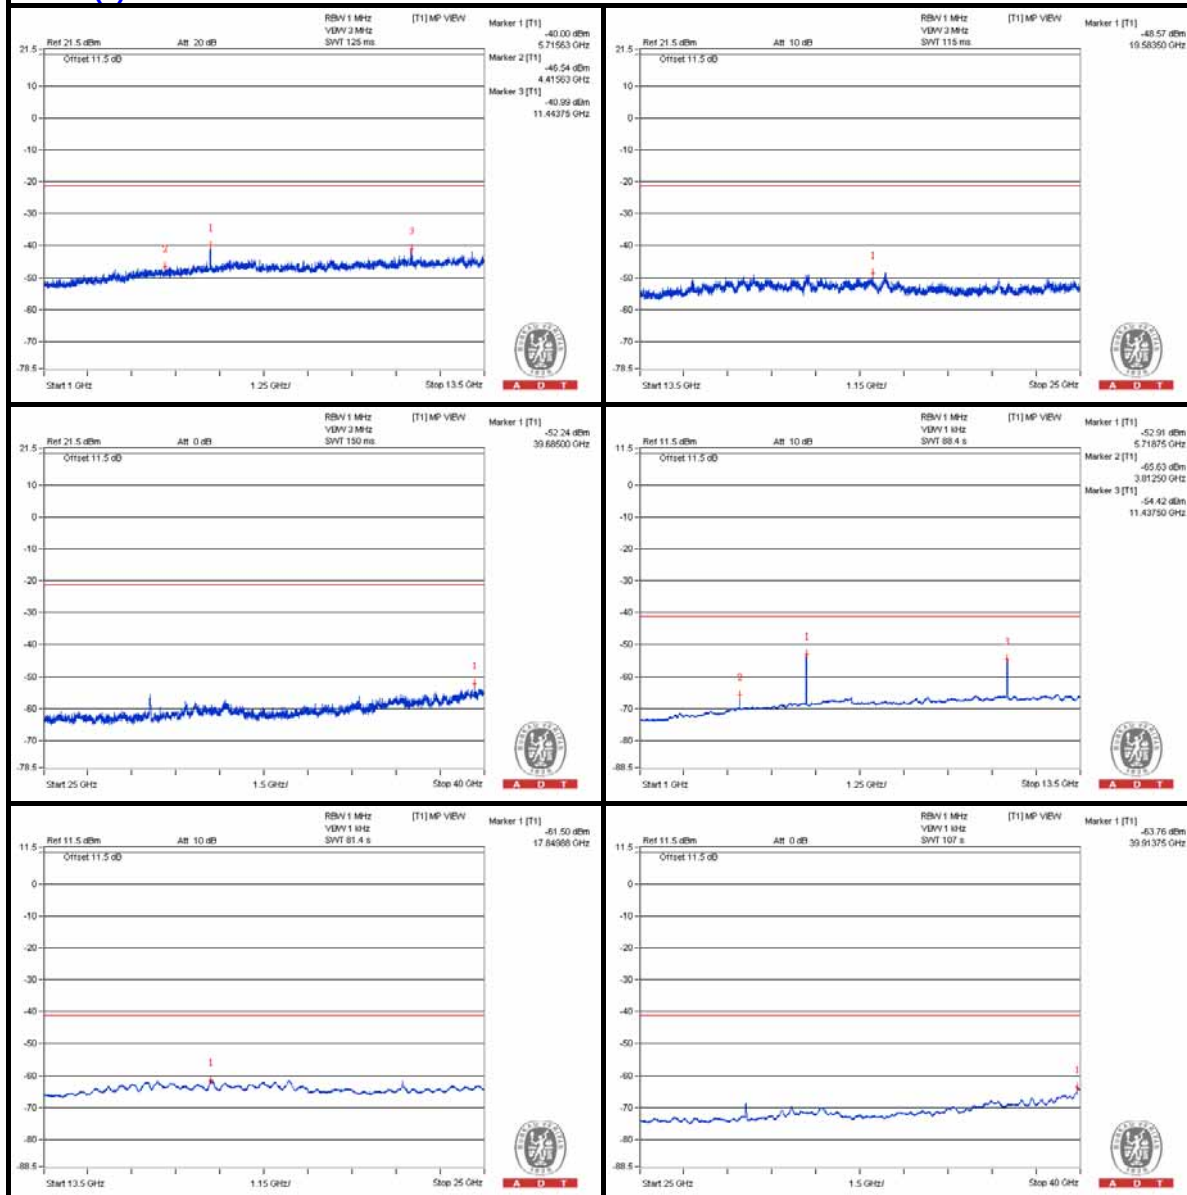

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5833.8 PK	60.38	74	-13.62	-45.61	-45.72	7.77	-34.88
2	5832.675 AV	46.71	54	-7.29	-59.27	-59.39	7.77	-48.55

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

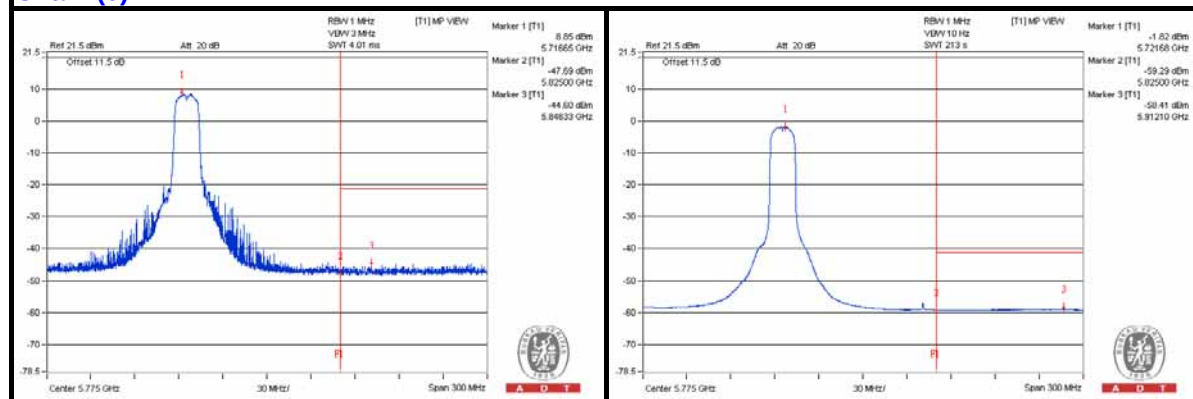

Chain (1)

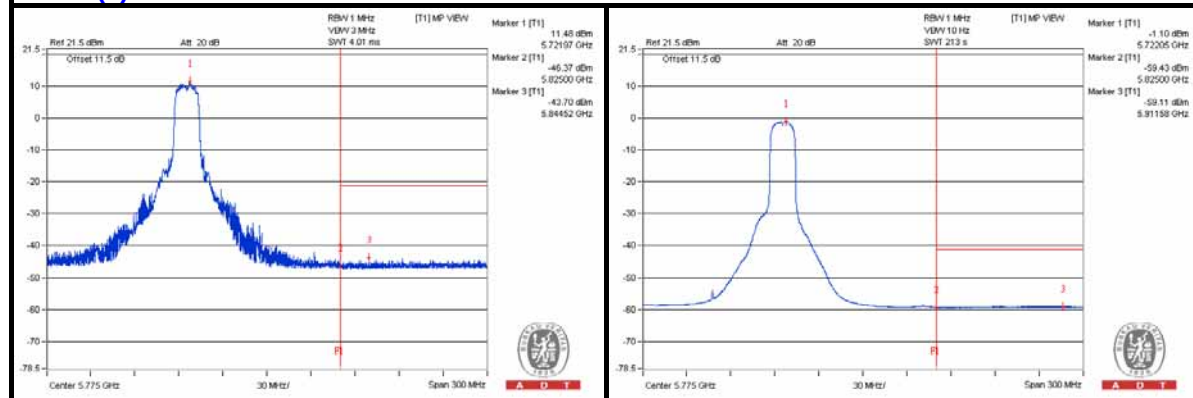

802.11ac (VHT20) - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3443.75 PK	55.19	74	-18.81	-49	-49.34	6.09	-40.07
2	3462.5 AV	33.7	54	-20.3	-70.58	-70.74	6.09	-61.56
3	6912.5 PK	59.3	74	-14.7	-45.56	-44.62	6.09	-35.96
4	6906.25 AV	41.63	54	-12.37	-60.51	-67.5	6.09	-53.63
5	10359.375 PK	61.34	74	-12.66	-42.41	-43.74	6.09	-33.92
6	10359.375 AV	44.15	54	-9.85	-59.67	-60.83	6.09	-51.11
7	15535.5 PK	51.85	74	-22.15	-52.59	-52.44	6.09	-43.41
8	15538.375 AV	41.2	54	-12.8	-63.1	-63.23	6.09	-54.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

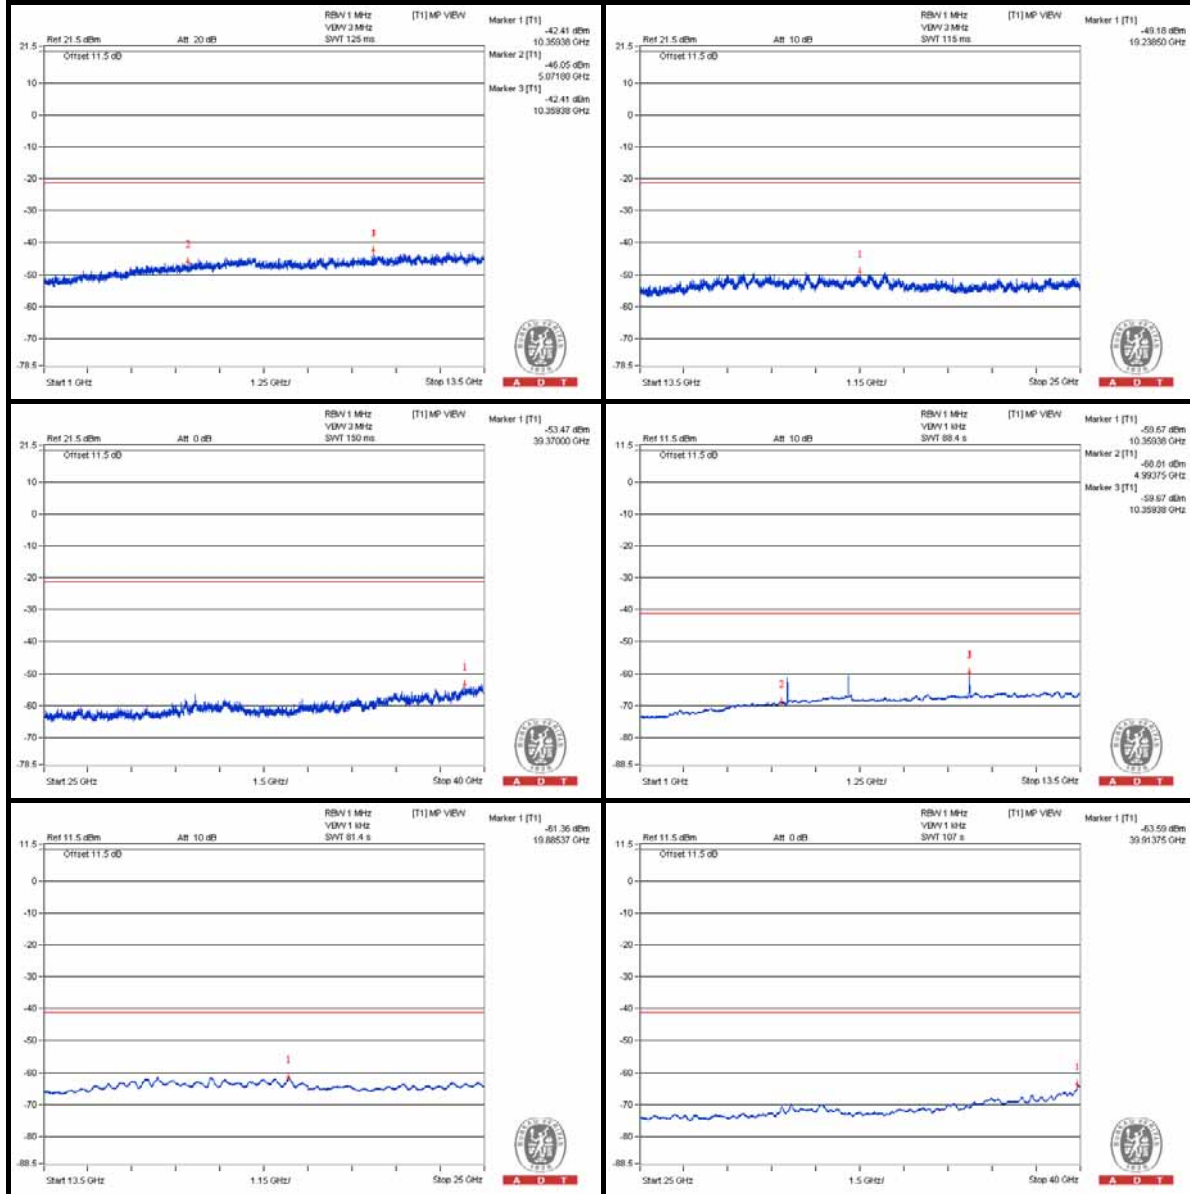

Chain (1)

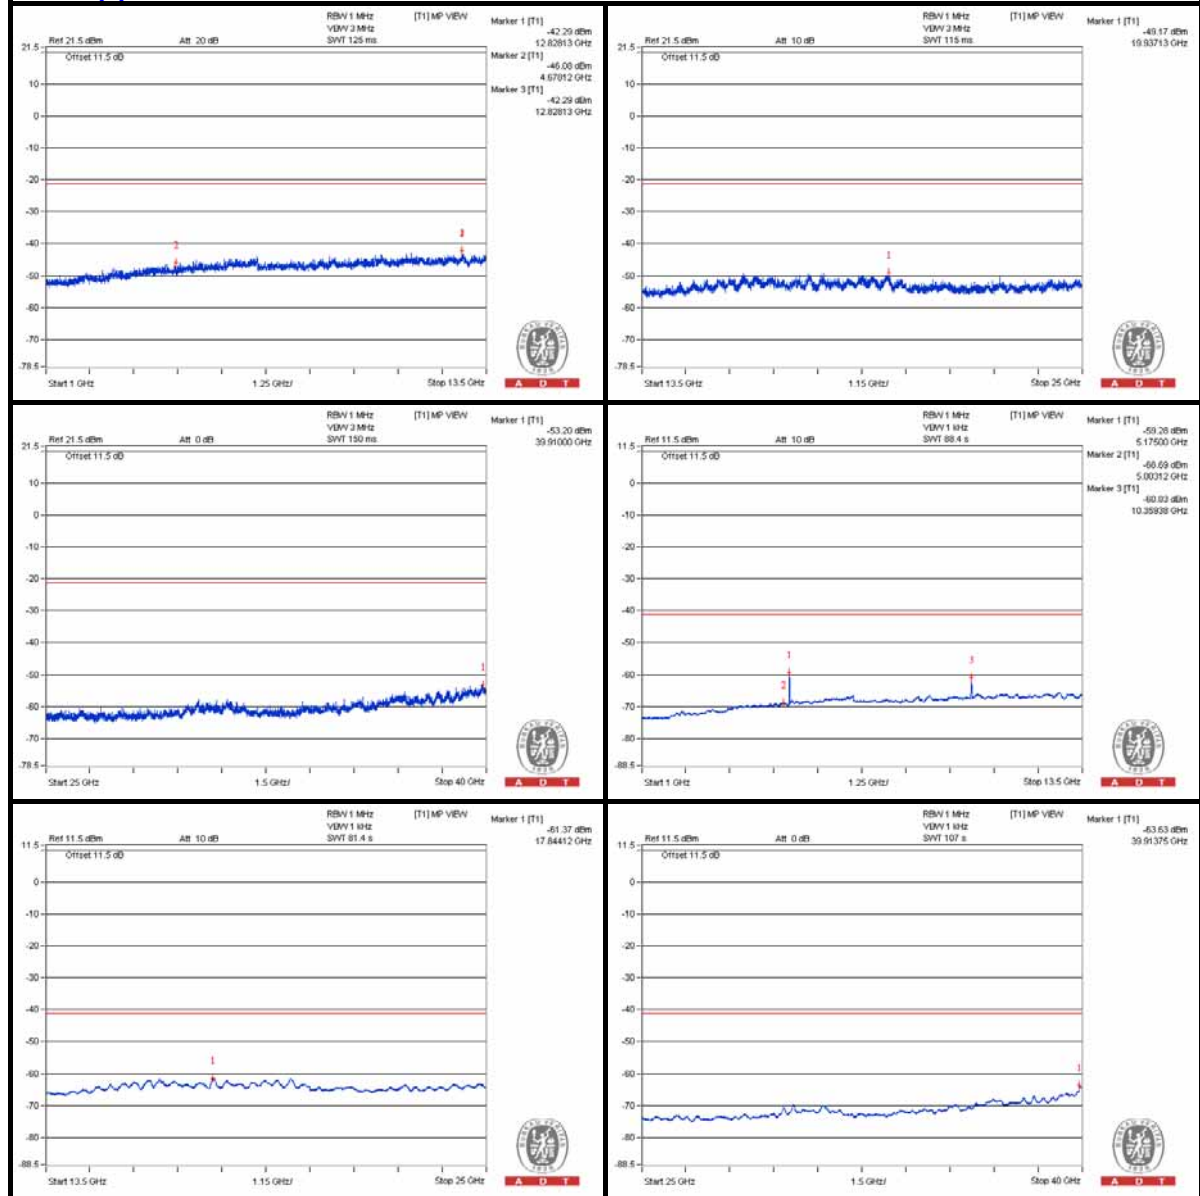

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.7 PK	72.39	74	-1.61	-32.62	-31.4	6.09	-22.87
2	5150 AV	48.43	54	-5.57	-56.58	-55.37	6.09	-46.83

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

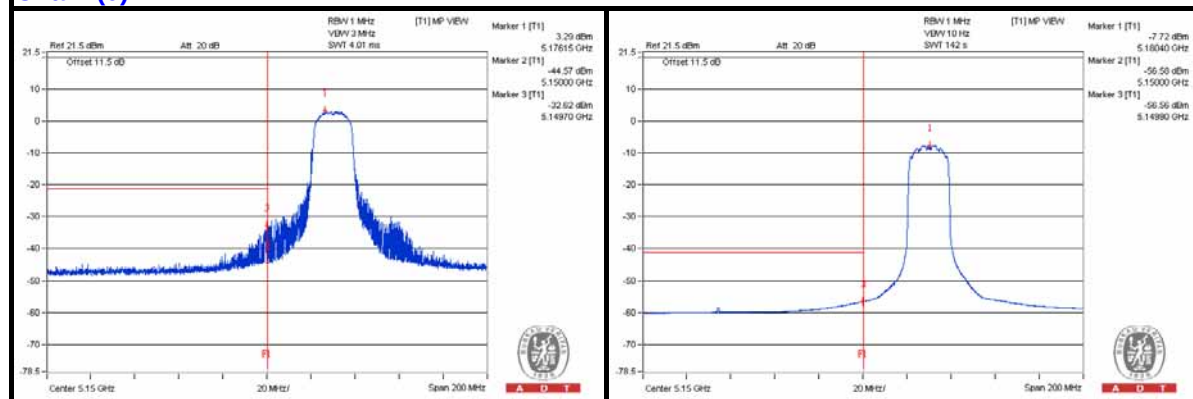

Chain (1)

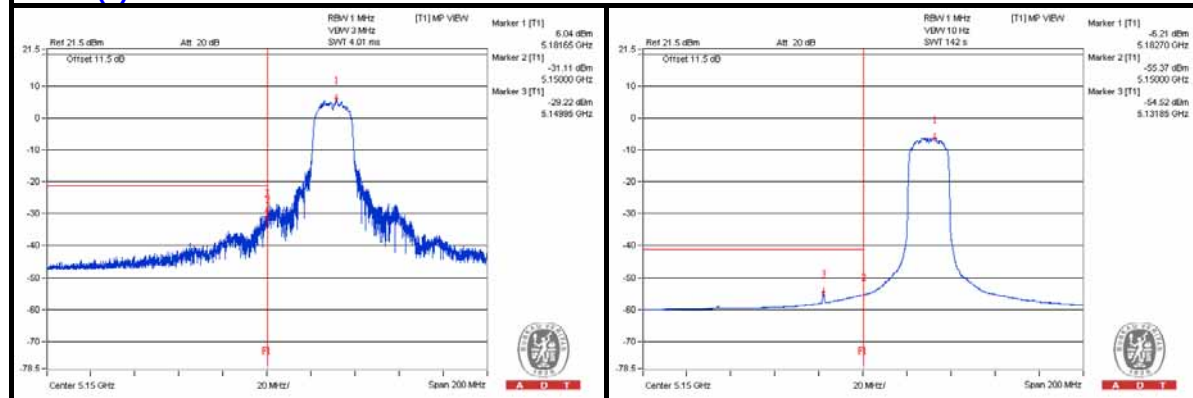

802.11ac (VHT20) - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3468.75 PK	55.34	74	-18.66	-49.39	-48.68	6.09	-39.92
2	3462.5 AV	33.66	54	-20.34	-70.74	-70.66	6.09	-61.6
3	6928.125 PK	58.78	74	-15.22	-44.54	-46.94	6.09	-36.48
4	6934.375 AV	40.37	54	-13.63	-62.15	-67.24	6.09	-54.89
5	10400 PK	61.89	74	-12.11	-42.04	-42.94	6.09	-33.37
6	10396.875 AV	46.71	54	-7.29	-56.29	-59.64	6.09	-48.55
7	15590.125 PK	52.27	74	-21.73	-51.38	-52.95	6.09	-42.99
8	15593 AV	40.65	54	-13.35	-63.57	-63.86	6.09	-54.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

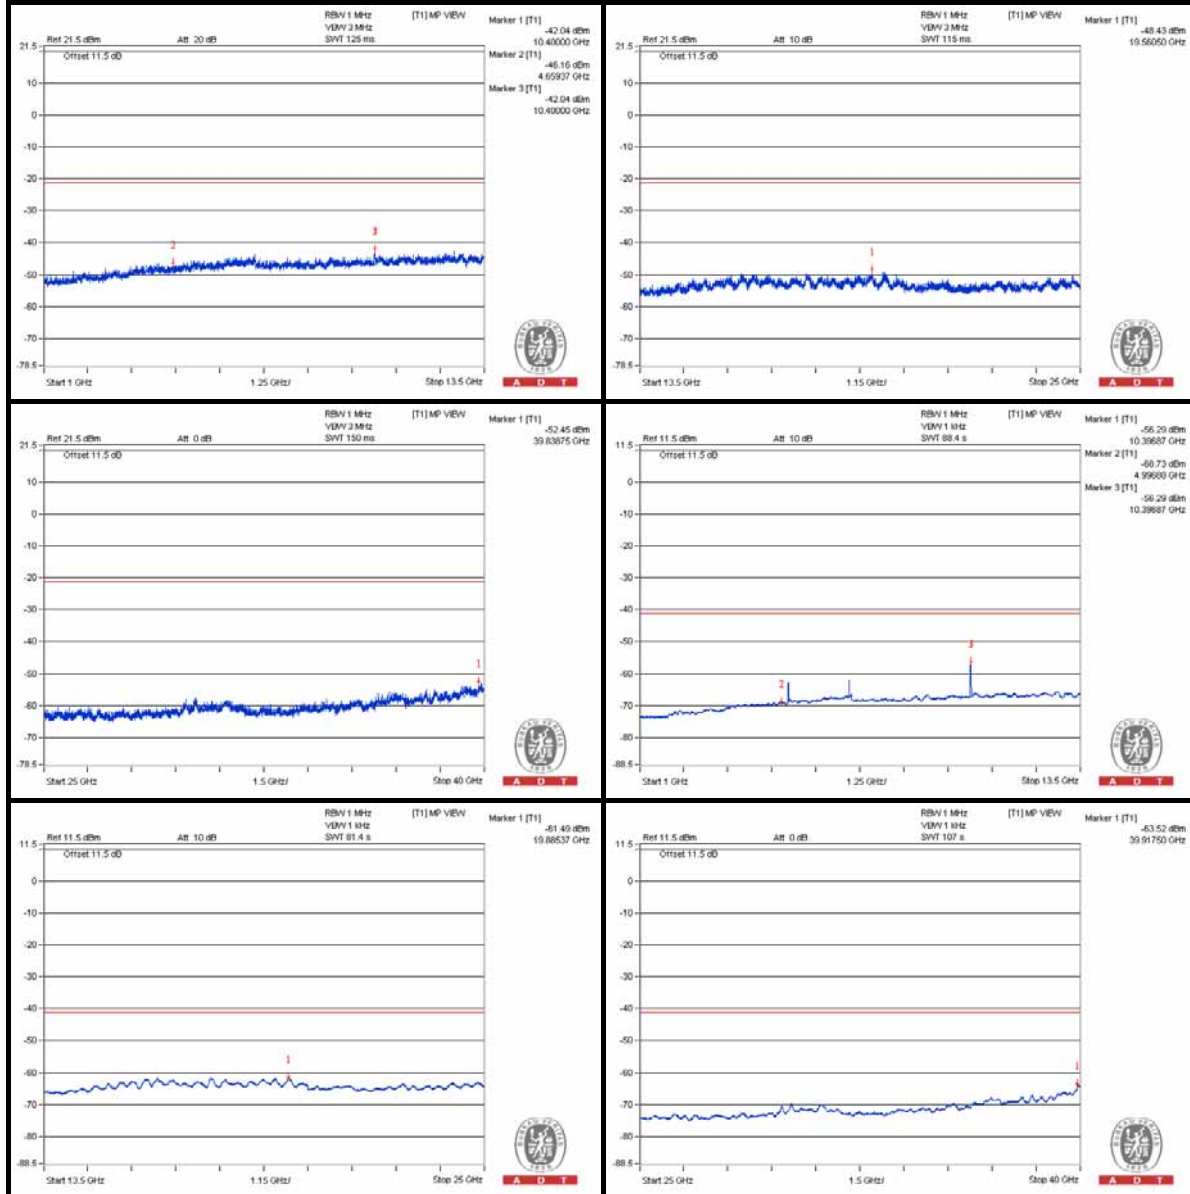

Chain (1)

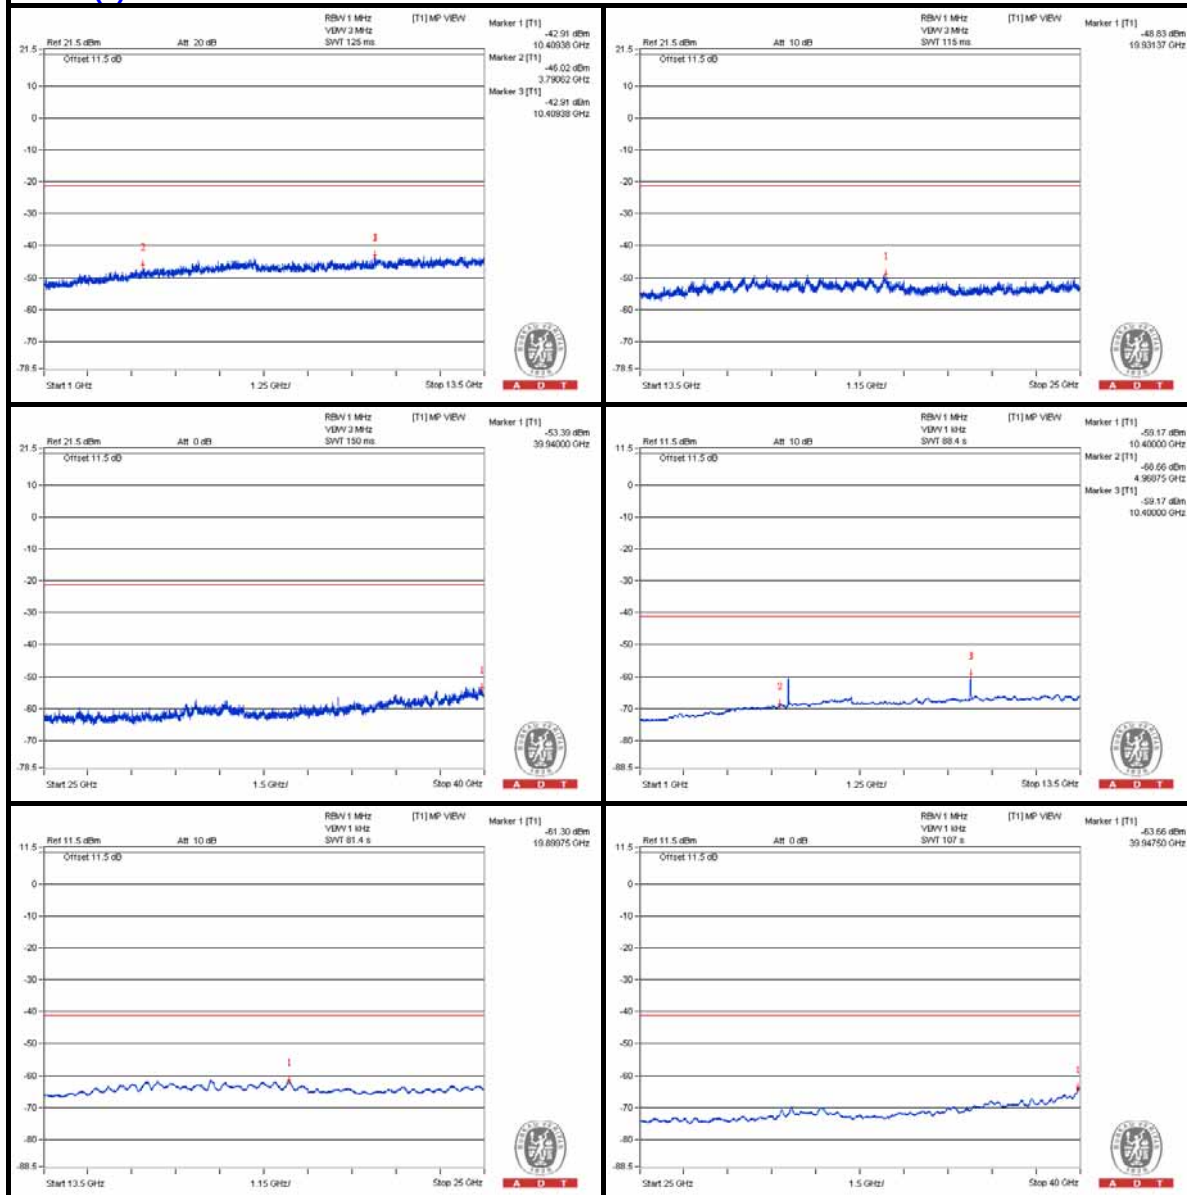

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.15 PK	67.44	74	-6.56	-41.53	-34.74	6.09	-27.82
2	5150 AV	46.19	54	-7.81	-58.29	-58.05	6.09	-49.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

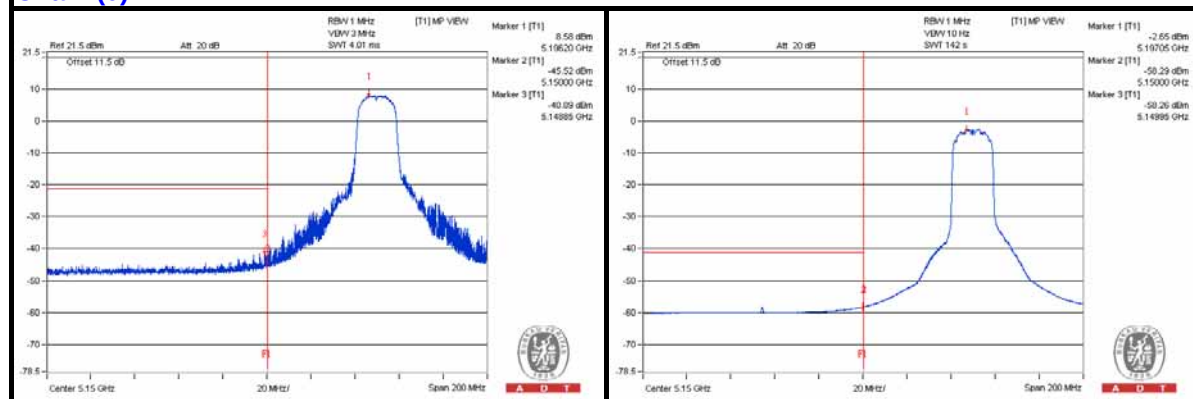

Chain (1)

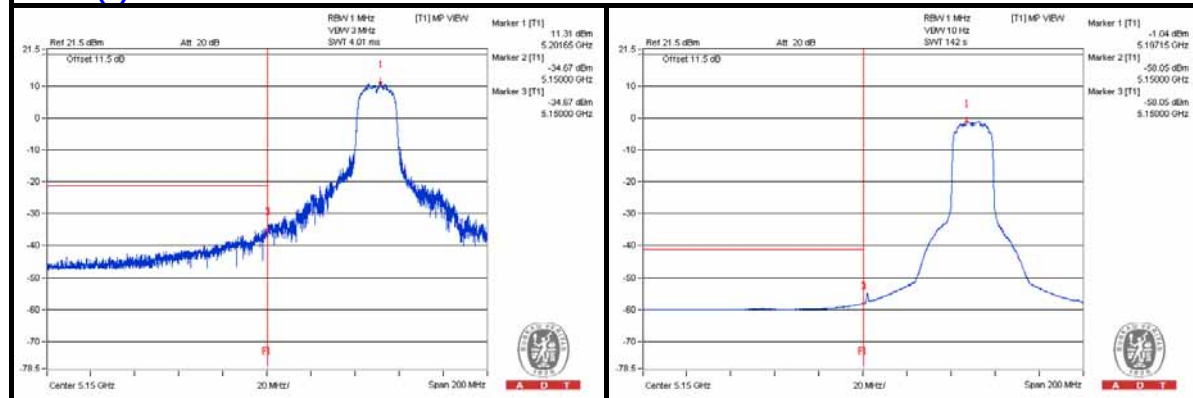

802.11ac (VHT20) - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3487.5 PK	55.12	74	-18.88	-49.84	-48.72	6.09	-40.14
2	3493.75 AV	33.77	54	-20.23	-70.54	-70.65	6.09	-61.49
3	6990.625 PK	59.52	74	-14.48	-46.03	-43.9	6.09	-35.74
4	6987.5 AV	39.83	54	-14.17	-63.41	-66.05	6.09	-55.43
5	10471.875 PK	60.87	74	-13.13	-42.74	-44.41	6.09	-34.39
6	10475 AV	44.51	54	-9.49	-57.88	-63.57	6.09	-50.75
7	15728.125 PK	53.07	74	-20.93	-50.24	-52.67	6.09	-42.19
8	15725.25 AV	40.89	54	-13.11	-63.49	-63.46	6.09	-54.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

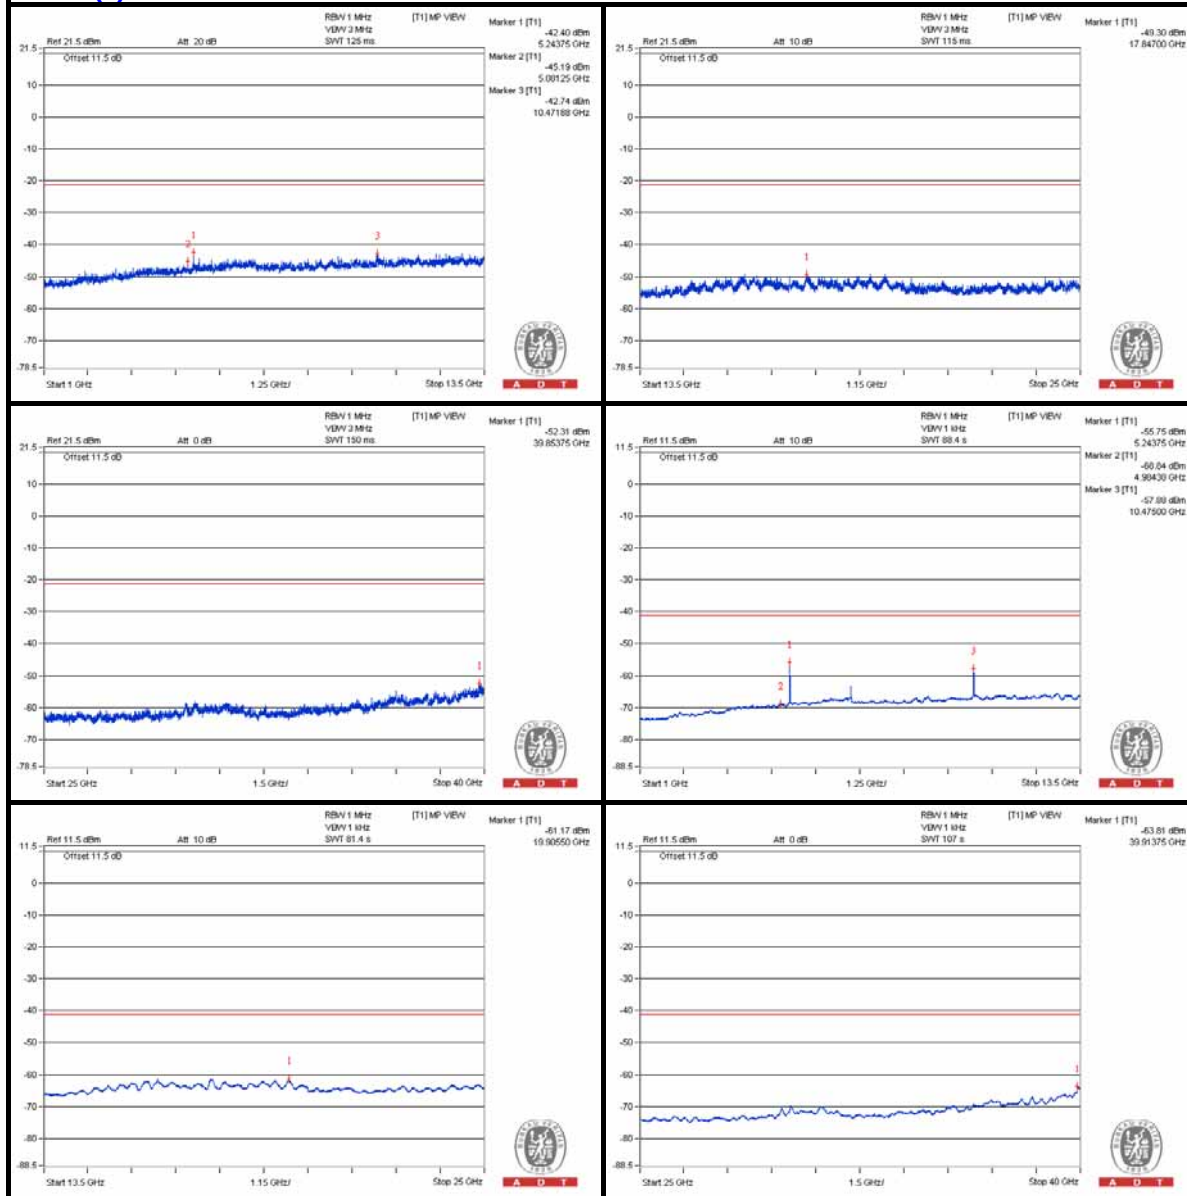

Chain (1)

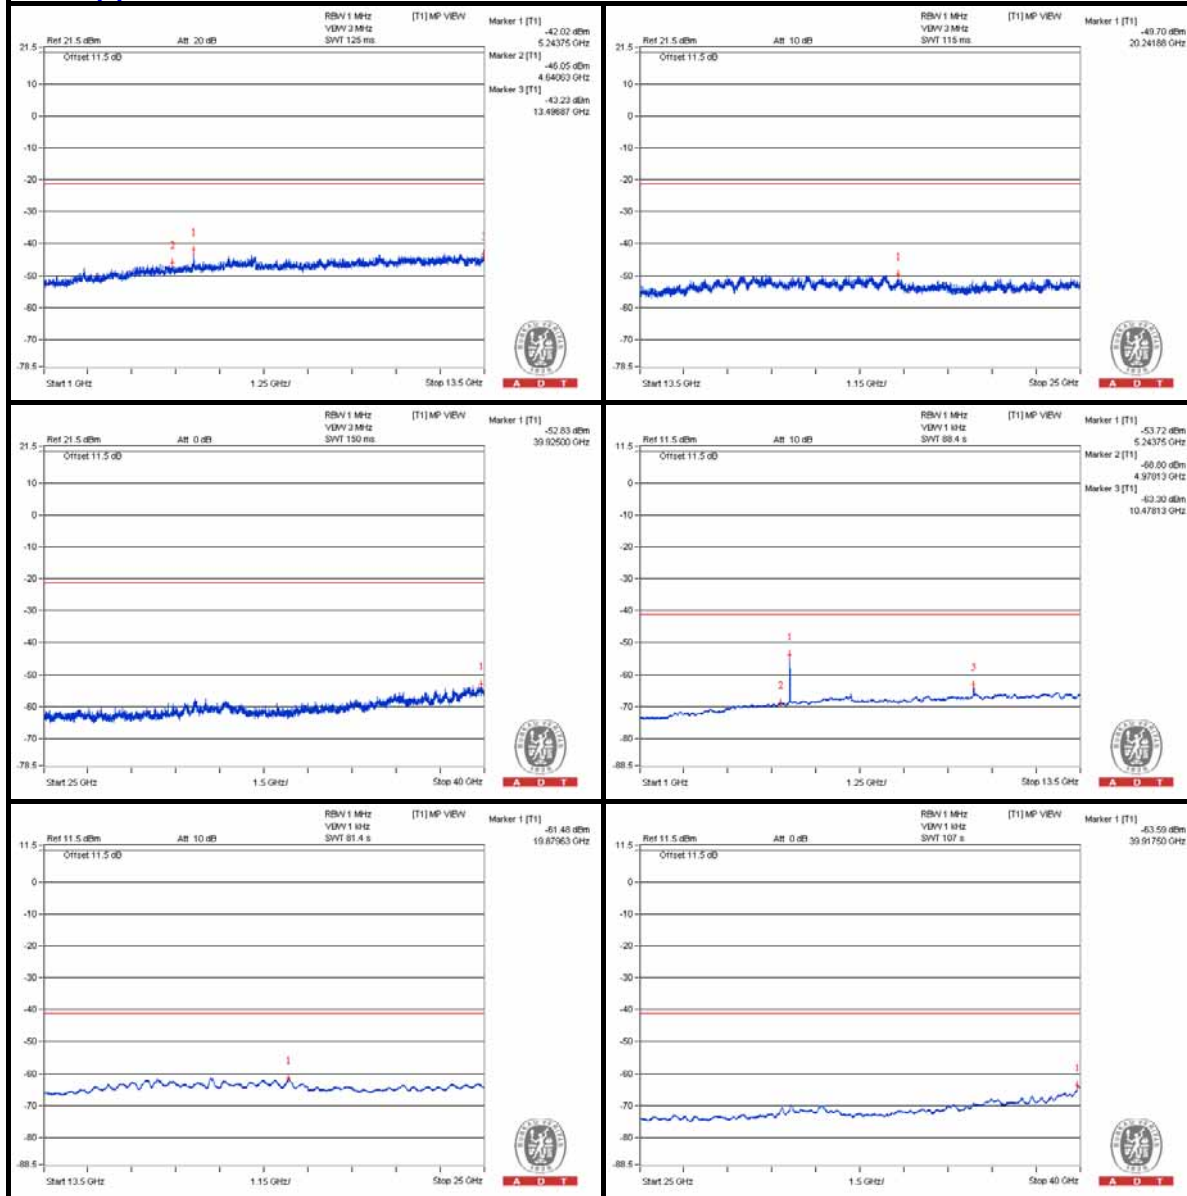

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5144.3 PK	60.58	74	-13.42	-45.32	-42.65	6.09	-34.68
2	5143.9 AV	45.72	54	-8.28	-58.09	-59.28	6.09	-49.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

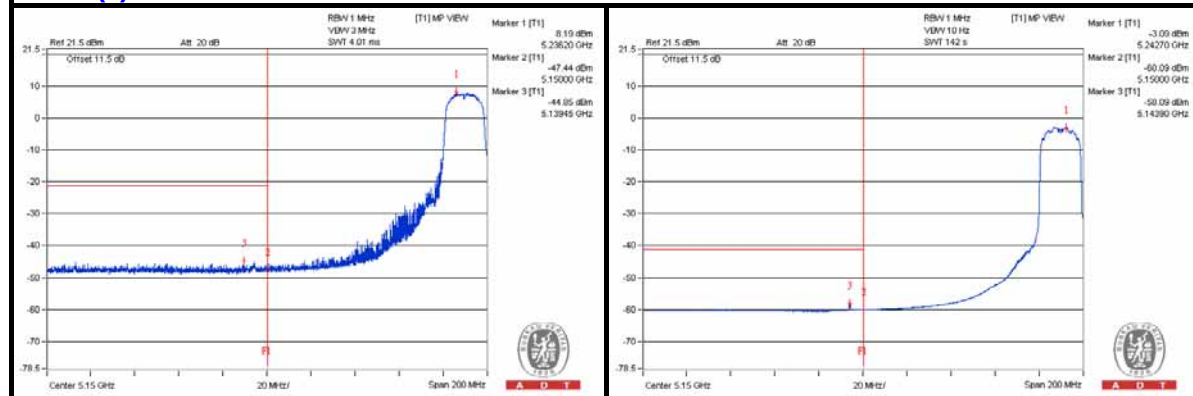

Chain (1)

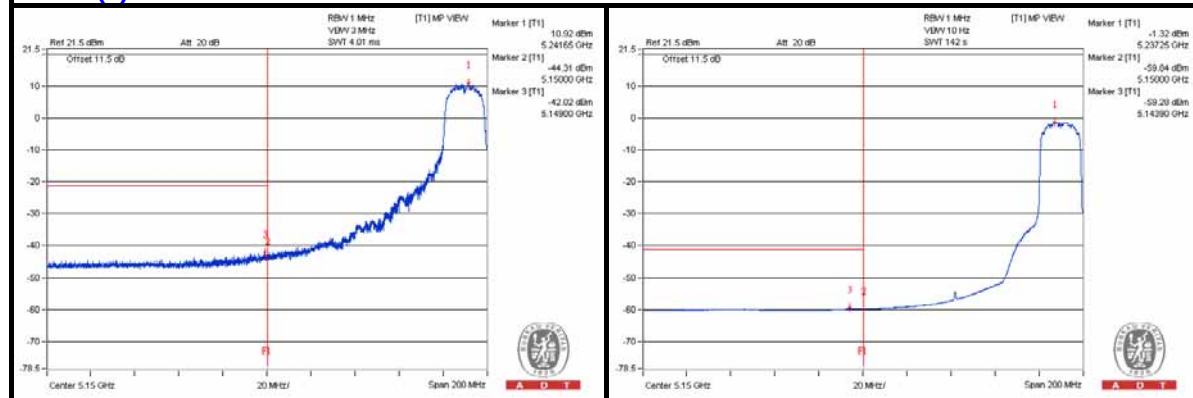

802.11ac (VHT20) - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3506.25 PK	55.2	74	-18.8	-48.61	-49.79	6.09	-40.06
2	3496.875 AV	33.75	54	-20.25	-70.65	-70.58	6.09	-61.51
3	7018.75 PK	58.12	74	-15.88	-46.16	-46.32	6.09	-37.14
4	7012.5 AV	39.01	54	-14.99	-64.01	-67.3	6.09	-56.25
5	10525 PK	60.84	74	-13.16	-43.16	-43.92	6.09	-34.42
6	10525 AV	45.83	54	-8.17	-56.25	-63.62	6.09	-49.43
7	15774.125 PK	52.48	74	-21.52	-51.68	-52.08	6.09	-42.78
8	15774.125 AV	41.73	54	-12.27	-62.68	-62.58	6.09	-53.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

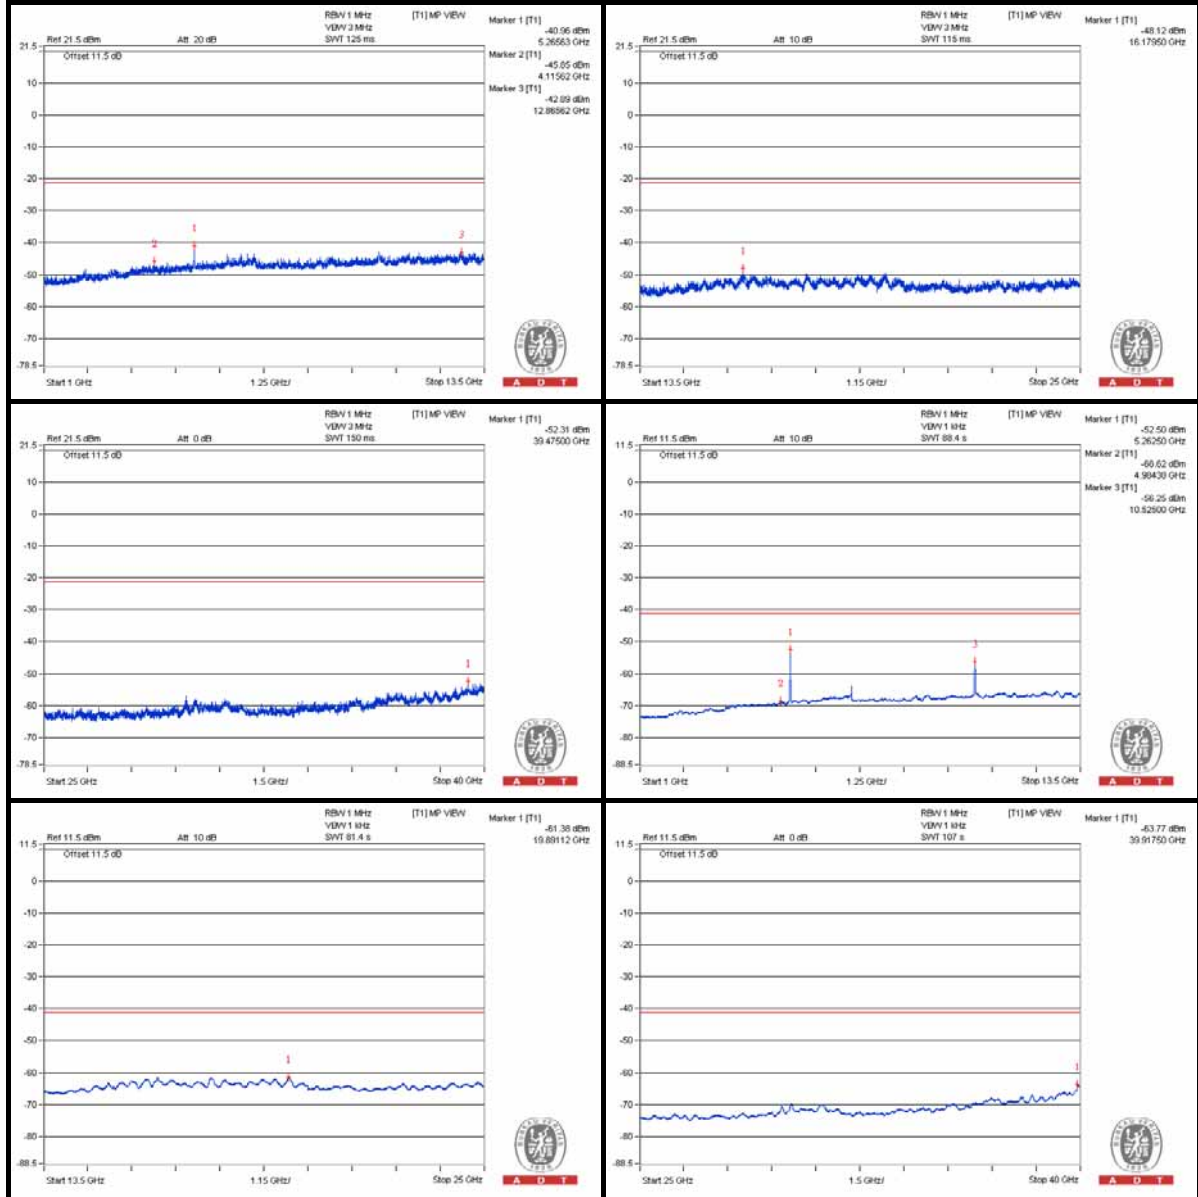

Chain (1)

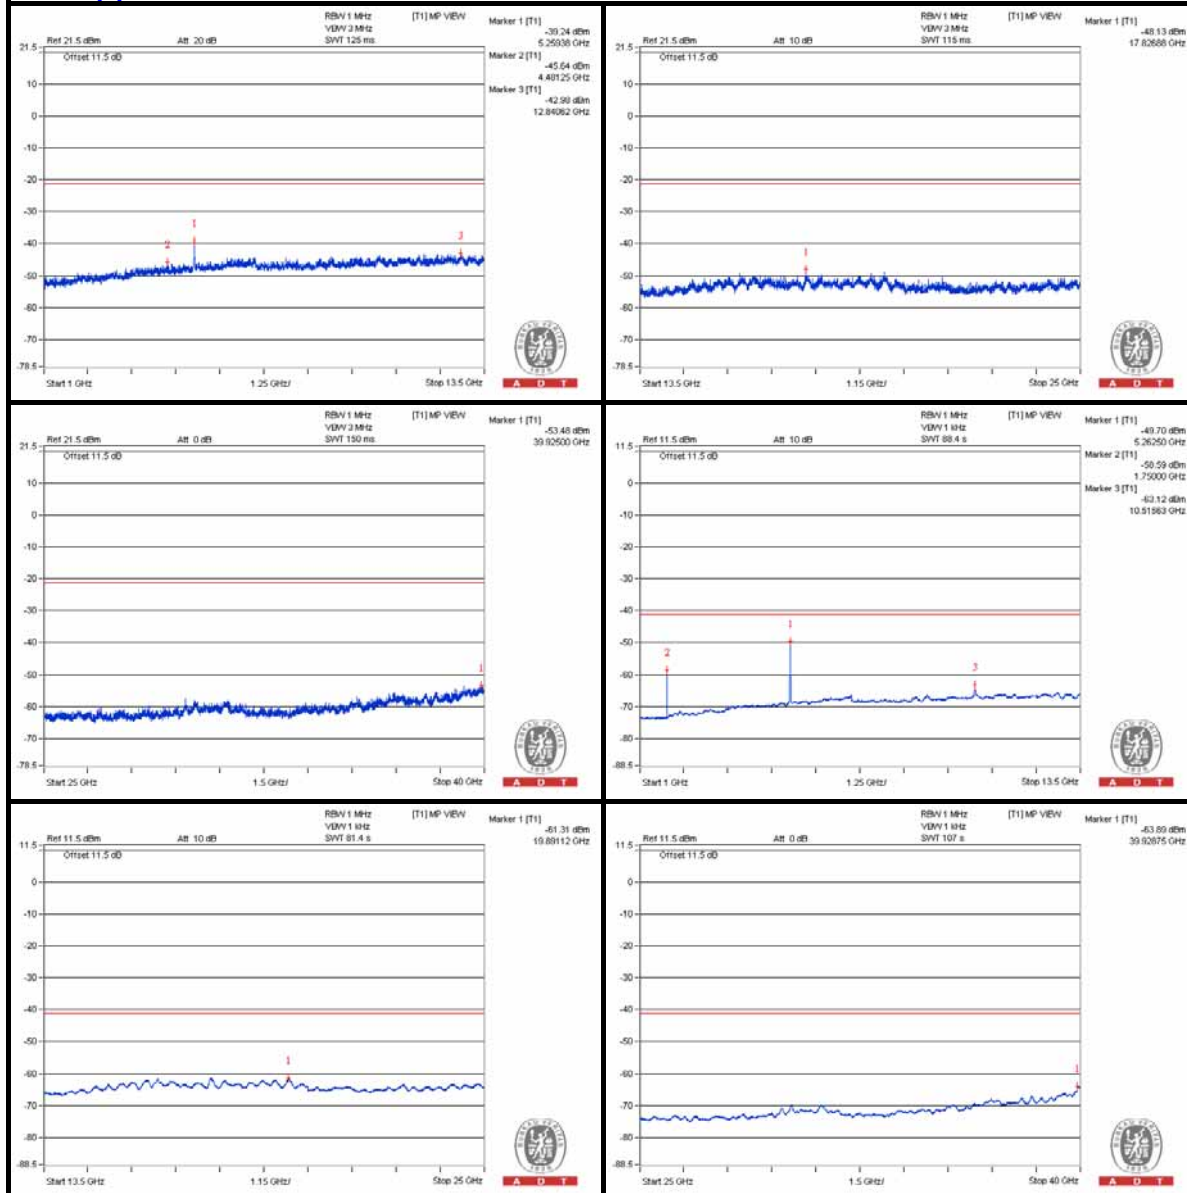

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.05 PK	58.95	74	-15.05	-46.9	-44.31	6.09	-36.31
2	5067.9 AV	44.44	54	-9.56	-59.65	-60.21	6.09	-50.82

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

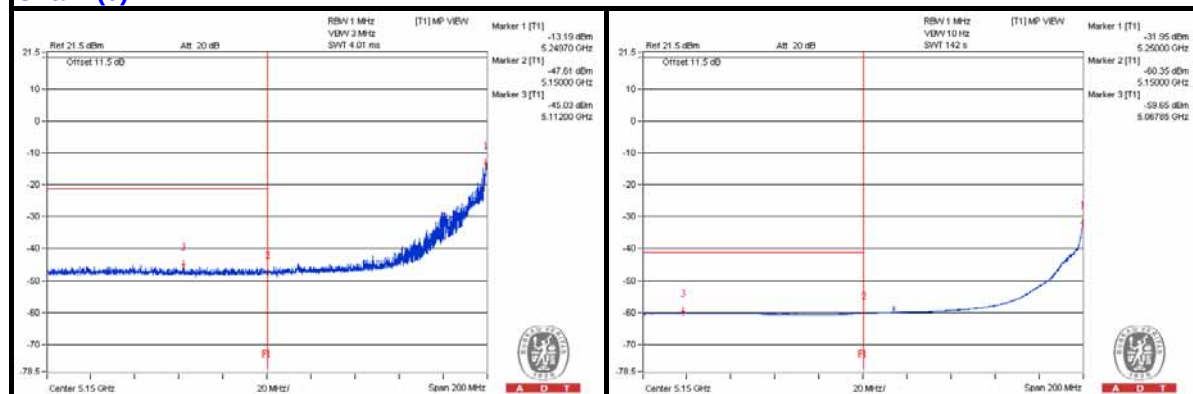

Chain (1)

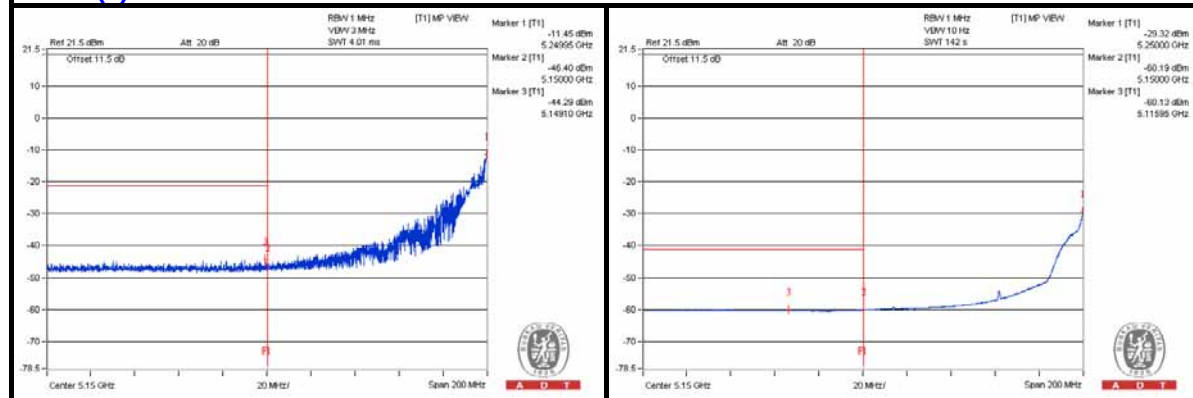

802.11ac (VHT20) - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3534.375 PK	55.15	74	-18.85	-49.85	-48.65	6.09	-40.11
2	3531.25 AV	33.76	54	-20.24	-70.51	-70.7	6.09	-61.5
3	7068.75 PK	57.64	74	-16.36	-46.69	-46.75	6.09	-37.62
4	7065.625 AV	37.78	54	-16.22	-66.35	-66.82	6.09	-57.48
5	10606.25 PK	61.23	74	-12.77	-41.98	-44.71	6.09	-34.03
6	10606.25 AV	46.43	54	-7.57	-55.89	-61.92	6.09	-48.83
7	15900.625 PK	52.09	74	-21.91	-51.65	-52.99	6.09	-43.17
8	15894.875 AV	41.04	54	-12.96	-63.32	-63.32	6.09	-54.22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

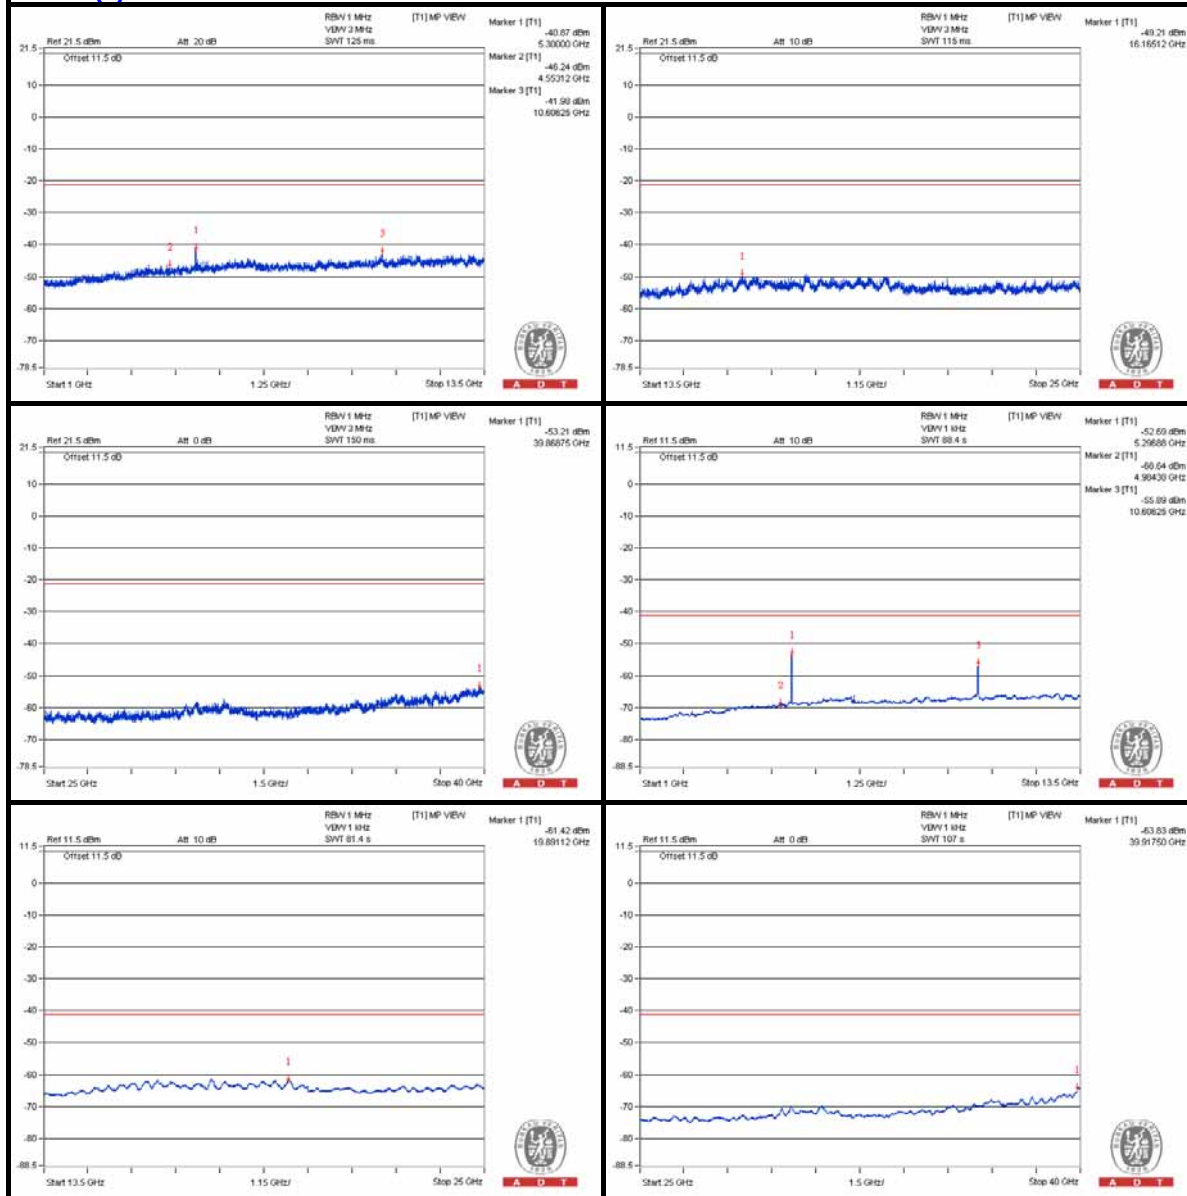

Chain (1)

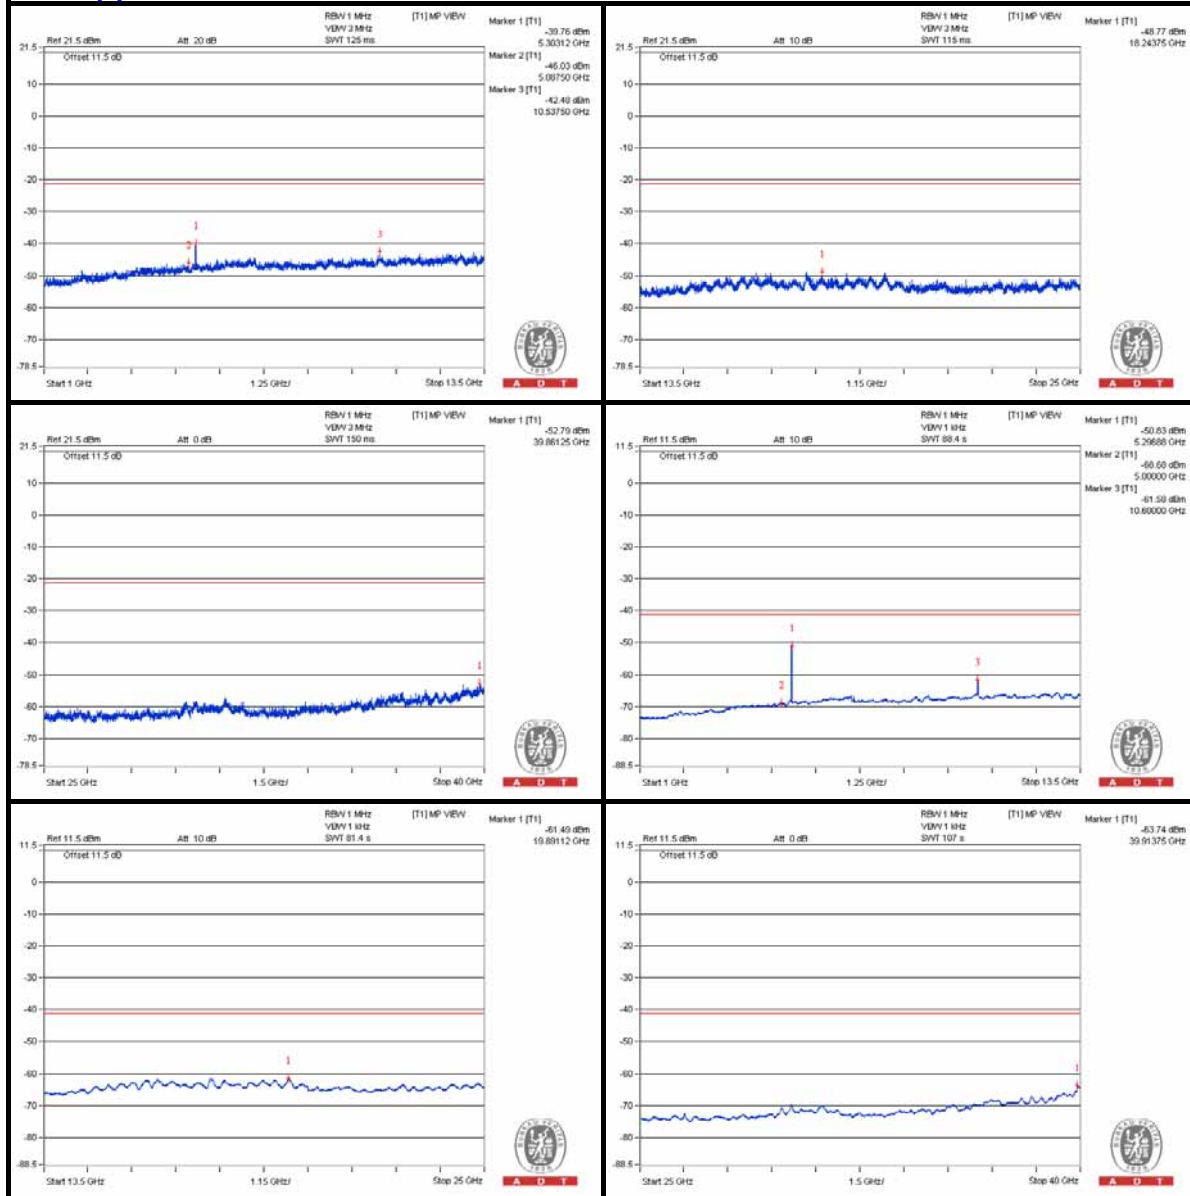

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5352.4 PK	66.33	74	-7.67	-39.81	-36.77	6.09	-28.93
2	5395.9 AV	46.95	54	-7.05	-56.57	-58.45	6.09	-48.31

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

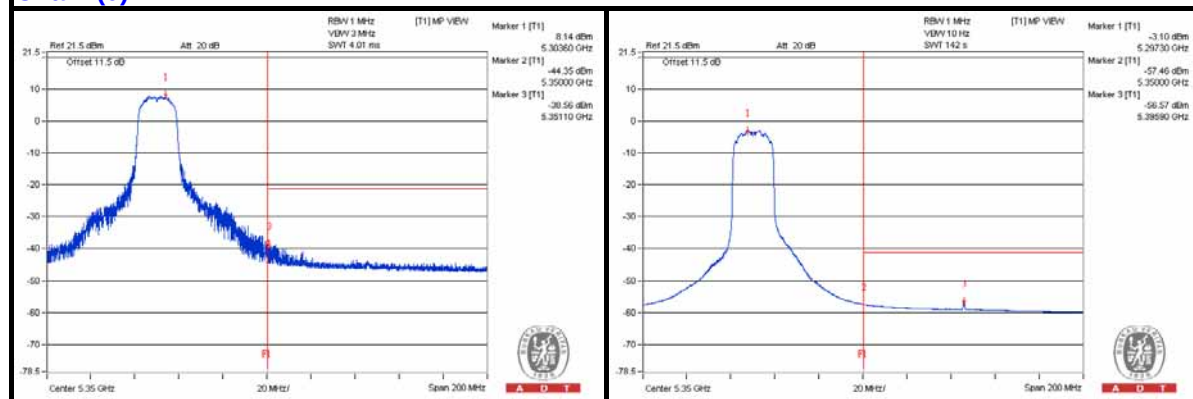

Chain (1)

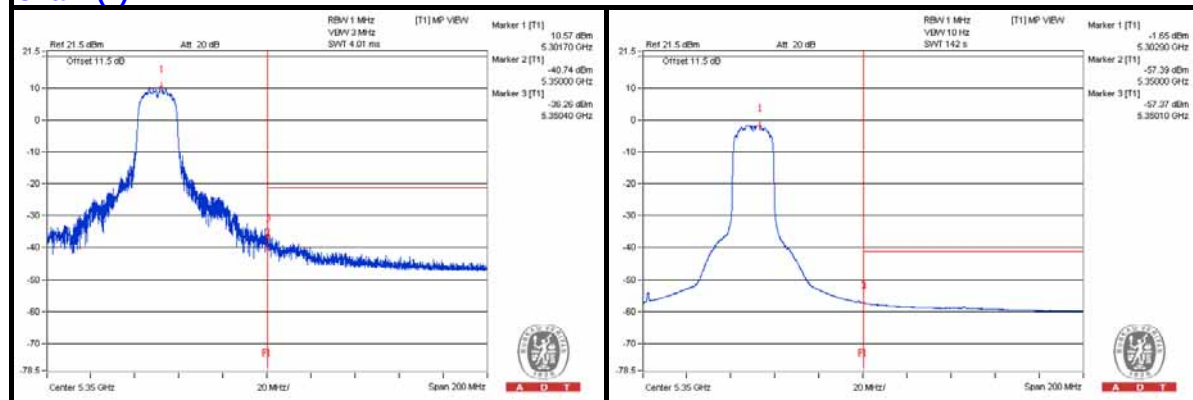

802.11ac (VHT20) - Channel 64

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3546.875 PK	55.39	74	-18.61	-48.02	-50.2	6.09	-39.87
2	3550 AV	33.96	54	-20.04	-70.35	-70.46	6.09	-61.3
3	7084.375 PK	57.4	74	-16.6	-47.42	-46.54	6.09	-37.86
4	7093.75 AV	38.18	54	-15.82	-65.74	-66.66	6.09	-57.08
5	10637.5 PK	59.57	74	-14.43	-44.77	-44.81	6.09	-35.69
6	10640.625 AV	40.92	54	-13.08	-62.12	-65.35	6.09	-54.34
7	15966.75 PK	50.59	74	-23.41	-53.69	-53.86	6.09	-44.67
8	15961 AV	39.69	54	-14.31	-64.69	-64.66	6.09	-55.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

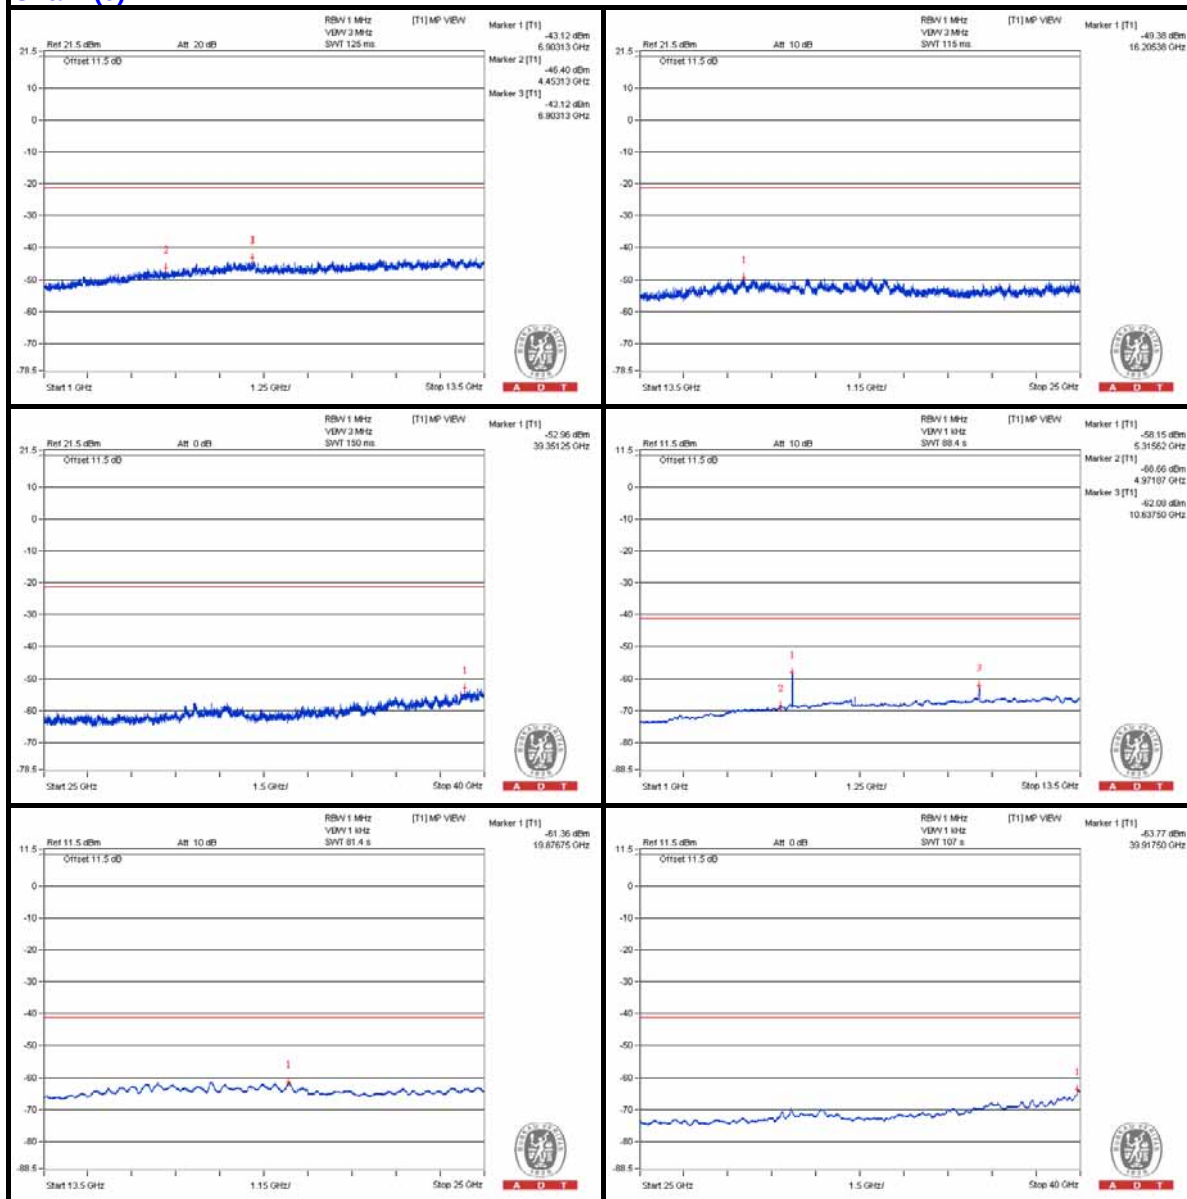

Chain (1)

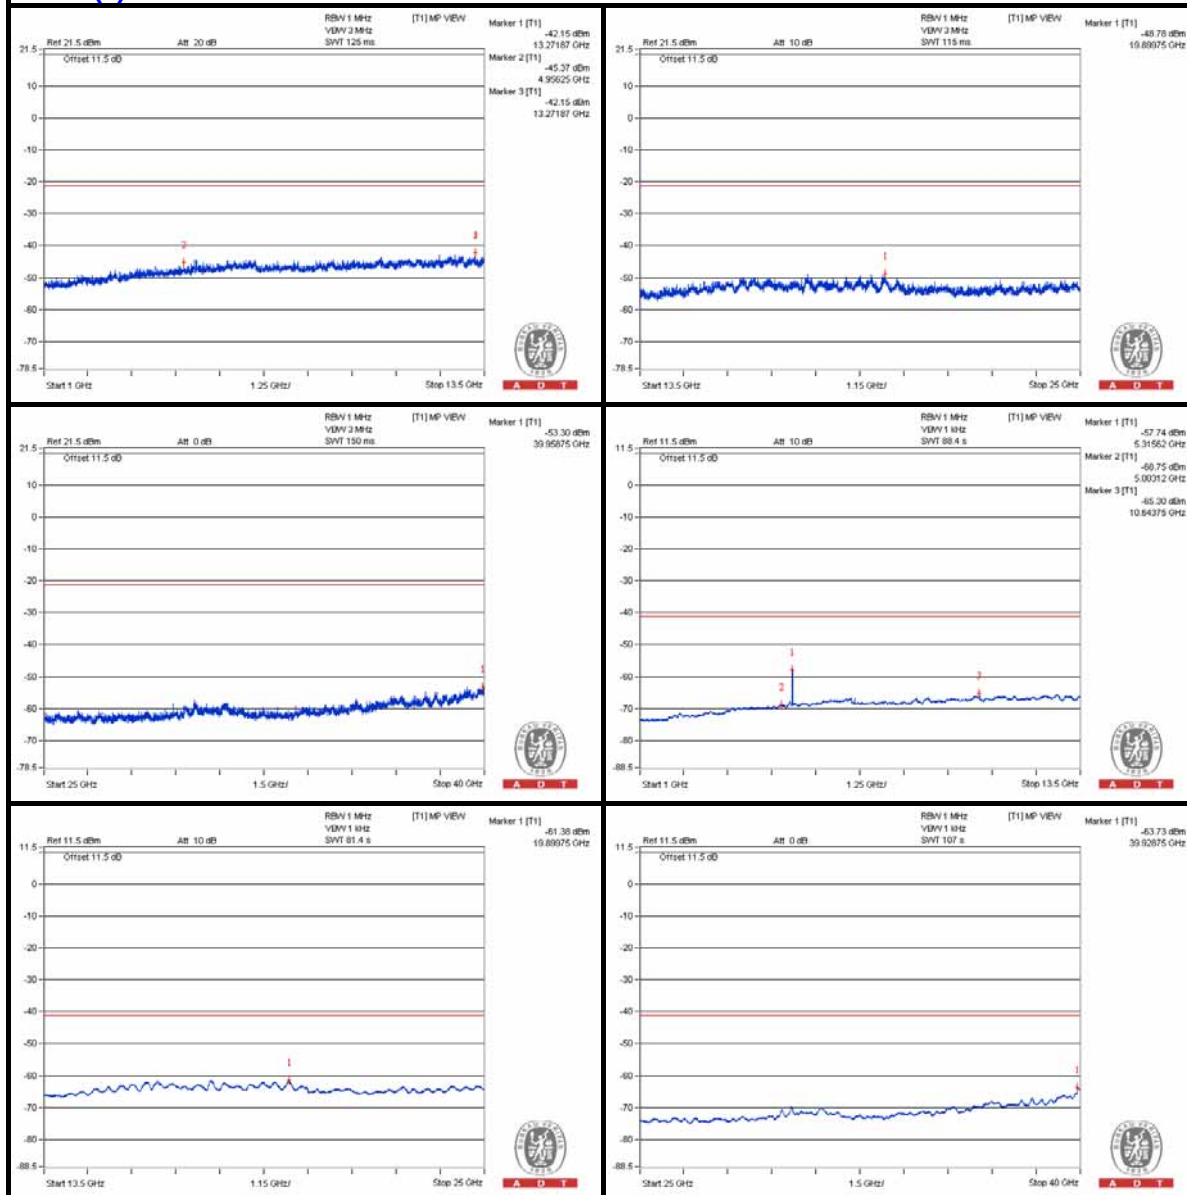

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.95 PK	70.86	74	-3.14	-37.08	-31.57	6.09	-24.4
2	5350 AV	46.96	54	-7.04	-57.41	-57.39	6.09	-48.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

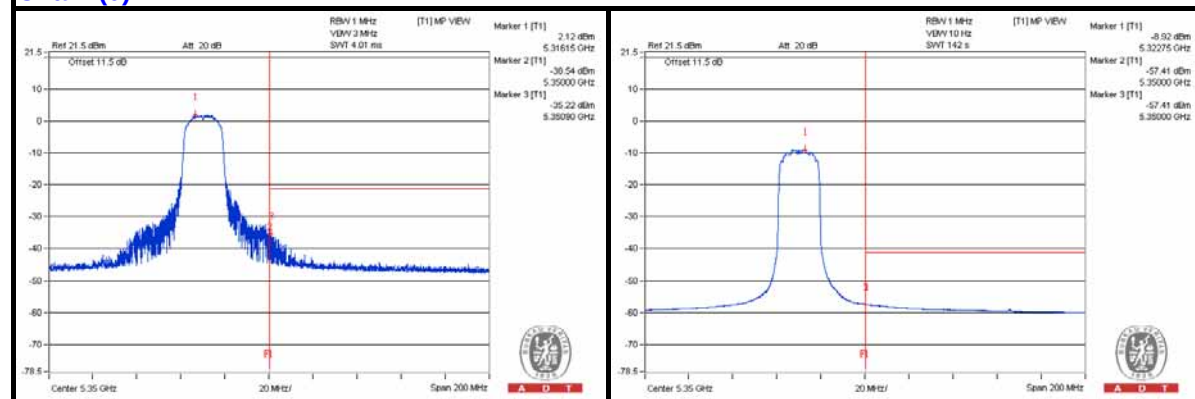

Chain (1)

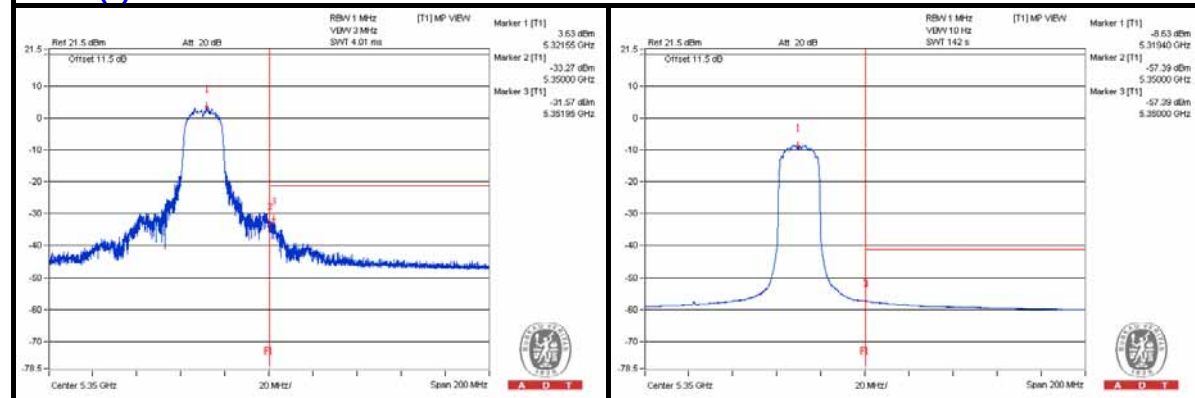

802.11ac (VHT20) - Channel 100

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3659.375 PK	57.87	74	-16.13	-49.04	-47.45	7.77	-37.39
2	3665.625 AV	37.5	54	-16.5	-68.69	-68.4	7.77	-57.76
3	7325 PK	59.59	74	-14.41	-47.88	-45.37	7.77	-35.67
4	7334.375 AV	37.88	54	-16.12	-68.08	-68.25	7.77	-57.38
5	10993.75 PK	60.47	74	-13.53	-45.32	-45.84	7.77	-34.79
6	11000 AV	40.83	54	-13.17	-65.1	-65.33	7.77	-54.43
7	16504.375 PK	54.81	74	-19.19	-51.93	-50.62	7.77	-40.45
8	16490 AV	43.53	54	-10.47	-62.48	-62.55	7.77	-51.73

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

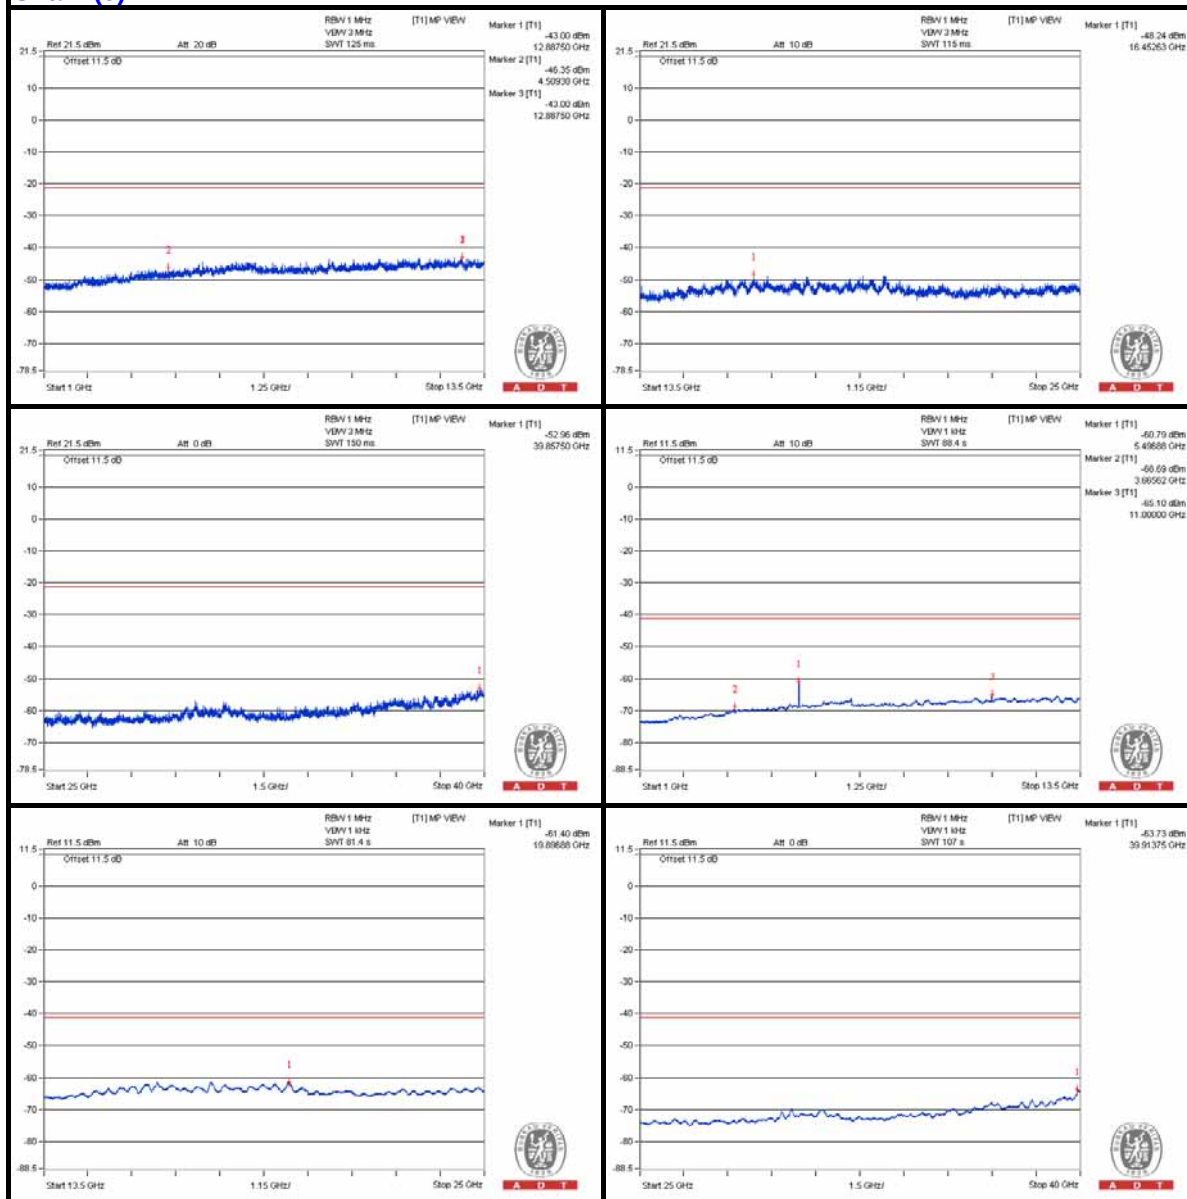

Chain (1)

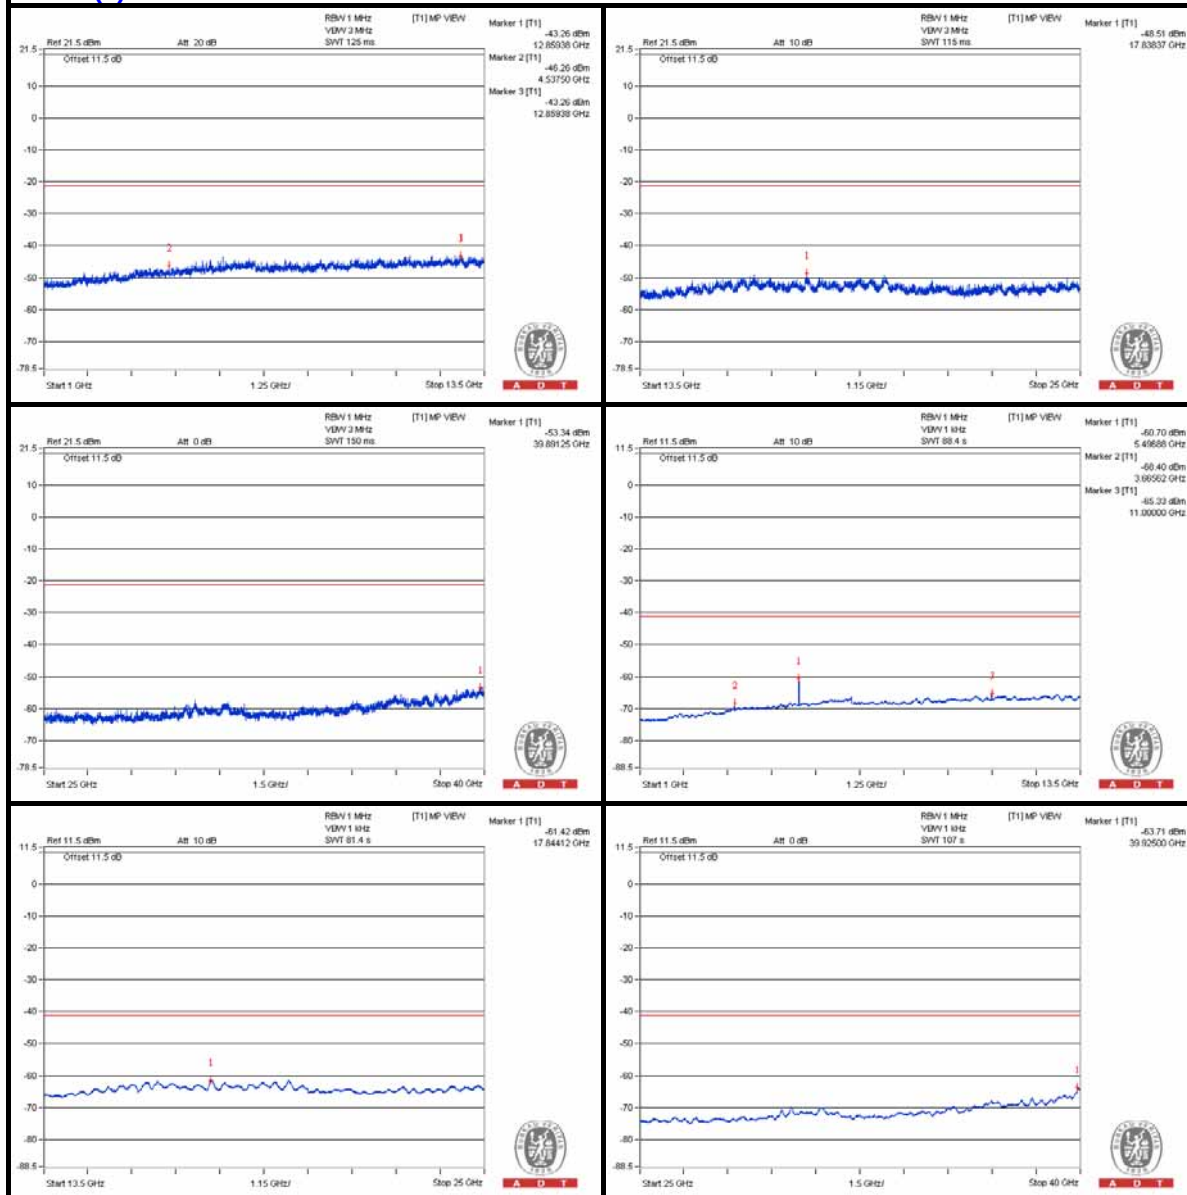

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.1875 PK	71.98	74	-2.02	-38.31	-31.96	7.77	-23.28
2	5470 AV	48.81	54	-5.19	-57.71	-56.8	7.77	-46.45

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

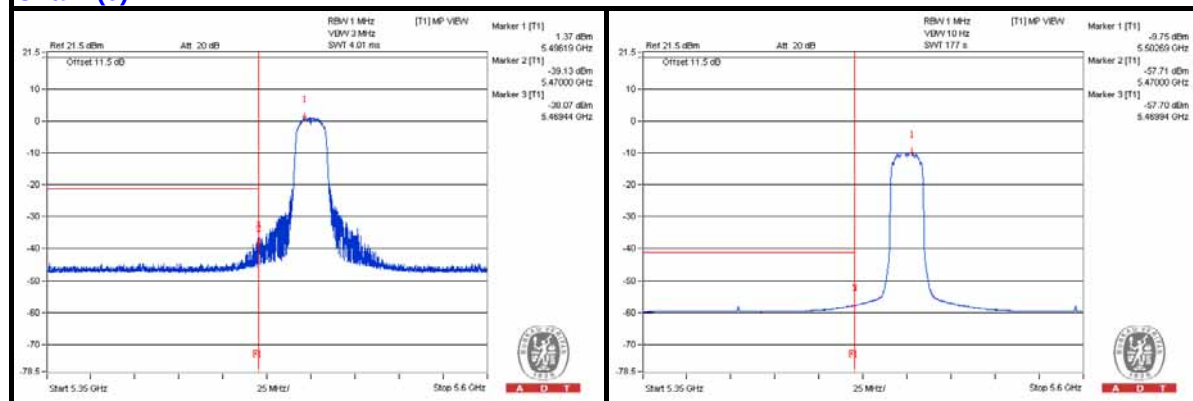

Chain (1)

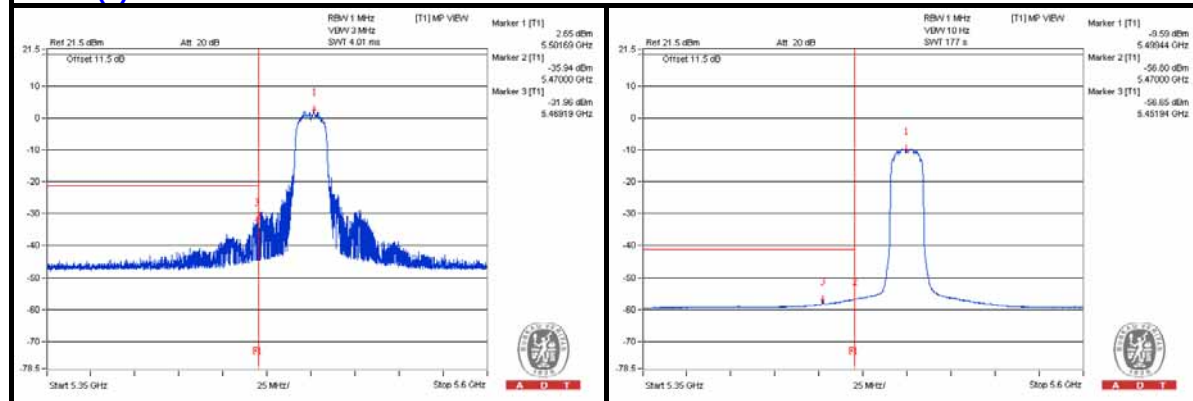

802.11ac (VHT20) - Channel 116

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3728.125 PK	57.78	74	-16.22	-47.91	-48.64	7.77	-37.48
2	3718.75 AV	38.25	54	-15.75	-67.35	-68.27	7.77	-57.01
3	7440.625 PK	59.08	74	-14.92	-47.15	-46.78	7.77	-36.18
4	7431.25 AV	37.74	54	-16.26	-68.37	-68.23	7.77	-57.52
5	11165.625 PK	62.5	74	-11.5	-42.35	-45.2	7.77	-32.76
6	11165.625 AV	45.82	54	-8.18	-57.92	-65.44	7.77	-49.44
7	16748.75 PK	55.37	74	-18.63	-49.52	-52.24	7.77	-39.89
8	16748.75 AV	43.1	54	-10.9	-62.93	-62.96	7.77	-52.16

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

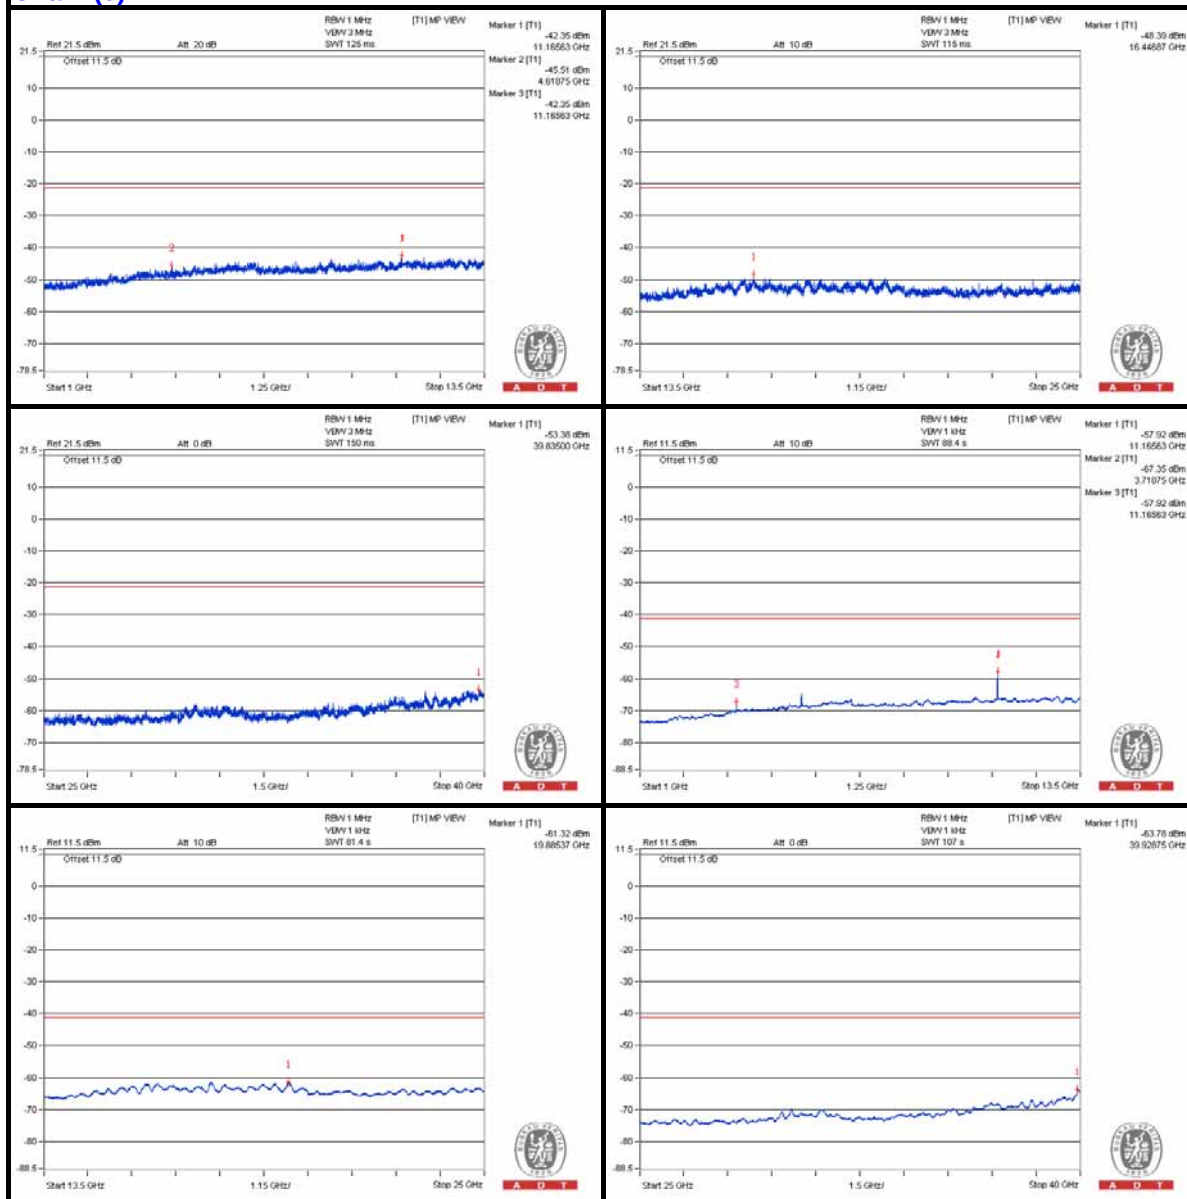

Chain (1)

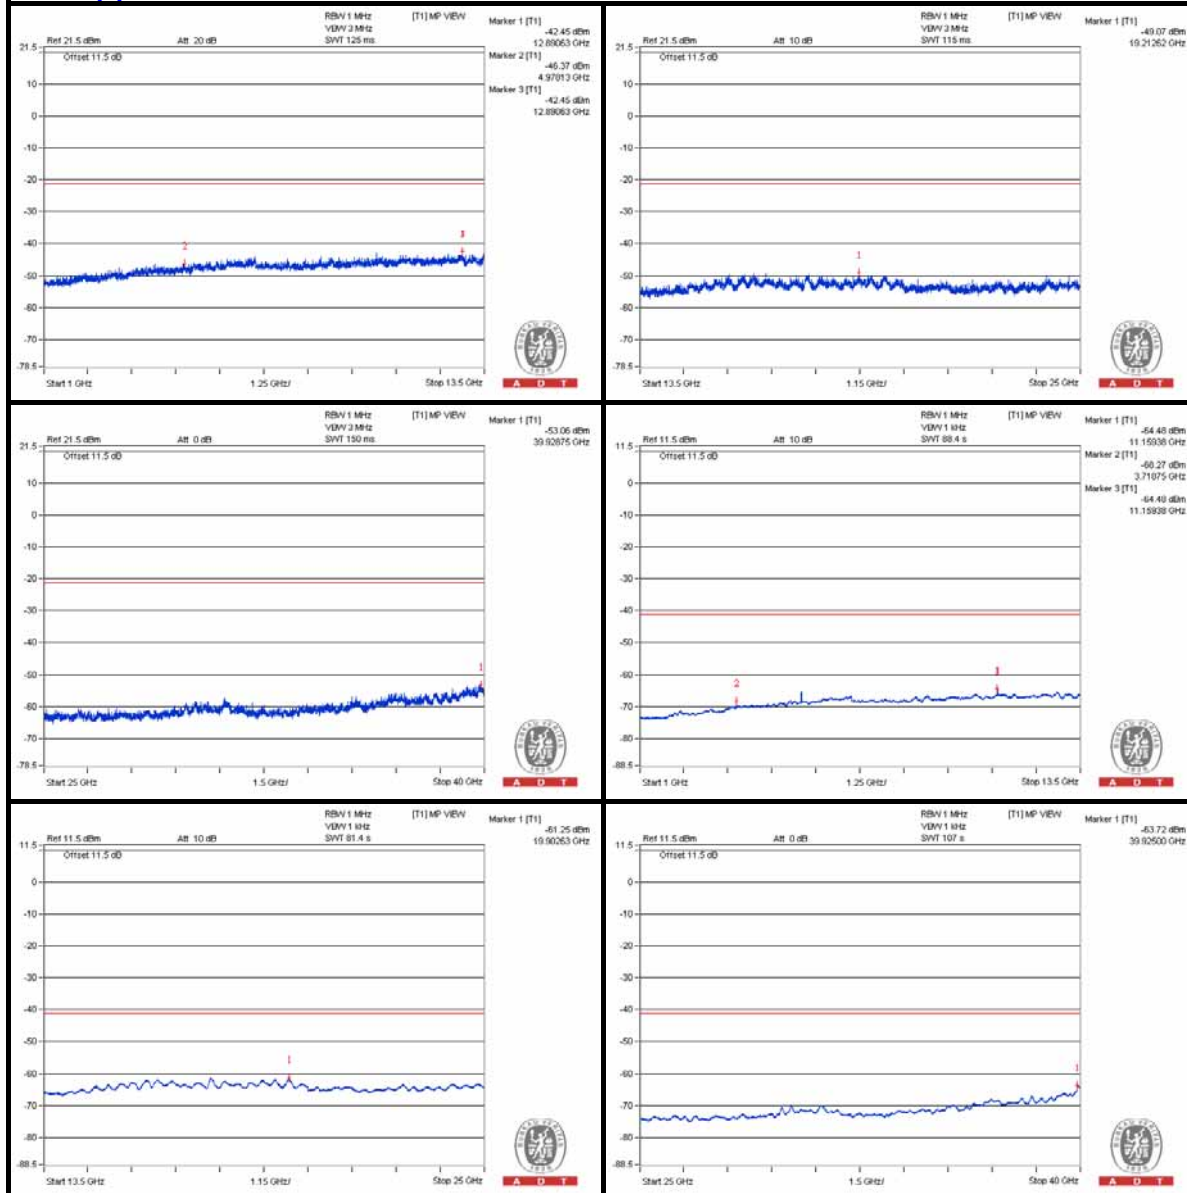

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.875 PK	62.34	74	-11.66	-46.31	-42.08	7.77	-32.92
2	5387.9375 AV	47.56	54	-6.44	-57.82	-59.26	7.77	-47.7

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

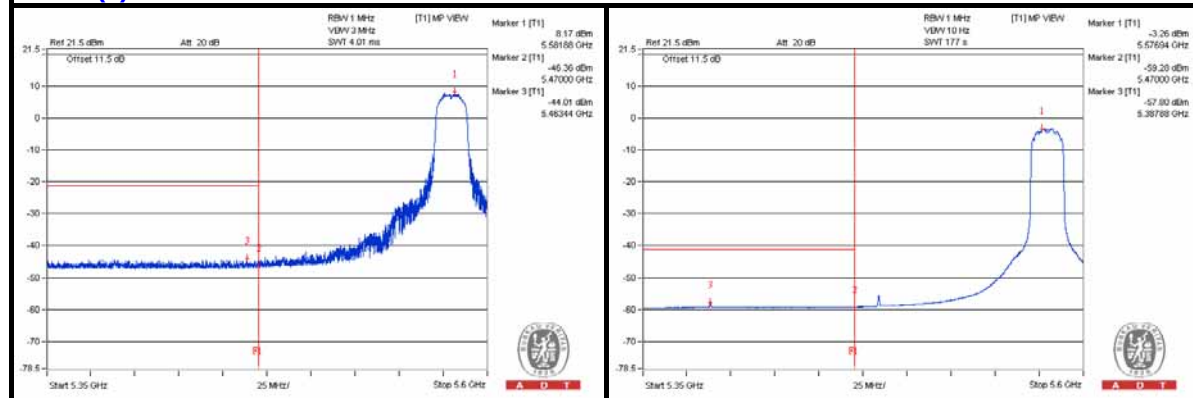

Chain (1)

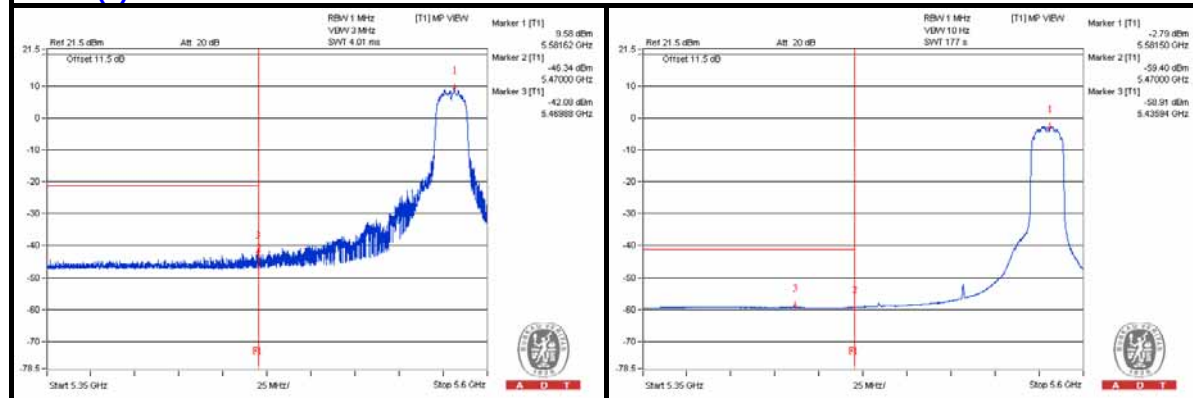

802.11ac (VHT20) - Channel 132

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3775 PK	57.49	74	-16.51	-48.85	-48.27	7.77	-37.77
2	3771.875 AV	41.7	54	-12.3	-62.91	-66.49	7.77	-53.56
3	7543.75 PK	59.58	74	-14.42	-46.28	-46.64	7.77	-35.68
4	7556.25 AV	37.82	54	-16.18	-68.17	-68.27	7.77	-57.44
5	11325 PK	63.02	74	-10.98	-43.36	-42.7	7.77	-32.24
6	11325 AV	48.11	54	-5.89	-57.34	-58.62	7.77	-47.15
7	16987.375 PK	54.03	74	-19.97	-53.12	-51.13	7.77	-41.23
8	16978.75 AV	42.63	54	-11.37	-63.49	-63.34	7.77	-52.63

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

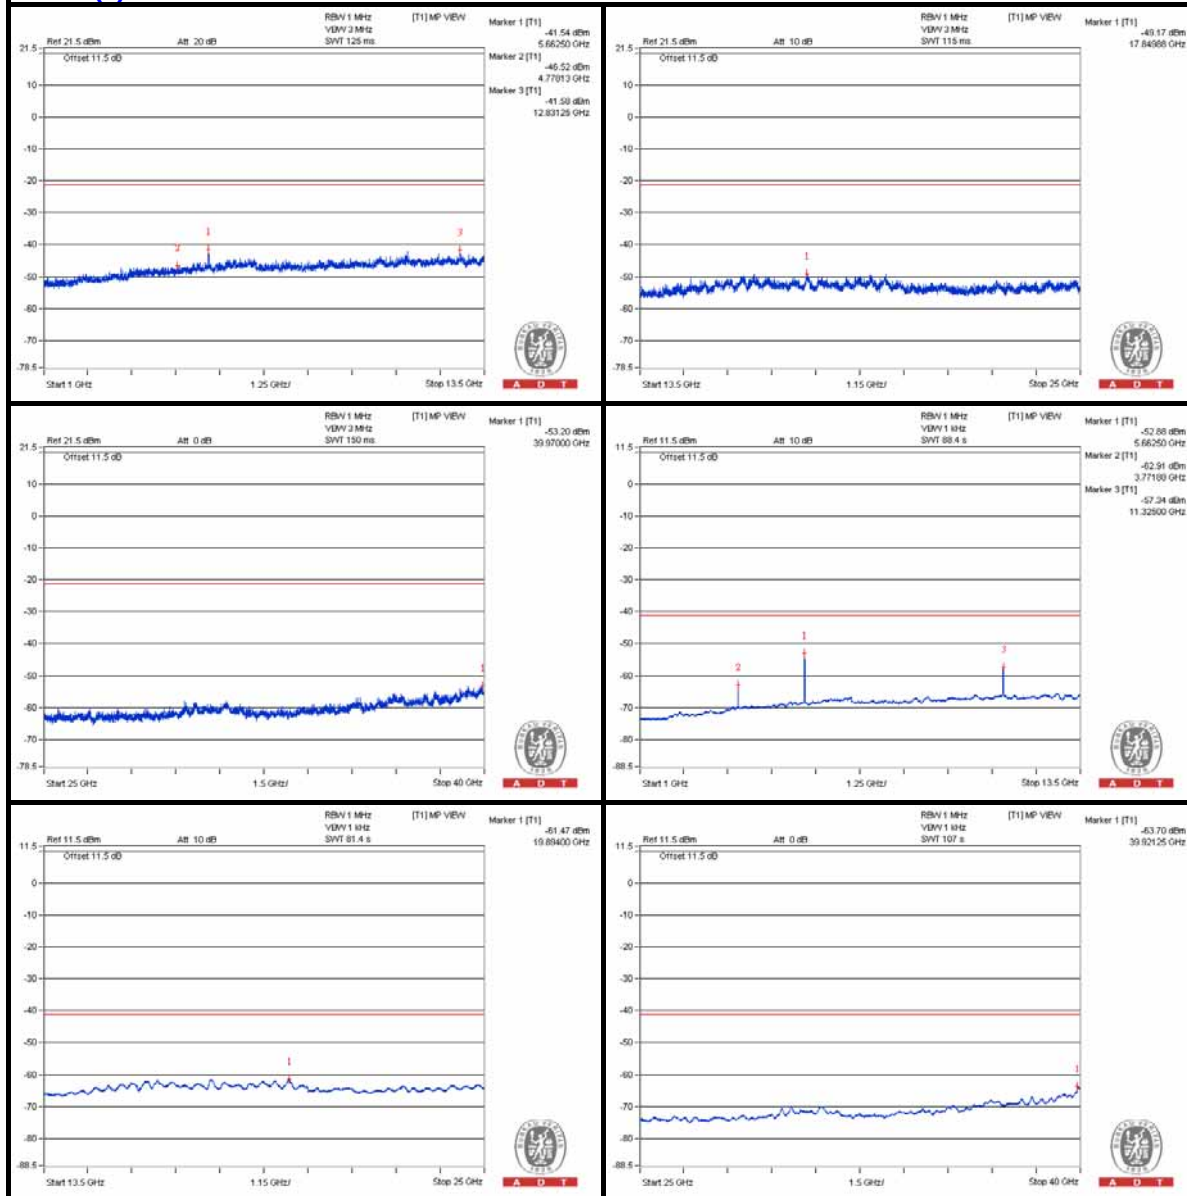

Chain (1)

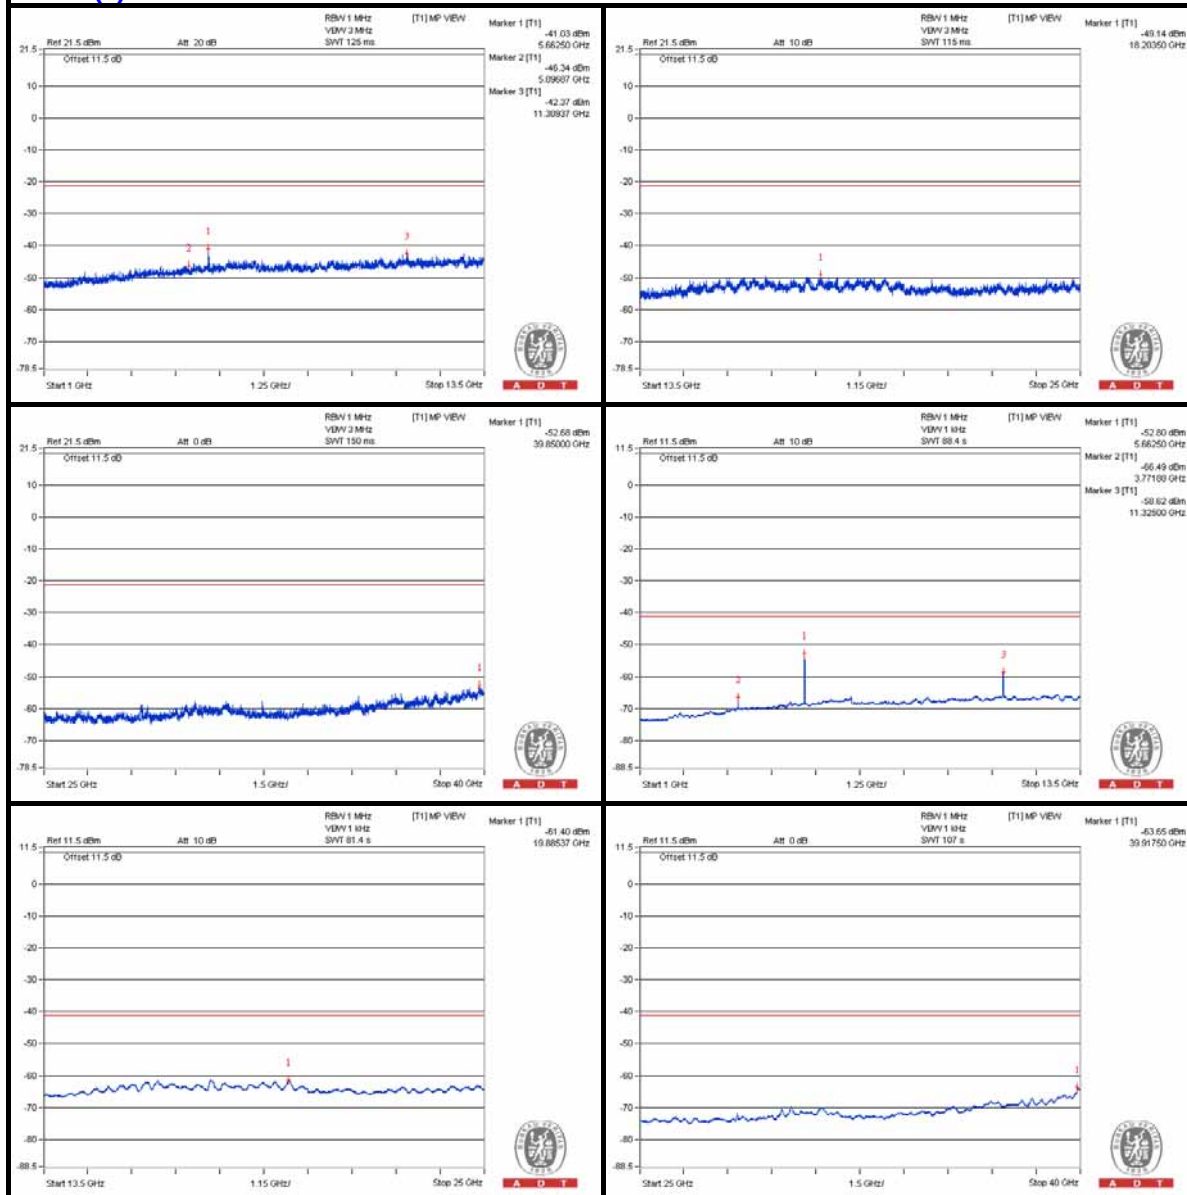

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.35 PK	65.78	74	-8.22	-41.71	-39.17	7.77	-29.48
2	5725.05 AV	47.66	54	-6.34	-58.31	-58.46	7.77	-47.6

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

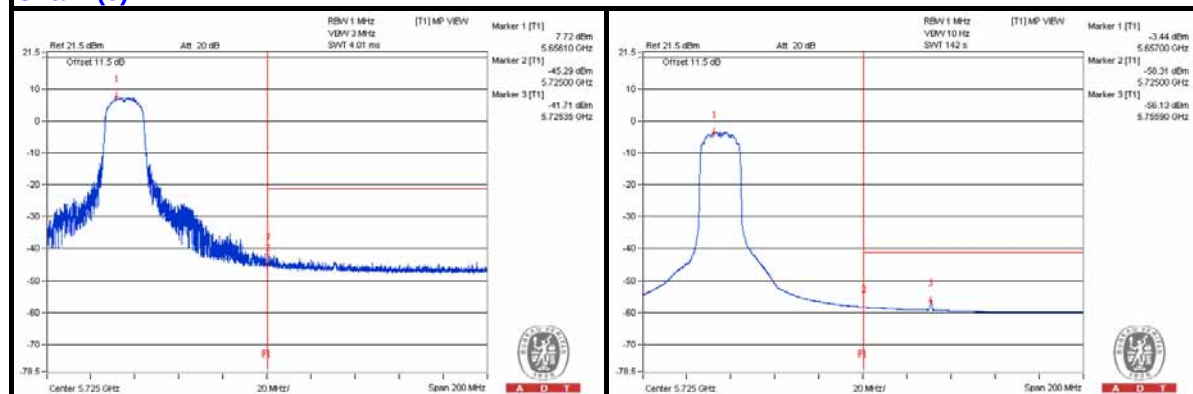

Chain (1)

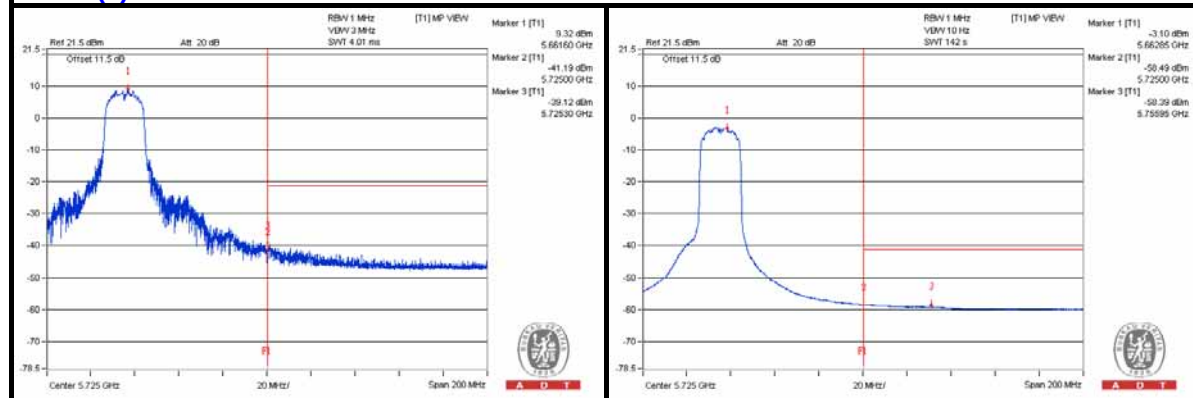

802.11ac (VHT20) - Channel 140

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3803.125 PK	58.43	74	-15.57	-47.03	-48.28	7.77	-36.83
2	3800 AV	40.08	54	-13.92	-66.58	-65.41	7.77	-55.18
3	7590.625 PK	59.45	74	-14.55	-46.07	-47.19	7.77	-35.81
4	7600 AV	37.99	54	-16.01	-68	-68.11	7.77	-57.27
5	11396.875 PK	61.63	74	-12.37	-43.8	-45.12	7.77	-33.63
6	11400 AV	40.71	54	-13.29	-64.94	-65.77	7.77	-54.55
7	17099.5 PK	53.95	74	-20.05	-51.59	-52.65	7.77	-41.31
8	17105.25 AV	42.6	54	-11.4	-63.34	-63.55	7.77	-52.66

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

Chain (0)

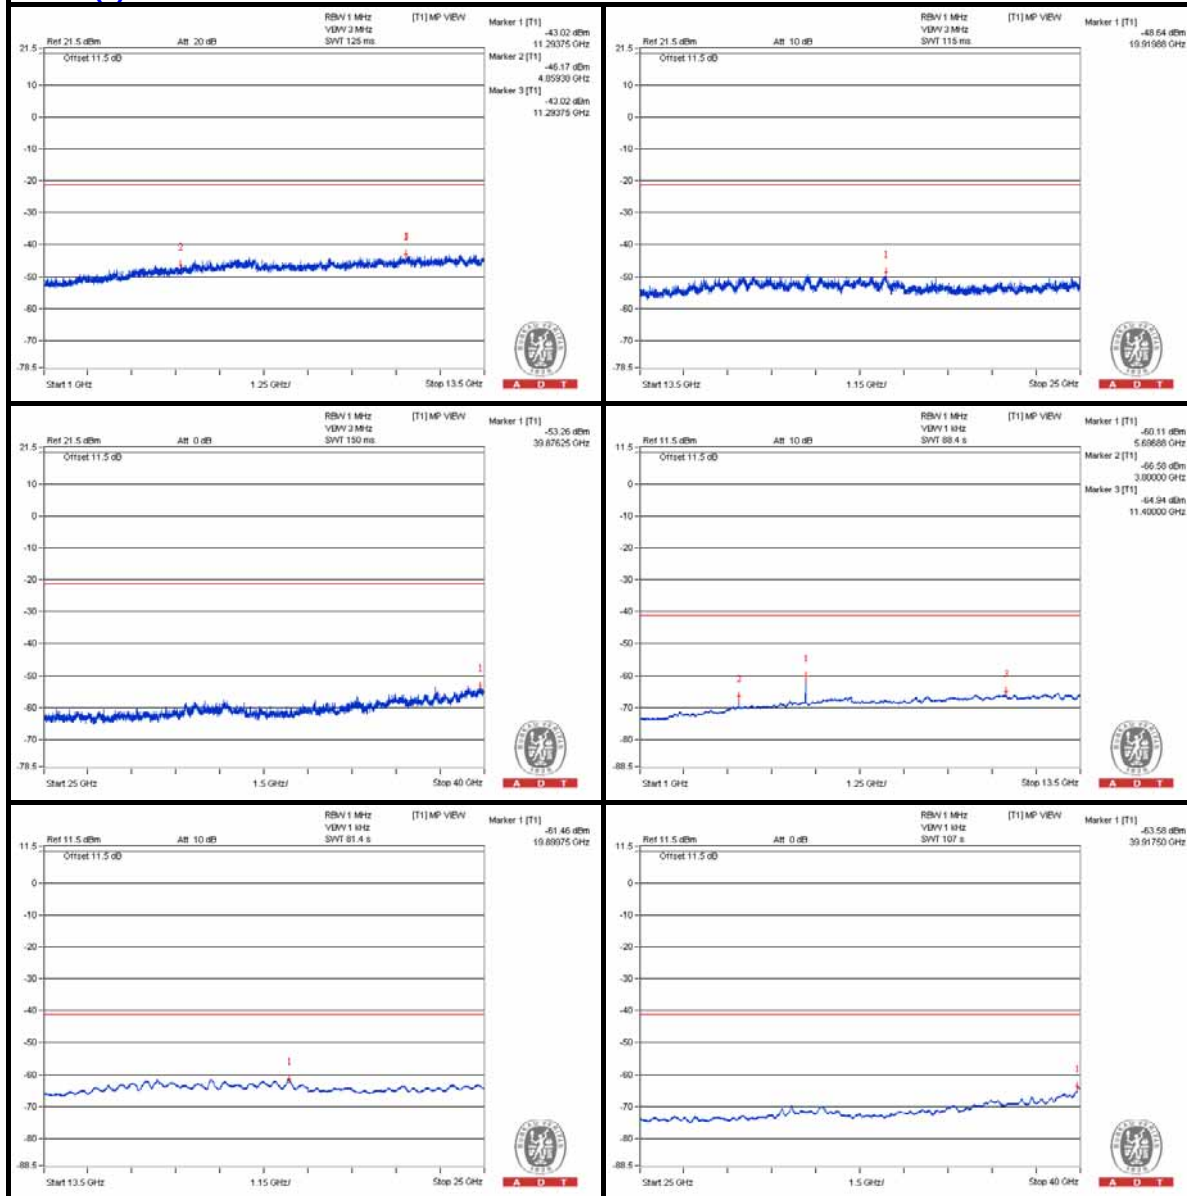

Chain (1)

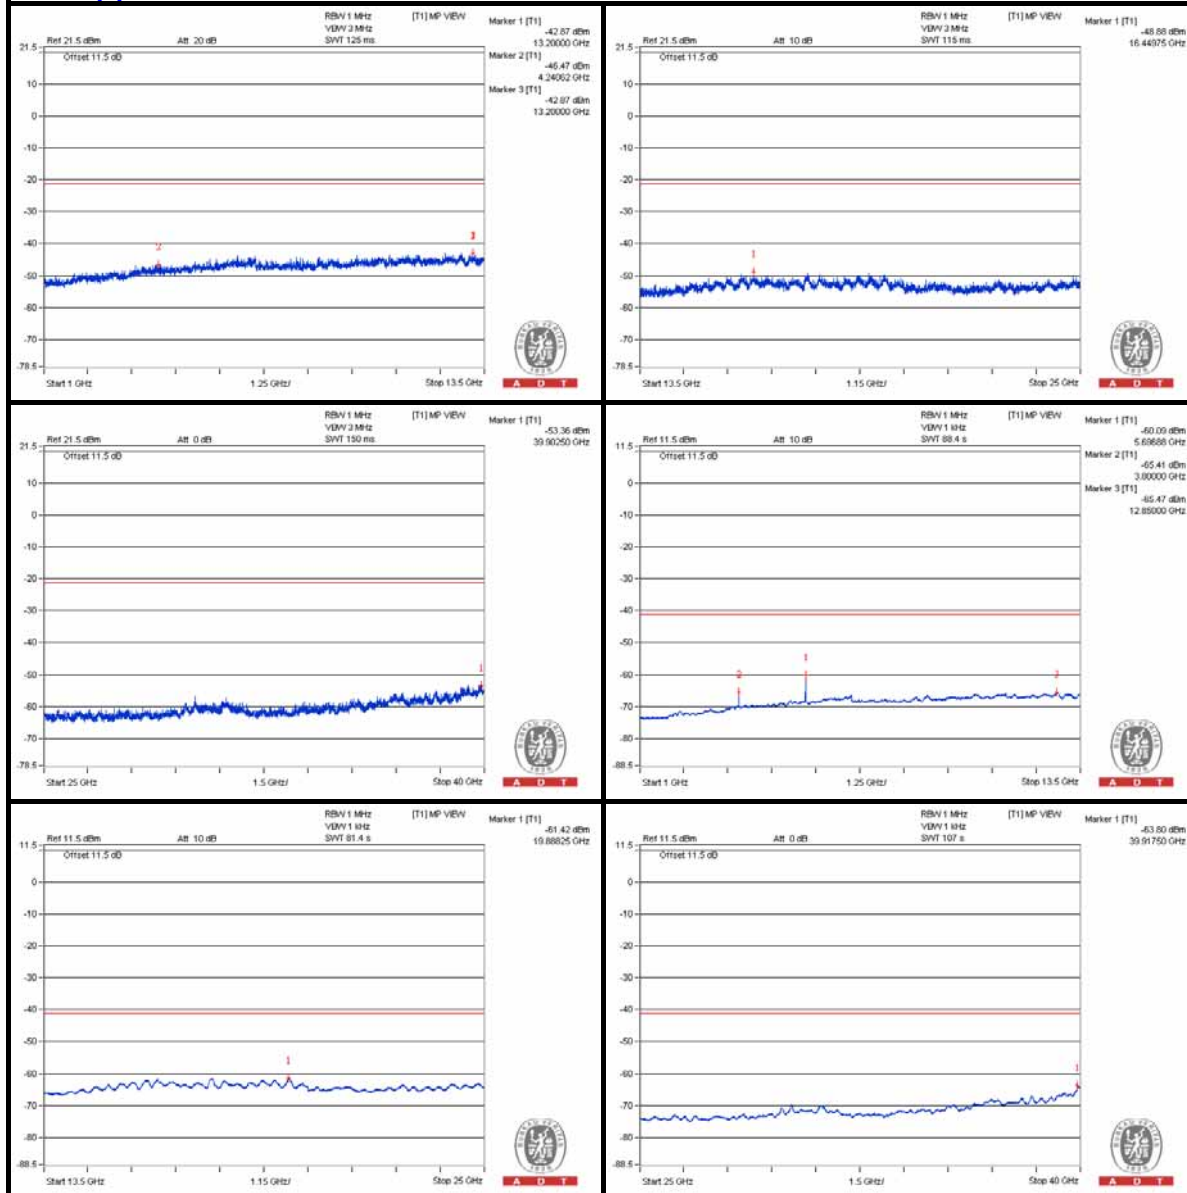

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5727.65 PK	72.44	74	-1.56	-34.99	-32.55	7.77	-22.82
2	5725 AV	48.42	54	-5.58	-57.39	-57.86	7.77	-46.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

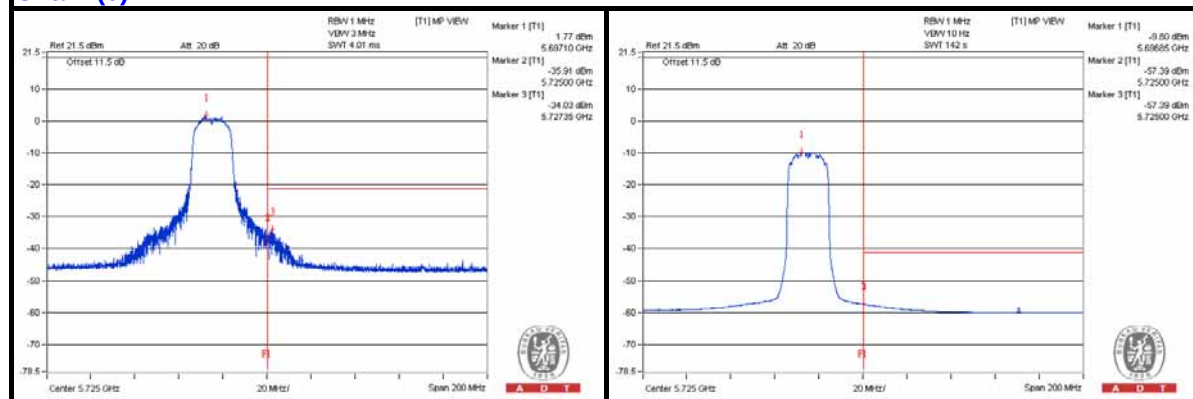

Chain (1)

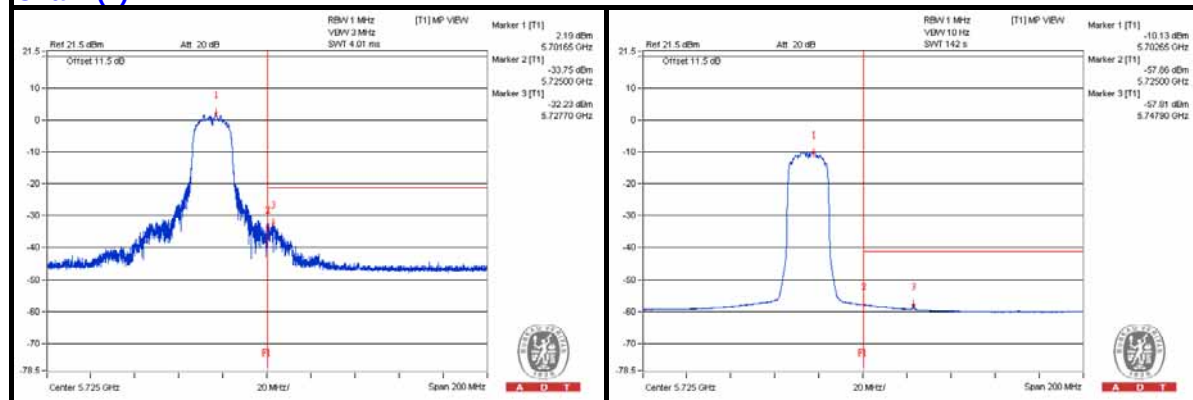

802.11ac (VHT20) - Channel 144

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3815.625 PK	57.9	74	-16.1	-48.4	-47.89	7.77	-37.36
2	3812.5 AV	42.42	54	-11.58	-63.2	-64.09	7.77	-52.84
3	7618.75 PK	59.46	74	-14.54	-46.5	-46.66	7.77	-35.8
4	7618.75 AV	38.09	54	-15.91	-67.98	-67.93	7.77	-57.17
5	11443.75 PK	62.49	74	-11.51	-43.55	-43.56	7.77	-32.77
6	11440.625 AV	47.48	54	-6.52	-59.61	-57.72	7.77	-47.78
7	17159.875 PK	54.17	74	-19.83	-52.4	-51.4	7.77	-41.09
8	17162.75 AV	42.63	54	-11.37	-63.39	-63.44	7.77	-52.63

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



A D T

Chain (0)

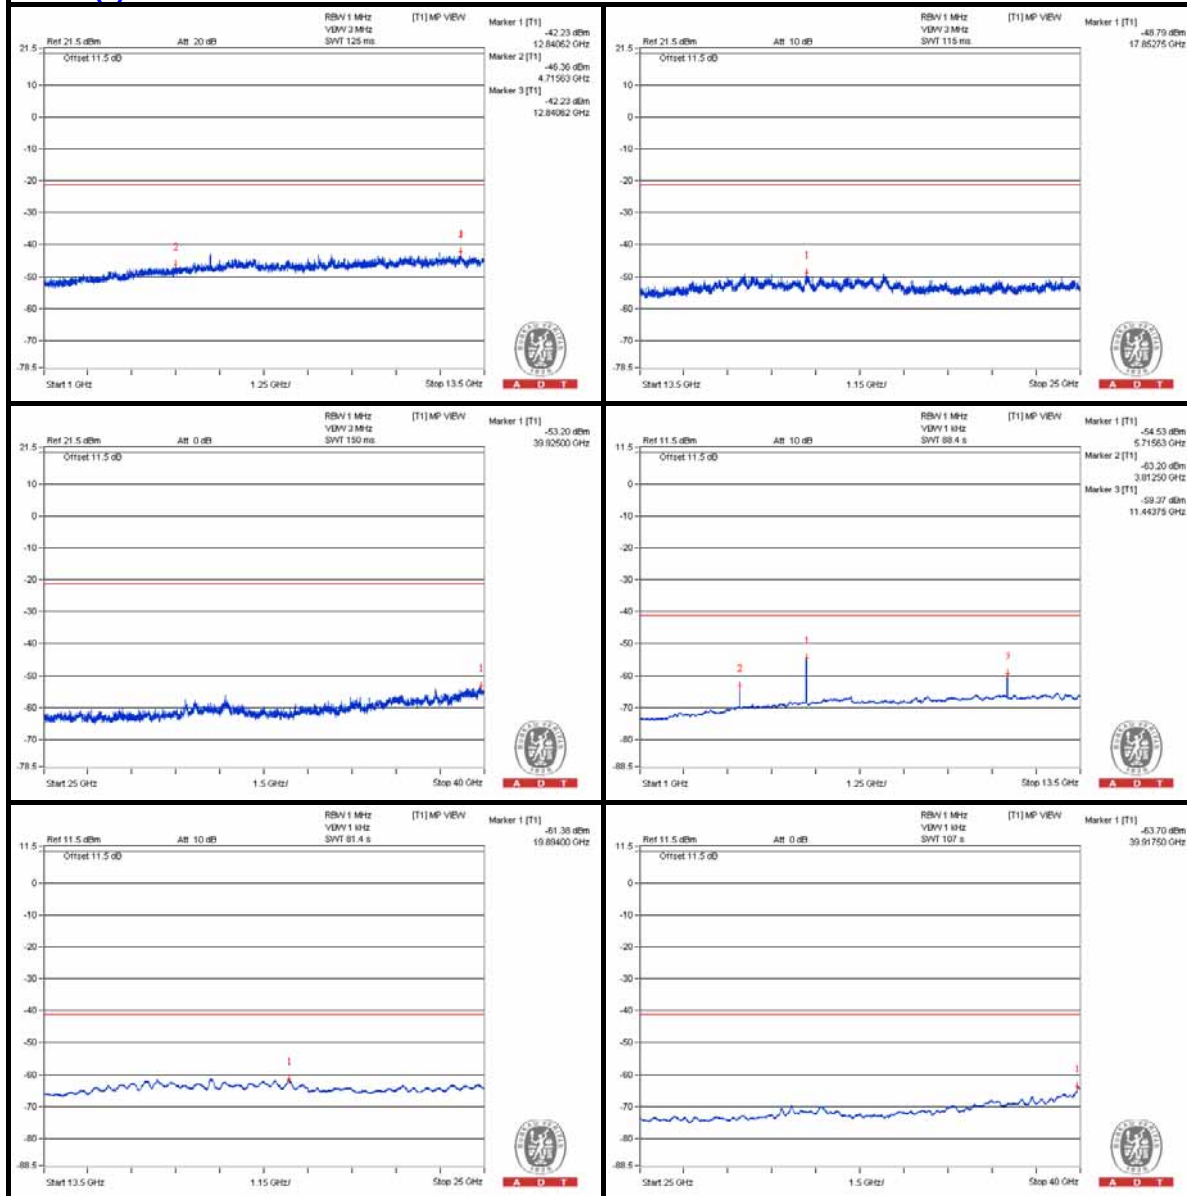

Chain (1)

