



ANSI/IEEE Std. C95.1-1992

in accordance with the requirements of
FCC Report and Order: ET Docket 93-62



FCC TEST REPORT

For
802.11 A/B/G/N/AC+ BT 4.1 M.2 TYPE CARD
(Tested inside of Notebook Computer, model Lenovo 3-1470)

Trade Name: Qualcomm Atheros

Model: QCNFA34AC

Issued to
Qualcomm Atheros, Inc.
1700 Technology Drive, san Jose, CA95110

Issued by
Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891,
Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: 2015/2/4



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2015/2/4	Initial Issue	ALL	Peter Chen



Table Of Contents

1	Certificate of Compliance (SAR Evaluation)	5
2	Description of Equipment Under Test	6
3	Requirements for Compliance Testing Defined	7
3.1	Requirements for Compliance Testing Defined by the FCC	7
4	Dosimetric Assessment System	8
4.1	Measurement System Diagram	9
4.2	System Components	10
5	Evaluation Procedures	13
6	SAR Measurement Procedures	15
6.1	Normal SAR Test Procedure	15
7	Device Under Test	17
7.1	Band Interface	17
7.2	Simultaneous Transmission	18
8	Summary of SAR Test Exclusion Configurations	19
8.1	Standalone SAR Test Exclusion Calculations	19
8.1.1	SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User	20
8.1.2	SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User	23
8.1.3	SAR test configuration	26
9	Measurement Uncertainty	29
10	Exposure Limit	30
11	Tissue Dielectric Properties	31
11.1	Test Liquid Confirmation	31
11.2	Typical Composition of Ingredients for Liquid Tissue Phantoms	32
11.3	Simulating Liquids Parameter Check Results	33
12	System Performance Check	35
12.1	System Performance Check Results	36
13	RF Output Power Measurement	37
13.1	Wi-Fi (2.4 GHz Band)	37
13.1	Wi-Fi (5GHz Band)	39
13.2	Bluetooth	49
14	SAR Measurements Results	50
15	Summary of Highest SAR Values	56
16	Simultaneous Transmission SAR Analysis	57
16.1	Estimated SAR for Simultaneous Transmission SAR Analysis	58
16.1.1	Estimated SAR	59



16.2	Sum of the SAR for Simultaneous Transmission Analysis	60
16.2.1	Sum of the SAR for Wi-Fi Aux & Bluetooth	60
16.2.2	Sum of the SAR for Wi-Fi MIMO	60
16.2.3	Sum of the 1g SAR for Body Exposure Condition	61
17	Equipment List & Calibration Status	62
18	Facilities	63
19	Reference	63
20	Attachments	64



1 Certificate of Compliance (SAR Evaluation)

Applicant: Qualcomm Atheros, Inc
1700 Technology Drive, san Jose, CA95110

Equipment Under Test: 802.11 A/B/G/N/AC+ BT 4.1 M.2 TYPE CARD
(Tested inside of Notebook Computer, model Lenovo 3-1470)

Trade Name: Qualcomm Atheros

Model Number: QCNFA34AC

Date of Test: January 24~26, 2015

Device Category: PORTABLE DEVICES

Exposure Category: GENERAL POPULATION/UNCONTROLLED EXPOSURE

Applicable Standards	
FCC	● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03 ● KDB 447498 D01 General RF Exposure Guidance v05r02 ● KDB 616217 D04 SAR for laptop and tablets v01r02 ● KDB 248227 D01 SAR measurement for 802 11 a b g v01r02
Limit	
1.6W/kg	
Test Result	
Pass	

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Alex Wu
Section Manager
Compliance Certification Services Inc.

Tested by:

Peter Chen
SAR Engineer
Compliance Certification Services Inc.



2 Description of Equipment Under Test

Product	802.11 A/B/G/N/AC+ BT 4.1 M.2 TYPE CARD (Tested inside of Notebook Computer, model Lenovo 3-1470)		
Trade Name	Qualcomm Atheros		
Model Number	QCNFA34AC		
RF Module	Qualcomm Atheros	Model:	QCNFA34AC
Host Manufacturer	Lenovo	Host Model Name	Flex 3-1470 ; Flex 3-1435 ; Flex 3-1475
Host Model	Market segmentation		
Transmitters	Wi-Fi & Bluetooth		
Modulation Technique	Bluetooth:GFSK for 1Mbps; π /4-DQPSK for 2Mbps;8DPSK for 3Mbps		
	802.11a: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11b: Direct Sequence Spread Spectrum(DSSS)		
	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11n: Orthogonal Frequency Division Multiplexing (OFDM)		
Antenna Specification	Ant 1	Brand name	High-Tek Electronics Co.,Ltd
		Parts Number	Main: 025.9006R.0011 Aux: 025.9006S.0011
		Type	PIFA
	Ant 2	Brand name	Wistron NeWeb Corporation
		Parts Number	Main: 025.9006R.0001 Aux: 025.9006S.0001
		Type	PIFA
Rechargeable Li-polymer Battery–alternate	1.Brand: LG Model: L14L3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh		
	2.Brand: SIMPLO Model: L14M3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh		
	3.Brand: LG Model: L14L2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh		
	4.Brand: SIMPLO Model: L14M2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh		

Remark:

- The sample selected for test was prototype that approximated to production product and was provided by manufacturer.
- The module has two variant designs as following table:

NO.	Explanation:
SKU 1	NFA344: This module supports 2T2R MIMO 802.11 on the main and aux antennas. Bluetooth operates on the Main antenna and when Bluetooth is transmitting, 802.11 is limited to the aux antenna.
SKU 2	NFA345: This module supports 1T2R. Bluetooth/802.11 Tx only on the main antenna and the Aux is receive only.

- The platform have Notebook mode, Stand mode, Tablet mode and Tent mode. We Performed SAR test in tablet mode, because the EUT can fold 360 degrees. Thus, testing under tablet mode would meet the testing criteria for Stand mode and Tent mode.



3 Requirements for Compliance Testing Defined

3.1 Requirements for Compliance Testing Defined by the FCC


The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992 [6].



4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY4/DAST5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3554 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528-2013.

4.1 Measurement System Diagram

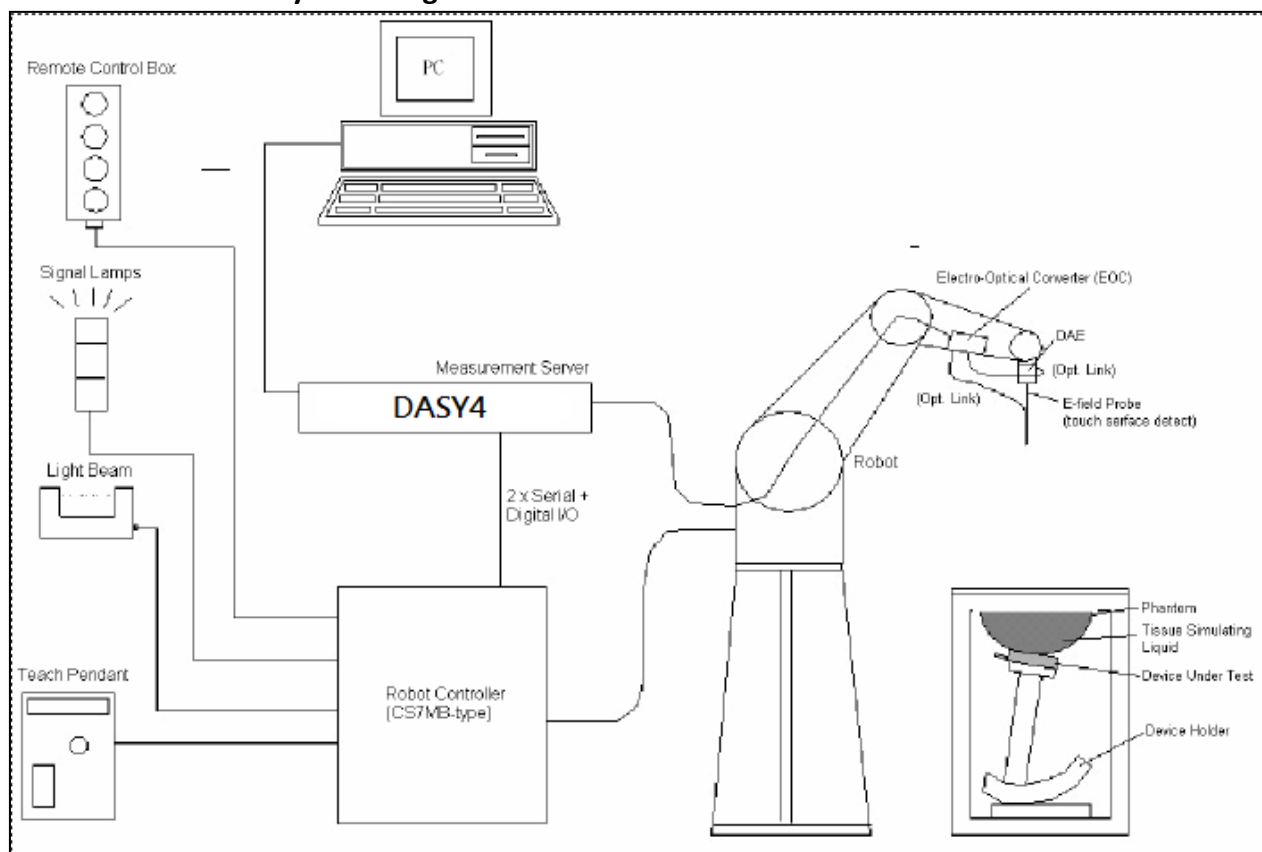

The DASY4/DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4/DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.



4.2 System Components

DASY4/DASY5 Measurement Server



The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200M Ω m; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

- Construction:** Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
- Calibration:** Basic Broad Band Calibration in air: 10-3000 MHz.
Conversion Factors (CF) for HSL 900 and HSL 1800
CF-Calibration for other liquids and frequencies upon request.
- Frequency:** 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
- Directivity:** ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in HSL (rotation normal to probe axis)
- Dynamic Range:** 10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
(noise: typically < 1 μ W/g)



REV. 00



Dimensions: Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 1 mm

Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Interior of probe


SAM Phantom (V4.0)

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm

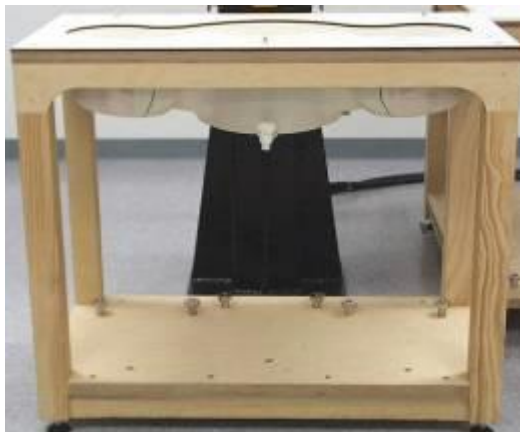

SAM Phantom (ELI4)

Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%)

Filling Volume: Approx. 25 liters

Dimensions: Major ellipse axis: 600 mm

Minor axis: 400 mm 500mm



**Device Holder for SAM Twin Phantom**

Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

**System Validation Kits for SAM Phantom (V4.0)**

Construction: Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5200, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

**System Validation Kits for ELI4 phantom**

Construction: Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5200, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm





5 Evaluation Procedures

Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	U_i	= Input signal of channel i	(i = x, y, z)
	cf	= Crest factor of exciting field	(DASY parameter)
	dcp_i	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:
$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$ for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
a_{ij}	= Sensor sensitivity factors for H-field probes
f	= Carrier frequency (GHz)
E_i	= Electric field strength of channel i in V/m
H_i	= Magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

SAR	= local specific absorption rate in W/kg
E_{tot}	= total field strength in V/m
σ	= conductivity in [mho/m] or [Siemens/m]
ρ	= equivalent tissue density in g/cm ³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

P_{pwe}	= Equivalent power density of a plane wave in mW/cm ²
E_{tot}	= total electric field strength in V/m
H_{tot}	= total magnetic field strength in A/m



6 SAR Measurement Procedures

6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency $\leq 2\text{GHz}$; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

	$\leq 3\text{ GHz}$	$> 3\text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1\text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5\text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$	$\leq 2\text{ GHz}: \leq 15\text{ mm}$ $2 - 3\text{ GHz}: \leq 12\text{ mm}$	$3 - 4\text{ GHz}: \leq 12\text{ mm}$ $4 - 6\text{ GHz}: \leq 10\text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



- Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1)The zoom scan volume was set to 5x5x7 points at frequency ≤ 2 GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2GHz to 4GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4GHz to 6GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$:between 1 st two points losest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

- Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

- Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.



7 Device Under Test

7.1 Band Interface

Tx Frequency Bands	802.11 a/b/g/n/ac: 2412 - 2462 MHz 5180 - 5825 MHz - Bluetooth: 2402 - 2480 MHz
Mode	802.11 a/b/g/n HT20/HT40/ac - Bluetooth 2.1 + EDR - Bluetooth 4.0 LE



7.2 Simultaneous Transmission

SKU1_NFA344 :

No.	Conditions	Body SAR
1	Wi-Fi 2.4GHz_Main+Aux Ant + Bluetooth	☐
2	Wi-Fi 5GHz_ Main+Aux Ant + Bluetooth	☒

SKU2_NFA345 :

No.	Conditions	Body SAR
1	Wi-Fi 2.4GHz_ Main Ant + Bluetooth	☐
2	Wi-Fi 5GHz_ Main Ant + Bluetooth	☒

☒: The Product can simultaneously transmit☐: The Product can't simultaneously transmit



8 Summary of SAR Test Exclusion Configurations

8.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1 5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

**8.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User**

According to KDB 447498 v05 r02 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required.

Tablet Mode_SKU1

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0		9.4	22.7	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	216.0	219.0	102.0		7.5	18.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	216.0	219.0	102.0		7.5	18.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	216.0	219.0	102.0		4.7	11.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11a	5200	15	32	18.6	7.7	216.0	219.0	102.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0		5.5	13.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0		5.7	13.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5785	16.5	45	18.6	7.7	216.0	219.0	102.0		5.8	14.1	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	216.0	219.0	102.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0		5.5	13.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0		5.7	13.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0		5.8	14.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	216.0	219.0	102.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0		4.9	11.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0		5.1	12.2	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0		5.2	12.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	216.0	219.0	102.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0		5.5	13.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5520	16.5	45	18.6	7.7	216.0	219.0	102.0		5.7	13.7	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0		5.8	14.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	216.0	219.0	102.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	244.6	50.9	2.5		4.9	11.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	244.6	50.9	2.5		5.1	12.2	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5710	16	40	18.6	7.7	244.6	50.9	2.5		5.1	12.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT80	5210	11	13	18.6	7.7	244.6	50.9	2.5		1.6	3.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5290	11.5	14	18.6	7.7	244.6	50.9	2.5		1.7	4.2	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5610	16.5	45	18.6	7.7	244.6	50.9	2.5		5.7	13.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5775	16.5	45	18.6	7.7	244.6	50.9	2.5		5.8	14.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	Bluetooth	DH5	2402	11	13	18.6	7.7	244.6	50.9	2.5		1.1	2.6	>50mm	>50mm	>50mm	N/A



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Aux	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	68.0	219.0	250.0		9.4	22.7	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	68.0	219.0	250.0		7.5	18.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	68.0	219.0	250.0		7.5	18.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	68.0	219.0	250.0		4.7	11.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.2GHz	802.11a	5200	15	32	18.6	7.7	68.0	219.0	250.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0		5.5	13.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0		5.7	13.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.8GHz		5785	16.5	45	18.6	7.7	68.0	219.0	250.0		5.8	14.1	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	68.0	219.0	250.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0		5.5	13.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0		5.7	13.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0		5.8	14.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	68.0	219.0	250.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.3GHz		5270	16	40	18.6	7.7	68.0	219.0	250.0		4.9	11.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.5GHz		5550	16	40	18.6	7.7	68.0	219.0	250.0		5.1	12.2	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.8GHz		5795	16	40	18.6	7.7	68.0	219.0	250.0		5.2	12.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	68.0	219.0	250.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0		5.5	13.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.5GHz		5520	16.5	45	18.6	7.7	68.0	219.0	250.0		5.7	13.7	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0		5.8	14.0	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	68.0	219.0	250.0		3.9	9.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.3GHz		5270	16	40	18.6	7.7	68.0	219.0	250.0		4.9	18.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.5GHz		5550	16	40	18.6	7.7	68.0	219.0	250.0		5.1	18.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.8GHz		5710	16	40	18.6	7.7	68.0	219.0	250.0		5.1	19.1	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.2GHz	802.11 ac VHT80	5210	11	13	18.6	7.7	68.0	219.0	250.0		1.6	5.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.3GHz		5290	11.5	14	18.6	7.7	68.0	219.0	250.0		1.7	6.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.5GHz		5610	16.5	45	18.6	7.7	68.0	219.0	250.0		5.7	21.3	>50mm	>50mm	>50mm	N/A
Wi-Fi Aux	5.8GHz		5775	16.5	45	18.6	7.7	68.0	219.0	250.0		5.8	21.6	>50mm	>50mm	>50mm	N/A



Tablet Mode_SKU2

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0		9.4	22.7	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11g	2412	20	100	18.6	7.7	216.0	219.0	102.0		8.3	20.2	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11n HT20	2457	20	100	18.6	7.7	216.0	219.0	102.0		8.4	20.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11n HT40	2437	18.5	71	18.6	7.7	216.0	219.0	102.0		6.0	14.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11a	5200	17	50	18.6	7.7	216.0	219.0	102.0		6.1	14.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0		6.2	14.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0		6.4	15.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5785	17	50	18.6	7.7	216.0	219.0	102.0		6.5	15.6	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11n HT20	5200	17	50	18.6	7.7	216.0	219.0	102.0		6.1	14.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0		6.2	14.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0		6.4	15.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0		6.4	15.6	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11n HT40	5230	16	40	18.6	7.7	216.0	219.0	102.0		4.9	11.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0		4.9	11.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0		5.1	12.2	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0		5.2	12.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT20	5200	17	50	18.6	7.7	216.0	219.0	102.0		6.1	14.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0		6.2	14.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5520	17	50	18.6	7.7	216.0	219.0	102.0		6.3	15.3	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0		6.4	15.6	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT40	5230	16	40	18.6	7.7	216.0	219.0	102.0		4.9	11.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0		4.9	11.9	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0		5.1	12.2	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5710	16	40	18.6	7.7	216.0	219.0	102.0		5.1	12.4	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT80	5210	12	16	18.6	7.7	216.0	219.0	102.0		2.0	4.7	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5290	12	16	18.6	7.7	216.0	219.0	102.0		2.0	4.8	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5610	16	40	18.6	7.7	216.0	219.0	102.0		5.1	12.3	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5775	16	40	18.6	7.7	216.0	219.0	102.0		5.2	12.5	>50mm	>50mm	>50mm	N/A
Wi-Fi Main	Bluetooth	DHS	2402	11	13	18.6	7.7	216.0	219.0	102.0		1.1	2.6	>50mm	>50mm	>50mm	N/A

**8.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User**

According to KDB 447498 v05 r02, if the calculated Power threshold is less than the output power then SAR testing is required.

Tablet Mode_SKU1

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.1	N/A
Wi-Fi Main	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.1	N/A
Wi-Fi Main	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.1	N/A
Wi-Fi Main	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.1	N/A
Wi-Fi Main	5.2GHz	802.11a	5200	15	32	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.8	N/A
Wi-Fi Main	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.4	N/A
Wi-Fi Main	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.4	N/A
Wi-Fi Main	5.8GHz		5785	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.4	N/A
Wi-Fi Main	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.8	N/A
Wi-Fi Main	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.4	N/A
Wi-Fi Main	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.4	N/A
Wi-Fi Main	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.6	N/A
Wi-Fi Main	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.6	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.3	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.7	N/A
Wi-Fi Main	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.3	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.8	N/A
Wi-Fi Main	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.4	N/A
Wi-Fi Main	5.5GHz		5520	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.8	N/A
Wi-Fi Main	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.6	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.6	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.3	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.7	N/A
Wi-Fi Main	5.8GHz		5710	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.8	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT80	5210	11	13	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.7	N/A
Wi-Fi Main	5.3GHz		5290	11.5	14	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.2	N/A
Wi-Fi Main	5.5GHz		5610	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.3	N/A
Wi-Fi Main	5.8GHz		5775	16.5	45	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.4	N/A
Wi-Fi Main	Bluetooth	DH5	2402	11	13	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.8	N/A



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Aux	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	276.1	>200mm	>200mm	N/A
Wi-Fi Aux	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	276.1	>200mm	>200mm	N/A
Wi-Fi Aux	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	276.1	>200mm	>200mm	N/A
Wi-Fi Aux	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	276.1	>200mm	>200mm	N/A
Wi-Fi Aux	5.2GHz	802.11a	5200	15	32	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.8	>200mm	>200mm	N/A
Wi-Fi Aux	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.4	>200mm	>200mm	N/A
Wi-Fi Aux	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	243.4	>200mm	>200mm	N/A
Wi-Fi Aux	5.8GHz		5785	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	242.4	>200mm	>200mm	N/A
Wi-Fi Aux	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.8	>200mm	>200mm	N/A
Wi-Fi Aux	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.4	>200mm	>200mm	N/A
Wi-Fi Aux	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	243.4	>200mm	>200mm	N/A
Wi-Fi Aux	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	242.6	>200mm	>200mm	N/A
Wi-Fi Aux	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.6	>200mm	>200mm	N/A
Wi-Fi Aux	5.3GHz		5270	16	40	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.3	>200mm	>200mm	N/A
Wi-Fi Aux	5.5GHz		5550	16	40	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	243.7	>200mm	>200mm	N/A
Wi-Fi Aux	5.8GHz		5795	16	40	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	242.3	>200mm	>200mm	N/A
Wi-Fi Aux	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.8	>200mm	>200mm	N/A
Wi-Fi Aux	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.4	>200mm	>200mm	N/A
Wi-Fi Aux	5.5GHz		5520	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	243.8	>200mm	>200mm	N/A
Wi-Fi Aux	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	242.6	>200mm	>200mm	N/A
Wi-Fi Aux	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.6	>200mm	>200mm	N/A
Wi-Fi Aux	5.3GHz		5270	16		18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.3	>200mm	>200mm	N/A
Wi-Fi Aux	5.5GHz		5550	16		18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	243.7	>200mm	>200mm	N/A
Wi-Fi Aux	5.8GHz		5710	16		18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	242.8	>200mm	>200mm	N/A
Wi-Fi Aux	5.2GHz	802.11 ac VHT80	5210	11		18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.7	>200mm	>200mm	N/A
Wi-Fi Aux	5.3GHz		5290	11.5		18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	245.2	>200mm	>200mm	N/A
Wi-Fi Aux	5.5GHz		5610	16.5		18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	243.3	>200mm	>200mm	N/A
Wi-Fi Aux	5.8GHz		5775	16.5		18.6	7.7	68.0	219.0	250.0		<50mm	<50mm	242.4	>200mm	>200mm	N/A



Tablet Mode_SKU2

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.1	N/A
Wi-Fi Main	2.4GHz	802.11g	2412	20	100	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.6	N/A
Wi-Fi Main	2.4GHz	802.11n HT20	2457	20	100	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	615.7	N/A
Wi-Fi Main	2.4GHz	802.11n HT40	2437	18.5	71	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.1	N/A
Wi-Fi Main	5.2GHz	802.11a	5200	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.8	N/A
Wi-Fi Main	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.4	N/A
Wi-Fi Main	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.4	N/A
Wi-Fi Main	5.8GHz		5785	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.4	N/A
Wi-Fi Main	5.2GHz	802.11n HT20	5200	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.8	N/A
Wi-Fi Main	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.4	N/A
Wi-Fi Main	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.4	N/A
Wi-Fi Main	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.6	N/A
Wi-Fi Main	5.2GHz	802.11n HT40	5230	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.6	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.3	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.7	N/A
Wi-Fi Main	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.3	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT20	5200	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.8	N/A
Wi-Fi Main	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.4	N/A
Wi-Fi Main	5.5GHz		5520	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.8	N/A
Wi-Fi Main	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.6	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT40	5230	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.6	N/A
Wi-Fi Main	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.3	N/A
Wi-Fi Main	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.7	N/A
Wi-Fi Main	5.8GHz		5710	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.8	N/A
Wi-Fi Main	5.2GHz	802.11 ac VHT80	5210	12	16	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.7	N/A
Wi-Fi Main	5.3GHz		5290	12	16	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	585.2	N/A
Wi-Fi Main	5.5GHz		5610	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	583.3	N/A
Wi-Fi Main	5.8GHz		5775	16	40	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	582.4	N/A
Wi-Fi Main	Bluetooth	DHS	2402	11	13	18.6	7.7	216.0	219.0	102.0		<50mm	<50mm	>200mm	>200mm	616.8	N/A

**8.1.3 SAR test configuration**

SKU1

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main 802.11 b	YES	YES	No	No	No
Wi-Fi Main 802.11 g	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.8GHz	YES	YES	No	No	No
Bluetooth	No	No	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



Test Configurations	Bottom	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux 802.11 b	YES	YES	No	No	No
Wi-Fi Aux 802.11 g	YES	YES	No	No	No
Wi-FiAux 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.8GHz	YES	YES	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



SKU2

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main 802.11 b	YES	YES	No	No	No
Wi-Fi Main 802.11 g	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.8GHz	YES	YES	No	No	No
Bluetooth	No	No	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



9 Measurement Uncertainty

Measurement uncertainty for 3 GHz to 6 GHz averaged over 1 gram

Uncertainty Component	Uncertainty	Prob.	Div.	c_i (tg)	Std. Unc.(1-g)	v_i or v_{eff}
Measurement System						
Probe Calibration ($k=1$)	5.90	Normal	1	1	5.9	∞
Axial Isotropy	4.70	Rectangular	$\sqrt{3}$	1	2.7	∞
Hemispherical Isotropy	9.60	Rectangular	$\sqrt{3}$	0	0.0	∞
Boundary Effect	0.90	Rectangular	$\sqrt{3}$	1	0.5	∞
Linearity	3.45	Rectangular	$\sqrt{3}$	1	2.0	∞
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	1.00	Normal	$\sqrt{3}$	1	1.0	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	0.5	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1.5	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1.7	∞
Algorithms for Max. SAR Evaluation	3.90	Rectangular	$\sqrt{3}$	1	2.3	∞
Dipole						
Dipole Axis to Liquid Distance	2.00	Normal	$\sqrt{3}$	1	1.2	∞
Input power and SAR drift meas.	4.70	Normal	$\sqrt{3}$	1	2.7	∞
Phantom and Tissue Parameters						
Phantom Uncertainty (shape and thickness tolerances)	4.00	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.64	1.8	∞
Liquid Conductivity - measurement uncertainty	3.04	Normal	1	0.64	1.9	∞
Liquid Permittivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity - measurement uncertainty	-4.22	Normal	1	0.6	-2.5	∞
Temp. Unc. - Conductivity	1.70	Rectangular	$\sqrt{3}$	0.78	0.77	∞
Temp. Unc. - Permittivity	0.30	Rectangular	$\sqrt{3}$	0.23	0.04	∞
Combined Standard Uncertainty					9.77	611
Coverage Factor for 95%		$k_p=2$				19.53%
Expanded Uncertainty		$k=2$				1.55dB

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram

Uncertainty Component	Uncertainty	Prob.	Div.	c_i (tg)	Std. Unc.(1-g)	v_i or v_{eff}
Measurement System						
Probe Calibration ($k=1$)	5.90	Normal	1	1	5.9	∞
Axial Isotropy	4.70	Rectangular	$\sqrt{3}$	1	2.7	∞
Hemispherical Isotropy	9.60	Rectangular	$\sqrt{3}$	0	0.0	∞
Boundary Effect	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Linearity	4.70	Rectangular	$\sqrt{3}$	1	2.7	∞
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	0.30	Normal	1	1	0.3	∞
Response Time	0.00	Rectangular	$\sqrt{3}$	1	0.0	∞
Integration Time	0.00	Rectangular	$\sqrt{3}$	1	0.0	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1.7	∞
Algorithms for Max. SAR Evaluation	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Dipole						
Dipole Axis to Liquid Distance	2.00	Normal	$\sqrt{3}$	1	1.2	∞
Input power and SAR drift meas.	4.70	Normal	$\sqrt{3}$	1	2.7	∞
Phantom and Tissue Parameters						
Phantom Uncertainty (shape and thickness tolerances)	4.00	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.64	1.8	∞
Liquid Conductivity - measurement uncertainty	-2.95	Normal	1	0.64	-1.9	∞
Liquid Permittivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity - measurement uncertainty	-1.73	Normal	1	0.6	-1.0	∞
Temp. Unc. - Conductivity	1.70	Rectangular	$\sqrt{3}$	0.78	0.77	∞
Temp. Unc. - Permittivity	0.30	Rectangular	$\sqrt{3}$	0.23	0.04	∞
Combined Standard Uncertainty					9.23	611
Coverage Factor for 95%		$k_p=2$				18.46%
Expanded Uncertainty		$k=2$				1.47dB



10 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg



11 Tissue Dielectric Properties

11.1 Test Liquid Confirmation

Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below. 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528-2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528-2013

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00



11.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99⁺% Pure Sodium Chloride

Sugar: 98⁺% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxy thyl Cellulose

DGBE: 99⁺% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2



11.3 Simulating Liquids Parameter Check Results

Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit(%)
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2015/1/24	Body 5000	5180	47.36	18.43	5.30	49.02	5.28	-3.38%	0.53%	± 5
		5200	47.21	18.41	5.32	49.00	5.30	-3.66%	0.34%	± 5
		5220	47.19	18.49	5.36	48.98	5.32	-3.66%	0.69%	± 5
		5240	47.25	18.59	5.41	48.96	5.35	-3.48%	1.21%	± 5
		5260	47.31	18.67	5.46	48.94	5.37	-3.33%	1.58%	± 5
		5280	47.28	18.65	5.47	48.92	5.40	-3.35%	1.36%	± 5
		5300	47.15	18.53	5.46	48.90	5.42	-3.57%	0.68%	± 5
		5320	47.02	18.51	5.47	48.86	5.44	-3.77%	0.53%	± 5
		5500	46.88	18.93	5.79	48.60	5.65	-3.54%	2.40%	± 5
		5520	46.84	18.82	5.77	48.58	5.67	-3.58%	1.69%	± 5
		5540	46.72	18.72	5.76	48.56	5.70	-3.79%	1.12%	± 5
		5560	46.60	18.72	5.78	48.54	5.72	-4.01%	1.05%	± 5
		5580	46.55	18.87	5.85	48.52	5.75	-4.07%	1.83%	± 5
		5600	46.61	19.04	5.92	48.50	5.77	-3.91%	2.65%	± 5
		5620	46.69	19.02	5.94	48.46	5.79	-3.66%	2.52%	± 5
		5640	46.64	18.90	5.92	48.42	5.81	-3.67%	1.88%	± 5
		5660	46.54	18.80	5.91	48.38	5.84	-3.81%	1.30%	± 5
		5680	46.39	18.84	5.94	48.34	5.86	-4.02%	1.47%	± 5
		5700	46.34	19.05	6.03	48.30	5.88	-4.06%	2.58%	± 5
		5745	46.44	19.05	6.08	48.26	5.93	-3.77%	2.49%	± 5
2015/1/25	Body 5000	5180	51.06	18.15	5.22	49.02	5.28	4.16%	-1.02%	± 5
		5200	51.04	18.19	5.25	49.00	5.30	4.17%	-0.86%	± 5
		5220	51.00	18.17	5.27	48.98	5.32	4.12%	-1.00%	± 5
		5240	50.96	18.19	5.30	48.96	5.35	4.09%	-0.97%	± 5
		5260	50.91	18.21	5.32	48.94	5.37	4.03%	-0.96%	± 5
		5280	50.87	18.24	5.35	48.92	5.40	3.98%	-0.83%	± 5
		5300	50.83	18.30	5.39	48.90	5.42	3.95%	-0.60%	± 5
		5320	50.80	18.30	5.41	48.86	5.44	3.98%	-0.64%	± 5
		5500	50.45	18.44	5.63	48.60	5.65	3.80%	-0.27%	± 5
		5520	50.44	18.47	5.66	48.58	5.67	3.83%	-0.16%	± 5
		5540	50.40	18.48	5.69	48.56	5.70	3.80%	-0.16%	± 5
		5560	50.39	18.49	5.71	48.54	5.72	3.80%	-0.16%	± 5
		5580	50.35	18.53	5.74	48.52	5.75	3.78%	-0.05%	± 5
		5600	50.29	18.52	5.76	48.50	5.77	3.70%	-0.14%	± 5
		5620	50.25	18.55	5.79	48.46	5.79	3.69%	0.01%	± 5
		5640	50.22	18.56	5.82	48.42	5.81	3.73%	0.03%	± 5
		5660	50.18	18.59	5.84	48.38	5.84	3.73%	0.14%	± 5
		5680	50.19	18.60	5.87	48.34	5.86	3.83%	0.18%	± 5
		5700	50.13	18.62	5.90	48.30	5.88	3.79%	0.30%	± 5
		5745	50.04	18.65	5.95	48.26	5.93	3.70%	0.30%	± 5
		5765	50.01	18.65	5.97	48.24	5.96	3.68%	0.26%	± 5
		5785	49.99	18.70	6.01	48.22	5.98	3.67%	0.47%	± 5
		5805	49.95	18.74	6.04	48.19	6.01	3.66%	0.63%	± 5
		5825	49.93	18.74	6.07	48.15	6.03	3.70%	0.59%	± 5



Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit(%)
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2015/1/26	Body 2450	2412	51.95	13.86	1.86	52.75	1.91	-1.52%	-2.95%	± 5
		2437	51.87	13.98	1.89	52.72	1.94	-1.61%	-2.32%	± 5
		2442	51.86	14.00	1.90	52.71	1.94	-1.62%	-2.25%	± 5
		2462	51.80	14.08	1.93	52.68	1.97	-1.68%	-2.11%	± 5
		2472	51.76	14.12	1.94	52.67	1.98	-1.73%	-2.14%	± 5



12 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4/DASY5 system with an E-filed probe EX3DV4 SN: 3554 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ($dx=dy=5\text{ mm}$, $dz=5\text{ mm}$).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was $100\text{ mW}\pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	728	2014/5/20	2450	1g	52.6	50.2
				10g	24.5	23.4
D5GHzV2	1004	2014/11/20	5200	1g	80.5	74.7
				10g	22.9	20.7
D5GHzV2	1004	2014/11/20	5300	1g	85.7	77.7
				10g	24.4	21.6
D5GHzV2	1004	2014/11/20	5600	1g	84.1	81.2
				10g	23.9	22.4
D5GHzV2	1004	2014/11/20	5800	1g	80.3	74.2
				10g	22.8	20.3

**12.1 System Performance Check Results**

Date	System Dipole			Parameters	Target	Measured	Deviation[%]	Limited[%]
	Type	Serial No.	Liquid					
2015/1/24	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.70	77.20	3.35	± 5
				10g SAR:	20.70	21.70	4.83	± 5
2015/1/24	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.70	78.70	1.29	± 5
				10g SAR:	21.60	22.10	2.31	± 5
2015/1/24	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.20	78.30	-3.57	± 5
				10g SAR:	22.40	22.30	-0.45	± 5
2015/1/24	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.20	73.00	-1.62	± 5
				10g SAR:	20.30	20.90	2.96	± 5
2015/1/25	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.70	76.20	2.01	± 5
				10g SAR:	20.70	21.40	3.38	± 5
2015/1/25	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.70	77.70	0.00	± 5
				10g SAR:	21.60	21.80	0.93	± 5
2015/1/25	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.20	81.90	0.86	± 5
				10g SAR:	22.40	23.00	2.68	± 5
2015/1/25	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.20	74.60	0.54	± 5
				10g SAR:	20.30	21.30	4.93	± 5
2015/1/26	D2450V2	728	Body	1g SAR:	50.20	48.90	-2.59	± 5
				10g SAR:	23.40	23.00	-1.71	± 5



13 RF Output Power Measurement

13.1 Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band (GHz)	Freq. (MHz)	Ch #	Default Test Channels	
				802.11b	802.11g
802.11 b/g	2.4	2412	1 [#]	✓	▽
		2437	6	✓	▽
		2462	11 [#]	✓	▽

Notes

✓ = “default test channels”

▽ = possible 802.11g channels with maximum average output ¼ dB the “default test channels”

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements

the highest output channels closest to each of these channels should be tested.

The indicated Wi-Fi target powers in the following table are absolute maximums.

Output power table-SKU1

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
2.4	802.11b	1	1	2412	19.0	19.0	22.0	±1.5	23.5	20.0	20.3	23.2
			6	2437	19.0	19.0	22.0	±1.5	23.5	20.2	20.5	23.4
			11	2462	19.0	19.0	22.0	±1.5	23.5	19.8	19.6	22.7
	802.11g	6	1	2412	14.5	14.5	17.5	±1.5	19.0	14.5	14.5	17.5
			6	2437	18.0	18.0	21.0	±1.5	22.5	18.0	18.0	21.0
			11	2462	14.0	14.0	17.0	±1.5	18.5	14.0	14.0	17.0
	802.11n HT20	MCS8	1	2412	12.5	12.5	15.5	±1.5	17.0	12.6	12.6	15.6
			6	2437	18.0	18.0	21.0	±1.5	22.5	18.3	18.3	21.3
			11	2462	12.5	12.5	15.5	±1.5	17.0	12.6	12.8	15.7
	802.11n HT40	MCS8	3	2412	11.0	11.0	14.0	±1.5	15.5	11.0	11.0	14.0
			6	2437	16.0	16.0	19.0	±1.5	20.5	16.0	16.0	19.0
			9	2462	10.0	10.0	13.0	±1.5	14.5	10.0	10.0	13.0

Note(s):

SAR is not required for 802.11g/HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels per KDB 248227 D01

**Output power table (SKU2)**

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
2.4	802.11b	1	1	2412	18.5	±1.5	20.0	19.4
			6	2437	19.0	±1.5	20.5	19.4
			11	2462	19.0	±1.5	20.5	19.4
	802.11g	6	1	2412	18.5	±1.5	20.0	18.7
			6	2437	18.0	±1.5	19.5	18.4
			11	2462	18.0	±1.5	19.5	19.4
	802.11n HT20	MCS0	1	2412	18.0	±1.5	19.5	18.2
			6	2437	18.0	±1.5	19.5	18.2
			11	2462	17.5	±1.5	19.0	18.0
	802.11n HT40	MCS0	3	2422	14.5	±1.5	16.0	15.2
			6	2437	17.0	±1.5	18.5	18.1
			9	2452	14.5	±1.5	16.0	15.0

**13.1 Wi-Fi (5GHz Band)**

Required Test Channels per KDB 248227 D01

Mode	Band (GHz)	Freq. (MHz)	Ch #	Default Test Channels			
				§15.247		UNII	
802.11a	UNII	5180	36			✓	
		5200	40				*
		5220	44				*
		5240	48			✓	
		5260	52			✓	
		5280	56				*
		5300	60				*
		5320	64			✓	
		5500	100				*
		5520	104			✓	
		5540	108				*
		5560	112				*
		5580	116			✓	
		5600	120				*
		5620	124			✓	
		5640	128				*
		5660	132				*
		5680	136			✓	
		5700	140				*
	UNII or §15.247	5745	149	✓		✓	
		5765	153		*		*
		5785	157	✓			*
		5805	161		*	✓	
	§15.247	5825	165	✓			

Notes

✓ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

The indicated Wi-Fi target powers in the following table are absolute maximums



Wi-Fi (5.2GHz Band)-SKU1

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.2	802.11a	6	36	5180	10.5	10.5	13.5	±2.0	15.5	10.7	11.6	14.2
			40	5200	13.0	13.0	16.0	±2.0	18.0	15.0	15.0	18.0
			44	5220	13.0	13.0	16.0	±2.0	18.0	14.3	15.0	17.7
			48	5240	13.0	13.0	16.0	±2.0	18.0	15.0	15.0	18.0
	802.11n HT20	MCS8	36	5180	10.0	10.0	13.0	±2.0	15.0	10.1	11.2	13.7
			40	5200	13.0	13.0	16.0	±2.0	18.0	14.0	14.9	17.5
			44	5220	13.0	13.0	16.0	±2.0	18.0	14.7	14.6	17.7
			48	5240	13.0	13.0	16.0	±2.0	18.0	14.8	14.9	17.8
	802.11n HT40	MCS8	38	5190	10.0	10.0	13.0	±2.0	15.0	10.3	10.5	13.4
			46	5230	13.0	13.0	16.0	±2.0	18.0	14.1	14.2	17.2
	802.11ac	VHT20	36	5180	10.0	10.0	13.0	±2.0	15.0	11.7	11.0	14.4
			40	5200	13.0	13.0	16.0	±2.0	18.0	14.9	15.0	18.0
			44	5220	13.0	13.0	16.0	±2.0	18.0	13.3	15.0	17.2
			48	5240	13.0	13.0	16.0	±2.0	18.0	15.0	15.0	18.0
		VHT40	38	5190	10.0	10.0	13.0	±2.0	15.0	11.2	12.0	14.6
			46	5230	13.0	13.0	16.0	±2.0	18.0	14.0	14.6	17.3
		VHT80	42	5210	9.0	9.0	12.0	±2.0	14.0	9.2	9.2	12.2



Wi-Fi 5.3GHz Band-SKU1

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.3	802.11a	6	52	5260	14.5	14.5	17.5	±2.0	19.5	16.5	16.4	19.5
			56	5280	10.0	10.0	13.0	±2.0	15.0	11.8	11.5	14.7
			60	5300	10.0	10.0	13.0	±2.0	15.0	11.7	11.6	14.7
			64	5320	8.0	8.0	11.0	±2.0	13.0	9.6	9.9	12.8
	802.11n HT20	MCS8	52	5260	14.5	14.5	17.5	±2.0	19.5	16.5	16.5	19.5
			56	5280	10.5	10.5	13.5	±2.0	15.5	12.4	12.2	15.3
			60	5300	10.5	10.5	13.5	±2.0	15.5	12.3	12.2	15.3
			64	5320	7.0	7.0	10.0	±2.0	12.0	8.2	8.2	11.2
	802.11n HT40	MCS8	54	5270	14.0	14.0	17.0	±2.0	19.0	14.0	14.2	17.1
			62	5310	10.0	10.0	13.0	±2.0	15.0	11.8	12.0	14.9
	802.11ac	VHT20	52	5260	14.5	14.5	17.5	±2.0	19.5	16.4	16.5	19.5
			56	5280	10.5	10.5	13.5	±2.0	15.5	12.3	12.1	15.2
			60	5300	10.5	10.5	13.5	±2.0	15.5	12.3	12.1	15.2
			64	5320	7.0	7.0	10.0	±2.0	12.0	9.0	8.5	11.8
		VHT40	54	5270	14.0	14.0	17.0	±2.0	19.0	15.6	15.9	18.8
			62	5310	9.5	9.5	12.5	±2.0	14.5	11.0	11.4	14.2
		VHT80	58	5290	9.5	9.5	12.5	±2.0	14.5	10.6	10.2	13.4



Wi-Fi 5.5GHz Band-SKU1

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.5	802.11a	6	100	5500	8.0	8.0	11.0	±2.0	13.0	9.1	8.5	11.8
			104	5520	14.5	14.5	17.5	±2.0	19.5	16.4	16.5	19.5
			108	5540	14.5	14.5	17.5	±2.0	19.5	16.1	16.5	19.3
			112	5560	14.5	14.5	17.5	±2.0	19.5	16.5	16.5	19.5
			116	5580	14.5	14.5	17.5	±2.0	19.5	16.5	16.5	19.5
			120	5600	14.5	14.5	17.5	±2.0	19.5	16.1	16.5	19.3
			124	5620	14.5	14.5	17.5	±2.0	19.5	16.5	15.8	19.2
			128	5640	14.5	14.5	17.5	±2.0	19.5	16.4	15.9	19.2
			132	5660	14.5	14.5	17.5	±2.0	19.5	16.3	15.7	19.0
			136	5680	14.5	14.5	17.5	±2.0	19.5	16.4	15.9	19.2
	802.11n (HT20)	MCS8	140	5700	7.0	7.0	10.0	±2.0	12.0	7.2	7.0	10.1
			100	5500	7.0	7.0	10.0	±2.0	12.0	7.6	7.3	10.5
			104	5520	14.5	14.5	17.5	±2.0	19.5	16.4	15.8	19.1
			108	5540	14.5	14.5	17.5	±2.0	19.5	16.3	15.8	19.1
			112	5560	14.5	14.5	17.5	±2.0	19.5	16.5	16.0	19.3
			116	5580	14.5	14.5	17.5	±2.0	19.5	16.1	16.4	19.3
			120	5600	14.5	14.5	17.5	±2.0	19.5	16.1	15.6	18.9
			124	5620	14.5	14.5	17.5	±2.0	19.5	16.5	16.3	19.4
			128	5640	14.5	14.5	17.5	±2.0	19.5	16.5	16.0	19.3
			132	5660	14.5	14.5	17.5	±2.0	19.5	16.4	16.5	19.4
			136	5680	14.5	14.5	17.5	±2.0	19.5	16.3	16.5	19.4
	802.11n (HT40)	MCS8	140	5700	7.0	7.0	10.0	±2.0	12.0	7.6	7.5	10.6
			102	5510	7.5	7.5	10.5	±2.0	12.5	7.6	8.1	10.9
			110	5550	14.0	14.0	17.0	±2.0	19.0	15.8	15.6	18.7
			118	5590	14.0	14.0	17.0	±2.0	19.0	14.3	14.3	17.3
			126	5630	14.0	14.0	17.0	±2.0	19.0	15.8	15.6	18.7
			134	5670	13.0	13.0	16.0	±2.0	18.0	13.9	14.3	17.1
			142	5710	14.0	14.0	17.0	±2.0	19.0	15.0	15.4	18.2



Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.5	802.11ac	VHT20	100	5500	7.0	7.0	10.0	±2.0	12.0	8.3	7.0	10.7
			104	5520	14.5	14.5	17.5	±2.0	19.5	16.3	15.6	19.0
			108	5540	14.5	14.5	17.5	±2.0	19.5	16.5	15.8	19.2
			112	5560	14.5	14.5	17.5	±2.0	19.5	16.5	15.6	19.1
			116	5580	14.5	14.5	17.5	±2.0	19.5	16.5	16.4	19.5
			120	5600	14.5	14.5	17.5	±2.0	19.5	16.4	16.5	19.5
			124	5620	14.5	14.5	17.5	±2.0	19.5	16.5	16.4	19.5
			128	5640	14.5	14.5	17.5	±2.0	19.5	16.5	15.7	19.1
			132	5660	14.5	14.5	17.5	±2.0	19.5	16.5	15.4	19.0
			136	5680	14.5	14.5	17.5	±2.0	19.5	16.5	15.7	19.1
		VHT40	140	5700	7.0	7.0	10.0	±2.0	12.0	7.6	7.3	10.5
			102	5510	7.5	7.5	10.5	±2.0	12.5	8.2	8.8	11.5
			110	5550	14.0	14.0	17.0	±2.0	19.0	15.8	16.0	18.9
			118	5590	14.0	14.0	17.0	±2.0	19.0	15.6	15.8	18.7
			126	5630	14.0	14.0	17.0	±2.0	19.0	15.4	15.6	18.5
			134	5670	13.0	13.0	16.0	±2.0	18.0	14.3	14.8	17.6
		VHT80	142	5710	14.0	14.0	17.0	±2.0	19.0	15.5	15.8	18.7
			106	5530	10.5	10.5	13.5	±2.0	15.5	10.6	10.8	13.7
			122	5610	14.5	14.5	17.5	±2.0	19.5	16.5	16.4	19.4
			138	5690	14.5	14.5	17.5	±2.0	19.5	16.5	16.1	19.3

**Wi-Fi 5.8GHz Band-SKU1**

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.8	802.11a	12	149	5745	14.5	14.5	17.5	±2.0	19.5	16.2	16.3	19.3
			153	5765	14.5	14.5	17.5	±2.0	19.5	16.1	16.3	19.2
			157	5785	14.5	14.5	17.5	±2.0	19.5	15.5	15.0	18.3
			161	5805	14.5	14.5	17.5	±2.0	19.5	15.6	15.1	18.4
			165	5825	14.5	14.5	17.5	±2.0	19.5	15.4	15.1	18.3
	802.11n HT20	MCS8	149	5745	14.5	14.5	17.5	±2.0	19.5	16.1	16.3	19.2
			153	5765	14.5	14.5	17.5	±2.0	19.5	15.0	14.6	17.8
			157	5785	14.5	14.5	17.5	±2.0	19.5	16.0	16.0	19.0
			161	5805	14.5	14.5	17.5	±2.0	19.5	15.4	14.9	18.2
			165	5825	14.5	14.5	17.5	±2.0	19.5	15.1	14.7	17.9
	802.11n HT40	MCS8	151	5755	14.0	14.0	17.0	±2.0	19.0	14.2	14.0	17.1
			159	5795	14.0	14.0	17.0	±2.0	19.0	14.0	14.0	17.0
	802.11ac	VHT20	149	5745	14.5	14.5	17.5	±2.0	19.5	16.2	16.3	19.3
			153	5765	14.5	14.5	17.5	±2.0	19.5	15.5	16.2	18.9
			157	5785	14.5	14.5	17.5	±2.0	19.5	15.0	15.0	18.0
			161	5805	14.5	14.5	17.5	±2.0	19.5	16.0	16.5	19.3
			165	5825	14.5	14.5	17.5	±2.0	19.5	16.0	16.5	19.3
		VHT40	151	5755	14.0	14.0	17.0	±2.0	19.0	15.6	16.0	18.8
			159	5795	14.0	14.0	17.0	±2.0	19.0	15.6	15.9	18.8
		VHT80	155	5775	14.5	14.5	17.5	±2.0	19.5	16.5	16.1	19.3

**Wi-Fi 5.2GHz Band-SKU2**

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
5.2	802.11a	6	36	5180	14.0	±2.0	16.0	15.2
			40	5200	15.0	±2.0	17.0	16.7
			44	5220	15.0	±2.0	17.0	16.9
			48	5240	15.0	±2.0	17.0	16.8
	802.11n (HT20)	MCS0	36	5180	14.0	±2.0	16.0	15.2
			40	5200	15.0	±2.0	17.0	16.7
			44	5220	15.0	±2.0	17.0	16.9
			48	5240	15.0	±2.0	17.0	16.9
	802.11n (HT40)	MCS0	38	5190	11.0	±2.0	13.0	11.3
			46	5230	14.0	±2.0	16.0	14.1
	802.11ac	VHT20	36	5180	14.0	±2.0	16.0	15.3
			40	5200	15.0	±2.0	17.0	16.5
			44	5220	15.0	±2.0	17.0	17.0
			48	5240	15.0	±2.0	17.0	16.6
		VHT40	38	5190	11.0	±2.0	13.0	11.6
			46	5230	14.0	±2.0	16.0	14.2
		VHT80	42	5210	10.0	±2.0	12.0	10.7

**Wi-Fi 5.3GHz Band-SKU2**

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
5.3	802.11a	6	52	5260	15.0	±2.0	17.0	16.9
			56	5280	15.0	±2.0	17.0	16.9
			60	5300	15.0	±2.0	17.0	17.0
			64	5320	14.0	±2.0	16.0	15.8
	802.11n (HT20)	MCS0	52	5260	15.0	±2.0	17.0	16.9
			56	5280	15.0	±2.0	17.0	16.8
			60	5300	15.0	±2.0	17.0	17.0
			64	5320	14.0	±2.0	16.0	15.2
	802.11n (HT40)	MCS0	54	5270	14.0	±2.0	16.0	15.9
			62	5310	12.5	±2.0	14.5	14.4
	802.11ac	VHT20	52	5260	15.0	±2.0	17.0	16.5
			56	5280	15.0	±2.0	17.0	16.8
			60	5300	15.0	±2.0	17.0	16.9
			64	5320	14.0	±2.0	16.0	15.6
		VHT40	54	5270	14.0	±2.0	16.0	14.0
			62	5310	12.5	±2.0	14.5	13.4
		VHT80	58	5290	10.0	±2.0	12.0	11.9

**Wi-Fi 5.5GHz Band-SKU2**

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
5.5	802.11a	6	100	5500	12.5	±2.0	14.5	14.5
			104	5520	15.0	±2.0	17.0	16.6
			108	5540	15.0	±2.0	17.0	16.4
			112	5560	15.0	±2.0	17.0	16.5
			116	5580	15.0	±2.0	17.0	16.7
			120	5600	15.0	±2.0	17.0	16.9
			124	5620	15.0	±2.0	17.0	16.8
			128	5640	15.0	±2.0	17.0	16.7
			132	5660	15.0	±2.0	17.0	16.8
			136	5680	15.0	±2.0	17.0	16.8
			140	5700	11.0	±2.0	13.0	12.5
	802.11n (HT20)	MCS0	100	5500	12.5	±2.0	14.5	14.5
			104	5520	15.0	±2.0	17.0	16.6
			108	5540	15.0	±2.0	17.0	16.6
			112	5560	15.0	±2.0	17.0	16.7
			116	5580	15.0	±2.0	17.0	17.0
			120	5600	15.0	±2.0	17.0	17.0
			124	5620	15.0	±2.0	17.0	16.8
			128	5640	15.0	±2.0	17.0	16.7
			132	5660	15.0	±2.0	17.0	16.5
			136	5680	15.0	±2.0	17.0	16.8
			140	5700	11.0	±2.0	13.0	12.5
	802.11n (HT40)	MCS0	102	5510	9.5	±2.0	11.5	10.8
			110	5550	14.0	±2.0	16.0	15.7
			118	5590	14.0	±2.0	16.0	15.6
			126	5630	14.0	±2.0	16.0	15.7
			134	5670	13.0	±2.0	15.0	14.5
			142	5710	14.0	±2.0	16.0	15.6
	802.11ac	VHT20	100	5500	12.5	±2.0	14.5	14.5
			104	5520	15.0	±2.0	17.0	16.7
			108	5540	15.0	±2.0	17.0	16.5
			112	5560	15.0	±2.0	17.0	16.7
			116	5580	15.0	±2.0	17.0	16.7
			120	5600	15.0	±2.0	17.0	16.8
			124	5620	15.0	±2.0	17.0	16.7
			128	5640	15.0	±2.0	17.0	16.7
			132	5660	15.0	±2.0	17.0	16.7
			136	5680	15.0	±2.0	17.0	16.8
			140	5700	11.0	±2.0	13.0	12.5
		VHT40	102	5510	10.5	±2.0	12.5	10.8
			110	5550	14.0	±2.0	16.0	15.6
			118	5590	14.0	±2.0	16.0	15.6
			126	5630	14.0	±2.0	16.0	15.7
			134	5670	13.0	±2.0	15.0	14.5
			142	5710	14.0	±2.0	16.0	15.6



Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
5.5	802.11ac	VHT80	106	5530	9.5	±2.0	11.5	10.8
			122	5610	14.0	±2.0	16.0	14.6
			138	5690	14.0	±2.0	16.0	14.5

Wi-Fi 5.8GHz Band-SKU2

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
5.8	802.11a	6	149	5745	15.0	±2.0	17.0	16.3
			153	5765	15.0	±2.0	17.0	16.6
			157	5785	15.0	±2.0	17.0	17.0
			161	5805	15.0	±2.0	17.0	16.9
			165	5825	15.0	±2.0	17.0	16.5
	802.11n (HT20)	MCS0	149	5745	15.0	±2.0	17.0	16.6
			153	5765	15.0	±2.0	17.0	16.6
			157	5785	15.0	±2.0	17.0	17.0
			161	5805	15.0	±2.0	17.0	16.8
			165	5825	15.0	±2.0	17.0	16.6
	802.11n (HT40)	MCS0	151	5755	14.0	±2.0	16.0	15.3
			159	5795	14.0	±2.0	16.0	15.4
	802.11ac	VHT20	149	5745	15.0	±2.0	17.0	16.3
			153	5765	15.0	±2.0	17.0	16.4
			157	5785	15.0	±2.0	17.0	17.0
			161	5805	15.0	±2.0	17.0	16.9
			165	5825	15.0	±2.0	17.0	16.5
		VHT40	151	5755	14.0	±2.0	16.0	15.3
			159	5795	14.0	±2.0	16.0	15.4
		VHT80	155	5775	14.0	±2.0	16.0	14.6



13.2 Bluetooth

Output power table

SKU1

Band (GHz)	Mode	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
Bluetooth	DH5	0	2402	9.5	± 1.5	11.0	9.8
		39	2441	9.5	± 1.5	11.0	10.1
		78	2480	9.5	± 1.5	11.0	10.0
	3DH5	0	2402	6.0	± 1.5	7.5	6.5
		39	2441	6.0	± 1.5	7.5	6.8
		78	2480	6.0	± 1.5	7.5	6.7
	BLE	0	2402	0.0	± 1.5	1.5	0.1
		19	2440	0.0	± 1.5	1.5	0.6
		39	2480	0.0	± 1.5	1.5	0.8

SKU2

Band (GHz)	Mode	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dB)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)
Bluetooth	DH5	0	2402	9.5	± 1.5	11.0	9.8
		39	2441	9.5	± 1.5	11.0	10.1
		78	2480	9.5	± 1.5	11.0	10.0
	3DH5	0	2402	6.0	± 1.5	7.5	6.5
		39	2441	6.0	± 1.5	7.5	6.8
		78	2480	6.0	± 1.5	7.5	6.7
	BLE	0	2402	0.0	± 1.5	1.5	0.1
		19	2440	0.0	± 1.5	1.5	0.6
		39	2480	0.0	± 1.5	1.5	0.8



14 SAR Measurements Results

Wi-Fi (2.4GHz Band)_SKU1:

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
802.11b	Tablet Mode	Rear	6	2437	0	0	20.5	20.2	0.270	0.289	
					1	0	20.5	20.3	0.165	0.173	
		Edge 1	6	2437	0	0	20.5	20.2	0.374	0.401	
					1	0	20.5	20.3	0.381	0.399	
802.11n HT20	Tablet Mode	Edge 1	6	2437	0	0	19.5	18.3	0.338	0.446	
					1	0	19.5	18.3	0.346	0.456	
802.11b	Tablet Mode	Edge 1	6	2437	0	0	20.5	20.2	0.361	0.387	1
					1	0	20.5	20.3	0.382	0.400	1

Note(s):

1. Ant 1 was performed the SAR testing. Ant 2 was performed the spot check of SAR only.
2. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)

**Wi-Fi (2.4GHz Band)_SKU2:**

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
802.11n HT40	Tablet Mode	Edge 1	6	2437	0	0	18.5	18.1	0.126	0.138	
			6	2437	0	0	18.5	18.1	0.133	0.146	2

Note(s):

1. The SKU2 single chain power was above SKU1 in HT40, so we only perform SAR test in HT40 of SKU2.
2. Ant 1 was performed the SAR testing. Ant 2 was performed the spot check of SAR only.



Wi-Fi (5GHz Band)_SKU1:

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
802.11a	Tablet Mode	Rear	48	5240	0	0	15.0	15.0	0.081	0.081	
					1	0	15.0	15.0	0.025	0.025	
			52	5260	0	0	16.5	16.5	0.068	0.068	
					1	0	16.5	16.4	0.021	0.022	
			116	5580	0	0	16.5	16.5	0.068	0.068	
					1	0	16.5	16.5	0.033	0.033	
			149	5745	0	0	16.5	16.2	0.060	0.065	
					1	0	16.5	16.3	0.034	0.036	
		Edge 1	48	5240	0	0	15.0	15.0	0.788	0.788	
					1	0	15.0	15.0	0.327	0.327	
			52	5260	0	0	16.5	16.5	0.894	0.894	
					1	0	16.5	16.4	0.247	0.253	
			56	5280	0	0	12.0	11.8	0.700	0.733	1
					1	0	12.0	11.5	0.393	0.441	1
			116	5580	0	0	16.5	16.5	0.972	0.972	
					1	0	16.5	16.5	0.447	0.447	
			104	5520	0	0	16.5	16.4	0.977	1.000	1
					1	0	16.5	16.5	0.294	0.294	1
			149	5745	0	0	16.5	16.2	0.651	0.698	
					1	0	16.5	16.3	0.384	0.402	
802.11n HT20	Tablet Mode	Edge 1	48	5240	0	0	15.0	14.8	0.791	0.828	
					1	0	15.0	14.9	0.289	0.296	
			44	5220	0	0	15.0	14.7	0.851	0.912	1
					1	0	15.0	14.6	0.251	0.275	1
			52	5260	0	0	16.5	16.5	0.744	0.744	
					1	0	16.5	16.5	0.218	0.218	
			136	5680	0	0	16.5	16.3	0.910	0.946	
					1	0	16.5	16.5	0.514	0.514	
			132	5660	0	0	16.5	16.4	0.930	0.952	1
					1	0	16.5	16.5	0.652	0.652	1
			149	5745	0	0	16.5	16.1	0.642	0.704	
					1	0	16.5	16.3	0.346	0.362	

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)



Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
802.11ac VHT20	Tablet Mode	Edge 1	48	5240	0	0	15.0	15.0	0.617	0.617	
					1	0	15.0	15.0	0.287	0.287	
			52	5260	0	0	16.5	16.4	0.608	0.622	
					1	0	16.5	16.5	0.386	0.386	
			116	5580	0	0	16.5	16.5	0.855	0.855	
					1	0	16.5	16.4	0.402	0.411	
			124	5620	0	0	16.5	16.5	0.877	0.877	1
					1	0	16.5	16.4	0.493	0.504	1
			149	5745	0	0	16.5	16.2	0.578	0.619	
					1	0	16.5	16.3	0.364	0.381	
802.11n HT40	Tablet Mode	Edge 1	110	5550	0	0	16.0	15.8	0.810	0.848	
					1	0	16.0	15.6	0.392	0.430	
			126	5630	0	0	16.0	15.8	0.729	0.763	1
					1	0	16.0	15.6	0.183	0.201	1
802.11ac VHT80	Tablet Mode	Edge 1	122	5610	0	0	16.5	16.5	0.444	0.444	
					1	0	16.5	16.4	0.256	0.262	
802.11a	Tablet Mode	Edge 1	116	5580	0	0	16.5	16.5	0.998	0.998	2
					1	0	16.5	16.5	0.477	0.477	2
802.11a	Tablet Mode	Edge 1	116	5580	0	0	16.5	16.5	0.986	0.986	3
					1	0	16.5	16.5	0.417	0.417	3

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03)
 - Original SAR = 0.972 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 0.998 W/kg < 1.45 W/kg
 - SAR variation= 2.6 $< 20\%$
- Ant 1 was performed the SAR testing. Ant 2 was performed the spot check of SAR only.
- We need to choose the channel it has the highest power for each band under 802.11 a/802.11n HT20/802.11ac VHT20 to test. Then we choose the channel(band) which is the worst case in 5G testing from these three result, and use it to perform 802.11n HT40 and 802.11ac VHT80.



Wi-Fi (5GHz Band)_SKU2:

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	
							Tune up limit	Measured				
802.11a	Tablet Mode	Rear	44	5220	0	0	17.0	16.9	0.119	0.122		
			60	5300	0	0	17.0	17.0	0.124	0.124		
			120	5600	0	0	17.0	16.9	0.125	0.128		
			157	5785	0	0	17.0	17.0	0.102	0.102		
802.11a		Edge 1	44	5220	0	0	17.0	16.9	1.120	1.146		
			48	5240	0	0	17.0	16.8	1.040	1.089	1	
			60	5300	0	0	17.0	17.0	1.100	1.100		
			56	5280	0	0	17.0	16.9	1.180	1.207	1	
			120	5600	0	0	17.0	16.9	1.120	1.146		
			124	5620	0	0	17.0	16.8	0.873	0.914	1	
			157	5785	0	0	17.0	17.0	0.851	0.851		
			161	5805	0	0	17.0	16.9	0.588	0.602	1	
802.11n HT20		Edge 1	44	5220	0	0	17.0	16.9	1.070	1.095		
			48	5240	0	0	17.0	16.9	1.090	1.115	1	
			60	5300	0	0	17.0	17.0	1.130	1.130		
			52	5260	0	0	17.0	16.9	1.300	1.330	1	
			120	5600	0	0	17.0	17.0	1.300	1.300		
			116	5580	0	0	17.0	17.0	1.330	1.330	1	
			124	5620	0	0	17.0	16.8	0.885	0.927	1	
			136	5680	0	0	17.0	16.8	0.741	0.776	1	
802.11ac VHT20		Edge 1	157	5785	0	0	17.0	17.0	0.793	0.793		
			44	5220	0	0	17.0	17.0	0.989	0.989		
			48	5240	0	0	17.0	16.6	1.040	1.140	1	
			60	5300	0	0	17.0	16.9	1.100	1.126		
			56	5280	0	0	17.0	16.8	1.060	1.110	1	
			120	5600	0	0	17.0	16.8	0.841	0.881		
			136	5680	0	0	17.0	16.8	0.457	0.479	1	
			157	5785	0	0	17.0	17.0	0.502	0.502		

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)



Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
802.11n HT40	Tablet Mode	Edge 1	54	5270	0	0	16.0	15.9	0.826	0.845	
		Edge 1	62	5310	0	0	14.5	14.4	0.784	0.799	1
802.11ac VHT80	Tablet Mode	Edge 1	122	5610	0	0	16.0	14.6	0.307	0.424	
802.11n HT20	Tablet Mode	Edge 1	52	5260	0	0	17.0	16.9	1.310	1.341	3
802.11n HT20	Tablet Mode	Edge 1	52	5260	0	0	17.0	16.9	1.260	1.289	2

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03)
 - Original SAR = 1.33 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.289 W/kg < 1.45 W/kg
 - SAR variation = 3 % $< 20\%$
- Ant 1 was performed the SAR testing. Ant 2 was performed the spot check of SAR only.
- We need to choose the channel it has the highest power for each band under 802.11 a/802.11n HT20/802.11ac VHT20 to test. Then we choose the channel(band) which is the worst case in 5G testing from these three result, and use it to perform 802.11n HT40 and 802.11ac VHT80.



15 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode

SKU1

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
Wi-Fi 2.4 GHz	Tablet@Edge1	8012.11n HT20	0.456
Wi-Fi 5.2 GHz	Tablet@Edge1	8012.11n HT20	0.912
Wi-Fi 5.3 GHz	Tablet@Edge1	8012.11a	0.894
Wi-Fi 5.5 GHz	Tablet@Edge1	8012.11a	1.000
Wi-Fi 5.8 GHz	Tablet@Edge1	8012.11n HT20	0.704

SKU2

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
Wi-Fi 2.4 GHz	Tablet@Edge1	8012.11n HT40	0.146
Wi-Fi 5.2 GHz	Tablet@Edge1	802.11a	1.146
Wi-Fi 5.3 GHz	Tablet@Edge1	8012.11n HT20	1.341
Wi-Fi 5.5 GHz	Tablet@Edge1	8012.11n HT20	1.330
Wi-Fi 5.8 GHz	Tablet@Edge1	802.11a	0.851



16 Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest Reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest Reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i < 0.04$$



16.1 Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg

**16.1.1 Estimated SAR****Tablet Mode_SKU1**

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Estimated 1-g SAR (W/Kg)				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux	2.4GHz	2412	23.5	224	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.2GHz	5260	18.0	63	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.3GHz	5280	19.5	89	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.5GHz	5520	19.5	89	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.8GHz	5745	19.5	89	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Main	Bluetooth	2402	11	13	18.6	7.7	68	219	250	0.144	Measure	0.400	0.400	0.400

Tablet Mode_SKU2

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Estimated 1-g SAR (W/Kg)				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux	2.4GHz	2412	20.5	112	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.2GHz	5260	17.0	50	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.3GHz	5280	17.0	50	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.5GHz	5520	17.0	50	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Aux	5.8GHz	5745	17.0	50	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Main	Bluetooth	2402	11	13	18.6	7.7	68	219	250	0.144	Measure	0.400	0.400	0.400



16.2 Sum of the SAR for Simultaneous Transmission Analysis

16.2.1 Sum of the SAR for Wi-Fi Aux & Bluetooth

SKU1

Band	Test Position	Simultaneous Transmission Scenario			$\sum$ 1-g SAR (W/kg)	SPLSR (Yes/No)
		Wi-Fi Main	Wi-Fi Aux	Bluetooth		
5.2GHz	Rear	0.081	0.025	0.144	0.250	No
	Edge 1	0.828	0.327	0.144	1.299	No
5.3GHz	Rear	0.068	0.021	0.144	0.233	No
	Edge 1	0.894	0.441	0.144	1.479	No
5.5GHz	Rear	0.068	0.033	0.144	0.245	No
	Edge 1	1.000	0.652	0.144	1.796	Yes
5.8GHz	Rear	0.065	0.036	0.144	0.245	No
	Edge 1	0.704	0.402	0.144	1.250	No

Note(s):

As the Sum of the SAR is not greater than 1.6W/Kg, so SPLSR is not required

SKU2

Band	Test Position	Simultaneous Transmission Scenario		$\sum$ 1-g SAR (W/kg)	SPLSR (Yes/No)
		Wi-Fi Main	Bluetooth		
5.2GHz	Rear	0.122	0.144	0.266	No
	Edge 1	1.146	0.144	1.290	No
5.3GHz	Rear	0.124	0.144	0.268	No
	Edge 1	1.341	0.144	1.485	No
5.5GHz	Rear	0.128	0.144	0.272	No
	Edge 1	1.330	0.144	1.474	No
5.8GHz	Rear	0.102	0.144	0.246	No
	Edge 1	0.851	0.144	0.995	No

Note(s):

As the Sum of the SAR is not greater than 1.6W/Kg, so SPLSR is not required

16.2.2 Sum of the SAR for Wi-Fi MIMO

SKU1

Band	Test Position	Simultaneous Transmission Scenario		$\sum$ 1-g SAR (W/kg)	SPLSR (Yes/No)
		Wi-Fi Main	Wi-Fi Aux		
2.4GHz	Rear	0.270	0.289	0.559	No
	Edge 1	0.446	0.456	0.902	No
5.2GHz	Rear	0.081	0.025	0.106	No
	Edge 1	0.828	0.327	1.155	No
5.3GHz	Rear	0.068	0.021	0.089	No
	Edge 1	0.894	0.386	1.280	No
5.5GHz	Rear	0.068	0.033	0.101	No
	Edge 1	1.000	0.652	1.652	Yes
5.8GHz	Rear	0.065	0.036	0.101	No
	Edge 1	0.704	0.402	1.106	No

Note(s):

As the Sum of the SAR is not greater than 1.6W/Kg, so SPLSR is not required

**16.2.3 Sum of the 1g SAR for Body Exposure Condition****5GHz Band**

Test Position	Mode	Channel	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
			Wi-Fi 5GHz Band Main	Wi-Fi 5GHz Band Aux				
Edge 1	802.11a	104	1.000	0.652	1.652	15.00	0.01	1

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04



17 Equipment List & Calibration Status

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
S-Parameter Network Analyzer	Agilent	E5071C	MY46213916	1	2015/6/25
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A	N/A
Power Meter	Agilent	4416	GB41291611	1	2015/9/4
Power Sensor	Agilent	8481H	MY41091956	1	2015/9/4
Data Acquisition Electronics (DAE)	SPEAG	DAE4	558	1	2015/7/21
Dosimetric E-Field Probe	SPEAG	EX3DV4	3554	1	2015/9/23
2450 MHz System Validation Dipole	SPEAG	D2450V2	728	1	2015/5/19
5GHz System Validation Dipole	SPEAG	D5GHzV2	1004	1	2015/11/19
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A



18 Facilities

All measurement facilities used to collect the measurement data are located at

- ☐ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- ☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

19 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Receptions in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10



20 Attachments

Exhibit	Content
1	System Performance Check Plots
2	SAR test plots for Wi-Fi 2.4GHz Band
3	SAR test plots for Wi-Fi 5 GHz Band
4	SAR test plots for Bluetooth
5	SAR_Probe_EX3DV4_sn3554
6	SAR_DAE4_sn558
7	SAR_Dipole_D2450v2_sn728
8	SAR_Dipole_D5GHzv2_sn1004
9	SPLSR Plots
10	T150109W06-SF PHOTOS

END OF REPORT