



ANSI/IEEE Std. C95.1-2005

in accordance with the requirements of
FCC Report and Order: ET Docket 93-62



FCC TEST REPORT

For

802.11 A/B/G/N/AC+ BT 4.1 M.2 TYPE CARD
(Tested inside of Notebook Computer, model lenovo Flex 3-1470)

Trade Name: Qualcomm Atheros

Model: QCNFA34AC

Issued to

Qualcomm Atheros, Inc.
1700 Technology Drive, san Jose, CA95110

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891,
Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: 2015/04/17



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2015/04/17	Initial Issue	ALL	Tony Liao
01	2015/05/29	1. Revise Sum of the SAR for Wi-Fi & Bluetooth note. 2. Revise Sum of the SAR for Wi-Fi MIMO and Sum of the 1g SAR for Body Exposure Condition note.	67, 68	Tony Liao
02	2015/06/08	1. Add the section to explain Wi-Fi and Bluetooth for SPLSR result	68	Tony Liao



Table of Contents

1	Certificate of Compliance (SAR Evaluation)	5
2	Description of Equipment Under Test	6
2.1	Summary of Highest SAR Values	7
3	Requirements for Compliance Testing Defined	8
3.1	Requirements for Compliance Testing Defined by the FCC	8
4	Dosimetric Assessment System	9
4.1	Measurement System Diagram	10
4.2	System Components	11
5	Evaluation Procedures	14
6	SAR Measurement Procedures	16
6.1	Normal SAR Test Procedure	16
7	Device Under Test	18
7.1	Wireless Technologies	18
7.2	Maximum Tune-up Power	19
7.3	Simultaneous Transmission	21
8	RF Output Power Measurement	22
8.1	Wi-Fi (2.4GHz Band)	22
8.2	Wi-Fi (5GHz Band)	24
8.3	Bluetooth	40
9	Summary of SAR Test Exclusion Configurations	41
9.1	Standalone SAR Test Exclusion Calculations	41
9.1.1	SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User	42
9.1.2	SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User	45
9.1.3	SAR Required Test Configuration	48
10	Exposure Limit	51
11	Tissue Dielectric Properties	52
11.1	Test Liquid Confirmation	52
11.2	Typical Composition of Ingredients for Liquid Tissue Phantoms	53
11.3	Simulating Liquids Parameter Check Results	54
12	Measurement Uncertainty	57
13	System Performance Check	58
13.1	System Performance Check Results	59
14	SAR Measurements Results	60
15	Simultaneous Transmission SAR Analysis	65
15.1	Estimated SAR for Simultaneous Transmission SAR Analysis	66



15.1.1	Estimated SAR for Bluetooth.....	66
15.2	Sum of the SAR for Simultaneous Transmission Analysis	67
15.2.1	Sum of the SAR for Wi-Fi MIMO	67
15.2.2	Sum of the 1g SAR for Body Exposure Condition	67
15.2.3	Sum of the SAR for Wi-Fi & Bluetooth	68
15.2.4	Sum of the 1g SAR for Body Exposure Condition	68
16	Equipment List & Calibration Status	69
17	Facilities	70
18	Reference	70
19	Attachments.....	71



1 Certificate of Compliance (SAR Evaluation)

Applicant Qualcomm Atheros, Inc.
1700 Technology Drive, san Jose, CA95110

Equipment Under Test: 802.11 A/B/G/N/AC+ BT 4.1 M.2 TYPE CARD
(Tested inside of Notebook Computer, model lenovo Flex 3-1470)

Trade Name: Qualcomm Atheros

Model Number: QCNFA34AC

Date of Test: April 10 ~ 17, 2015

Device Category: PORTABLE DEVICES

Exposure Category: GENERAL POPULATION/UNCONTROLLED EXPOSURE

Applicable Standards	
FCC	● IEEE 1528 2013 ● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03 ● KDB 447498 D01 General RF Exposure Guidance v05r02 ● KDB 616217 D04 SAR for laptop and tablets v01r01 ● KDB 248227 D01 SAR measurement for 802 11 a b g v01r02
Limit	
1.6 W/kg	
Test Result	
Pass	

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Tested by:

Alex Wu
Section Manager
Compliance Certification Services Inc.

Tony Liao
SAR Engineer
Compliance Certification Services Inc.



2 Description of Equipment Under Test

Product	802.11 A/B/G/N/AC+ BT 4.1 M.2 TYPE CARD (Tested inside of Notebook Computer, model lenovo Flex 3-1470)		
Trade Name	Qualcomm Atheros		
Model Number	QCNFA34AC		
RF Module	Qualcomm Atheros	Model:	QCNFA34AC
Host Manufacturer	lenovo	Host Model Name	Flex 3-1470 ; Flex 3-1435 ; Flex 3-1475
Host Model discrepancy	Market segmentation		
Transmitters	Wi-Fi & Bluetooth		
Modulation Technique	Bluetooth:GFSK for 1Mbps;π/4-DQPSK for 2Mbps;8DPSK for 3Mbps		
	802.11a: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11b: Direct Sequence Spread Spectrum(DSSS)		
	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11n: Orthogonal Frequency Division Multiplexing (OFDM)		
Antenna Specification	802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)		
	Brand name	High-Tek Electronics Co.,Ltd	
	Parts Number	Main: 025.900CP.0001	
		Aux: 025.900CQ.0001	
	Type	PIFA	
Rechargeable Li-polymer Battery–alternate	1.Brand: LG Model: L14L3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh		
	2.Brand: SIMPLO Model: L14M3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh		
	3.Brand: LG Model: L14L2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh		
	4.Brand: SIMPLO Model: L14M2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh		
	Test is using battery No.1 There are difference rating of battery, we chooses No.1 to perform the SAR testing of maximum rating.		

Note:

- The sample selected for test was prototype that representative to production product and was provided by manufacturer
- The module has two variant designs as following table:

NO.	Explanation:
SKU 1	NFA344: This module supports 2T2R MIMO 802.11 on the main and aux antennas. Bluetooth operates on the Main antenna and when Bluetooth is transmitting, 802.11 is limited to the aux antenna.
SKU 2	NFA345: This module supports 1T2R. Bluetooth/802.11 Tx only on the main antenna and the Aux is receive only.

- The platform have Notebook mode, Stand mode, Tablet mode and Tent mode. We Performed SAR test in tablet mode, because the EUT can fold 360 degrees. Thus, testing under tablet mode would meet the testing criteria for Notebook mode, Stand mode and Tent mode.
- This report documents re-measurement of host platforms with alternate antennas to verify continued compliance from original module/host integration evaluation. See also test report no. T150109W06-SF/FCC ID: PPD-QCNFA34AC.



2.1 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode, these are spot check measurements of the original host/module combination, where the worst-case transmit mode and test positions were selected.

SKU1

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
Wi-Fi 2.4 GHz	Tablet Mode@Edge1	802.11b	0.684
Wi-Fi 5.2 GHz	Tablet Mode@Edge1	802.11a	1.090
Wi-Fi 5.3 GHz	Tablet Mode@Edge1	802.11a	1.250
Wi-Fi 5.6 GHz	Tablet Mode@Edge1	802.11n HT20	1.187
Wi-Fi 5.8 GHz	Tablet Mode@Edge1	802.11ac VHT20	0.795

SKU2

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
Wi-Fi 2.4 GHz	Tablet Mode@Edge1	802.11n HT40	0.237
Wi-Fi 5.2 GHz	Tablet Mode@Edge1	802.11a	1.215
Wi-Fi 5.3 GHz	Tablet Mode@Edge1	802.11a	1.330
Wi-Fi 5.6 GHz	Tablet Mode@Edge1	802.11a	1.167
Wi-Fi 5.8 GHz	Tablet Mode@Edge1	802.11n HT20	0.696



3 Requirements for Compliance Testing Defined

3.1 Requirements for Compliance Testing Defined by the FCC

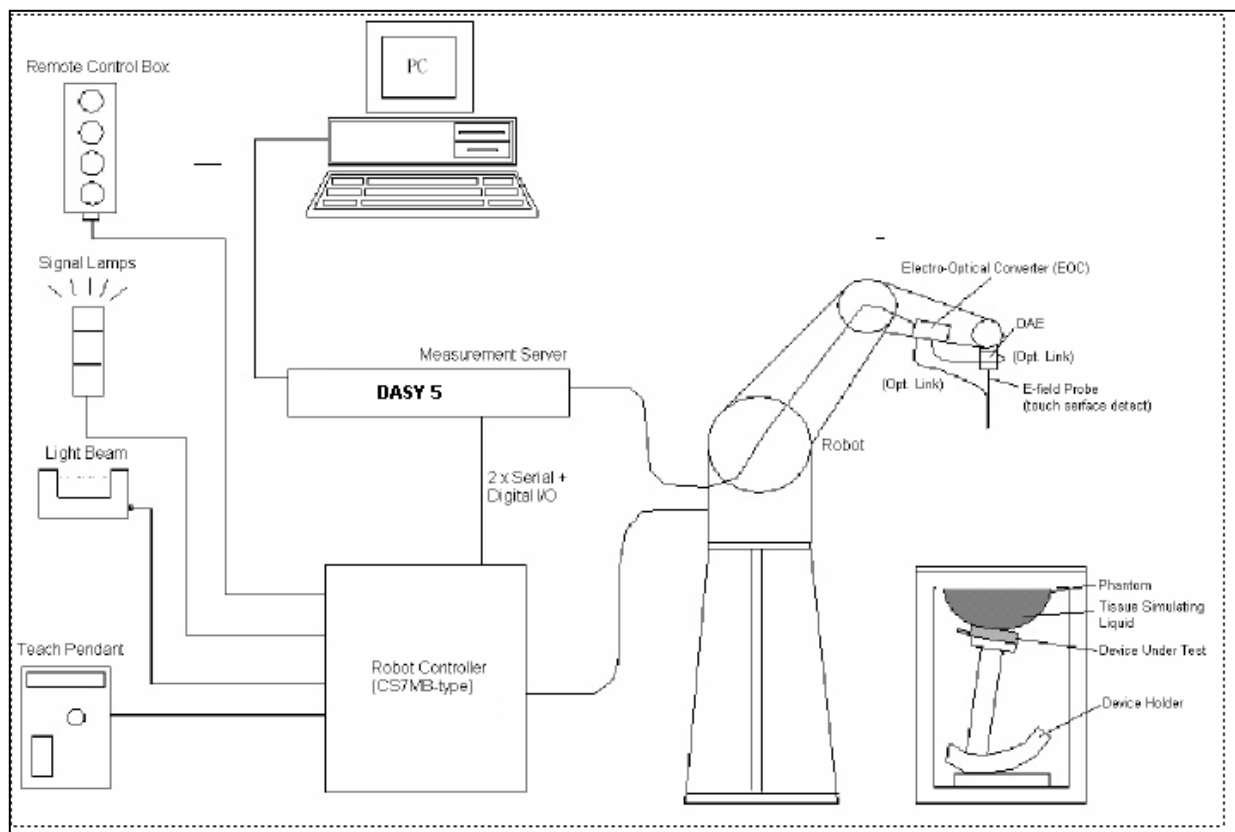
The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-2005 [6].



4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3665 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528 2013.

4.1 Measurement System Diagram



The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4/DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.



4.2 System Components

DASY4/DASY5 Measurement Server



The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

Data Acquisition Electronics (DAE)



The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

	Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) Calibration: Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request. Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) Directivity: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis) Dynamic Range: 10 μW/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
	Dimensions: Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1 mm Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

SAM Phantom (V4.0)

	Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot. Shell Thickness: 2 ± 0.2 mm Filling Volume: Approx. 25 liters Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm
---	---

SAM Phantom (ELI4)

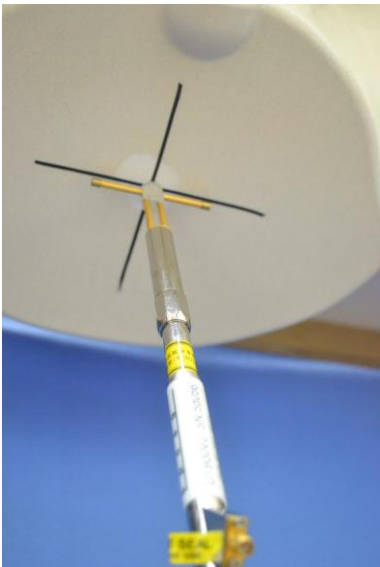
	Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%) Filling Volume: Approx. 25 liters Dimensions: Major ellipse axis: 600 mm Minor axis: 400 mm 500mm
---	--



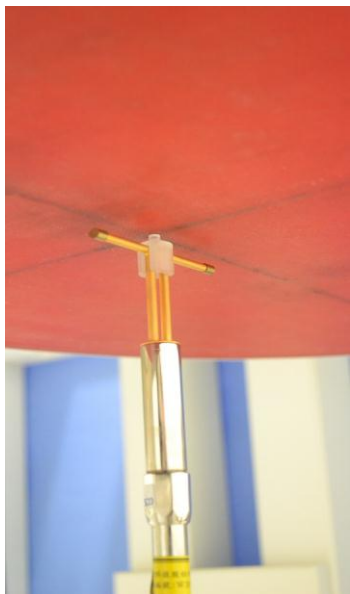
Device Holder for SAM Twin Phantom

	Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).
---	---

System Validation Kits for SAM Phantom (V4.0)

	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 2450, 5200, 5300, 5600, 5800 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm
--	---

System Validation Kits for ELI4 phantom

	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 2450, 5200, 5300, 5600, 5800 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm
---	---



5 Evaluation Procedures

Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	U_i	= Input signal of channel i	(i = x, y, z)
	cf	= Crest factor of exciting field	(DASY parameter)
	dcp_i	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:
$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$ for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
a_{ij}	= Sensor sensitivity factors for H-field probes
f	= Carrier frequency (GHz)
E_i	= Electric field strength of channel i in V/m
H_i	= Magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

SAR	= local specific absorption rate in W/kg
E_{tot}	= total field strength in V/m
σ	= conductivity in [mho/m] or [Siemens/m]
ρ	= equivalent tissue density in g/cm ³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

P_{pwe}	= Equivalent power density of a plane wave in mW/cm ²
E_{tot}	= total electric field strength in V/m
H_{tot}	= total magnetic field strength in A/m



6 SAR Measurement Procedures

6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency ≤ 2 GHz; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



- Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1)The zoom scan volume was set to 5x5x7 points at frequency ≤ 2 GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2GHz to 4GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4GHz to 6GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$:between 1 st two points losest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

- Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

- Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.



7 Device Under Test

7.1 Wireless Technologies

Wireless technologies	Tx Frequency Bands	Operating mode	Duty Cycle used for testing
Wi-Fi	2.4GHz Band	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	100%
	5GHz Band	802.11a 802.11n(HT20) 802.11n(HT40) 802.11ac(VHT20) 802.11ac(VHT40) 802.11ac(VHT80)	100%
Bluetooth	2.4GHz	2.1 4.0 LE	77% (DH5) 77% (3DH5) 63% (LE)

**7.2 Maximum Tune-up Power****Output power table-SKU1**

Tolerance (dB): ± 1.5		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
2.4GHz	802.11b	22.0	23.5
	802.11g	21.0	22.5
	802.11n HT20	21.0	22.5
	802.11n HT40	19.0	20.5
Tolerance (dB): ± 2		RF Output Power (dBm)	
5.2GHz Band	802.11a	16.0	18.0
	802.11n HT20	16.0	18.0
	802.11n HT40	16.0	18.0
	802.11ac VHT20	16.0	18.0
	802.11ac VHT40	16.0	18.0
	802.11ac VHT80	12.0	14.0
5.3GHz Band	802.11a	17.5	19.5
	802.11n HT20	17.5	19.5
	802.11n HT40	17.0	19.0
	802.11ac VHT20	17.5	19.5
	802.11ac VHT40	17.0	19.0
	802.11ac VHT80	12.5	14.5
5.6GHz Band	802.11a	17.5	19.5
	802.11n HT20	17.5	19.5
	802.11n HT40	17.0	19.0
	802.11ac VHT20	17.5	19.5
	802.11ac VHT40	17.0	19.0
	802.11ac VHT80	17.5	19.5
5.8GHz Band	802.11a	17.5	19.5
	802.11n HT20	17.5	19.5
	802.11n HT40	17.0	19.0
	802.11ac VHT20	17.5	19.5
	802.11ac VHT40	17.0	19.0
	802.11ac VHT80	17.5	19.5
Tolerance (dB): ± 1.5		RF Output Power (dBm)	
Bluetooth	DH5	9.5	11.0
	3DH5	6.0	7.5
	BLE	0.0	1.5

**Output power table-SKU2**

Tolerance (dB): ± 1.5		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
2.4GHz	802.11b	19.0	20.5
	802.11g	18.5	20.0
	802.11n HT20	18.5	20.0
	802.11n HT40	17.0	18.5
Tolerance (dB): ± 2.0		RF Output Power (dBm)	
5.2GHz Band	802.11a	15.0	17.0
	802.11n HT20	15.0	17.0
	802.11n HT40	14.0	16.0
	802.11ac VHT20	15.0	17.0
	802.11ac VHT40	14.0	16.0
	802.11ac VHT80	10.0	12.0
5.3GHz Band	802.11a	15.0	17.0
	802.11n HT20	15.0	17.0
	802.11n HT40	14.0	16.0
	802.11ac VHT20	15.0	17.0
	802.11ac VHT40	14.0	16.0
	802.11ac VHT80	10.0	12.0
5.6GHz Band	802.11a	15.0	17.0
	802.11n HT20	15.0	17.0
	802.11n HT40	14.0	16.0
	802.11ac VHT20	15.0	17.0
	802.11ac VHT40	14.0	16.0
	802.11ac VHT80	14.0	16.0
5.8GHz Band	802.11a	15.0	17.0
	802.11n HT20	15.0	17.0
	802.11n HT40	14.0	16.0
	802.11ac VHT20	15.0	17.0
	802.11ac VHT40	14.0	16.0
	802.11ac VHT80	14.0	16.0
Tolerance (dB): ± 1.5		RF Output Power (dBm)	
Bluetooth	DH5	9.5	11.0
	3DH5	6.0	7.5
	BLE	0.0	1.5



7.3 Simultaneous Transmission

SKU1_NFA344:

RF Exposure Condition	Transmit Configurations
Wi-Fi	2.4GHz(Chain 0 + Chain 1) 5GHz(Chain 0 + Chain 1) 5GHz(Chain 0 + Chain 1) + BT (Chain 0) BT (Chain 0)

Note(s):

1. For WLAN mode can be used as transmitting/receiving on the Chain 0 and Chain 1.
2. For BT mode only Chain 0 can be used as transmitting/receiving.

SKU2_NFA345:

RF Exposure Condition	Transmit Configurations
Wi-Fi	2.4GHz(Chain 0) 5GHz(Chain 0) + BT (Chain 0) BT (Chain 0)

Note(s):

1. For WLAN mode only Chain 0 can be used as transmitting/receiving.
2. For BT mode only Chain 0 can be used as transmitting/receiving.



8 RF Output Power Measurement

8.1 Wi-Fi (2.4GHz Band)

Output power table-SKU1

Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)			
				Data Rate (Mbps)			
				1	2	5.5	11
802.11b 2TX	1	2412	0	20.3			
			1	20.0			
			0+1	23.2			
	6	2437	0	<u>20.5</u>	20.1	20.1	20.0
			1	<u>20.2</u>	20.4	20.4	20.3
			0+1	<u>23.4</u>	23.3	23.2	23.2
	11	2462	0	19.8			
			1	19.6			
			0+1	22.7			

Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6	9	12	18	24	36	48	54
802.11g 2TX	1	2412	0	14.8							
			1	14.7							
			0+1	17.8							
	6	2437	0	<u>18.3</u>	18.4	18.4	18.3	18.3	18.2	18.2	18.1
			1	<u>18.2</u>	18.3	18.3	18.2	18.2	18.1	18.1	18.0
			0+1	<u>21.3</u>	21.4	21.3	21.3	21.2	21.2	21.1	21.1
	11	2462	0	14.2							
			1	14.0							
			0+1	17.1							

Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11n HT20 2TX	1	2412	0	12.7							
			1	12.6							
			0+1	15.7							
	6	2437	0	<u>19.5</u>	19.4	19.4	19.3	19.3	19.2	19.2	19.1
			1	<u>19.1</u>	19.0	19.0	18.9	18.9	18.8	18.8	18.7
			0+1	<u>22.3</u>	22.2	22.2	22.1	22.1	22.0	22.0	21.9
	11	2462	0	12.8							
			1	12.7							
			0+1	15.8							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				13.5	27	40.5	54	81	108	121.5	135
802.11n HT40 2TX	3	2422	0	11.3							
			1	11.2							
			0+1	14.3							
	6	2437	0	<u>16.4</u>	16.3	16.3	16.2	16.2	16.1	16.1	16.0
			1	<u>16.3</u>	16.2	16.2	16.1	16.1	16.0	16.0	15.9
			0+1	<u>19.4</u>	19.3	19.2	19.2	19.1	19.1	19.0	19.0
	9	2452	0	10.4							
			1	10.2							
			0+1	13.3							

Output power table-SKU2

Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				1	2	5.5	11				
802.11b 1TX	1	2412	0	19.3							
	6	2437	0	<u>19.4</u>	19.3	19.3	19.2				
	11	2462	0	19.2							
Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6	9	12	18	24	36	48	54
802.11g 1TX	1	2412	0	18.7							
	6	2437	0	<u>18.4</u>	18.3	18.2	18.2	18.1	18.0	18.0	17.9
	11	2462	0	18.2							
Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11n HT20 1TX	1	2412	0	18.2							
	6	2437	0	<u>18.3</u>	18.2	18.1	18.1	18.0	17.9	17.9	17.8
	11	2462	0	18.0							
Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				13.5	27	40.5	54	81	108	121.5	135
802.11n HT40 1TX	3	2422	0	15.2							
	6	2437	0	<u>18.3</u>	18.2	18.1	18.1	18.0	17.9	17.9	17.8
	9	2452	0	15.5							



8.2 Wi-Fi (5GHz Band)

Output power table-SKU1

Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6	9	12	18	24	36	48	54
802.11a 2TX	36	5180	0	11.6							
			1	10.7							
			0+1	14.2							
	40	5200	0	<u>15.0</u>	14.9	14.8	14.8	14.7	14.7	14.6	14.5
			1	<u>14.5</u>	14.4	14.3	14.3	14.2	14.2	14.1	14.0
			0+1	<u>17.8</u>	17.7	17.6	17.5	17.5	17.4	17.4	17.3
	44	5220	0	15.0							
			1	14.3							
			0+1	17.7							
	48	5240	0	15.0							
			1	14.3							
			0+1	17.7							
	52	5260	0	<u>16.5</u>	16.4	16.3	16.3	16.2	16.2	16.1	16.0
			1	<u>16.1</u>	16.0	15.9	15.9	15.8	15.8	15.7	15.6
			0+1	<u>19.3</u>	19.2	19.2	19.1	19.0	19.0	18.9	18.9
	56	5280	0	11.7							
			1	11.3							
			0+1	14.5							
	60	5300	0	11.8							
			1	11.5							
			0+1	14.7							
	64	5320	0	9.9							
			1	9.6							
			0+1	12.8							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6	9	12	18	24	36	48	54
802.11a 2TX	100	5500	0	9.1							
			1	8.5							
			0+1	11.8							
	104	5520	0	16.3							
			1	15.8							
			0+1	19.1							
	108	5540	0	16.5							
			1	15.9							
			0+1	19.2							
	112	5560	0	16.4							
			1	15.7							
			0+1	19.1							
	116	5580	0	<u>16.5</u>	16.4	16.3	16.3	16.2	16.2	16.1	16.0
			1	<u>16.0</u>	15.9	15.8	15.8	15.7	15.7	15.6	15.5
			0+1	<u>19.3</u>	19.2	19.1	19.0	19.0	18.9	18.9	18.8
	120	5600	0	16.4							
			1	15.8							
			0+1	19.1							
	124	5620	0	16.4							
			1	15.7							
			0+1	19.1							
	128	5640	0	16.3							
			1	15.8							
			0+1	19.1							
	132	5660	0	16.3							
			1	15.7							
			0+1	19.0							
	136	5680	0	16.4							
			1	15.9							
			0+1	19.2							
	140	5700	0	7.8							
			1	7.2							
			0+1	10.5							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6	9	12	18	24	36	48	54
802.11a 2TX	149	5745	0	<u>16.5</u>	16.4	16.4	16.3	16.3	16.2	16.2	16.1
			1	<u>16.0</u>	15.9	15.9	15.8	15.8	15.7	15.7	15.6
			0+1	<u>19.3</u>	19.2	19.1	19.1	19.0	19.0	18.9	18.9
	153	5765	0	16.3							
			1	15.8							
			0+1	19.1							
	157	5785	0	16.5							
			1	15.9							
			0+1	19.2							
	161	5805	0	16.2							
			1	15.5							
			0+1	18.9							
	165	5825	0	16.2							
			1	15.1							
			0+1	18.7							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11n HT20 2TX	36	5180	0	11.2							
			1	10.1							
			0+1	13.7							
	40	5200	0	<u>14.9</u>	14.8	14.8	14.7	14.7	14.6	14.6	14.5
			1	<u>14.5</u>	14.4	14.4	14.3	14.3	14.2	14.2	14.1
			0+1	<u>17.7</u>	17.6	17.6	17.5	17.5	17.4	17.4	17.3
	44	5220	0	14.6							
			1	14.0							
			0+1	17.3							
	48	5240	0	14.7							
			1	14.2							
			0+1	17.5							
	52	5260	0	<u>16.5</u>	14.8	14.8	14.7	14.7	14.6	14.6	14.5
			1	<u>16.1</u>	14.4	14.4	14.3	14.3	14.2	14.2	14.1
			0+1	<u>19.3</u>	17.6	17.6	17.5	17.5	17.4	17.4	17.3
	56	5280	0	12.2							
			1	11.8							
			0+1	15.0							
	60	5300	0	12.3							
			1	11.9							
			0+1	15.1							
	64	5320	0	8.0							
			1	7.5							
			0+1	10.8							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11n HT20 2TX	100	5500	0	9.1							
			1	8.5							
			0+1	11.8							
	104	5520	0	<u>16.5</u>	16.4	16.4	16.3	16.3	16.2	16.2	16.1
			1	<u>16.1</u>	16.1	16.1	16.0	16.0	15.9	15.9	15.8
			0+1	<u>19.3</u>	19.3	19.2	19.2	19.1	19.1	19.0	19.0
	108	5540	0	16.4							
			1	15.9							
			0+1	19.2							
	112	5560	0	16.3							
			1	15.8							
			0+1	19.1							
	116	5580	0	16.2							
			1	15.7							
			0+1	19.0							
	120	5600	0	16.2							
			1	15.8							
			0+1	19.0							
	124	5620	0	16.3							
			1	15.4							
			0+1	18.9							
	128	5640	0	16.2							
			1	15.3							
			0+1	18.8							
	132	5660	0	16.2							
			1	15.7							
			0+1	19.0							
	136	5680	0	16.2							
			1	15.7							
			0+1	19.0							
	140	5700	0	7.6							
			1	7.5							
			0+1	10.6							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11n HT20 2TX	149	5745	0	<u>16.3</u>	16.2	16.2	16.1	16.1	16.0	16.0	15.9
			1	<u>16.1</u>	16.0	16.0	15.9	15.9	15.8	15.8	15.7
			0+1	<u>19.2</u>	19.1	19.1	19.0	19.0	18.9	18.9	18.8
	153	5765	0	16.0							
			1	15.7							
			0+1	18.9							
	157	5785	0	15.6							
			1	15.2							
			0+1	18.4							
	161	5805	0	15.6							
			1	15.0							
			0+1	18.3							
	165	5825	0	15.7							
			1	15.2							
			0+1	18.5							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				13.5	27	40.5	54	81	108	121.5	135
802.11n HT40 2TX	38	5190	0	10.5							
			1	10.3							
			0+1	13.4							
	46	5230	0	<u>14.2</u>	14.1	14.0	14.0	13.9	13.8	13.8	13.7
			1	<u>14.0</u>	13.9	13.8	13.8	13.7	13.6	13.6	13.5
			0+1	<u>17.1</u>	17.0	16.9	16.9	16.8	16.7	16.7	16.6
	54	5270	0	<u>15.8</u>	15.7	15.7	15.6	15.6	15.5	15.5	15.4
			1	<u>15.2</u>	15.1	15.1	15.0	15.0	14.9	14.9	14.8
			0+1	<u>18.5</u>	18.4	18.4	18.3	18.3	18.2	18.2	18.1
	62	5310	0	12.0							
			1	11.8							
			0+1	14.9							
	102	5510	0	8.1							
			1	7.5							
			0+1	10.8							
	110	5550	0	<u>15.7</u>	6.7	6.7	6.6	6.6	6.6	6.6	6.5
			1	<u>15.3</u>	6.8	6.8	6.7	6.7	6.7	6.6	6.6
			0+1	<u>18.5</u>	9.8	9.8	9.7	9.7	9.7	9.6	9.6
	118	5590	0	15.6							
			1	15.2							
			0+1	18.4							
	126	5630	0	15.7							
			1	15.1							
			0+1	18.4							
	134	5670	0	14.3							
			1	13.9							
			0+1	17.1							
	142	5710	0	15.4							
			1	15.0							
			0+1	18.2							
	151	5755	0	<u>14.8</u>	14.7	14.7	14.6	14.6	14.5	14.5	14.4
			1	<u>14.2</u>	14.1	14.1	14.0	14.0	13.9	13.9	13.8
			0+1	<u>17.5</u>	17.4	17.4	17.3	17.3	17.2	17.2	17.1
	159	5795	0	11.2							
			1	10.8							
			0+1	14.0							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11ac VHT20 2TX	36	5180	0	11.5							
			1	11.6							
			0+1	14.6							
	40	5200	0	<u>15.0</u>	14.9	14.9	14.8	14.8	14.7	14.7	14.6
			1	<u>14.4</u>	14.3	14.3	14.2	14.2	14.1	14.1	14.0
			0+1	<u>17.7</u>	17.6	17.6	17.5	17.5	17.4	17.4	17.3
	44	5220	0	14.7							
			1	14.1							
			0+1	17.4							
	48	5240	0	14.8							
			1	14.2							
			0+1	17.5							
	52	5260	0	<u>16.5</u>	16.4	16.4	16.3	16.3	16.2	16.2	16.1
			1	<u>16.0</u>	15.9	15.9	15.8	15.8	15.7	15.7	15.6
			0+1	<u>19.3</u>	19.2	19.1	19.1	19.0	19.0	18.9	18.9
	56	5280	0	11.7							
			1	11.3							
			0+1	14.5							
	60	5300	0	12.3							
			1	11.9							
			0+1	15.1							
	64	5320	0	9.0							
			1	8.5							
			0+1	11.8							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11ac VHT20 2TX	100	5500	0	9.0							
			1	8.4							
			0+1	11.7							
	104	5520	0	16.4							
			1	15.9							
			0+1	19.2							
	108	5540	0	16.3							
			1	15.8							
			0+1	19.1							
	112	5560	0	<u>16.5</u>	16.4	16.3	16.3	16.2	16.1	16.1	16.0
			1	<u>16.0</u>	15.9	15.8	15.8	15.7	15.6	15.6	15.5
			0+1	<u>19.3</u>	19.2	19.1	19.0	19.0	18.9	18.8	18.7
	116	5580	0	16.2							
			1	15.7							
			0+1	19.0							
	120	5600	0	16.3							
			1	15.6							
			0+1	19.0							
	124	5620	0	16.3							
			1	15.7							
			0+1	19.0							
	128	5640	0	16.2							
			1	15.6							
			0+1	18.9							
	132	5660	0	16.2							
			1	15.5							
			0+1	18.9							
	136	5680	0	16.3							
			1	15.8							
			0+1	19.1							
	140	5700	0	7.6							
			1	7.3							
			0+1	10.5							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11ac VHT20 2TX	149	5745	0	<u>16.5</u>	16.4	16.4	16.3	16.3	16.2	16.2	16.1
			1	<u>16.1</u>	16.0	16.0	15.9	15.9	15.8	15.8	15.7
			0+1	<u>19.3</u>	19.2	19.2	19.1	19.1	19.0	19.0	18.9
	153	5765	0	16.3							
			1	15.8							
			0+1	19.1							
	157	5785	0	16.5							
			1	15.9							
			0+1	19.2							
	161	5805	0	16.2							
			1	15.5							
			0+1	18.9							
	165	5825	0	16.2							
			1	15.1							
			0+1	18.7							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				13.5	27	40.5	54	81	108	121.5	135
802.11ac VHT40 2TX	38	5190	0	10.5							
			1	10.3							
			0+1	13.4							
	46	5230	0	<u>14.3</u>	14.2	14.2	14.1	14.1	14.0	14.0	13.9
			1	<u>14.0</u>	13.9	13.9	13.8	13.8	13.7	13.7	13.6
			0+1	<u>17.2</u>	17.1	17.0	17.0	16.9	16.9	16.8	16.8
	54	5270	0	<u>15.8</u>	15.7	15.7	15.6	15.6	15.5	15.5	15.4
			1	<u>15.2</u>	15.1	15.1	15.0	15.0	14.9	14.9	14.8
			0+1	<u>18.5</u>	18.4	18.4	18.3	18.3	18.2	18.2	18.1
	62	5310	0	12.0							
			1	11.6							
			0+1	14.8							
	102	5510	0	8.8							
			1	8.2							
			0+1	11.5							
	110	5550	0	<u>16.0</u>	15.9	15.9	15.8	15.8	15.7	15.7	15.6
			1	<u>15.7</u>	15.6	15.6	15.5	15.5	15.4	15.4	15.3
			0+1	<u>18.9</u>	18.8	18.7	18.7	18.6	18.6	18.5	18.5
	118	5590	0	15.8							
			1	15.4							
			0+1	18.6							
	126	5630	0	15.6							
			1	15.2							
			0+1	18.4							
	134	5670	0	14.8							
			1	14.3							
			0+1	17.6							
	142	5710	0	15.8							
			1	15.5							
			0+1	18.7							
	151	5755	0	16.0							
			1	15.6							
			0+1	18.8							
	159	5795	0	<u>16.2</u>	16.1	16.1	16.0	16.0	15.9	15.9	15.8
			1	<u>15.5</u>	15.4	15.4	15.3	15.3	15.2	15.2	15.1
			0+1	<u>18.9</u>	18.8	18.7	18.7	18.6	18.6	18.5	18.5



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)									
				Data Rate (Mbps)									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac VHT80 2TX	42	5210	0	<u>9.8</u>	9.7	9.7	9.6	9.6	9.5	9.5	9.4	9.4	9.3
			1	<u>9.2</u>	9.1	9.1	9.0	9.0	8.9	8.9	8.8	8.7	8.7
			0+1	<u>12.5</u>	12.4	12.4	12.3	12.3	12.2	12.2	12.1	12.1	12.0
	58	5290	0	<u>10.6</u>	10.5	10.5	10.4	10.4	10.3	10.3	10.2	10.2	10.1
			1	<u>10.2</u>	10.1	10.1	10.0	10.0	9.9	9.9	9.8	9.7	9.7
			0+1	<u>13.4</u>	13.3	13.3	13.2	13.2	13.1	13.1	13.0	13.0	12.9
	106	5530	0	10.8									
			1	10.4									
			0+1	13.6									
	122	5610	0	<u>16.5</u>	16.4	16.4	16.3	16.3	16.2	16.2	16.1	16.1	16.0
			1	<u>16.4</u>	16.3	16.3	16.2	16.2	16.1	16.1	16.0	16.0	15.9
			0+1	<u>19.5</u>	19.4	19.3	19.3	19.2	19.2	19.1	19.1	19.0	19.0
	138	5690	0	16.5									
			1	16.1									
			0+1	19.3									
	155	5775	0	<u>16.5</u>	16.4	16.4	16.3	16.3	16.2	16.2	16.1	16.1	16.0
			1	<u>16.1</u>	16.0	16.0	15.9	15.9	15.8	15.8	15.7	15.7	15.6
			0+1	<u>19.3</u>	19.2	19.2	19.1	19.1	19.0	19.0	18.9	18.9	18.8

**Output power table-SKU2**

Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6	9	12	18	24	36	48	54
802.11a 1TX	36	5180	0	15.2							
	40	5200	0	16.8							
	44	5220	0	16.7							
	48	5240	0	<u>16.9</u>	16.8	16.8	16.7	16.7	16.6	16.6	16.5
	52	5260	0	<u>17.0</u>	16.9	16.9	16.8	16.8	16.7	16.7	16.6
	56	5280	0	16.8							
	60	5300	0	16.9							
	64	5320	0	15.2							
	100	5500	0	14.5							
	104	5520	0	16.5							
	108	5540	0	16.8							
	112	5560	0	16.5							
	116	5580	0	<u>16.9</u>	16.8	16.8	16.7	16.7	16.6	16.6	16.5
	120	5600	0	16.7							
	124	5620	0	16.7							
	128	5640	0	16.7							
	132	5660	0	16.6							
	136	5680	0	16.6							
	140	5700	0	12.5							
	149	5745	0	16.3							
	153	5765	0	<u>17.0</u>	16.9	16.9	16.8	16.8	16.7	16.7	16.6
	157	5785	0	16.8							
	161	5805	0	16.9							
	165	5825	0	16.5							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11n HT20 1TX	36	5180	0	15.2							
	40	5200	0	16.9							
	44	5220	0	16.8							
	48	5240	0	<u>17.0</u>	16.9	16.8	16.8	16.7	16.6	16.6	16.5
	52	5260	0	<u>17.0</u>	16.9	16.9	16.8	16.8	16.7	16.7	16.6
	56	5280	0	16.8							
	60	5300	0	16.9							
	64	5320	0	15.2							
	100	5500	0	14.5							
	104	5520	0	16.9							
	108	5540	0	<u>17.0</u>	16.9	16.9	16.8	16.8	16.7	16.7	16.6
	112	5560	0	16.7							
	116	5580	0	16.7							
	120	5600	0	16.6							
	124	5620	0	16.7							
	128	5640	0	16.8							
	132	5660	0	16.9							
	136	5680	0	16.8							
	140	5700	0	12.5							
	149	5745	0	16.6							
	153	5765	0	<u>17.0</u>	16.9	16.9	16.8	16.8	16.7	16.7	16.6
	157	5785	0	16.9							
	161	5805	0	16.8							
	165	5825	0	16.6							
Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				13.5	27	40.5	54	81	108	121.5	135
802.11n HT40 1TX	38	5190	0	11.3							
	46	5230	0	<u>14.1</u>	14.0	14.0	13.9	13.9	13.8	13.8	13.7
	54	5270	0	<u>15.9</u>	15.8	15.8	15.7	15.7	15.6	15.6	15.5
	62	5310	0	14.4							
	102	5510	0	10.8							
	110	5550	0	<u>15.7</u>	15.6	15.6	15.5	15.5	15.4	15.4	15.3
	118	5590	0	15.6							
	126	5630	0	15.7							
	134	5670	0	14.5							
	142	5710	0	15.6							
	151	5755	0	<u>15.3</u>	15.2	15.2	15.1	15.1	15.0	15.0	14.9
	159	5795	0	15.4							



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				6.5	13	19.5	26	39	52	58.5	65
802.11ac VHT20 1TX	36	5180	0	15.3							
	40	5200	0	16.9							
	44	5220	0	16.7							
	48	5240	0	<u>17.0</u>	16.9	16.9	16.8	16.8	16.7	16.7	16.6
	52	5260	0	<u>17.0</u>	16.9	16.9	16.8	16.75	16.7	16.65	16.6
	56	5280	0	16.8							
	60	5300	0	16.9							
	64	5320	0	15.6							
	100	5500	0	14.5							
	104	5520	0	16.9							
	108	5540	0	<u>17.0</u>	16.9	16.9	16.8	16.75	16.7	16.65	16.6
	112	5560	0	16.7							
	116	5580	0	16.7							
	120	5600	0	16.8							
	124	5620	0	16.7							
	128	5640	0	16.7							
	132	5660	0	16.7							
	136	5680	0	16.8							
	140	5700	0	12.5							
	149	5745	0	16.6							
	153	5765	0	<u>16.8</u>	16.7	16.7	16.6	16.6	16.5	16.5	16.4
	157	5785	0	16.7							
	161	5805	0	16.7							
	165	5825	0	16.6							
Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)							
				Data Rate (Mbps)							
				13.5	27	40.5	54	81	108	121.5	135
802.11ac VHT40 1TX	38	5190	0	11.6							
	46	5230	0	<u>14.2</u>	14.1	14.1	14.0	14.0	13.9	13.9	13.8
	54	5270	0	<u>15.9</u>	15.8	15.8	15.7	15.7	15.6	15.6	15.5
	62	5310	0	14.5							
	102	5510	0	10.8							
	110	5550	0	15.6							
	118	5590	0	<u>15.9</u>	15.8	15.8	15.7	15.7	15.6	15.6	15.5
	126	5630	0	15.7							
	134	5670	0	14.5							
	142	5710	0	15.6							
	151	5755	0	15.3							
	159	5795	0	<u>15.4</u>	15.3	15.3	15.2	15.2	15.1	15.1	15.0



Mode	Channel	Frequency (MHz)	Chain	Avg. Pwr (dBm)									
				Data Rate (Mbps)									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac VHT80 1TX	42	5210	0	<u>10.7</u>	10.6	10.6	10.5	10.5	10.4	10.4	10.3	10.3	10.2
	58	5290	0	<u>11.9</u>	11.8	11.7	11.7	11.6	11.6	11.5	11.4	11.4	11.3
	106	5530	0	10.8									
	122	5610	0	<u>15.0</u>	14.9	14.8	14.8	14.7	14.7	14.6	14.5	14.5	14.4
	138	5690	0	14.8									
	155	5775	0	<u>14.6</u>	14.5	14.4	14.4	14.3	14.3	14.2	14.1	14.1	14.0



8.3 Bluetooth

Output power table-SKU1

Band (GHz)	Mode	Ch #	Freq. (MHz)	Measured Avg. Pwr (dBm)
Bluetooth	DH5	0	2402	10.1
		39	2441	9.8
		78	2480	10.0
	3DH5	0	2402	6.5
		39	2441	6.8
		78	2480	6.7
	BLE	0	2402	0.1
		19	2440	0.6
		39	2480	0.8

Output power table-SKU2

Band (GHz)	Mode	Ch #	Freq. (MHz)	Measured Avg. Pwr (dBm)
Bluetooth	DH5	0	2402	10.1
		39	2441	9.8
		78	2480	10.0
	3DH5	0	2402	6.5
		39	2441	6.8
		78	2480	6.7
	BLE	0	2402	0.1
		19	2440	0.6
		39	2480	0.8



9 Summary of SAR Test Exclusion Configurations

9.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1.5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

**9.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User**

According to KDB 447498 v05 r02 in section 4.3.1, if the calculated **threshold value** is > 3 then SAR testing is required.

Tablet Mode_SKU1

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0	9.4	22.7	>200mm	>200mm	>50mm
	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	216.0	219.0	102.0	7.5	18.0	>200mm	>200mm	>50mm
	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	216.0	219.0	102.0	7.5	18.0	>200mm	>200mm	>50mm
	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	216.0	219.0	102.0	4.7	11.4	>200mm	>200mm	>50mm
	5.2GHz	802.11a	5200	15	32	18.6	7.7	216.0	219.0	102.0	3.9	9.5	>200mm	>200mm	>50mm
	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0	5.5	13.4	>200mm	>200mm	>50mm
	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0	5.7	13.8	>200mm	>200mm	>50mm
	5.8GHz		5785	16.5	45	18.6	7.7	216.0	219.0	102.0	5.8	14.1	>200mm	>200mm	>50mm
	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	216.0	219.0	102.0	3.9	9.5	>200mm	>200mm	>50mm
	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0	5.5	13.4	>200mm	>200mm	>50mm
	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0	5.7	13.8	>200mm	>200mm	>50mm
	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0	5.8	14.0	>200mm	>200mm	>50mm
	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	216.0	219.0	102.0	3.9	9.5	>200mm	>200mm	>50mm
	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0	4.9	11.9	>200mm	>200mm	>50mm
	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0	5.1	12.2	>200mm	>200mm	>50mm
	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0	5.2	12.5	>200mm	>200mm	>50mm
	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	216.0	219.0	102.0	3.9	9.5	>200mm	>200mm	>50mm
	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0	5.5	13.4	>200mm	>200mm	>50mm
	5.5GHz		5520	16.5	45	18.6	7.7	216.0	219.0	102.0	5.7	13.7	>200mm	>200mm	>50mm
	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0	5.8	14.0	>200mm	>200mm	>50mm
	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	216.0	219.0	102.0	3.9	9.5	>200mm	>200mm	>50mm
	5.3GHz		5270	16	40	18.6	7.7	244.6	50.9	2.5	4.9	11.9	>200mm	>200mm	>50mm
	5.5GHz		5550	16	40	18.6	7.7	244.6	50.9	2.5	5.1	12.2	>200mm	>200mm	>50mm
	5.8GHz		5710	16	40	18.6	7.7	244.6	50.9	2.5	5.1	12.4	>200mm	>200mm	>50mm
	5.2GHz	802.11 ac VHT80	5210	11	13	18.6	7.7	244.6	50.9	2.5	1.6	3.9	>200mm	>200mm	>50mm
	5.3GHz		5290	11.5	14	18.6	7.7	244.6	50.9	2.5	1.7	4.2	>200mm	>200mm	>50mm
	5.5GHz		5610	16.5	45	18.6	7.7	244.6	50.9	2.5	5.7	13.8	>200mm	>200mm	>50mm
	5.8GHz		5775	16.5	45	18.6	7.7	244.6	50.9	2.5	5.8	14.0	>200mm	>200mm	>50mm
	Bluetooth	DH5	2402	11	13	18.6	7.7	244.6	50.9	2.5	1.1	2.6	>200mm	>200mm	>50mm



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	68.0	219.0	250.0	9.4	22.7	>50mm	>200mm	>200mm
	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	68.0	219.0	250.0	7.5	18.0	>50mm	>200mm	>200mm
	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	68.0	219.0	250.0	7.5	18.0	>50mm	>200mm	>200mm
	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	68.0	219.0	250.0	4.7	11.4	>50mm	>200mm	>200mm
	5.2GHz	802.11a	5200	15	32	18.6	7.7	68.0	219.0	250.0	3.9	9.5	>50mm	>200mm	>200mm
	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0	5.5	13.4	>50mm	>200mm	>200mm
	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0	5.7	13.8	>50mm	>200mm	>200mm
	5.8GHz		5785	16.5	45	18.6	7.7	68.0	219.0	250.0	5.8	14.1	>50mm	>200mm	>200mm
	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	68.0	219.0	250.0	3.9	9.5	>50mm	>200mm	>200mm
	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0	5.5	13.4	>50mm	>200mm	>200mm
	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0	5.7	13.8	>50mm	>200mm	>200mm
	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0	5.8	14.0	>50mm	>200mm	>200mm
	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	68.0	219.0	250.0	3.9	9.5	>50mm	>200mm	>200mm
	5.3GHz		5270	16	40	18.6	7.7	68.0	219.0	250.0	4.9	11.9	>50mm	>200mm	>200mm
	5.5GHz		5550	16	40	18.6	7.7	68.0	219.0	250.0	5.1	12.2	>50mm	>200mm	>200mm
	5.8GHz		5795	16	40	18.6	7.7	68.0	219.0	250.0	5.2	12.5	>50mm	>200mm	>200mm
	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	68.0	219.0	250.0	3.9	9.5	>50mm	>200mm	>200mm
	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0	5.5	13.4	>50mm	>200mm	>200mm
	5.5GHz		5520	16.5	45	18.6	7.7	68.0	219.0	250.0	5.7	13.7	>50mm	>200mm	>200mm
	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0	5.8	14.0	>50mm	>200mm	>200mm
	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	68.0	219.0	250.0	3.9	9.5	>50mm	>200mm	>200mm
	5.3GHz		5270	16	40	18.6	7.7	68.0	219.0	250.0	4.9	11.9	>50mm	>200mm	>200mm
	5.5GHz		5550	16	40	18.6	7.7	68.0	219.0	250.0	5.1	12.2	>50mm	>200mm	>200mm
	5.8GHz		5710	16	40	18.6	7.7	68.0	219.0	250.0	5.1	12.4	>50mm	>200mm	>200mm
	5.2GHz	802.11 ac VHT80	5210	11	13	18.6	7.7	68.0	219.0	250.0	1.6	3.9	>50mm	>200mm	>200mm
	5.3GHz		5290	11.5	14	18.6	7.7	68.0	219.0	250.0	1.7	4.2	>50mm	>200mm	>200mm
	5.5GHz		5610	16.5	45	18.6	7.7	68.0	219.0	250.0	5.7	13.8	>50mm	>200mm	>200mm
	5.8GHz		5775	16.5	45	18.6	7.7	68.0	219.0	250.0	5.8	14.0	>50mm	>200mm	>200mm



Tablet Mode_SKU2

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0	9.4	22.7	>200mm	>200mm	>50mm
	2.4GHz	802.11g	2412	20	100	18.6	7.7	216.0	219.0	102.0	8.3	20.2	>200mm	>200mm	>50mm
	2.4GHz	802.11n HT20	2457	20	100	18.6	7.7	216.0	219.0	102.0	8.4	20.4	>200mm	>200mm	>50mm
	2.4GHz	802.11n HT40	2437	18.5	71	18.6	7.7	216.0	219.0	102.0	6.0	14.4	>200mm	>200mm	>50mm
	5.2GHz	802.11a	5200	17	50	18.6	7.7	216.0	219.0	102.0	6.1	14.8	>200mm	>200mm	>50mm
	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0	6.2	14.9	>200mm	>200mm	>50mm
	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0	6.4	15.4	>200mm	>200mm	>50mm
	5.8GHz		5785	17	50	18.6	7.7	216.0	219.0	102.0	6.5	15.6	>200mm	>200mm	>50mm
	5.2GHz	802.11n HT20	5200	17	50	18.6	7.7	216.0	219.0	102.0	6.1	14.8	>200mm	>200mm	>50mm
	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0	6.2	14.9	>200mm	>200mm	>50mm
	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0	6.4	15.4	>200mm	>200mm	>50mm
	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0	6.4	15.6	>200mm	>200mm	>50mm
	5.2GHz	802.11n HT40	5230	16	40	18.6	7.7	216.0	219.0	102.0	4.9	11.9	>200mm	>200mm	>50mm
	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0	4.9	11.9	>200mm	>200mm	>50mm
	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0	5.1	12.2	>200mm	>200mm	>50mm
	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0	5.2	12.5	>200mm	>200mm	>50mm
	5.2GHz	802.11 ac VHT20	5200	17	50	18.6	7.7	216.0	219.0	102.0	6.1	14.8	>200mm	>200mm	>50mm
	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0	6.2	14.9	>200mm	>200mm	>50mm
	5.5GHz		5520	17	50	18.6	7.7	216.0	219.0	102.0	6.3	15.3	>200mm	>200mm	>50mm
	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0	6.4	15.6	>200mm	>200mm	>50mm
	5.2GHz	802.11 ac VHT40	5230	16	40	18.6	7.7	216.0	219.0	102.0	4.9	11.9	>200mm	>200mm	>50mm
	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0	4.9	11.9	>200mm	>200mm	>50mm
	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0	5.1	12.2	>200mm	>200mm	>50mm
	5.8GHz		5710	16	40	18.6	7.7	216.0	219.0	102.0	5.1	12.4	>200mm	>200mm	>50mm
	5.2GHz	802.11 ac VHT80	5210	12	16	18.6	7.7	216.0	219.0	102.0	2.0	4.7	>200mm	>200mm	>50mm
	5.3GHz		5290	12	16	18.6	7.7	216.0	219.0	102.0	2.0	4.8	>200mm	>200mm	>50mm
	5.5GHz		5610	16	40	18.6	7.7	216.0	219.0	102.0	5.1	12.3	>200mm	>200mm	>50mm
	5.8GHz		5775	16	40	18.6	7.7	216.0	219.0	102.0	5.2	12.5	>200mm	>200mm	>50mm
	Bluetooth	DH5	2402	11	13	18.6	7.7	216.0	219.0	102.0	1.1	2.6	>200mm	>200mm	>50mm

**9.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User**

According to KDB 447498 v05 r02, if the calculated Power threshold is less than the output power then SAR testing is required.

Tablet Mode_SKU1

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.1
	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.1
	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.1
	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.1
	5.2GHz	802.11a	5200	15	32	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.8
	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.4
	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.4
	5.8GHz		5785	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.4
	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.8
	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.4
	5.5GHz		5600	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.4
	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.6
	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.6
	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.3
	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.7
	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.3
	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.8
	5.3GHz		5260	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.4
	5.5GHz		5520	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.8
	5.8GHz		5745	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.6
	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.6
	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.3
	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.7
	5.8GHz		5710	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.8
	5.2GHz	802.11 ac VHT80	5210	11	13	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.7
	5.3GHz		5290	11.5	14	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.2
	5.5GHz		5610	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.3
	5.8GHz		5775	16.5	45	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.4
	Bluetooth	DH5	2402	11	13	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.8



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	276.1	>200mm	>200mm
	2.4GHz	802.11g	2437	19.5	89	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	276.1	>200mm	>200mm
	2.4GHz	802.11n HT20	2437	19.5	89	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	276.1	>200mm	>200mm
	2.4GHz	802.11n HT40	2437	17.5	56	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	276.1	>200mm	>200mm
	5.2GHz	802.11a	5200	15	32	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.8	>200mm	>200mm
	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.4	>200mm	>200mm
	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	243.4	>200mm	>200mm
	5.8GHz		5785	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	242.4	>200mm	>200mm
	5.2GHz	802.11n HT20	5200	15	32	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.8	>200mm	>200mm
	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.4	>200mm	>200mm
	5.5GHz		5600	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	243.4	>200mm	>200mm
	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	242.6	>200mm	>200mm
	5.2GHz	802.11n HT40	5230	15	32	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.6	>200mm	>200mm
	5.3GHz		5270	16	40	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.3	>200mm	>200mm
	5.5GHz		5550	16	40	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	243.7	>200mm	>200mm
	5.8GHz		5795	16	40	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	242.3	>200mm	>200mm
	5.2GHz	802.11 ac VHT20	5200	15	32	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.8	>200mm	>200mm
	5.3GHz		5260	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.4	>200mm	>200mm
	5.5GHz		5520	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	243.8	>200mm	>200mm
	5.8GHz		5745	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	242.6	>200mm	>200mm
	5.2GHz	802.11 ac VHT40	5230	15	32	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.6	>200mm	>200mm
	5.3GHz		5270	16	40	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.3	>200mm	>200mm
	5.5GHz		5550	16	40	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	243.7	>200mm	>200mm
	5.8GHz		5710	16	40	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	242.8	>200mm	>200mm
	5.2GHz	802.11 ac VHT80	5210	11	13	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.7	>200mm	>200mm
	5.3GHz		5290	11.5	14	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	245.2	>200mm	>200mm
	5.5GHz		5610	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	243.3	>200mm	>200mm
	5.8GHz		5775	16.5	45	18.6	7.7	68.0	219.0	250.0	<50mm	<50mm	242.4	>200mm	>200mm



Tablet Mode_SKU2

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	802.11b	2437	20.5	112	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.1
	2.4GHz	802.11g	2412	20	100	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.6
	2.4GHz	802.11n HT20	2457	20	100	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	615.7
	2.4GHz	802.11n HT40	2437	18.5	71	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.1
	5.2GHz	802.11a	5200	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.8
	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.4
	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.4
	5.8GHz		5785	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.4
	5.2GHz	802.11n HT20	5200	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.8
	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.4
	5.5GHz		5600	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.4
	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.6
	5.2GHz	802.11n HT40	5230	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.6
	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.3
	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.7
	5.8GHz		5795	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.3
	5.2GHz	802.11 ac VHT20	5200	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.8
	5.3GHz		5260	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.4
	5.5GHz		5520	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.8
	5.8GHz		5745	17	50	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.6
	5.2GHz	802.11 ac VHT40	5230	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.6
	5.3GHz		5270	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.3
	5.5GHz		5550	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.7
	5.8GHz		5710	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.8
	5.2GHz	802.11 ac VHT80	5210	12	16	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.7
	5.3GHz		5290	12	16	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	585.2
	5.5GHz		5610	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	583.3
	5.8GHz		5775	16	40	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	582.4
	Bluetooth	DH5	2402	11	13	18.6	7.7	216.0	219.0	102.0	<50mm	<50mm	>200mm	>200mm	616.8

**9.1.3 SAR Required Test Configuration****SKU1**

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main 802.11 b	YES	YES	No	No	No
Wi-Fi Main 802.11 g	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.8GHz	YES	YES	No	No	No
Bluetooth	YES	YES	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux 802.11 b	YES	YES	No	No	No
Wi-Fi Aux 802.11 g	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT80_5.2GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT80_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT80_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac VHT80_5.8GHz	YES	YES	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required

**SKU2**

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main 802.11 b	YES	YES	No	No	No
Wi-Fi Main 802.11 g	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.2GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac VHT80_5.8GHz	YES	YES	No	No	No
Bluetooth	YES	YES	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required



10 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg



11 Tissue Dielectric Properties

11.1 Test Liquid Confirmation

Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below. 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2013

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00



11.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99⁺% Pure Sodium Chloride

Sugar: 98⁺% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxy thyl Cellulose

DGBE: 99⁺% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2



11.3 Simulating Liquids Parameter Check Results

Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2015/4/10	Body 2450	2412	52.77	14.64	1.96	52.75	1.91	0.04%	2.49%	± 5
		2437	52.78	14.87	2.01	52.72	1.94	0.13%	3.89%	± 5
		2442	52.80	14.89	2.02	52.71	1.94	0.17%	4.01%	± 5
		2450	52.83	14.93	2.03	52.70	1.95	0.24%	4.22%	± 5
		2462	52.88	14.99	2.05	52.68	1.97	0.37%	4.22%	± 5
		2472	52.86	15.02	2.06	52.67	1.98	0.36%	4.13%	± 5
2015/4/12	Body 5000	5180	48.21	18.60	5.35	49.02	5.28	-1.64%	1.45%	± 5
		5200	47.99	18.49	5.34	49.00	5.30	-2.07%	0.76%	± 5
		5220	48.01	18.57	5.38	48.98	5.32	-1.99%	1.14%	± 5
		5240	48.21	18.84	5.48	48.96	5.35	-1.53%	2.53%	± 5
		5260	48.39	19.04	5.56	48.94	5.37	-1.12%	3.55%	± 5
		5280	48.36	18.94	5.56	48.92	5.40	-1.14%	2.96%	± 5
		5300	48.10	18.66	5.50	48.90	5.42	-1.64%	1.39%	± 5
		5320	47.86	18.52	5.47	48.86	5.44	-2.05%	0.60%	± 5
		5500	47.98	19.26	5.89	48.60	5.65	-1.27%	4.18%	± 5
		5520	47.91	18.93	5.81	48.58	5.67	-1.38%	2.33%	± 5
		5540	47.62	18.71	5.76	48.56	5.70	-1.94%	1.05%	± 5
		5560	47.43	18.89	5.84	48.54	5.72	-2.29%	1.99%	± 5
		5580	47.47	19.27	5.97	48.52	5.75	-2.16%	3.97%	± 5
		5600	47.67	19.41	6.04	48.50	5.77	-1.71%	4.67%	± 5
		5620	47.73	19.21	6.00	48.46	5.79	-1.50%	3.55%	± 5
		5640	47.61	18.92	5.93	48.42	5.81	-1.68%	1.95%	± 5
		5660	47.36	18.86	5.93	48.38	5.84	-2.10%	1.60%	± 5
		5680	47.30	19.16	6.04	48.34	5.86	-2.15%	3.19%	± 5
		5700	47.42	19.44	6.16	48.30	5.88	-1.82%	4.68%	± 5
		5745	47.36	18.96	6.05	48.26	5.93	-1.86%	1.99%	± 5
		5765	47.16	18.94	6.07	48.24	5.96	-2.23%	1.83%	± 5
		5785	47.10	19.26	6.19	48.22	5.98	-2.31%	3.46%	± 5
		5805	47.24	19.54	6.30	48.19	6.01	-1.97%	4.94%	± 5
		5825	47.37	19.43	6.29	48.15	6.03	-1.62%	4.29%	± 5



Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (Er)	e''	σ	e' (Er)	σ	e' (Er)	σ	± 5
2015/4/13	Body 5000	5180	48.40	18.29	5.26	49.02	5.28	-1.26%	-0.25%	± 5
		5200	48.39	18.24	5.27	49.00	5.30	-1.25%	-0.59%	± 5
		5220	48.38	18.20	5.28	48.98	5.32	-1.22%	-0.87%	± 5
		5240	48.36	18.26	5.32	48.96	5.35	-1.23%	-0.62%	± 5
		5260	48.28	18.34	5.36	48.94	5.37	-1.35%	-0.23%	± 5
		5280	48.27	18.40	5.40	48.92	5.40	-1.32%	0.04%	± 5
		5300	48.22	18.36	5.41	48.90	5.42	-1.38%	-0.27%	± 5
		5320	48.18	18.29	5.41	48.86	5.44	-1.38%	-0.65%	± 5
		5500	47.87	18.62	5.69	48.60	5.65	-1.50%	0.72%	± 5
		5520	47.87	18.53	5.68	48.58	5.67	-1.47%	0.16%	± 5
		5540	47.81	18.41	5.67	48.56	5.70	-1.54%	-0.54%	± 5
		5560	47.71	18.42	5.69	48.54	5.72	-1.70%	-0.59%	± 5
		5580	47.64	18.56	5.75	48.52	5.75	-1.81%	0.14%	± 5
		5600	47.64	18.67	5.81	48.50	5.77	-1.78%	0.67%	± 5
		5620	47.69	18.68	5.83	48.46	5.79	-1.59%	0.70%	± 5
		5640	47.65	18.55	5.81	48.42	5.81	-1.60%	-0.01%	± 5
		5660	47.58	18.48	5.81	48.38	5.84	-1.64%	-0.41%	± 5
		5680	47.46	18.56	5.86	48.34	5.86	-1.81%	-0.03%	± 5
		5700	47.42	18.72	5.93	48.30	5.88	-1.81%	0.83%	± 5
		5745	47.47	18.63	5.95	48.26	5.93	-1.63%	0.20%	± 5
		5765	47.41	18.55	5.94	48.24	5.96	-1.72%	-0.29%	± 5
2015/4/14	Body 5000	5785	47.30	18.64	5.99	48.22	5.98	-1.91%	0.15%	± 5
		5805	47.26	18.75	6.05	48.19	6.01	-1.94%	0.70%	± 5
		5825	47.27	18.84	6.10	48.15	6.03	-1.82%	1.09%	± 5
		5180	48.24	17.97	5.17	49.02	5.28	-1.59%	-1.96%	± 5
		5200	48.17	17.93	5.18	49.00	5.30	-1.69%	-2.25%	± 5
		5220	48.18	17.90	5.19	48.98	5.32	-1.62%	-2.52%	± 5
		5240	48.22	17.97	5.23	48.96	5.35	-1.51%	-2.21%	± 5
		5260	48.21	18.09	5.29	48.94	5.37	-1.48%	-1.59%	± 5
		5280	48.19	18.11	5.31	48.92	5.40	-1.49%	-1.54%	± 5
		5300	48.08	18.02	5.31	48.90	5.42	-1.67%	-2.08%	± 5
		5320	48.01	17.94	5.30	48.86	5.44	-1.74%	-2.59%	± 5
		5500	47.81	18.36	5.61	48.60	5.65	-1.62%	-0.73%	± 5
		5520	47.80	18.19	5.58	48.58	5.67	-1.61%	-1.68%	± 5
		5540	47.69	18.04	5.55	48.56	5.70	-1.80%	-2.57%	± 5
		5560	47.57	18.04	5.57	48.54	5.72	-2.00%	-2.61%	± 5
		5580	47.51	18.25	5.66	48.52	5.75	-2.09%	-1.51%	± 5
		5600	47.54	18.40	5.72	48.50	5.77	-1.98%	-0.80%	± 5
		5620	47.63	18.37	5.74	48.46	5.79	-1.72%	-0.97%	± 5
		5640	47.59	18.19	5.70	48.42	5.81	-1.72%	-1.97%	± 5
		5660	47.48	18.12	5.70	48.38	5.84	-1.86%	-2.39%	± 5
		5680	47.37	18.22	5.75	48.34	5.86	-2.02%	-1.86%	± 5
		5700	47.33	18.41	5.83	48.30	5.88	-2.00%	-0.84%	± 5
		5745	47.39	18.26	5.83	48.26	5.93	-1.79%	-1.81%	± 5
		5765	47.31	18.18	5.82	48.24	5.96	-1.91%	-2.28%	± 5
		5785	47.20	18.29	5.88	48.22	5.98	-2.11%	-1.71%	± 5
		5805	47.17	18.44	5.95	48.19	6.01	-2.12%	-1.00%	± 5
		5825	47.19	18.49	5.98	48.15	6.03	-1.98%	-0.75%	± 5



Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2015/4/17	Body 2450	2412	54.03	14.26	1.91	52.75	1.91	2.42%	-0.17%	± 5
		2437	53.92	14.40	1.95	52.72	1.94	2.29%	0.60%	± 5
		2442	53.91	14.42	1.96	52.71	1.94	2.28%	0.71%	± 5
		2450	53.90	14.45	1.97	52.70	1.95	2.27%	0.89%	± 5
		2462	53.88	14.51	1.98	52.68	1.97	2.27%	0.90%	± 5
		2472	53.86	14.54	2.00	52.67	1.98	2.26%	0.82%	± 5



12 Measurement Uncertainty

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz section 2.8.2, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.



13 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4/DASY5 system with an E-field probe EX3DV4 SN:3665 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration (dx=dy= 5 mm, dz= 5 mm).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was 100 mW $\pm$ 3%.
- The results are normalized to 1 W input power.

Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	728	2014/5/20	2450	1g	52.6	50.2
				10g	24.5	23.4
D5GHzV2	1004	2014/11/20	5200	1g	80.5	74.7
				10g	22.9	20.7
D5GHzV2	1004	2014/11/20	5300	1g	85.7	77.7
				10g	24.4	21.6
D5GHzV2	1004	2014/11/20	5600	1g	84.1	81.2
				10g	23.9	22.4
D5GHzV2	1004	2014/11/20	5800	1g	80.3	74.2
				10g	22.8	20.3



13.1 System Performance Check Results

Date	System Dipole			Parameters	Target	Measured	Deviation[%]	Limited[%]
	Type	Serial No.	Liquid					
2015/04/10	D2450V2	728	Body	1g SAR:	50.2	51.5	2.59	± 5
				10g SAR:	23.4	23.7	1.28	± 5
2015/04/12	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.7	72.6	-2.81	± 5
				10g SAR:	20.7	20.7	0.00	± 5
2015/04/12	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.7	75.1	-3.35	± 5
				10g SAR:	21.6	21.4	-0.93	± 5
2015/04/12	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.2	79.3	-2.34	± 5
				10g SAR:	22.4	22.1	-1.34	± 5
2015/04/12	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.2	74.1	-0.13	± 5
				10g SAR:	20.3	20.9	2.96	± 5
2015/04/13	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.7	71.7	-4.02	± 5
				10g SAR:	20.7	20.4	-1.45	± 5
2015/04/13	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.7	77.0	-0.90	± 5
				10g SAR:	21.6	22.5	4.17	± 5
2015/04/13	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.2	83.5	2.83	± 5
				10g SAR:	22.4	23.4	4.46	± 5
2015/04/13	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.2	71.2	-4.04	± 5
				10g SAR:	20.3	20.1	-0.99	± 5
2015/04/14	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.7	71.8	-3.88	± 5
				10g SAR:	20.7	20.9	0.97	± 5
2015/04/14	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.7	76.9	-1.03	± 5
				10g SAR:	21.6	22.5	4.17	± 5
2015/04/14	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.2	80.5	-0.86	± 5
				10g SAR:	22.4	23.5	4.91	± 5
2015/04/14	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.2	72.9	-1.75	± 5
				10g SAR:	20.3	21.3	4.93	± 5
2015/04/17	D2450V2	728	Body	1g SAR:	50.2	52.4	4.38	± 5
				10g SAR:	23.4	24.2	3.42	± 5



14 SAR Measurements Results

Wi-Fi (2.4GHz Band)_SKU1:

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot No.
							Tune up limit	Measured				
802.11b	Tablet	Rear	6	2437	0	0	20.5	20.5	0.226	0.226		
					1	0	20.5	20.2	0.132	0.141		
		Edge 1	6	2437	0	0	20.5	20.5	0.351	0.351		1
					1	0	20.5	20.2	0.638	0.684		1
802.11n HT20		Edge 1	6	2437	0	0	19.5	19.5	0.268	0.268		
					1	0	19.5	19.1	0.499	0.547		

Note(s):

- We need to choose the channel it has the highest power for each band under 802.11 b to test. Then we choose the channel(band) which is the worst case in 2.4G testing from these three result, and use it to perform 802.11n HT20.

Wi-Fi (2.4GHz Band)_SKU2:

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot No.
							Tune up limit	Measured				
802.11n HT40	Tablet	Rear	6	2437	0	0	18.5	18.3	0.100	0.105		
		Edge 1	6	2437	0	0	18.5	18.3	0.226	0.237		

Note(s):

- The SKU2 single chain power was above SKU1 in HT40, so we only perform SAR test in HT40 of SKU2.



Wi-Fi (5GHz Band)_SKU1:

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot No.
							Tune up limit	Measured				
802.11a	Tablet Mode	Rear	40	5200	0	0	15.0	15.0	0.070	0.070		
					1	0	15.0	14.5	0.011	0.012		
			52	5260	0	0	16.5	16.5	0.088	0.088		
					1	0	16.5	16.1	0.026	0.029		
			116	5580	0	0	16.5	16.5	0.078	0.078		
					1	0	16.5	16.0	0.043	0.048		
			149	5745	0	0	16.5	16.5	0.075	0.075		
					1	0	16.5	16.0	0.032	0.036		
		Edge 1	40	5200	0	0	15.0	15.0	1.090	1.090		2
					1	0	15.0	14.5	0.384	0.431		2
			48	5240	0	0	15.0	15.0	1.050	1.050	1	
					1	0	15.0	14.3	0.359	0.422	1	
			52	5260	0	0	16.5	16.5	1.250	1.250		3
					1	0	16.5	16.1	0.669	0.734		3
			60	5300	0	0	12.0	11.8	0.435	0.456	1	
					1	0	12.0	11.5	0.165	0.185	1	
			116	5580	0	0	16.5	16.5	1.140	1.140		
					1	0	16.5	16.0	0.378	0.424		
			108	5540	0	0	16.5	16.5	1.120	1.120	1	
					1	0	16.5	15.9	0.466	0.535	1	
			149	5745	0	0	16.5	16.5	0.800	0.800		
					1	0	16.5	16.0	0.404	0.453		
			157	5785	0	0	16.5	16.5	0.750	0.750	1	
					1	0	16.5	15.9	0.560	0.643	1	
802.11n HT20	Tablet Mode	Edge 1	40	5200	0	0	15.0	14.9	1.050	1.074		
					1	0	15.0	14.5	0.416	0.467		
			48	5240	0	0	15.0	14.7	0.960	1.029	1	
					1	0	15.0	14.2	0.368	0.442	1	
			52	5260	0	0	16.5	16.5	1.050	1.050		
					1	0	16.5	16.1	0.597	0.655		
			60	5300	0	0	12.5	12.3	0.624	0.653	1	
					1	0	12.5	11.9	0.278	0.319	1	
			104	5520	0	0	16.5	16.5	1.140	1.140		
					1	0	16.5	16.1	0.490	0.537		
			108	5540	0	0	16.5	16.4	1.160	1.187	1	4
					1	0	16.5	15.9	0.544	0.625	1	4
			149	5745	0	0	16.5	16.3	0.750	0.785		
					1	0	16.5	16.1	0.443	0.486		

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
2. We need to choose the channel it has the highest power for each band under 802.11 a/802.11n HT20/802.11ac VHT20 to test. Then we choose the channel(band) which is the worst case in 5G testing from these three result, and use it to perform 802.11n HT40 and 802.11ac VHT80.



Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot No.
							Tune up limit	Measured				
802.11ac VHT20	Tablet	Edge 1	40	5200	0	0	15.0	15.0	1.040	1.040		
					1	0	15.0	14.4	0.396	0.455		
			48	5240	0	0	15.0	14.8	0.886	0.928	1	
					1	0	15.0	14.2	0.361	0.434	1	
			52	5260	0	0	16.5	16.5	1.060	1.060		
					1	0	16.5	16.0	0.467	0.524		
			60	5300	0	0	12.5	12.3	0.637	0.667	1	
					1	0	12.5	11.9	0.252	0.289	1	
			112	5560	0	0	16.5	16.5	0.990	0.990		
					1	0	16.5	16.0	0.384	0.431		
104		5520	0	0	16.5	16.4	1.130	1.156	1			
			1	0	16.5	15.9	0.519	0.596	1			
149		5745	0	0	16.5	16.5	0.795	0.795		5		
			1	0	16.5	16.1	0.432	0.474		5		
802.11n HT40		Edge 1	54	5270	0	0	16.0	15.8	1.070	1.120		
					1	0	16.0	15.2	0.562	0.676		
62			5310	0	0	12.0	12.0	0.536	0.536	1		
				1	0	12.0	11.8	0.165	0.173	1		
802.11ac VHT80		Edge 1	58	5290	0	0	11.0	10.6	0.371	0.407		
					1	0	11.0	10.2	0.125	0.150		
802.11a	Edge 1	52	5260	0	0	16.5	16.5	1.090	1.090	2		
				1	0	16.5	16.1	0.557	0.611	2		

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03)
 - For chain 0, Original SAR = 1.250 W/kg, therefore two times repeat SAR is required.
 - For chain 0, Repeat SAR = 1.090 W/kg < 1.45 W/kg
 - For chain 0, SAR variation= 12.8 $< 20\%$
 - For chain 1, Original SAR = 0.669 W/kg, therefore two times repeat SAR is required.
 - For chain 1, Repeat SAR = 0.557 W/kg < 1.45 W/kg
 - For chain 1, SAR variation= 16.7 $< 20\%$
- We need to choose the channel it has the highest power for each band under 802.11 a/802.11n HT20/802.11ac VHT20 to test. Then we choose the channel(band) which is the worst case in 5G testing from these three result, and use it to perform 802.11n HT40 and 802.11ac VHT80.



Wi-Fi (5GHz Band)_SKU2:

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot No.
							Tune up limit	Measured				
802.11a		Rear	48	5240	0	0	17.0	16.9	0.088	0.090		
			52	5260	0	0	17.0	17.0	0.091	0.091		
			116	5580	0	0	17.0	16.9	0.088	0.090		
			153	5765	0	0	17.0	17.0	0.075	0.075		
802.11a		Edge 1	48	5240	0	0	17.0	16.9	1.070	1.095		
			40	5200	0	0	17.0	16.8	1.160	1.215		6
			52	5260	0	0	17.0	17.0	1.330	1.330		7
			60	5300	0	0	17.0	16.9	1.280	1.310	1	
			116	5580	0	0	17.0	16.9	1.140	1.167		8
			108	5540	0	0	17.0	16.8	1.000	1.047	1	
802.11n HT20		Edge 1	153	5765	0	0	17.0	17.0	0.663	0.663		
			48	5240	0	0	17.0	17.0	0.998	0.998		
			40	5200	0	0	17.0	16.9	1.030	1.054	1	
			52	5260	0	0	17.0	17.0	1.210	1.210		
			60	5300	0	0	17.0	16.9	1.060	1.085	1	
			108	5540	0	0	17.0	17.0	0.960	0.960		
802.11ac VHT20		Edge 1	104	5520	0	0	17.0	16.9	0.904	0.925	1	
			153	5765	0	0	17.0	17.0	0.696	0.696		9
			48	5240	0	0	17.0	17.0	1.030	1.030		
			40	5200	0	0	17.0	16.9	1.070	1.095	1	
			52	5260	0	0	17.0	17.0	1.190	1.190		
			60	5300	0	0	17.0	16.9	1.080	1.105	1	
802.11n HT40		Edge 1	108	5540	0	0	17.0	17.0	0.932	0.932		
			104	5520	0	0	17.0	16.9	0.914	0.935	1	
			153	5765	0	0	17.0	16.8	0.611	0.640		
			54	5270	0	0	16.0	15.9	1.010	1.034		
802.11ac VHT80		Edge 1	62	5310	0	0	14.5	14.4	0.504	0.513	1	
			58	5290	0	0	12.0	11.9	0.278	0.284		
802.11a			52	5260	0	0	17.0	17.0	1.230	1.230	2	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03)
 - Original SAR = 1.330 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.230 W/kg < 1.45 W/kg
 - SAR variation = 7.5 % $< 20\%$
- We need to choose the channel it has the highest power for each band under 802.11 a/802.11n HT20/802.11ac VHT20 to test. Then we choose the channel(band) which is the worst case in 5G testing from these three result, and use it to perform 802.11n HT40 and 802.11ac VHT80.

**Bluetooth:**

Mode	Test Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot No.
							Tune up limit	Measured				
DH5	Tablet	Rear	0	2402	0	0	11.0	10.1	0.020	0.025		
		Edge1	0	2402	0	0	11.0	10.1	0.024	0.030		

Note(s):

1. The SKU2 Bluetooth power was same SKU1, so we only perform SAR test of SKU1.



15 Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest Reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest Reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

A new threshold of 0.04 is also introduced in the KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04$$



15.1 Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

- When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
- Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg

15.1.1 Estimated SAR for Bluetooth

According to section 9, the Bluetooth must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [v_{f(\text{GHz})}/x]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Tablet Mode_SKU1

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Estimated 1-g SAR (W/Kg)				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux	2.4GHz	2412	23.5	224	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
	5.2GHz	5260	18.0	63	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
	5.3GHz	5280	19.5	89	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
	5.5GHz	5520	19.5	89	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
	5.8GHz	5745	19.5	89	18.6	7.7	68	219	250	Measure	Measure	0.400	0.400	0.400
Wi-Fi Main	Bluetooth	2402	11	13	18.6	7.7	216	219	102	Measure	Measure	0.400	0.400	0.400

Tablet Mode_SKU2

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Estimated 1-g SAR (W/Kg)				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2412	20.5	112	18.6	7.7	216	219	102	Measure	Measure	0.400	0.400	0.400
	5.2GHz	5260	17.0	50	18.6	7.7	216	219	102	Measure	Measure	0.400	0.400	0.400
	5.3GHz	5280	17.0	50	18.6	7.7	216	219	102	Measure	Measure	0.400	0.400	0.400
	5.5GHz	5520	17.0	50	18.6	7.7	216	219	102	Measure	Measure	0.400	0.400	0.400
	5.8GHz	5745	17.0	50	18.6	7.7	216	219	102	Measure	Measure	0.400	0.400	0.400
	Bluetooth	2402	11	13	18.6	7.7	216	219	102	Measure	Measure	0.400	0.400	0.400



15.2 Sum of the SAR for Simultaneous Transmission Analysis

15.2.1 Sum of the SAR for Wi-Fi MIMO

SKU1

Band	Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		Wi-Fi Main	Wi-Fi Aux		
2.4GHz	Rear	0.226	0.141	0.367	No
	Edge 1	0.351	0.684	1.035	No
5.2GHz	Rear	0.070	0.012	0.082	No
	Edge 1	1.090	0.431	1.521	No
5.3GHz	Rear	0.088	0.029	0.117	No
	Edge 1	1.250	0.734	1.984	Yes
5.5GHz	Rear	0.078	0.048	0.126	No
	Edge 1	1.187	0.625	1.812	Yes
5.8GHz	Rear	0.075	0.036	0.111	No
	Edge 1	0.795	0.474	1.269	No

Note(s):

- As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

15.2.2 Sum of the 1g SAR for Body Exposure Condition

Test Position	Mode	Channel	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
			Wi-Fi 5GHz Band Main	Wi-Fi 5GHz Band Aux				
Edge 1	802.11a	52	1.250	0.734	1.984	14.50	0.02	1
Edge 1	802.11n HT20	108	1.187	0.625	1.812	14.40	0.02	2

Note(s):

- According to KDB 447498 D01 V05r02 (4.3.2, the SPLSR, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

**15.2.3 Sum of the SAR for Wi-Fi & Bluetooth**

SKU1

Band	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		Wi-Fi Main	Wi-Fi Aux	Bluetooth		
5.2GHz	Rear	0.070	0.012	0.025	0.107	No
	Edge 1	1.090	0.431	0.030	1.551	No
5.3GHz	Rear	0.088	0.029	0.025	0.142	No
	Edge 1	1.250	0.734	0.030	2.014	Yes
5.5GHz	Rear	0.078	0.048	0.025	0.151	No
	Edge 1	1.187	0.625	0.030	1.842	Yes
5.8GHz	Rear	0.075	0.036	0.025	0.136	No
	Edge 1	0.795	0.474	0.030	1.299	No

Note(s):

- As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

SKU2

Band	Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		Wi-Fi Main	Bluetooth		
5.2GHz	Rear	0.090	0.025	0.115	No
	Edge 1	1.215	0.030	1.245	No
5.3GHz	Rear	0.091	0.025	0.116	No
	Edge 1	1.330	0.030	1.360	No
5.5GHz	Rear	0.090	0.025	0.115	No
	Edge 1	1.167	0.030	1.197	No
5.8GHz	Rear	0.075	0.025	0.100	No
	Edge 1	0.696	0.030	0.726	No

Note(s):

- As the Sum of the SAR is not greater than 1.6W/Kg, so SPLSR is not required.

15.2.4 Sum of the 1g SAR for Body Exposure Condition

Since the SAR value of Wi-Fi (Main or Aux) and Bluetooth are less than SAR limits (1.6W/Kg), so we just estimated the Wi-Fi MIMO for SPLSR Result.



16 Equipment List & Calibration Status

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
S-Parameter Network Analyzer	Agilent	E5071C	MY46213916	1	2015/06/25
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A	N/A
Power Meter	Agilent	4416	GB41291611	1	2015/09/04
Power Sensor	Agilent	8481H	MY41091956	1	2015/09/04
Data Acquisition Electronics (DAE)	SPEAG	DAE4	1305	1	2015/12/10
Data Acquisition Electronics (DAE)	SPEAG	DAE4	877	1	2016/03/18
Dosimetric E-Field Probe	SPEAG	EX3DV4	3665	1	2015/05/21
2450 MHz System Validation Dipole	SPEAG	D2450V2	728	1	2015/05/19
5GHz System Validation Dipole	SPEAG	D5GHzV2	1004	1	2015/11/19
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A



17 Facilities

All measurement facilities used to collect the measurement data are located at

- ☐ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- ☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

18 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEEE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 2005.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard Kuhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10



19 Attachments

Exhibit	Content
1	System Performance Check Plots
2	SAR Test Data Plots
3	SPLSR Plots
4	Calibration Data Report
5	T150327W02-SF PHOTOS

END OF REPORT